


C5VRX_JACK_DIY / FAT SHARK DOMINATOR + 3.5MM AV – XIAO THT CARRIER

Only 5V, GND and VIDEO connected at the goggle bay.
D4..D9 = DAC bit 0..5. Use XIAO firmware pin mapping.
R1..R7: upstream C5VRX-5 values, 1% recommended.

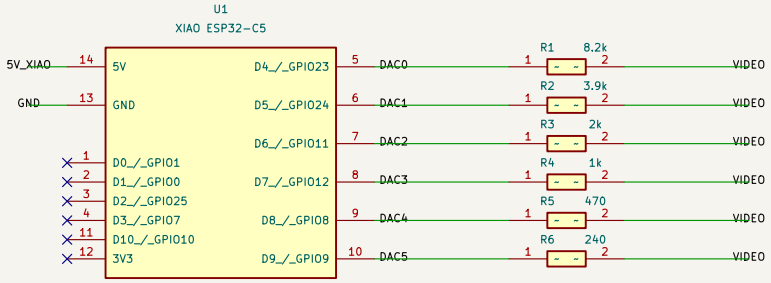






J1: pin 1 = bottom / 5V; pin 9 = top.
Component side: header RIGHT, USB LEFT.
Unused bay pins intentionally unconnected.













SJ1: solder bridge for bay power.
Open SJ1 before USB programming.
XIAO BOOT button controls the firmware menu.

C1: OPTIONAL / DNP.
470 pF C0G/NP0, only if needed.
Check loaded video before fitting.

PJ-320D / 3.5 mm AV (TRS / TRRS)
Tip + Ring 1 = VIDEO
Sleeve = GND; Ring 2 = N/C

R1..R7: axial through-hole, DIN0207 / 0.25W, 10.16 mm lead pitch.
XIAO: plug-in mounting on 2 x 7-pin headers.
Decoupling is provided on the XIAO module.

LOCAL FIRMWARE BOM OPTION (same PCB):
R1 7.87k, R2 3.92k, R3 1.96k, R4 976, R5 487, R6 243, R7 191.
Choose one complete DAC set to match the firmware. No extra 75-ohm shunt.

Sheet: /
File: C5VRX_JACK_DIY.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.6 | Id: 1/1