
C5VRX_JACK_DIY_V3 / FAT SHARK DOMINATOR + 3.5MM AV – XIAO THT CARRIER


Only 5V, GND and VIDEO connected at the goggle bay.
D4..D9 = DAC bit 0..5. Use XIAO firmware pin mapping.
R1..R7: upstream C5VRX-5 values, 1% recommended.


REV C: R8 15k / D10 and R9 33k / D3 are DNP.
PR259 remains 6-bit. 8-bit: D9..D4 = bits 7..2. D10 = bit 1, D3 = bit 0.
Populate only with wider DAC firmware and loaded CVBS / D3 boot validation.






SJ2 / SJ3: rear, normally OPEN.
6-bit: both open. 7-bit: close SJ2 only.
8-bit: close SJ2 + SJ3.
Fit R8/R9 and use matching DAC firmware.

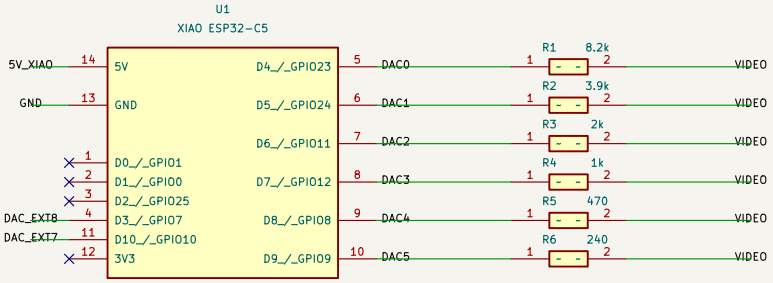




J1: pin 1 = bottom / 5V; pin 9 = top.
Component side: header RIGHT, USB LEFT.
Unused bay pins intentionally unconnected.















D1: 1N5819 Schottky, bay 5V (anode) -> XIAO 5V (cathode).
Bay power always on; USB 5V cannot feed the goggle bay.
XIAO BOOT button controls the firmware menu.

C1: OPTIONAL / DNP.
470 pF C0G/NP0, only if needed.
Check loaded video before fitting.

PJ-320D / 3.5 mm AV (TRS / TRRS)
Tip + Ring 1 = VIDEO
Sleeve = GND; Ring 2 = N/C

R1..R7: axial through-hole, DIN0207 / 0.25W, 10.16 mm lead pitch.
XIAO: plug-in mounting on 2 x 7-pin headers.
Decoupling is provided on the XIAO module.

LOCAL FIRMWARE BOM OPTION (same PCB):
R1 7.87k, R2 3.92k, R3 1.96k, R4 976, R5 487, R6 243, R7 191.
Choose one complete DAC set to match the firmware. No extra 75-ohm shunt.

Sheet: /
File: C5VRX_JACK_DIY_V3.kicad_sch

Title: C5VRX_JACK_DIY_V3

Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.7		Id: 1/1