



DC – AI – Routing – Switching – Security – Wireless – Automation

Optimize your Network with Routing Director

An HPE Juniper Networking Techpost

Masagung Nugroho

2025-09-25

HPE



Contents

1	Optimize your Network with Routing Director	3
1.1	Introduction	3
1.2	Topology Connection Infrastructure	3
1.3	Demonstration Topology	4
1.4	Demonstration Use Cases	8
1.4.1	1. RSVP-TE PCEP tunnel link diversity	8
1.4.2	2. RSVP-TE Netconf tunnel creation and delegation	14
1.4.3	3. SR-TE PCEP Flex-algo delay-based constraint tunnel	19
1.4.4	4. SR-TE full mesh path intent creation	26
1.5	Conclusion	31
1.6	Useful links	31
1.7	Glossary	31
1.8	Acknowledgements	32

List of Figures

1	Logical Connection Infrastructure	4
2	Network Topology	5
3	Paragon Automation Topology View	5
4	Routing Director 2.5 Version	6
5	- RD Topology GUI	9
6	- RD GUI Provision Diverse Tunnel	9
7	- Variable Definition for Diverse Tunnel (1)	10
8	- Variable Definition for Diverse Tunnel (2)	11
9	- RSVP-TE Tunnel Diversity Result	11
10	- P2P Interface Information in RD GUI	13
11	- Tunnel Diversity Path After Simulate Fibre Cut	13
12	Tunnel Events History	14
13	- RD GUI for NETCONF Tunnel Provisioning Flow	15
14	- Netconf-LSP Successfully Created	15
15	- control Type: PCC Information from RD GUI	16
16	LSP Delegation Preparation	17
17	Final LSP Delegation Step	18
18	Control Type change to	18
19	Node-SID and Adj-SID Information	21
20	Flex-Algo 128 Topology	22
21	Flex-Algo 129 Topology	22
22	P2P Delay-measurement Information	23
23	Step-by-step Defining the Variables	23
24	SRTE-Delay-FlexAlgo-128 Tunnel UP	24
25	Detail Tunnel Information Align with Defined Variables	24
26	Delay-metric in RD GUI	25
27	Rerouting Tunnel	25
28	Delay-measurement and Tunnel Down in RD GUI	26
29	Network Optimization Intent	27
30	RD Tunnel Profiles	27
31	RD Optimization Profiles	28
32	RD Endpoint Group	28
33	RD Path Intent	29
34	RD Final Result Network Optimization Intent	30
35	all SR-TE Tunnels Up	30

1 Optimize your Network with Routing Director

Masagung Nugroho 09/25/2025

Automating the MPLS and SR network with Juniper Routing Director network optimization use case.

1.1 Introduction

Service providers and large enterprise networks nowadays offer multiple services with different traffic criteria, e.g., high bandwidth, moderate bandwidth with moderate latency, and small bandwidth with latency-sensitive requirements, etc. These requirements are also commonly used for 5G transport network slicing in IP networks. To meet the demand, using LSP (RSVP-TE, SR-TE, or SRv6-TE) is one of the solutions.

Manual CLI configuration is time-consuming and requires a high level of operational and maintenance expertise. We need to configure every ingress router and ensure the LSP paths are reachable from every router. The strict LSP path creation also complicates the network engineer to be absolutely aware of the hop-by-hop path (i.e., P2P IP, loopback IP, adj-SID, node-SID, etc., depending on what technology is being used in the network) from the ingress to the egress router. Imagine a customer willing to add multiple nodes to expand their network, they need to manually configure numerous routers to create new LSPs tunnels between the existing and the new nodes.

Juniper Routing Director (RD), formerly known as Paragon Automation, is built to solve this problem. It automates the LSP creation, but also the traffic steering based on defined constraints. The automation could be done via PCEP or NETCONF. RD is a multi-vendor solution by nature, hence it can also automate and monitor third-party hardware. However, I will only focus on Juniper router in this Techpost article.

You may head to this article [1], if you want to learn more about RD.

[1] <https://www.juniper.net/documentation/us/en/quick-start/software/juniper-routing-director2.5.0/rd-quick-start-guide/>

1.2 Topology Connection Infrastructure

The high-level topology below describes how the routers communicate with RD:

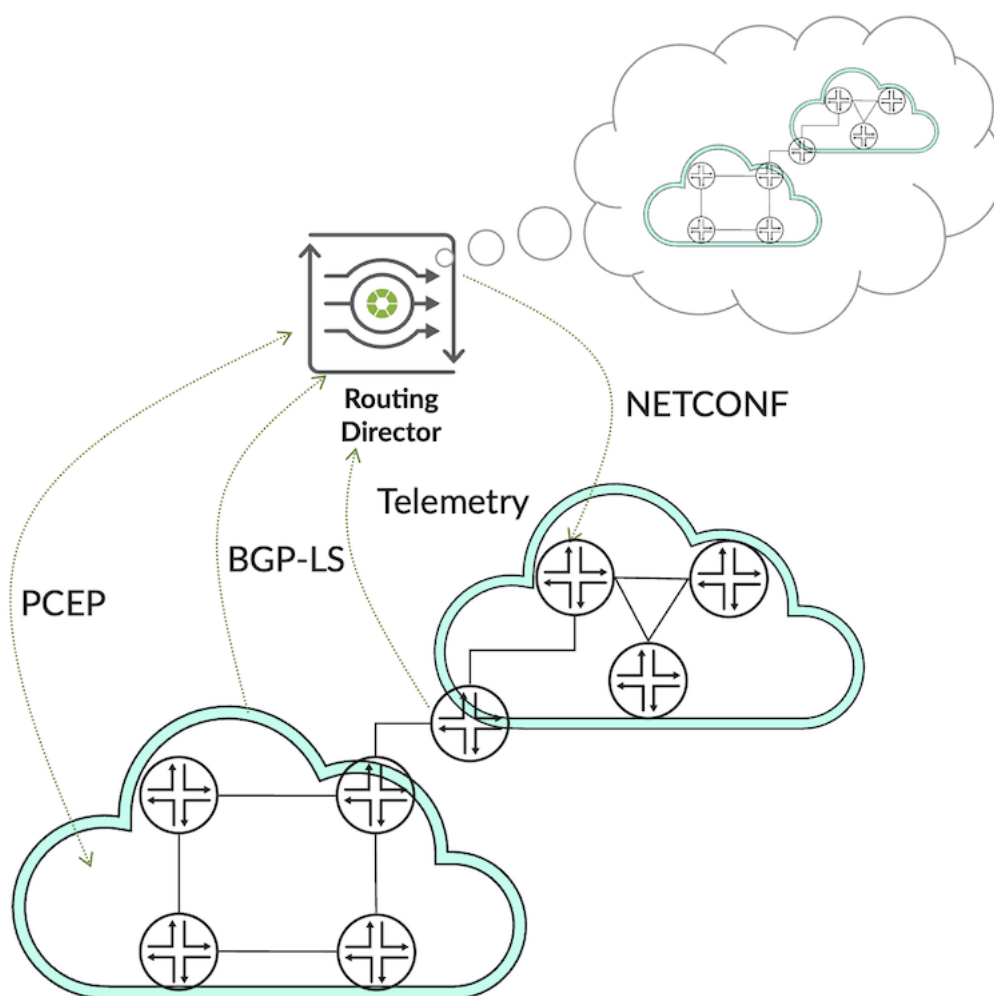


Figure 1: Logical Connection Infrastructure

There are some essential key protocols to enable the communication:

1. BGP-LS (BGP Link State): this connection is required for Routing Director to learn the full IGP topology, metric, bandwidth, delay, Segment-ID information and many more. BGP-LS is a standard defined on RFC8571.
2. PCEP (Path Computation Element Protocol): protocol used between routers, or Path Computation Client, and the Routing Director (Path Computation Element). PCEP is based on RFC5440 and the PCEP extension function is defined in RFC8231 (Stateful-PCE), RFC8281(PCE-Initiated LSP), SR-PCE ,etc.
3. NETCONF (Network Configuration Protocol) over SSH: provides fine-grained structured configuration management. In this case, routers are NETCONF servers and RD is the NETCONF client. NETCONF is a standard based on RFC6241.

1.3 Demonstration Topology

I will use the same topology (figure 2) than my previous Techpost article (Service Orchestration in RD) with the addition of SR-MPLS (ISIS) as an underlay protocol. If you have not read it yet, [please go here](#).

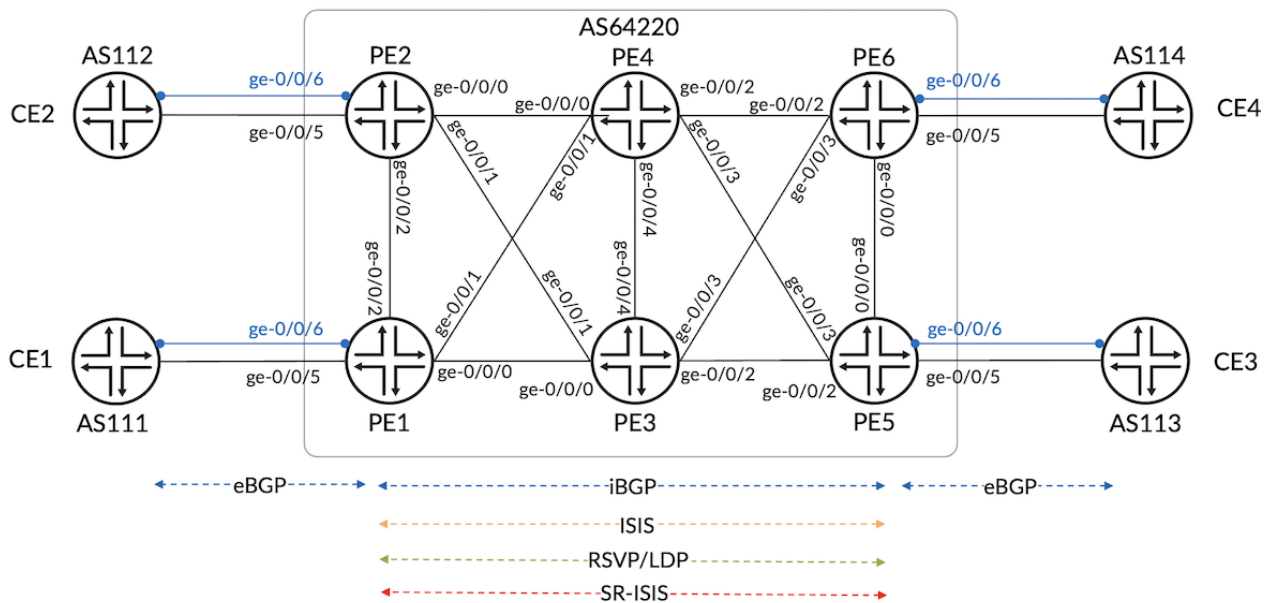


Figure 2: Network Topology

RD offers real-time topology discovery by BGP-LS. When the devices are connected by IGP, the topology can be visualized on the GUI depicted in Figure 3. Routing Director 2.5 (Figure 4) and Junos 23.4R1.9 are used in this demonstration.

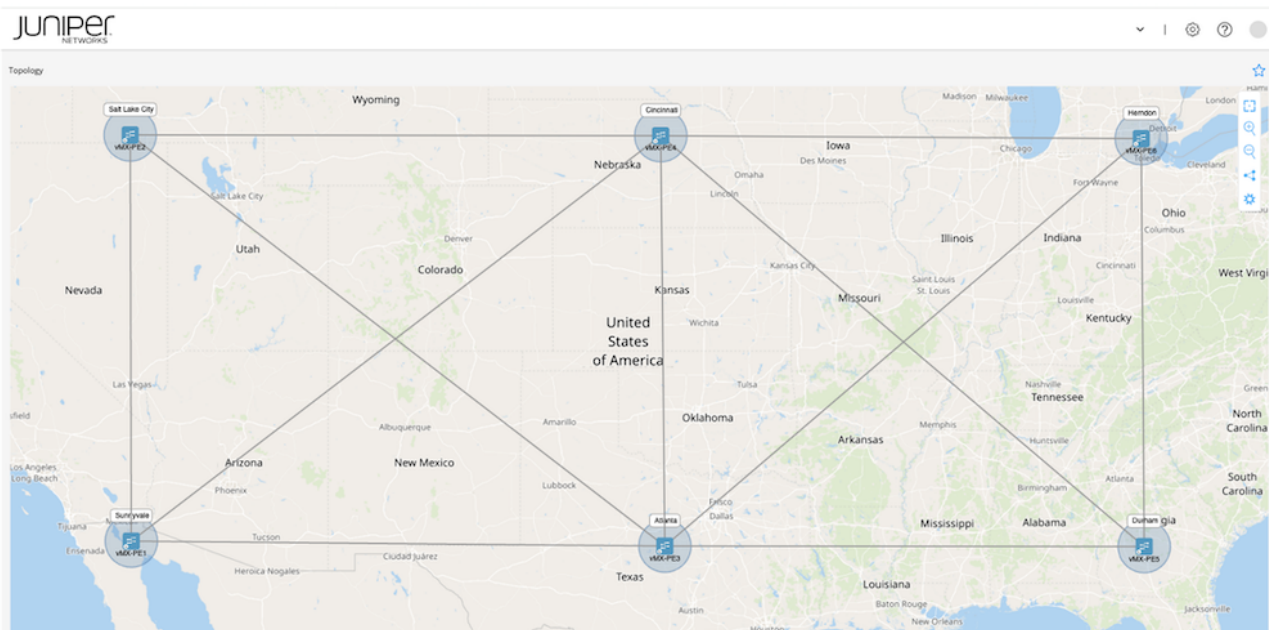


Figure 3: Paragon Automation Topology View

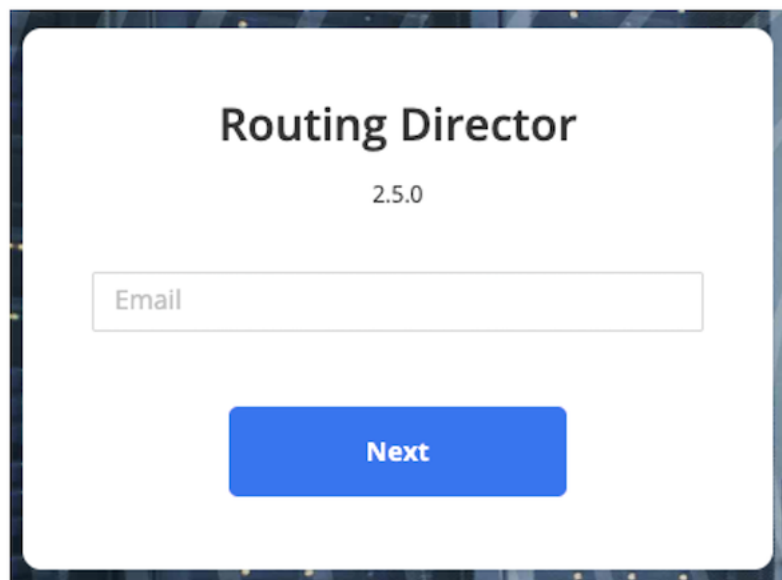


Figure 4: Routing Director 2.5 Version

```

1 jcluser@vMX-PE1> show version
2 Hostname: vMX-PE1
3 Model: vmx
4 Junos: 23.4R1.9
5 JUNOS OS Kernel 64-bit [20231122.ee0e992_builder_stable_12_234]
6 JUNOS OS libs [20231122.ee0e992_builder_stable_12_234]
7 JUNOS OS runtime [20231122.ee0e992_builder_stable_12_234]
8 [...]

```

Let's verify the prerequisite connectivity from the router perspective.

BGP-LS connection to RD.

```

1 jcluser@vMX-PE2> show bgp summary
2 Threading mode: BGP I/O
3 Default eBGP mode: advertise - accept, receive - accept
4 Groups: 3 Peers: 7 Down peers: 1
5 Unconfigured peers: 1
6 Table Tot Paths Act Paths Suppressed History Damp State Pending
7 lsdist.0
8
9 bgp.l3vpn.0          0 0 0 0 0 0
10
11 bgp.evpn.0          0 0 0 0 0 0
12
13 inet.0              1 1 0 0 0 0
14
15 inet6.0             0 0 0 0 0 0
16
17 Peer AS InPkt OutPkt OutQ Flaps Last Up/Dwn State|#Active/Received/Accepted/Damped...
18 1.1.192.0 64220 3749 3726 0 0 1d 4:26:02 Establ
19   bgp.l3vpn.0: 0/0/0/0
20   bgp.evpn.0: 0/0/0/0
21   bc7e1b55-7c1a-11f0-8e80-2abea23635c2.evpn.0: 0/0/0/0
22   __default_evpn__.evpn.0: 0/0/0/0
23 2.2.2.0 64220 3750 3726 0 0 1d 4:25:50 Establ
24   bgp.l3vpn.0: 0/0/0/0
25   bgp.evpn.0: 0/0/0/0
26   bc7e1b55-7c1a-11f0-8e80-2abea23635c2.evpn.0: 0/0/0/0
27   __default_evpn__.evpn.0: 0/0/0/0
28 2.2.2.2 64220 3748 3726 0 0 1d 4:25:49 Establ
29   bgp.l3vpn.0: 0/0/0/0
30   bgp.evpn.0: 0/0/0/0
31   bc7e1b55-7c1a-11f0-8e80-2abea23635c2.evpn.0: 0/0/0/0
32   __default_evpn__.evpn.0: 0/0/0/0
33 2.2.2.3 64220 3749 3726 0 0 1d 4:25:54 Establ
34   bgp.l3vpn.0: 0/0/0/0
35   bgp.evpn.0: 0/0/0/0
36   bc7e1b55-7c1a-11f0-8e80-2abea23635c2.evpn.0: 0/0/0/0

```

```

37 __default_evpn__.evpn.0: 0/0/0/0
38 3.3.3.0 64220 3751 3727 0 0 1d 4:26:05 Establ
39 bgp.l3vpn.0: 0/0/0/0
40 bgp.evpn.0: 1/1/1/0
41 bc7e1b55-7c1a-11f0-8e80-2abea23635c2.evpn.0: 1/1/1/0
42 __default_evpn__.evpn.0: 0/0/0/0
43 100.123.42.4 64220 3790 25469 0 0 1d 4:27:14 Establ
44 lsdist.0: 0/0/0/0
45 192.168.2.1 112 0 0 0 0 1d 4:27:46 Idle

```

Topology information advertisement from router to RD.

```

1 jcluser@vMX-PE2> show route advertising-protocol bgp 100.123.42.4
2
3 lsdist.0: 98 destinations, 98 routes (98 active, 0 holddown, 0 hidden)
4 Prefix Nexthop MED Lclpref AS path
5 NODE { AS:64220 ISO:0010.0119.2000.00 ISIS-L1:0 }/1216
6 * Self 100 I
7     IPv4 Router-ids:
8         1.1.192.0
9     Area border router: No
10    External router: No
11    Attached: No
12    Overload: No
13    Hostname: vMX-PE3
14    Area membership:
15        49 00 03
16    SPRING-Capabilities:
17        - SRGB block [Start: 16000, Range: 8000, Flags: 0xc0]
18    SPRING-Algorithms:
19        - Algo: 0
20        - Algo: 1
21        - Algo: 129
22    SPRING Flex-Algorithms Definition:
23        - Flex-Algo: 129
24            Metric: 0, Calc: 0, Priority: 100
25            - Flags: 0x00000000
26    Node MSD:
27        - Type: 1, Value: 3
28        - Type: 2, Value: 16
29 Prefix Nexthop MED Lclpref AS path
30 LINK { Local { AS:64220 ISO:0010.0119.2000.00 }.{ IPv4:11.11.11.1 } Remote { AS:64220 ISO
31 :0020.0200.2002.00 }.{ IPv4:11.11.11.2 } ISIS-L1:0 }/1216
32 * Self 100 I
33     Color: 0
34     Maximum bandwidth: 1000Mbps
35     Reservable bandwidth: 1000Mbps
36     Unreserved bandwidth by priority:
37         0 1000Mbps
38         1 1000Mbps
39         2 1000Mbps
40         3 1000Mbps
41         4 1000Mbps
42         5 1000Mbps
43         6 1000Mbps
44         7 1000Mbps
45     Metric: 10
46     TE Metric: 10
47     Average delay: 809
48     Minimum delay: 645
49     Maximum delay: 1112
50     Delay variation: 184
51     Label: 25, Flags: 0x30, Weight: 0
52     Link MSD:
53         - Type: 1, Value: 3

```

PCE connection from router to RD.

```

1 jcluser@vMX-PE1> show configuration protocols pcep | display inheritance no-comments
2 disable-multipath-capability;
3 pce pso-pce-server {
4     destination-ipv4-address 100.123.42.9;
5     pce-type active stateful;
6     lsp-provisioning;
7     spring-capability;
8     delegation-cleanup-timeout 10;
9     pce-traffic-steering;
10 }

```

```
11
12 jcluser@vMX-PE1> show path-computation-client status
13
14 Session Type Provisioning Status Uptime
15   pso-pce-server Stateful Active On Up 102875
16
17 LSP Summary
18   Total number of LSPs : 20
19   Static LSPs : 8
20   Externally controlled LSPs : 0
21   Externally provisioned LSPs : 12/16000 (current/limit)
22   Orphaned LSPs : 0
23
24 pso-pce-server (main)
25   Delegated : 0
26 [...]
```

NETCONF connection from router to RD (RD uses port 2200).

```
1 jcluser@vMX-PE1> show configuration system services
2 netconf {
3     ssh {
4         rate-limit 20;
5     }
6 }
7
8 jcluser@vMX-PE1> show system connections | match 2200
9 tcp4 0 0 100.123.1.4.62479 100.123.42.100.2200 ESTABLISHED
10
11
12 [...]
```

Since all prerequisite protocols are clear, let's head up to the use cases.

1.4 Demonstration Use Cases

I will demonstrate the following use cases :

1. RSVP-TE PCEP tunnel link diversity
2. RSVP-TE Netconf tunnel creation and delegation
3. SR-TE PCEP Flex-algo delay-based constraint tunnel
4. SR-TE full mesh path intent creation

1.4.1 1. RSVP-TE PCEP tunnel link diversity

The objective is to demonstrate that RD could automate the creation of two active paths using different links from ingress to egress. Diversity tunnel is commonly used for critical service that has strict requirements for resiliency.

I will create diversity tunnels from PE1 to PE6 for this use case.

First, we need to go to Observability -> Network -> Topology.

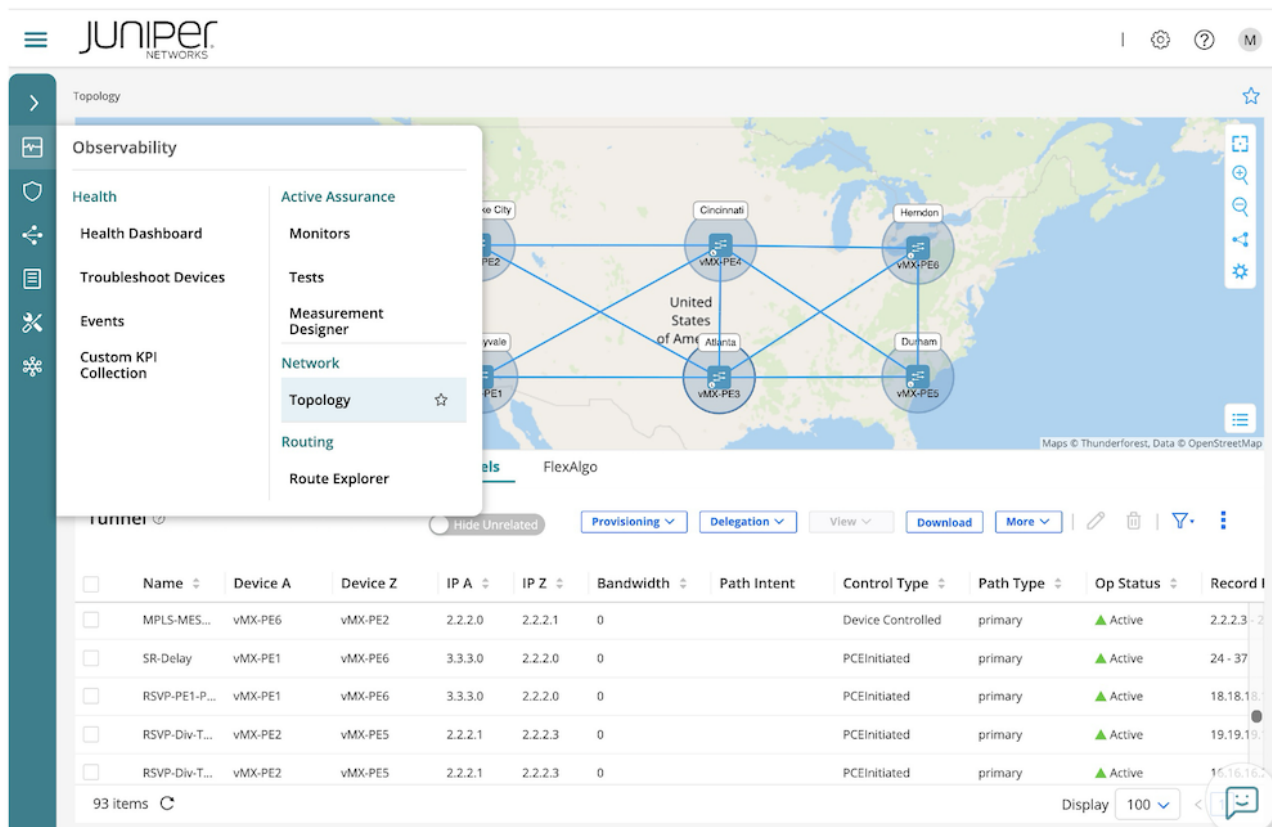


Figure 5: - RD Topology GUI

Then, we go to the Tunnels tab to create the Diverse Tunnels.

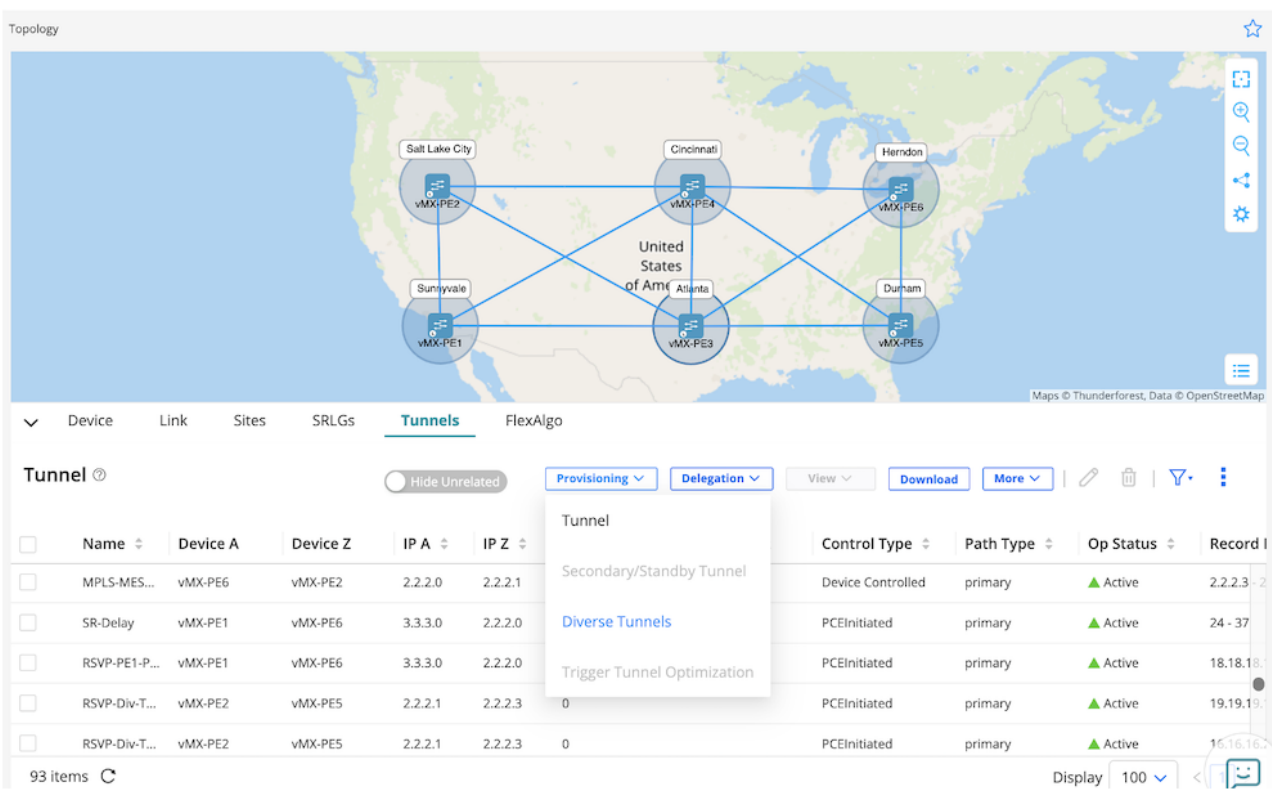


Figure 6: - RD GUI Provision Diverse Tunnel

We define the following variables in the GUI:

- Provisioning Method: PCEP
- Provision Type: RSVP
- Diversity Group: Div-Tunnel
- Diversity Level: Link
- Tunnel 1 Name: Div-Tunnel1
- Device A: vMX-PE1
- Device Z: vMX-PE6
- Tunnel 2 Name: Div-Tunnel2
- Device A: vMX-PE1
- Device Z: vMX-PE6
- And the click “Add”

Add Diverse Tunnels

Provisioning Method * ?
PCEP

Provision Type * ?
RSVP

Diversity Group * ?
Div-Tunnel

Diversity Level * ?
Link

Tunnel 1

Name * ?
Div-Tunnel1

Device A * ?
vMX-PE1
[Select Node A and Z from the Map](#)

Device Z * ?
vMX-PE6

	Name	Device A	Device Z	IP A	IP Z	Bandwidth	Path Intent	
☐	MPLS-MES...	vMX-PE3	vMX-PE2	1.1.192.0	2.2.2.1	0		De
☐	MPLS-MES...	vMX-PE4	vMX-PE2	2.2.2.2	2.2.2.1	0		De
☐	MPLS-MES...	vMX-PE5	vMX-PE2	2.2.2.3	2.2.2.1	0		De
☐	MPLS-MES...	vMX-PE6	vMX-PE2	2.2.2.0	2.2.2.1	0		De
☐	SR-Delay	vMX-PE1	vMX-PE6	3.3.3.0	2.2.2.0	0		PC

Figure 7: - Variable Definition for Diverse Tunnel (1)

Add Diverse Tunnels

Tunnel 2

Name *

Device A * [Select Node A and Z from the Map](#)

Device Z *

Planned Bandwidth *

Planned Metric

Setup *

Hold *

[Cancel](#) [Preview Path](#) [Add](#)

Tunnel	Name	Device A	Device Z	IP A	IP Z	Bandwidth	Path Intent
☐	MPLS-MES...	vMX-PE3	vMX-PE2	1.1.192.0	2.2.2.1	0	
☐	MPLS-MES...	vMX-PE4	vMX-PE2	2.2.2.2	2.2.2.1	0	
☐	MPLS-MES...	vMX-PE5	vMX-PE2	2.2.2.3	2.2.2.1	0	
☐	MPLS-MES...	vMX-PE6	vMX-PE2	2.2.2.0	2.2.2.1	0	
☐	SR-Delav	vMX-PE1	vMX-PE6	3.3.3.0	2.2.2.0	0	

Figure 8: - Variable Definition for Diverse Tunnel (2)

We see in that the tunnels were successfully created with different paths.

Tunnels

2 selected

[Provisioning](#) [Delegation](#) [View](#) [Download](#) [More](#)

Tunnel	Name	Device A	Device Z	IP A	IP Z	Bandwidth	Path Intent	Control Type	Path Type	Op Status	Record R
☒	Div-Tunnel1	vMX-PE1	vMX-PE6	1.1.192.0	2.2.2.1	0	PCEInitiated	primary	Active	27.27.27.1	
☒	Div-Tunnel2	vMX-PE1	vMX-PE6	1.1.192.0	2.2.2.1	0	PCEInitiated	primary	Active	13.13.13.2	

Figure 9: - RSVP-TE Tunnel Diversity Result

Now, let's check from the router side.

```
1 jcluser@vMX-PE1> show mpls lsp ingress
2 Ingress LSP: 7 sessions
```

```

3 To From State Rt P ActivePath LSPname
4 2.2.2.1 1.1.192.0 Up 0 * Div-Tunnel1
5 2.2.2.1 1.1.192.0 Up 0 * Div-Tunnel2
6 1.1.192.2 1.1.192.0 Up 0 * MPLS-MESH-from-VMX-PE1-to-VMX-PE2
7 2.2.2.2 1.1.192.0 Up 0 * MPLS-MESH-from-VMX-PE1-to-VMX-PE3
8 2.2.2.0 1.1.192.0 Up 0 * MPLS-MESH-from-VMX-PE1-to-VMX-PE4
9 1.1.192.1 1.1.192.0 Up 0 * MPLS-MESH-from-VMX-PE1-to-VMX-PE5
10 2.2.2.1 1.1.192.0 Up 0 * MPLS-MESH-from-VMX-PE1-to-VMX-PE6
11
12 jcluser@VMX-PE1> show mpls lsp ingress name Div-Tunnel1 detail
13 Ingress LSP: 7 sessions
14
15 2.2.2.1
16   From: 1.1.192.0, State: Up, ActiveRoute: 0, LSPname: Div-Tunnel1, LSPid: 7
17   ActivePath: (primary)
18   LSPtype: Externally provisioned, Penultimate hop popping
19   LSP Control Status: Externally controlled
20   LoadBalance: Random
21   Follow destination IGP metric
22   Encoding type: Packet, Switching type: Packet, GPID: IPv4
23   LSP Self-ping Status : Enabled
24   *Primary State: Up
25     Priorities: 7 7
26     External Path CSPF Status: external
27     SmartOptimizeTimer: 180
28     Flap Count: 0
29     MBB Count: 0
30     Externally Computed ERO (S [L] denotes strict [loose] hops):
31     27.27.27.1 S 31.31.31.2 S
32     Received RR0 (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt 20=Node-ID):
33       27.27.27.1(Label=41) 31.31.31.2(Label=3)
34 Total 1 displayed, Up 1, Down 0
35
36 jcluser@VMX-PE1> show mpls lsp ingress name Div-Tunnel2 detail
37 Ingress LSP: 7 sessions
38
39 2.2.2.1
40   From: 1.1.192.0, State: Up, ActiveRoute: 0, LSPname: Div-Tunnel2, LSPid: 8
41   ActivePath: (primary)
42   LSPtype: Externally provisioned, Penultimate hop popping
43   LSP Control Status: Externally controlled
44   LoadBalance: Random
45   Follow destination IGP metric
46   Encoding type: Packet, Switching type: Packet, GPID: IPv4
47   LSP Self-ping Status : Enabled
48   *Primary State: Up
49     Priorities: 7 7
50     External Path CSPF Status: external
51     SmartOptimizeTimer: 180
52     Flap Count: 0
53     MBB Count: 0
54     Externally Computed ERO (S [L] denotes strict [loose] hops):
55     13.13.13.2 S 16.16.16.1 S
56     Received RR0 (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt 20=Node-ID):
57       13.13.13.2(Label=30) 16.16.16.1(Label=3)
58 Total 1 displayed, Up 1, Down 0

```

****Let's simulate a link failure to check the link diversity consistency. I will create a link fiber cut between PE1 (ge-0/0/0) and PE3 (ge-0/0/0).

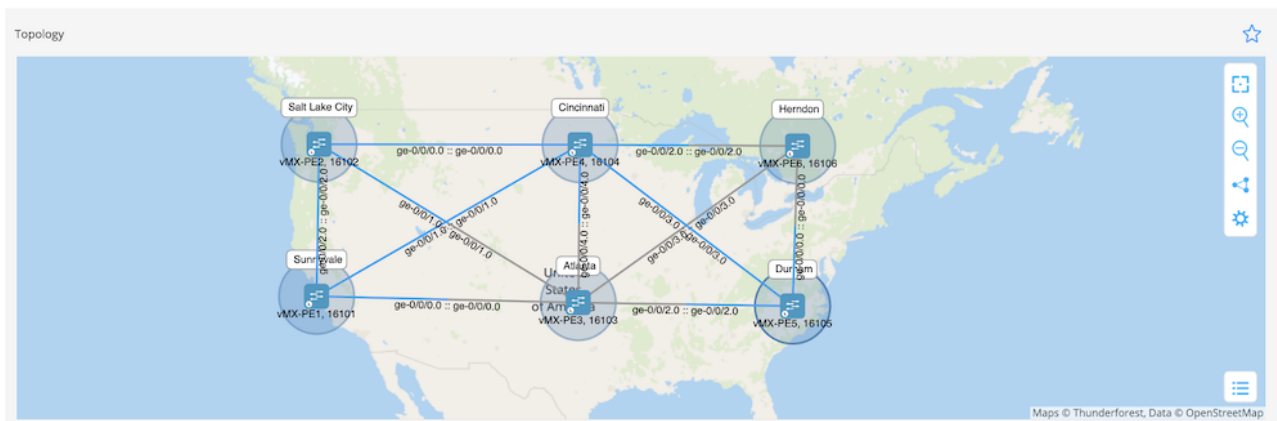


Figure 10: - P2P Interface Information in RD GUI

```

1 jcluser@vMX-PE1# show | compare
2 [edit groups paragon-service-orchestration interfaces ge-0/0/0]
3 + disable;
4
5 jcluser@vMX-PE1# commit and-quit
6 warning: Could not connect to re1 : No route to host
7 warning: Cannot connect to other RE, ignoring it
8 kenv: unable to get vmtpe
9 commit complete
10 Exiting configuration mode
11
12 jcluser@vMX-PE1> show isis adjacency
13 Interface System L State Hold (secs) SNPA
14 ge-0/0/0.0 vMX-PE3 3 Down 0
15 ge-0/0/1.0 vMX-PE4 3 Up 26
16 ge-0/0/2.0 vMX-PE2 3 Up 25

```

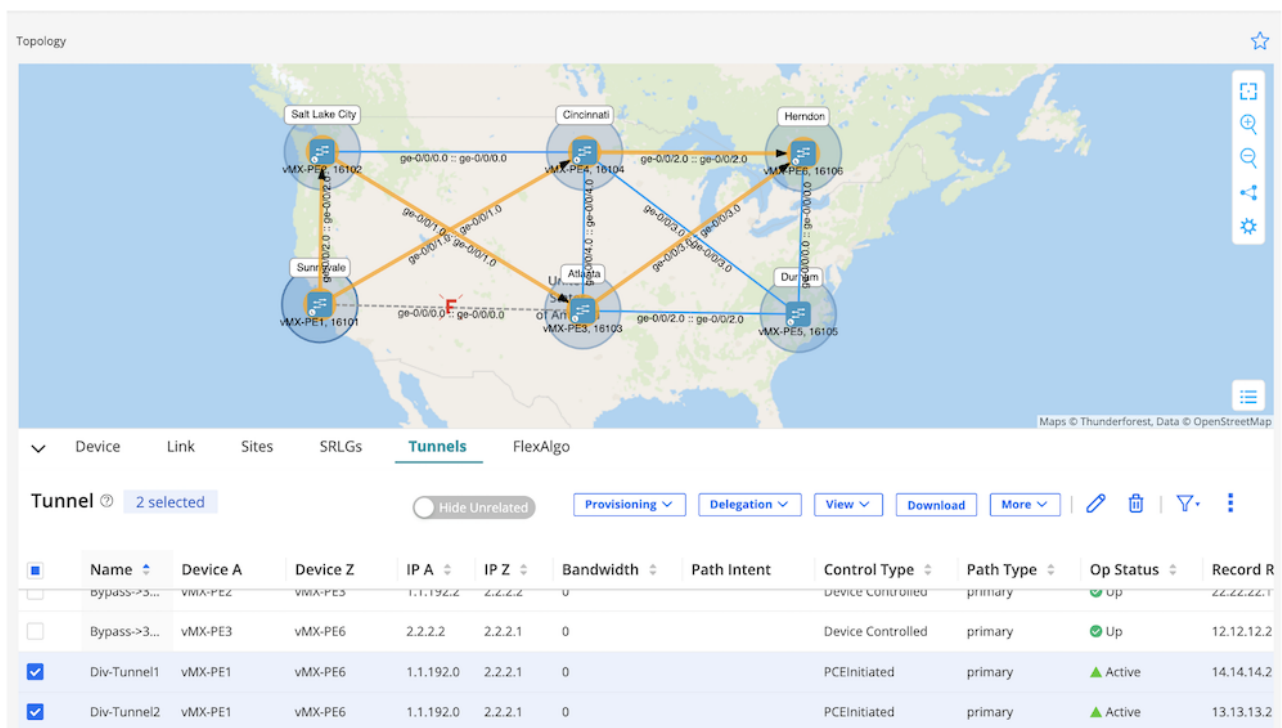


Figure 11: - Tunnel Diversity Path After Simulate Fibre Cut

We can see the result in figure 11: RD will announce two important things:

1. Link between PE1 and PE6 is declared down and a dotted line with “F” (Fail) link is represented in the

topology GUI. It will not being used for traffic.

2. Div-Tunnel1 LSP initially used the PE1 >< PE3 link. It's now rerouted through other path (in this demo to PE1 >< PE2 link) and we still maintain the link diversity constraint with Div-Tunnel2 LSP.

Furthermore, starting from RD2.5, we can track the tunnel changes with complete detailed information, including timestamp and record route.

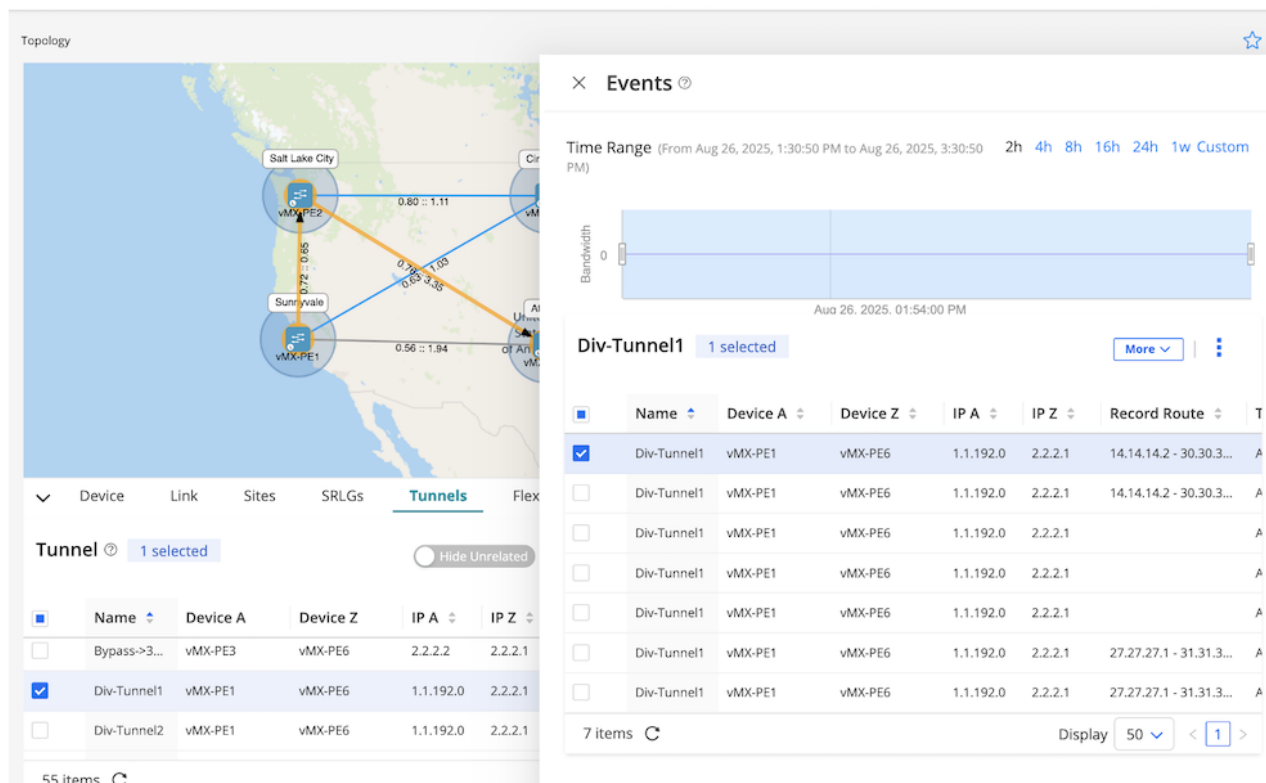


Figure 12: Tunnel Events History

1.4.2 2. RSVP-TE Netconf tunnel creation and delegation

Let's demonstrate we can create an RSVP-TE tunnel and associate it with the CLI configuration. This will result in the control type from RD GUI being "Device Controlled". The LSP is initiated from RD but is statically controlled by the router itself.

We can delegate it to RD after the LSP is successfully created. The RD will take control of the LSP, the control type becomes "Delegated".

I will create a tunnel from PE2 to PE5 for this use case.

First, we go to Tunnels -> Provisioning and we define key variables in the GUI:

- Provisioning Method: NETCONF
- Provision Type: RSVP
- Name: Netconf-LSP
- Device A: vMX-PE2
- Device B: vMX-PE5
- Routing Method: Routed by Device

Add Tunnel

PROPERTIES CONSTRAINTS ADVANCE ...

Provisioning Method * NETCONF

Provision Type * RSVP

Name * Netconf-LSP

Device A * vMX-PE2
 Select Node A and Z from the Map

Device Z * vMX-PE5

Path Type * Primary

Cancel Preview Path **Add**

Tunnel ☐ Hide Unrelated Provisioning Delegation View

☐	Name	Device A	Device Z	IP A	IP Z	Bandwidth	Path Intent	Co
☐	Bypass->1...	vMX-PE5	vMX-PE3	1.1.192.1	2.2.2.2	0		De
☐	Bypass->1...	vMX-PE3	vMX-PE5	2.2.2.2	1.1.192.1	0		De
☐	Bypass->1...	vMX-PE4	vMX-PE1	2.2.2.0	1.1.192.0	0		De

54 items

Figure 13: - RD GUI for NETCONF Tunnel Provisioning Flow

Click Add after finishing defining everything.

Tunnel 1 selected ☐ Hide Unrelated Provisioning Delegation View Download More

☐	Name	Device A	Device Z	IP A	IP Z	Bandwidth	Path Intent	Control Type	Path Type	Op Status	Record R
☐	MPLS-MES...	vMX-PE6	vMX-PE5	2.2.2.1	1.1.192.1	0		Device Controlled	primary	▲ Active	1.1.192.1 - 2
☒	Netconf-LSP	vMX-PE2	vMX-PE5	1.1.192.2	1.1.192.1	0		Device Controlled	primary	▲ Active	30.30.30.2 -

Figure 14: - Netconf-LSP Successfully Created

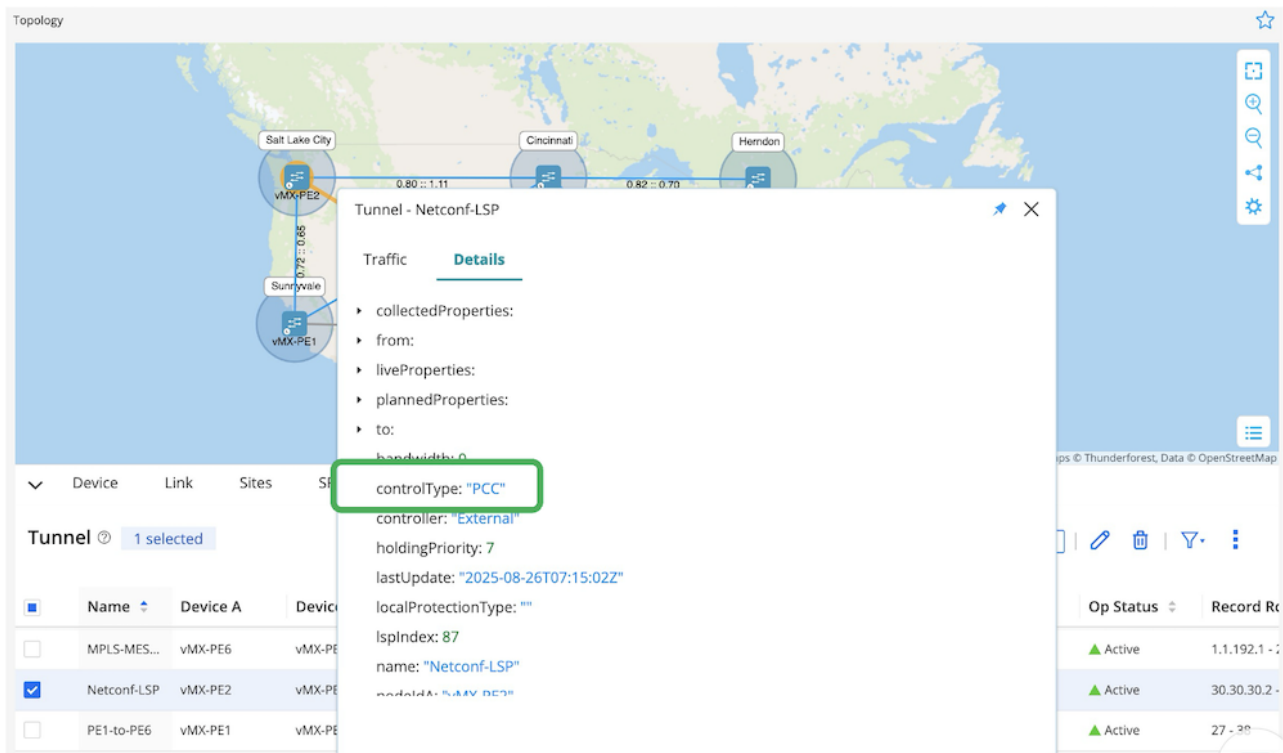


Figure 15: - control Type: PCC Information from RD GUI

We can see in and that the LSP has been successfully created.

Let's check from the PE2 router:

```

1 jcluser@VMX-PE2> show mpls lsp ingress
2 Ingress LSP: 6 sessions
3 To From State Rt P ActivePath LSPname
4 1.1.192.0 1.1.192.2 Up 0 * MPLS-MESH-from-VMX-PE2-to-VMX-PE1
5 2.2.2.2 1.1.192.2 Up 0 * MPLS-MESH-from-VMX-PE2-to-VMX-PE3
6 2.2.2.0 1.1.192.2 Up 0 * MPLS-MESH-from-VMX-PE2-to-VMX-PE4
7 1.1.192.1 1.1.192.2 Up 0 * MPLS-MESH-from-VMX-PE2-to-VMX-PE5
8 2.2.2.1 1.1.192.2 Up 0 * MPLS-MESH-from-VMX-PE2-to-VMX-PE6
9 1.1.192.1 1.1.192.2 Up 0 * Netconf-LSP Netconf-LSP
10
11 jcluser@VMX-PE2> show configuration protocols mpls
12 label-switched-path Netconf-LSP {
13     from 1.1.192.2;
14     to 1.1.192.1;
15     adaptive;
16     primary Netconf-LSP {
17         bandwidth 0;
18         priority 7 7;
19     }
20 }
21 path Netconf-LSP;
22
23 jcluser@VMX-PE2> show mpls lsp name Netconf-LSP detail
24 Ingress LSP: 6 sessions
25
26 1.1.192.1
27 From: 1.1.192.2, State: Up, ActiveRoute: 0, LSPname: Netconf-LSP, LSPid: 7
28 ActivePath: Netconf-LSP (primary)
29 LSPtype: Static Configured, Penultimate hop popping
30 LoadBalance: Random
31 Follow destination IGP metric
32 Encoding type: Packet, Switching type: Packet, GPID: IPv4
33 LSP Self-ping Status : Enabled
34 *Primary Netconf-LSP State: Up
35 Priorities: 7 7
36 SmartOptimizeTimer: 180
37 Flap Count: 0
38 MBB Count: 0
39 Computed ERO (S [L] denotes strict [loose] hops): (CSPF metric: 20)

```

```

40 30.30.30.2 S 12.12.12.2 S
41 Received RR0 (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt 20=Node-ID):
42 30.30.30.2(Label=47) 12.12.12.2(Label=3)
43 Total 1 displayed, Up 1, Down 0

```

RD2.5 successfully provisioned the Netconf-LSP tunnel via NETCONF, and the tunnel configuration appeared in CLI. I will delegate this Netconf-LSP to Routing Director for the next step.

We need to select in the list: Netconf-LSP → Delegation → Configure Delegation

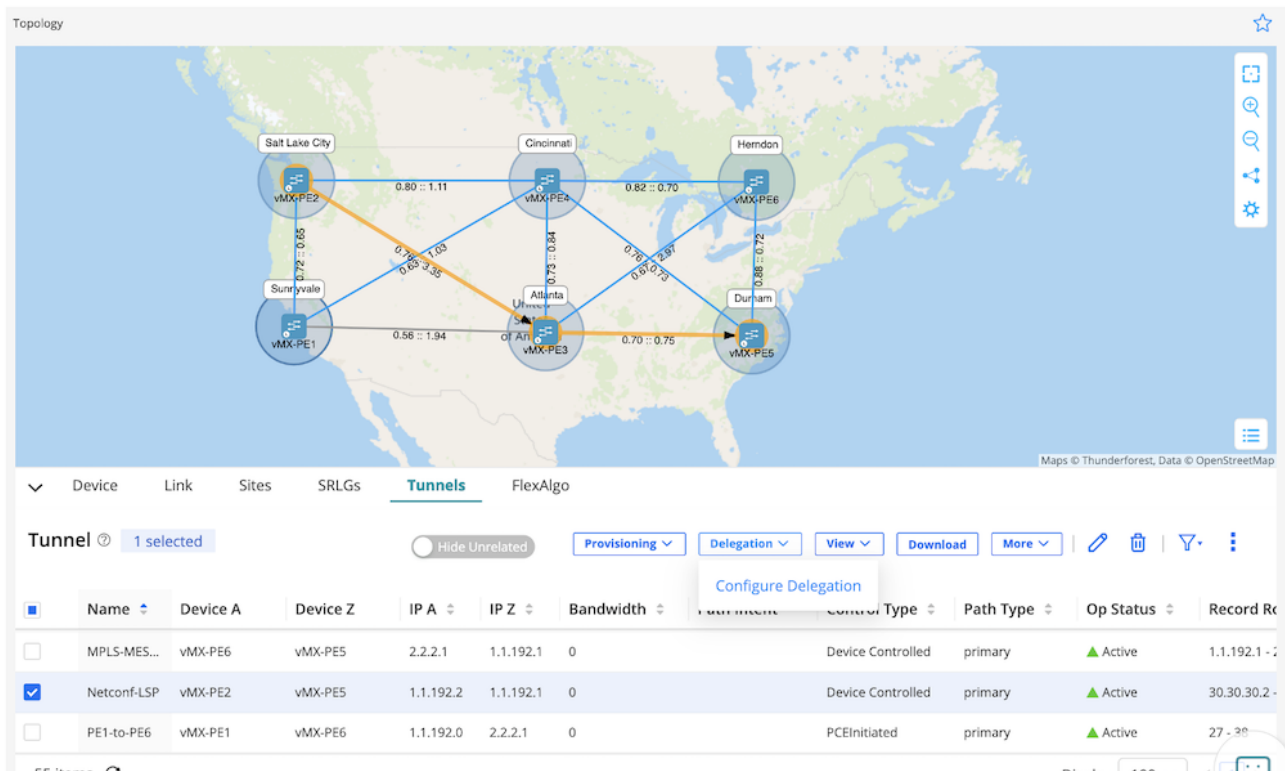


Figure 16: LSP Delegation Preparation

Select Netconf-LSP and click on “Delegate LSP”

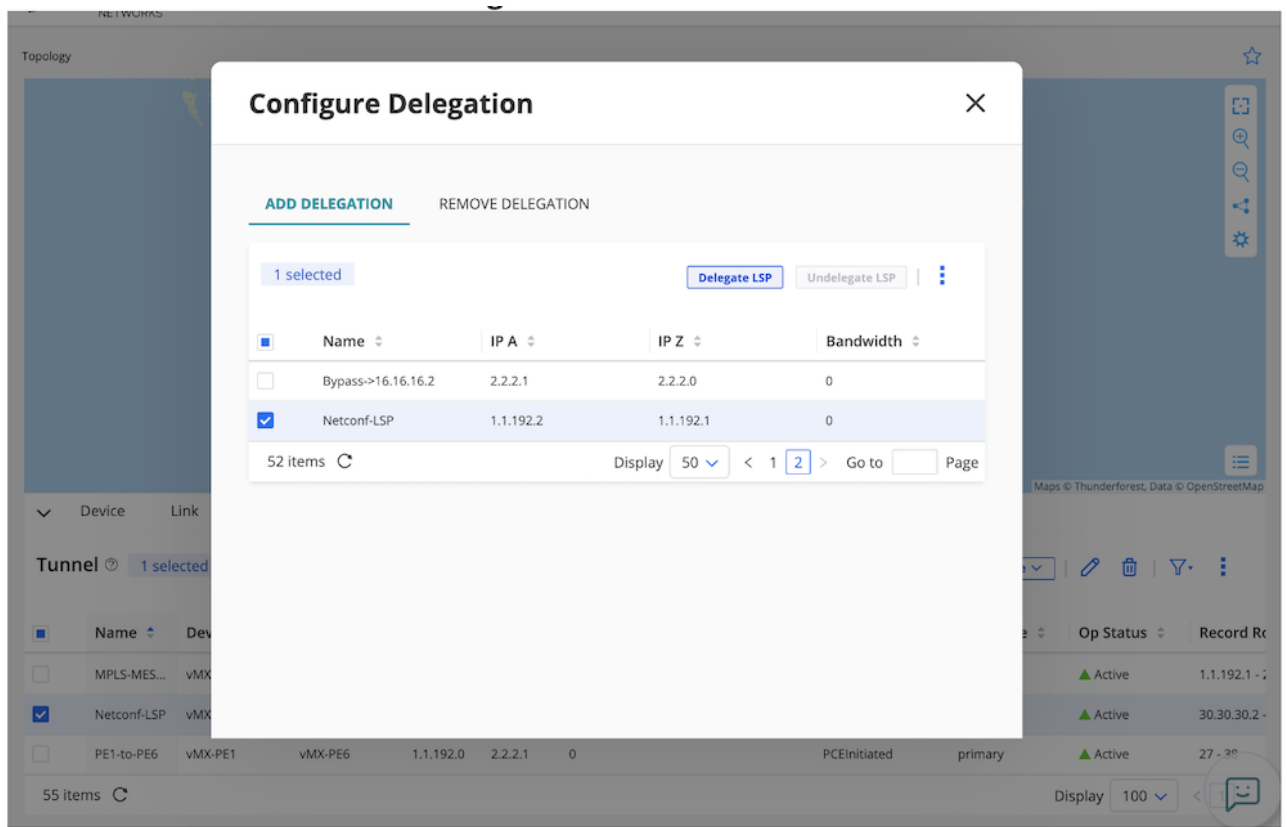


Figure 17: Final LSP Delegation Step

Once successful, RD GUI will provide the new information for this LSP.

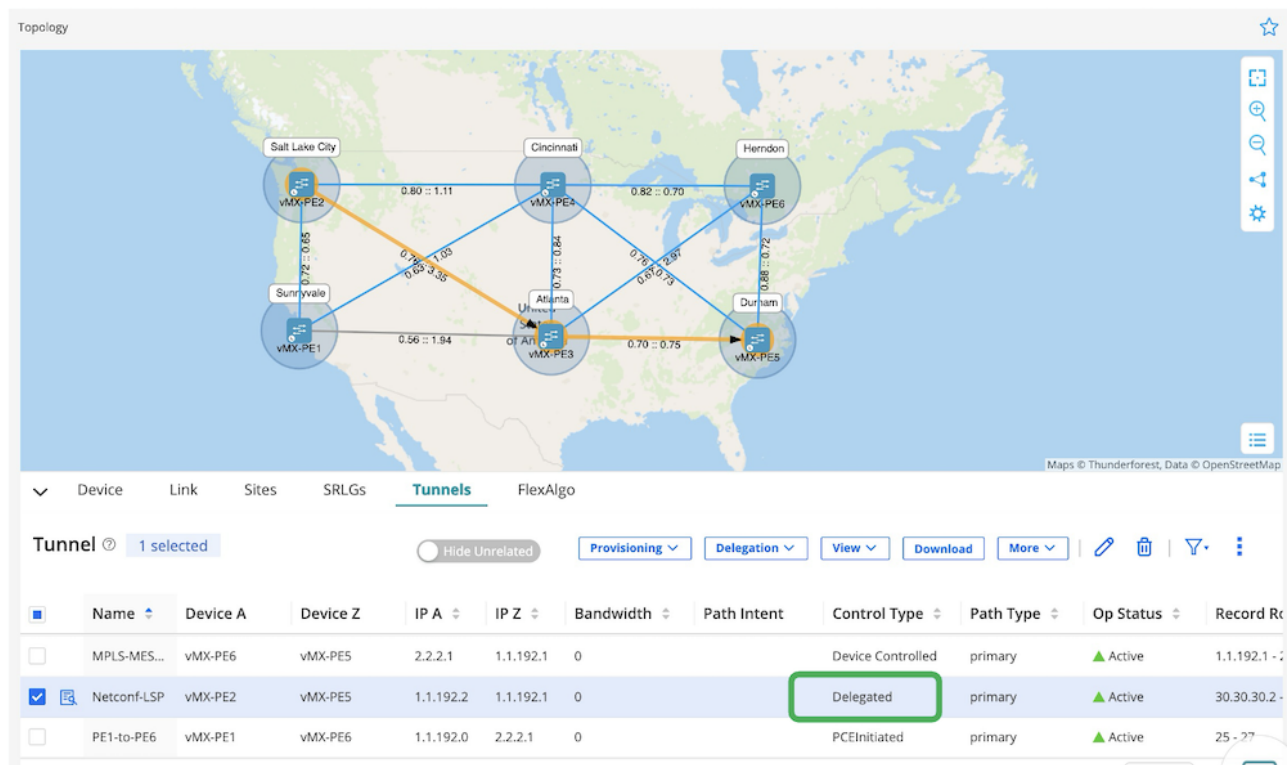


Figure 18: Control Type change to

The new details are also reflected in the router:

```

1 jcluser@vMX-PE2> show configuration protocols mpls
2 sensor-based-stats;
3 label-switched-path Netconf-LSP {
4     from 1.1.192.2;
5     to 1.1.192.1;
6     adaptive;
7     primary Netconf-LSP {
8         bandwidth 0;
9         priority 7 7;
10    }
11    lsp-external-controller pccd; Additional command added after control type change
12 }
13 path Netconf-LSP;
14
15 jcluser@vMX-PE2> show mpls lsp name Netconf-LSP detail
16 Ingress LSP: 6 sessions
17
18 1.1.192.1
19   From: 1.1.192.2, State: Up, ActiveRoute: 0, LSPname: Netconf-LSP, LSPid: 7
20   ActivePath: Netconf-LSP (primary)
21   LSPtype: Externally controlled - static configured, Penultimate hop popping
22   LSP Control Status: Externally controlled -> the LSP is now controlled by RD
23   LoadBalance: Random
24   Follow destination IGP metric
25   Encoding type: Packet, Switching type: Packet, GPID: IPv4
26   LSP Self-ping Status : Enabled
27   *Primary Netconf-LSP State: Up
28     Priorities: 7 7
29     External Path CSPF Status: external
30     SmartOptimizeTimer: 180
31     Flap Count: 0
32     MBB Count: 0
33     Received RRO (ProtectionFlag 1=Available 2=InUse 4=B/W 8=Node 10=SoftPreempt 20=Node-ID):
34       30.30.30.2(Label=47) 12.12.12.2(Label=3)
35 Total 1 displayed, Up 1, Down 0

```

1.4.3 3. SR-TE PCEP Flex-algo delay-based constraint tunnel

- PE1: Flex-algo 128 and 129
- PE2: Flex-algo 129
- PE3: Flex-algo 129
- PE4: Flex-algo 128
- PE5: Flex-algo 128
- PE6: Flex-algo 128 and 129

Some configurations in the router are mandatory to ensure SR-TE flex-algo with delay-based constraint will behave properly.

Configuration from PE1:

```

1 jcluser@vMX-PE1#
2 set protocols isis source-packet-routing srgb start-label 16000
3 set protocols isis source-packet-routing srgb index-range 8000
4 set protocols isis source-packet-routing node-segment ipv4-index 101
5 set protocols isis source-packet-routing flex-algorithm 128
6 set protocols isis source-packet-routing flex-algorithm 129
7 set protocols source-packet-routing lsp-external-controller pccd
8 set protocols pcep pce pso-pce-server spring-capability
9 set routing-options flex-algorithm 128 definition metric-type te-metric
10 set routing-options flex-algorithm 128 definition priority 100
11 set routing-options flex-algorithm 128 color 128
12 set routing-options flex-algorithm 129 definition metric-type te-metric
13 set routing-options flex-algorithm 129 definition priority 100
14 set routing-options flex-algorithm 129 color 129
15 set services rpm twamp server authentication-mode none
16 set services rpm twamp server light
17 set groups p2p-protocols protocols isis interface <*> delay-measurement

```

Next step, we verify the SR-TE in this router:

```

1 jcluser@vMX-PE1> show isis overview
2 Instance: master
3 Router ID: 1.1.192.0
4 Hostname: vMX-PE1
5 Sysid: 0010.0119.2000
6 Areaid: 49.0003
7 Adjacency holddown: enabled
8 Maximum Areas: 3
9 LSP life time: 1200
10 Attached bit evaluation: enabled
11 SPF delay: 200 msec, SPF holddown: 5000 msec, SPF rapid runs: 3
12 IPv4 is enabled, IPv6 is enabled, SPRING based MPLS is enabled
13 Traffic engineering: enabled
14 Traffic engineering v6: disabled
15 Restart: Disabled
16 Helper mode: Enabled
17 Layer2-map: Disabled
18 Source Packet Routing (SPRING): Enabled
19 SRGB Config Range :
20 SRGB Start-Label : 16000, SRGB Index-Range : 8000
21 SRGB Block Allocation: Success
22 SRGB Start Index : 16000, SRGB Size : 8000, Label-Range: [ 16000, 23999 ]
23 Node Segments: Enabled
24 Ipv4 Index : 101
25 SRv6: Disabled
26 ...Truncated...
27
28 jcluser@vMX-PE1> show isis database level 2 flex-algorithm-id 128
29 IS-IS level 2 link-state database:
30 LSP ID Sequence Checksum Lifetime Attributes
31 vMX-PE1.00-00 0x10e 0xe161 1145 L1 L2
32 vMX-PE5.00-00 0x108 0x9d33 1131 L1 L2
33 vMX-PE4.00-00 0x27 0x63a9 879 L1 L2
34 vMX-PE4.00-01 0x19a 0xa353 1192 L1 L2
35 vMX-PE6.00-00 0x108 0x5e56 1140 L1 L2
36 5 LSPs
37
38 jcluser@vMX-PE1> show isis database level 2 flex-algorithm-id 129
39 IS-IS level 2 link-state database:
40 LSP ID Sequence Checksum Lifetime Attributes
41 vMX-PE1.00-00 0x10e 0xe161 1143 L1 L2
42 vMX-PE2.00-00 0x106 0xc608 1128 L1 L2
43 vMX-PE6.00-00 0x109 0xffb 1194 L1 L2
44 vMX-PE3.00-00 0x2b 0x649b 608 L1 L2
45 vMX-PE3.00-01 0x19f 0xcccd 1179 L1 L2
46 5 LSPs

```

In addition of SR information, delay-measurement and Flex-algo details are also advertised to Routing Director.

```

1 jcluser@vMX-PE6> show ted database extensive
2 TED database: 6 ISIS nodes 6 INET nodes 0 INET6 nodes
3 NodeID: vMX-PE1.00(1.1.192.0)
4 Type: Rtr, Age: 77 secs, LinkIn: 3, LinkOut: 3
5 Protocol: IS-IS(2)
6 1.1.192.0
7 To: vMX-PE4.00(2.2.2.0), Local: 13.13.13.1, Remote: 13.13.13.2
8 Local interface index: 335, Remote interface index: 334
9 Color: 0 <none>
10 Metric: 10
11 IGP metric: 10
12 Average delay: 1540
13 Minimum delay: 697
14 Maximum delay: 6612
15 Delay variation: 2886
16 Static BW: 10Mbps
17 Reservable BW: 10Mbps
18 Available BW [priority] bps:
19 [0] 10Mbps [1] 10Mbps [2] 10Mbps [3] 10Mbps
20 [4] 10Mbps [5] 10Mbps [6] 10Mbps [7] 10Mbps
21 Interface Switching Capability Descriptor(1):
22 Switching type: Packet
23 Encoding type: Packet
24 Maximum LSP BW [priority] bps:
25 [0] 10Mbps [1] 10Mbps [2] 10Mbps [3] 10Mbps
26 [4] 10Mbps [5] 10Mbps [6] 10Mbps [7] 10Mbps

```

```

27 P2P Adjacency-SID:
28   IPV4, SID: 25, Flags: 0x30, Weight: 0
29   Link MSD:
30     - Type: 1, Value: 3
31   To: VMX-PE3.00(2.2.2.2), Local: 27.27.27.2, Remote: 27.27.27.1
32   Local interface index: 334, Remote interface index: 333
33   Color: 0 <none>
34   Metric: 10
35   IGP metric: 10
36   Average delay: 687
37   Minimum delay: 513
38   Maximum delay: 842
39   Delay variation: 173
40   Static BW: 10Mbps
41   Reservable BW: 10Mbps
42   Available BW [priority] bps:
43     [0] 10Mbps [1] 10Mbps [2] 10Mbps [3] 10Mbps
44     [4] 10Mbps [5] 10Mbps [6] 10Mbps [7] 10Mbps
45   Interface Switching Capability Descriptor(1):
46     Switching type: Packet
47     Encoding type: Packet
48     Maximum LSP BW [priority] bps:
49       [0] 10Mbps [1] 10Mbps [2] 10Mbps [3] 10Mbps
50       [4] 10Mbps [5] 10Mbps [6] 10Mbps [7] 10Mbps
51   P2P Adjacency-SID:
52     IPV4, SID: 27, Flags: 0x30, Weight: 0
53     Link MSD:
54       - Type: 1, Value: 3
55   SPRING-Capabilities:
56     SRGB block [Start: 16000, Range: 8000, Flags: 0xc0]
57   SPRING-Algorithms:
58     Algo: 0
59     Algo: 1
60     Algo: 128
61     Algo: 129
62   SPRING Flex-Algorithms:
63     Flex-Algo: 128
64       Metric: 2, Calc: 0, Prio: 100
65       Flags: 0x00000000
66     Flex-Algo: 129
67       Metric: 2, Calc: 0, Prio: 100
68       Flags: 0x00000000
69   Node MSD:
70     - Type: 1, Value: 3
71     - Type: 2, Value: 16
72   [...]

```

Looks like everything is working perfectly from the router perspective, let's do a quick check in RD, shall we?

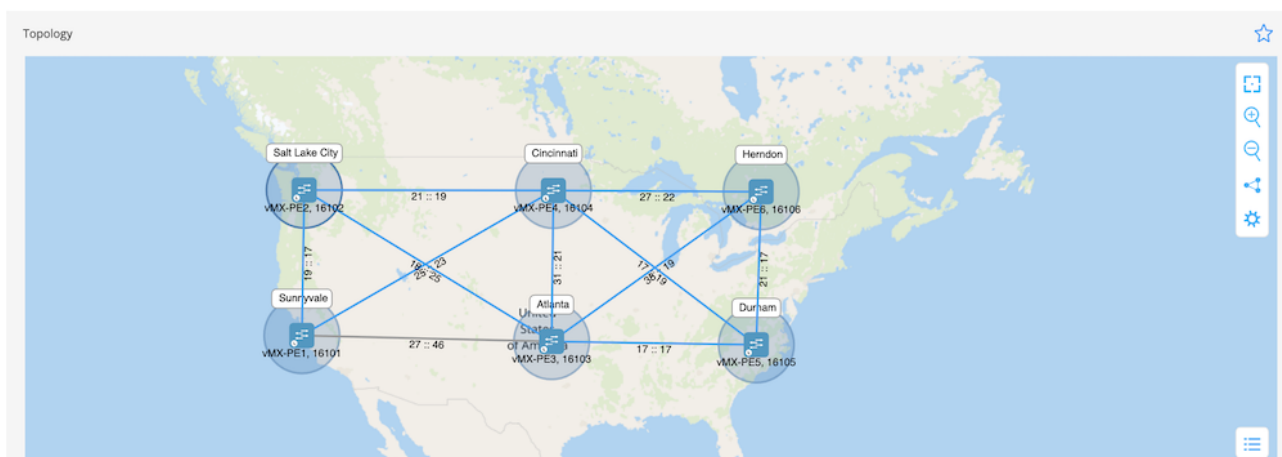
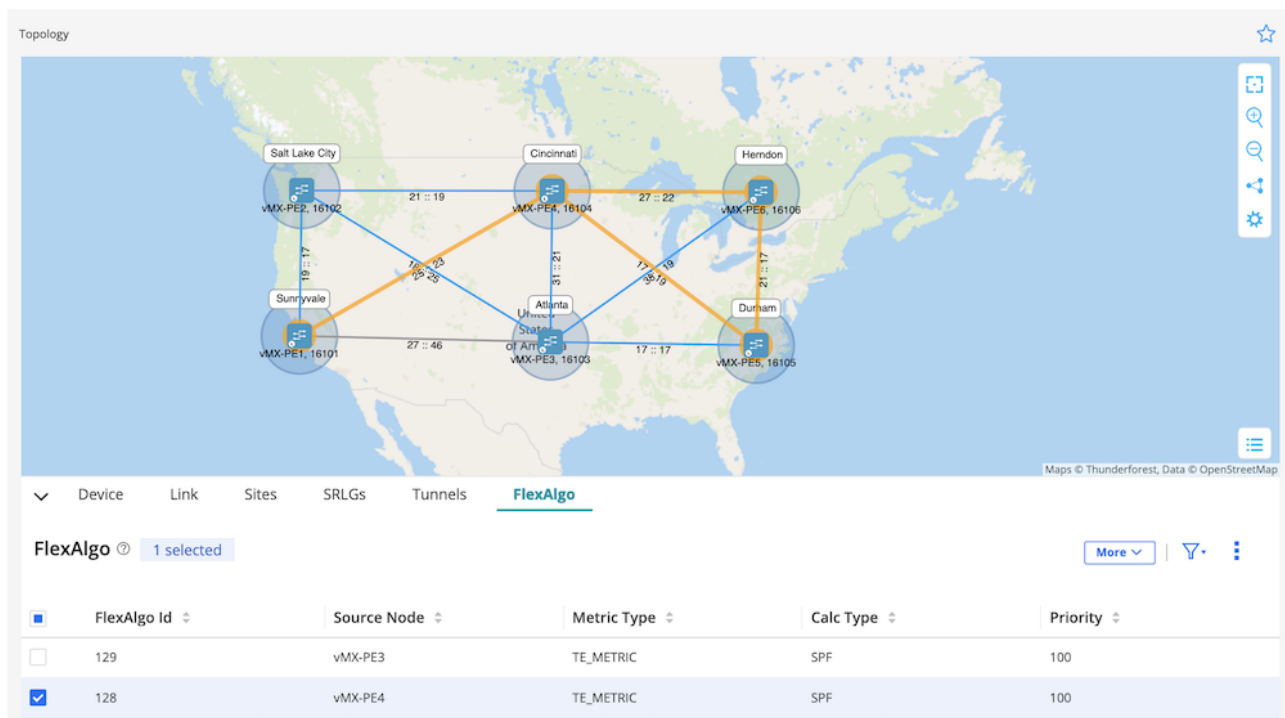
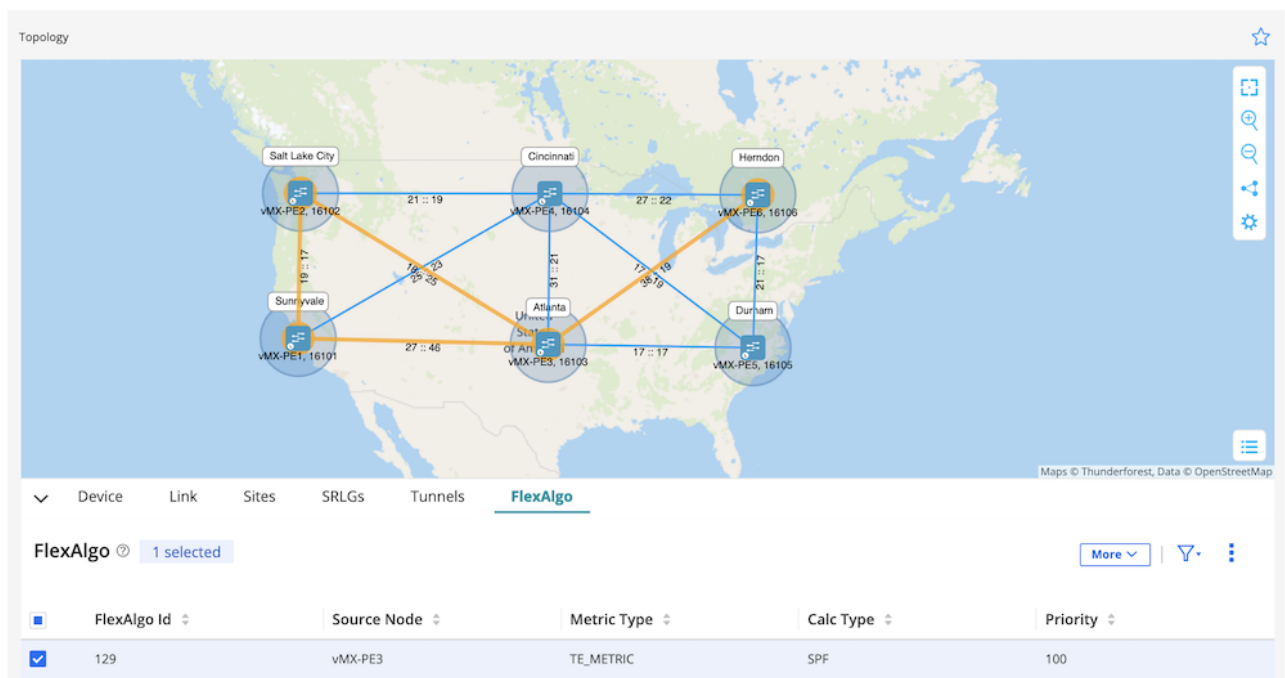


Figure 19: Node-SID and Adj-SID Information

**Figure 20:** Flex-Algo 128 Topology**Figure 21:** Flex-Algo 129 Topology

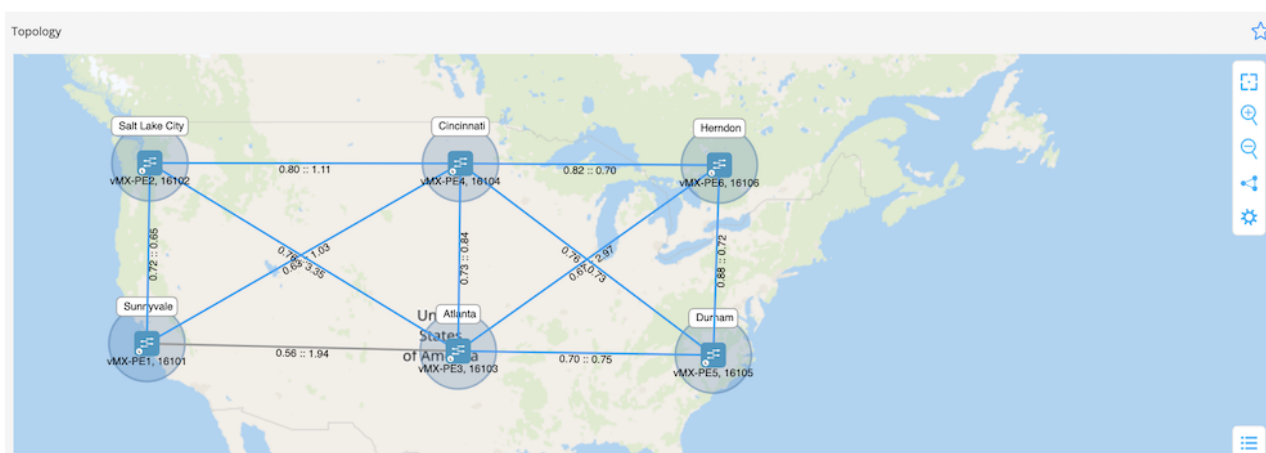


Figure 22: P2P Delay-measurement Information

We can see in Figures 19, 20, 21 and 22 that all SR information (node-SID and Adj-SID), Flex-algo and delay-measurement details are aligned with the routers outputs.

Let's provision our intended SR-TE now. I will create an SR-TE tunnel from PE6 to PE1 for this use case.

First, we go to Tunnels → Provisioning and we define important variables in the GUI:

- Provisioning Method: PCEP
- Provision Type: SR
- Name: SRTE-Delay-FlexAlgo-128
- Device A: vMX-PE6
- Device B: vMX-PE1
- Routing Method: Delay
- FlexAlgo ID: 128
- Constraints Maximum Delay: 150ms

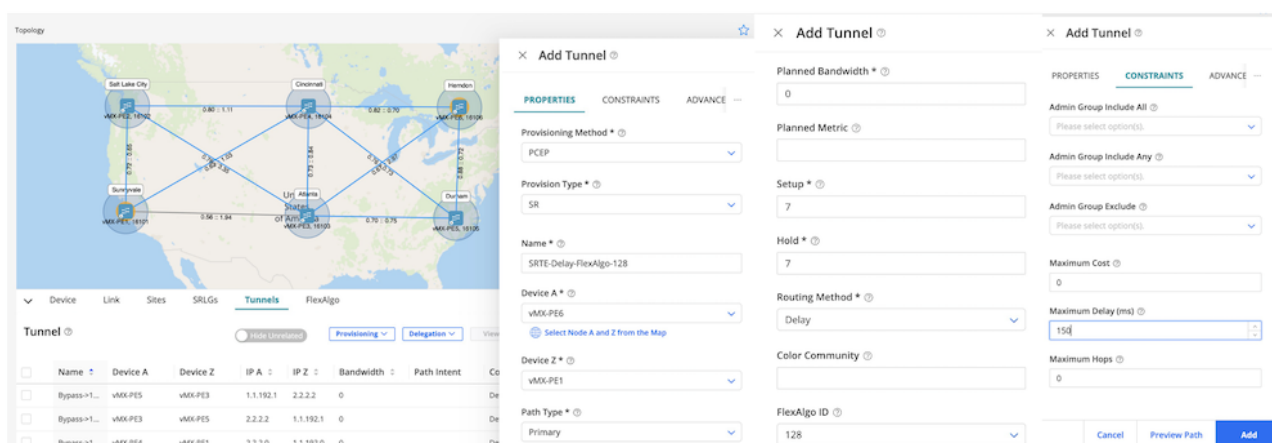


Figure 23: Step-by-step Defining the Variables

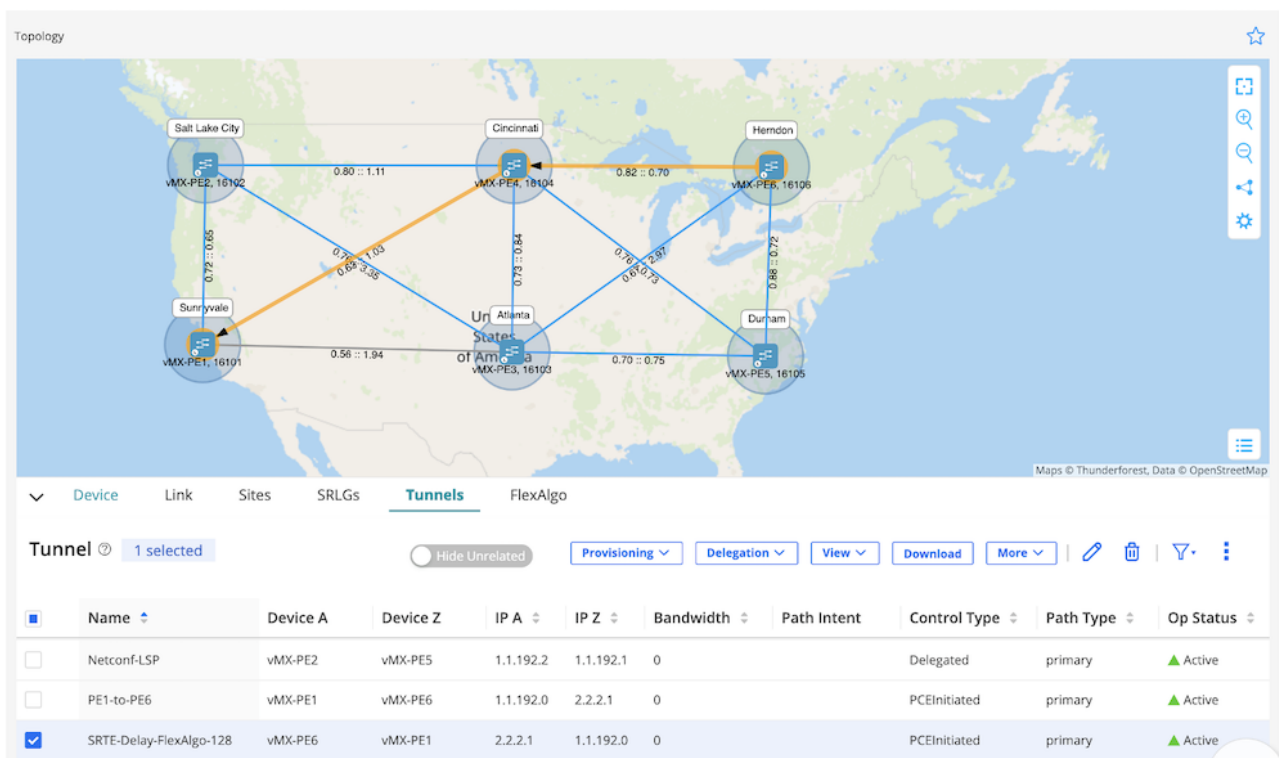


Figure 24: SRTE-Delay-FlexAlgo-128 Tunnel UP

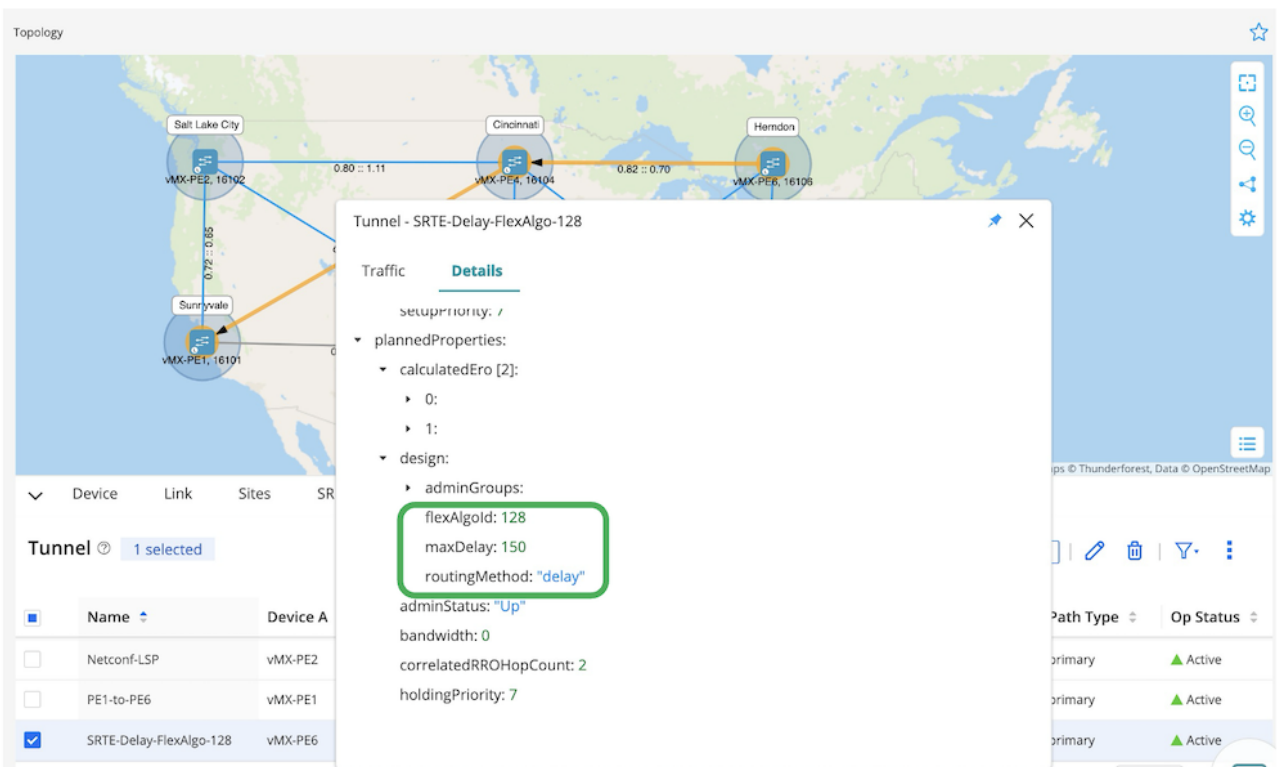


Figure 25: Detail Tunnel Information Align with Defined Variables

After the tunnel has been successfully created, we'll need to exceed the 150ms maximum delay to prove the delay constraint works well. I will statically advertise 250ms delay variation via ISIS IGP protocol for the link PE6 (ge-0/0/2) >< PE4 link (ge-0/0/2) to test this.

```

1 jcluser@VMX-PE6# set protocols isis interface ge-0/0/2 delay-metric 250000
2 jcluser@VMX-PE6# show | compare
3 [edit groups paragon-service-orchestration protocols isis interface ge-0/0/2.0]
4 + delay-metric 250000;
5 jcluser@VMX-PE6# show ted database extensive | match 250000
6     Average delay: 250000
7     Minimum delay: 250000

```

Delay-metric information will be advertised to RD.

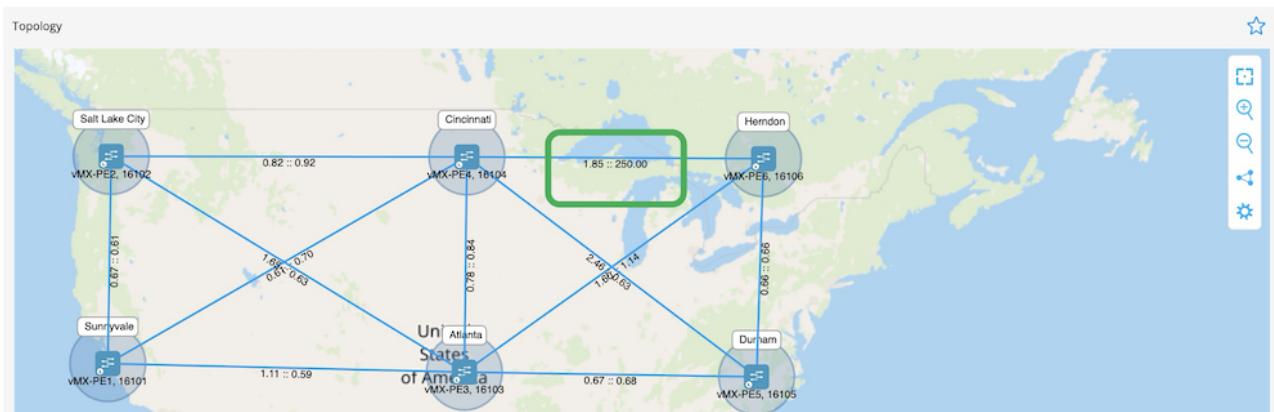


Figure 26: Delay-metric in RD GUI

The tunnel is automatically rerouted via the other Flex-algo 128 link where the measured delay is still below the defined threshold.

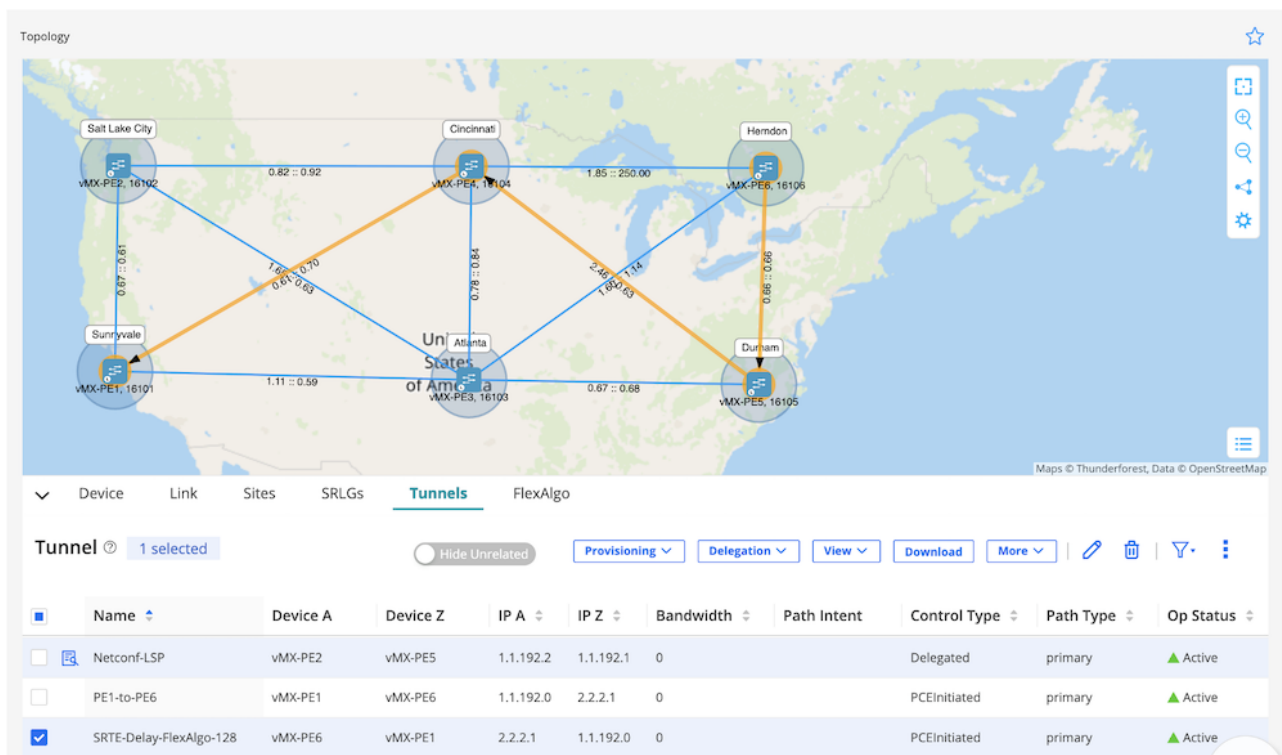


Figure 27: Rerouting Tunnel

Next, I will also violate the last Flex-algo 128 link by statically advertising 250ms delay-metric information.

```

1 jcluser@VMX-PE6# set protocols isis interface ge-0/0/0 delay-metric 250000

```

```

2 jcluser@VMX-PE6# show | compare
3 [edit groups paragon-service-orchestration protocols isis interface ge-0/0/2.0]
4 + delay-metric 250000;
5 jcluser@VMX-PE6> show ted database extensive | match 250000
6     Average delay: 250000
7     Minimum delay: 250000
8     Average delay: 250000
9     Minimum delay: 250000

```

As expected, the tunnel is declared down for two reasons:

1. There is no more resource of Flex-algo 128 link in the topology (remember that PE3 is part of Flex-algo 129, hence PE3 > PE6 link is not part of the Flex-algo 128 resource)
2. All Flex-algo 128 available links are exceeding the 150ms maximum delay constraint

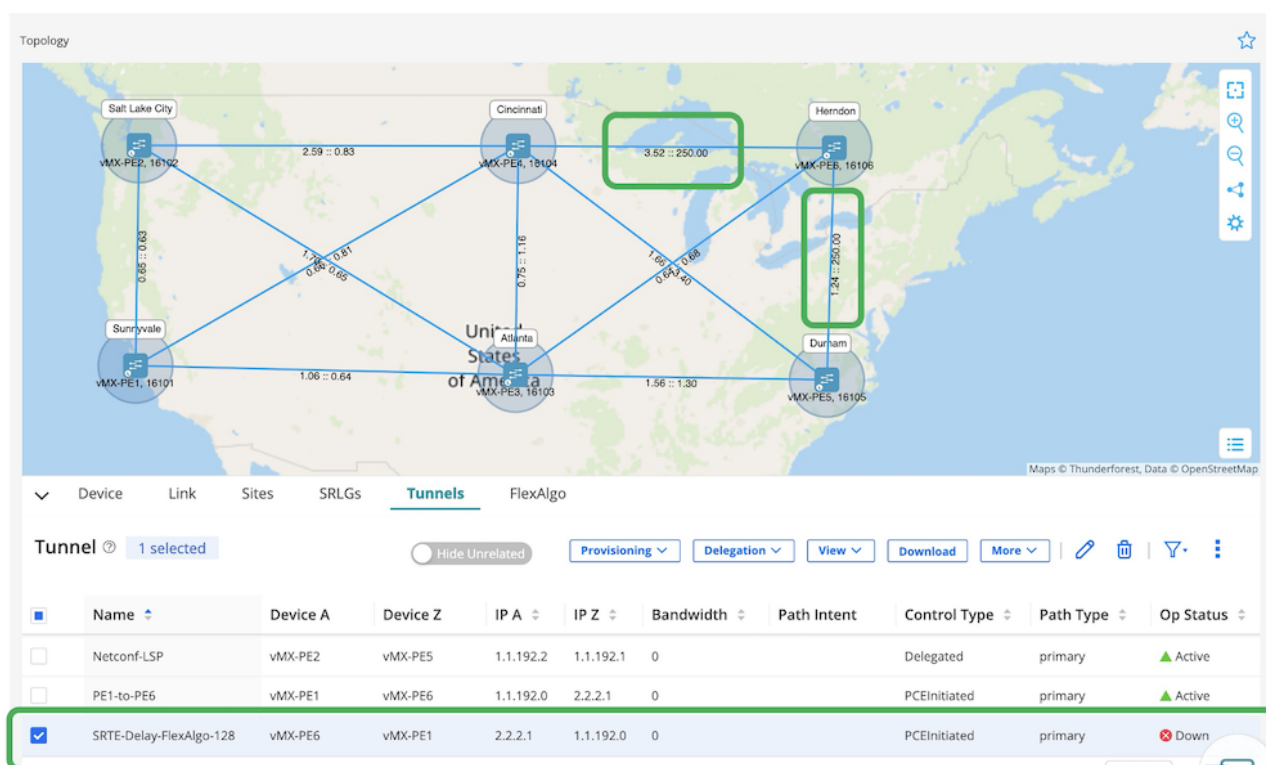


Figure 28: Delay-measurement and Tunnel Down in RD GUI

This test case proves that RD2.5 can handle multiple constraint tunnels.

1.4.4 4. SR-TE full mesh path intent creation

Imagine we have hundreds of routers in the network and we need to create a new full mesh LSP traffic engineering. A service provider wants to upgrade the network from MPLS-based LDP/RSVP to SR-MPLS, and SR-TE is mandatory. Configuring routers manually via the CLI will be a tedious and error-prone effort.

Routing Director introduced a new feature in RD2.5 version to overcome this problem. It's called *Network Optimization Intent*. **It can automate and create a full mesh LSP with only a few steps. I will show you how easy it is with RD in this last use case.

First, we need to go to the "Network Optimization Intent" tab.

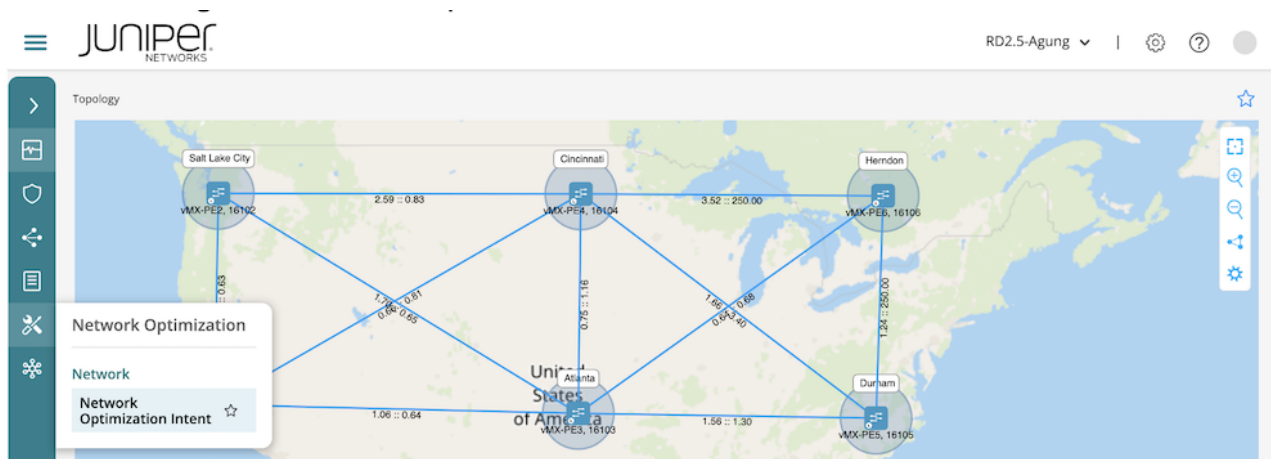


Figure 29: Network Optimization Intent

We need to define the “Tunnel Profiles” then click “Publish”.

- Name: Tunnel-profile
- Provisioning Method: PCEP
- Signaling Protocol: SR

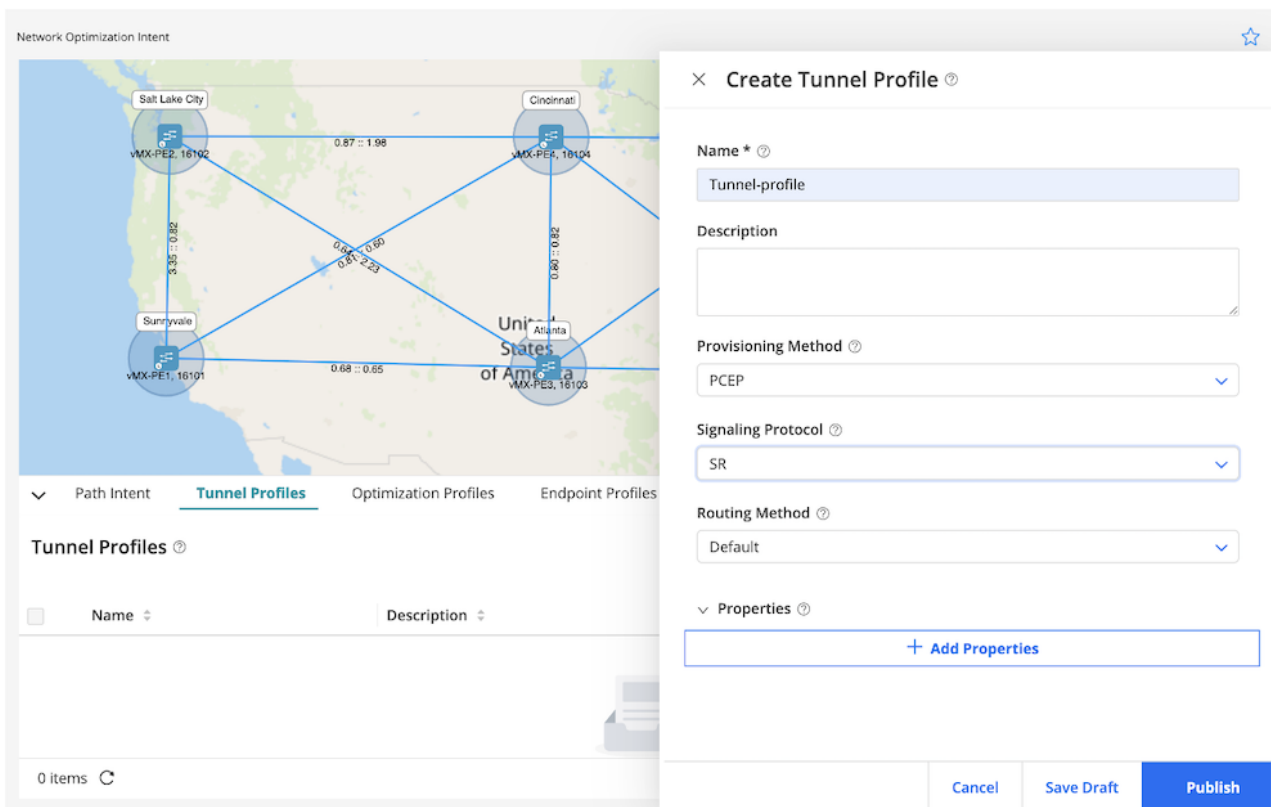


Figure 30: RD Tunnel Profiles

Creating “Optimization Profiles” is the next prerequisite stage, then click “Publish”.

- Name: Optim-profile
- Tunnel Optimization Context: 0 (I will leave it zero, but we can define this as per the requirements)

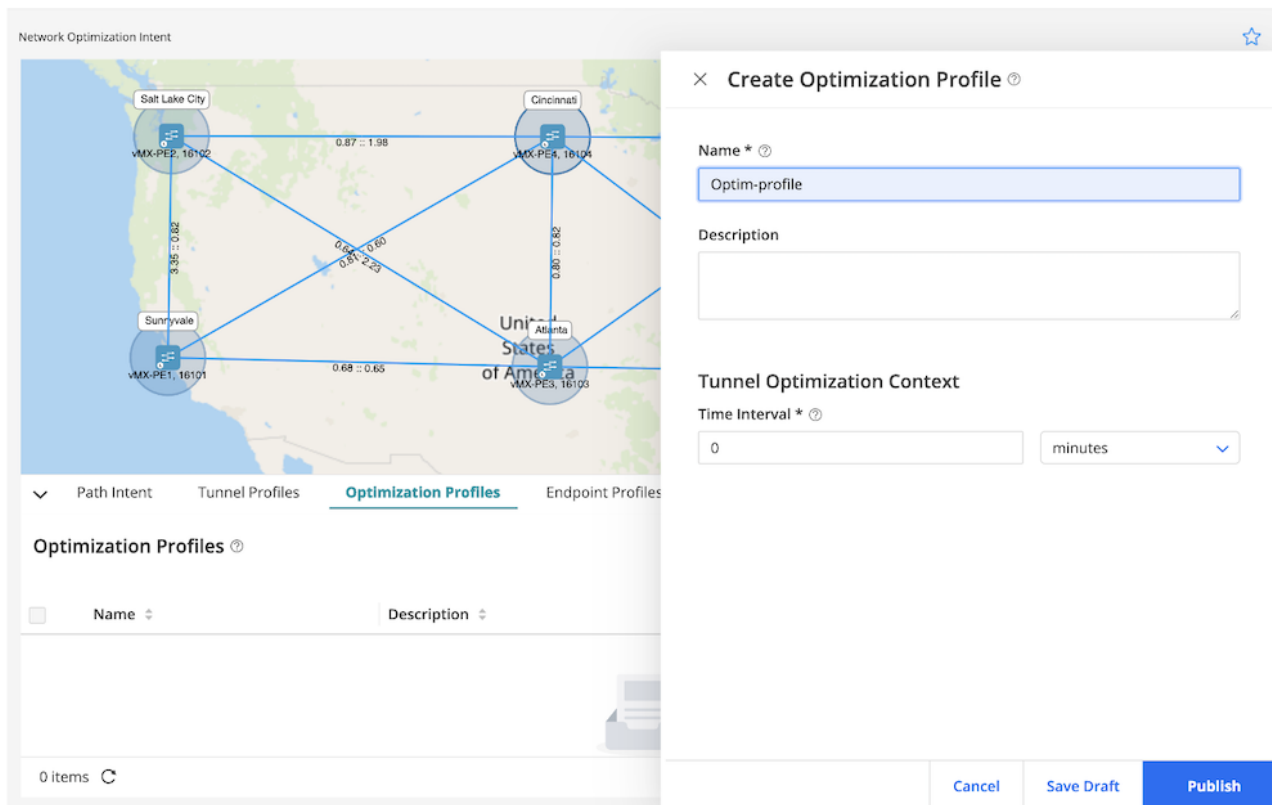


Figure 31: RD Optimization Profiles

Last one is to define the “Endpoint Group” with the name: Node-Endpoint before we move to the final stage. Then, we click “Publish”.

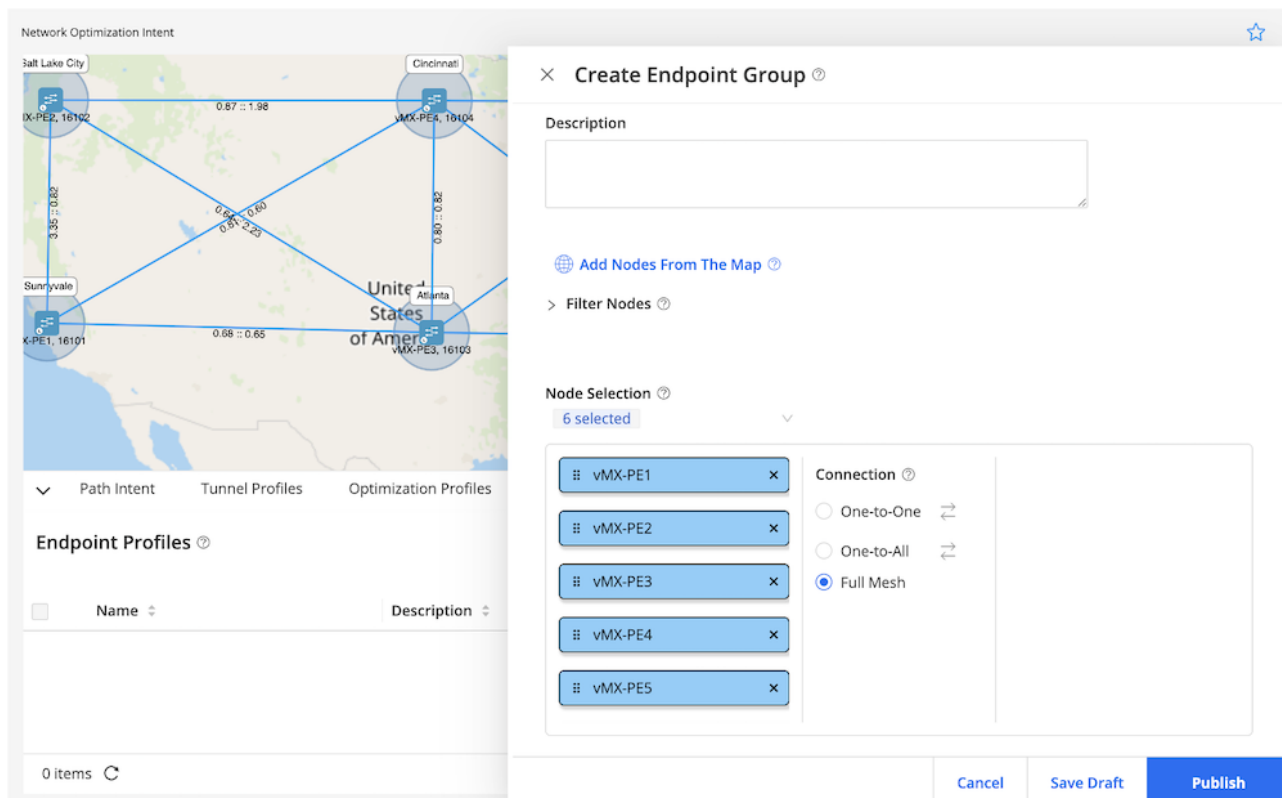


Figure 32: RD Endpoint Group

We move to the “Path Intent” after all the prerequisites have been defined as per the capture below and then click “Publish”.

- Name: Path-Intent
- Tunnel Profile: Tunnel-profile
- Optimization Profile: Optim-profile
- Endpoint Group: Node-Endpoint

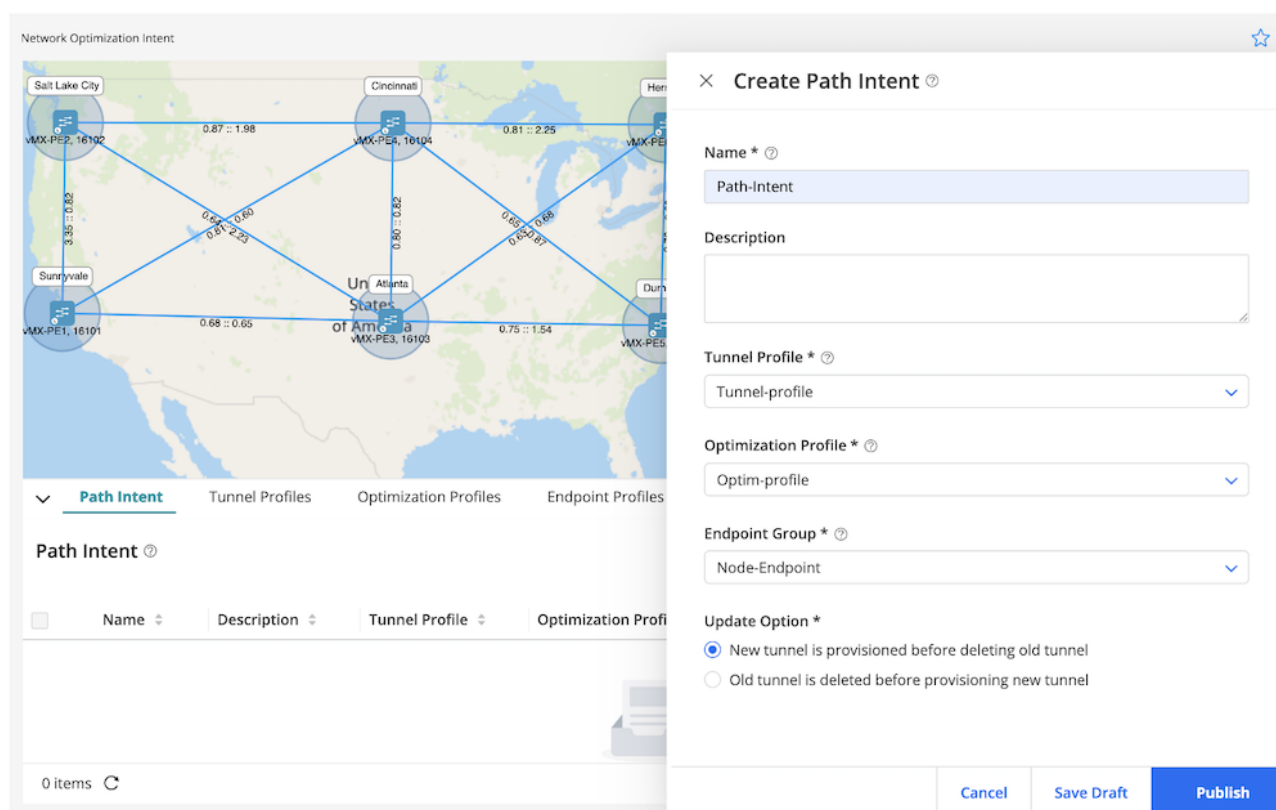


Figure 33: RD Path Intent

Since I am creating a full mesh path intent, the total provisioned paths will be using a simple formula $N \times (N-1)$. I have six routers in my lab, hence the total will be $6 \times (6-1) = 30$ provisioned tunnels (with 5 SR-TE tunnels per router) as per Figure 34.

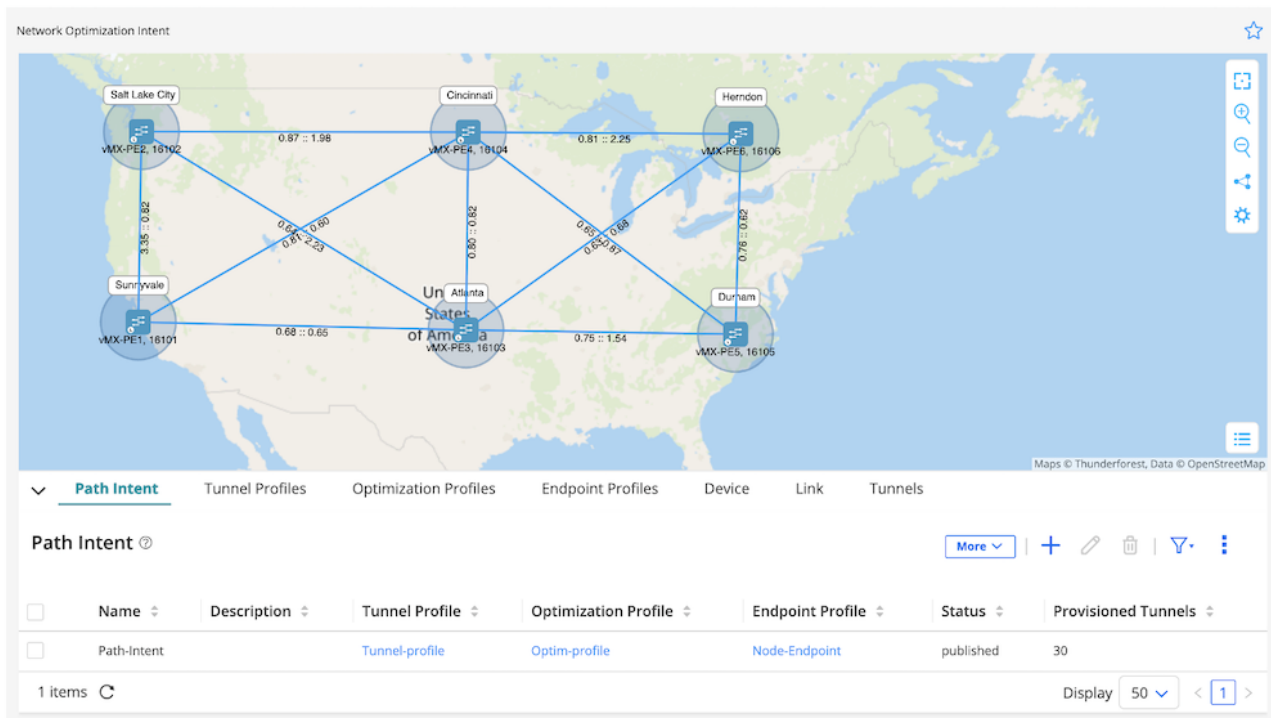


Figure 34: RD Final Result Network Optimization Intent

We verify the active tunnels' status in Figure 35

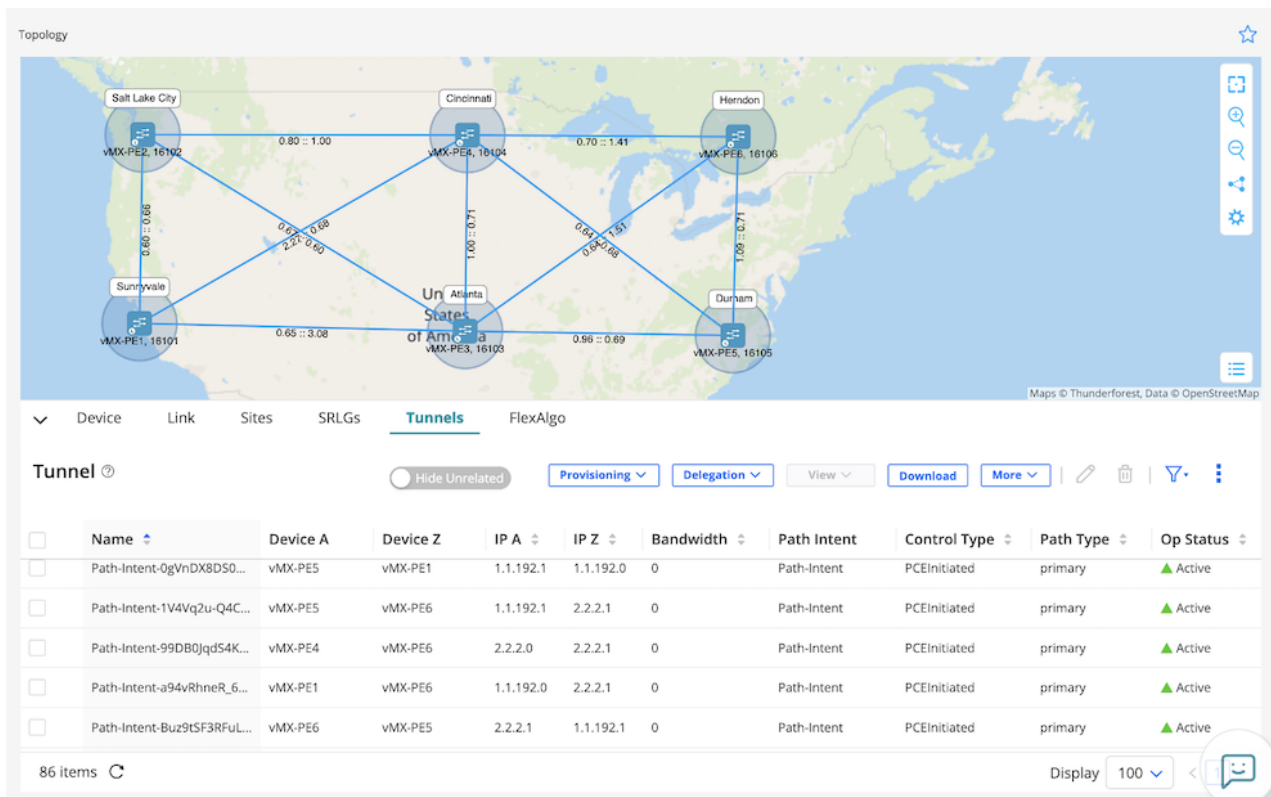


Figure 35: all SR-TE Tunnels Up

I will grab sample output from router PE3 and PE4 for the Network Optimization Intent result.

```
1 jcluser@vMX-PE3> show spring-traffic-engineering lsp
2 To State LSPname
3 2.2.2.0 Up Path-Intent-FG06Dm-8SYe5l08niUlKdg
4 1.1.192.0 Up Path-Intent-Nj9A0i-cRiu0ZcdKVA424g
5 1.1.192.1 Up Path-Intent-UUWHi7CRQUiCSfudlW093A
6 2.2.2.1 Up Path-Intent-jYj8-40iSnKKiXWeoFmc0Q
7 1.1.192.2 Up Path-Intent-nBeNfCMATZ6Xg_hhzHkCow
8
9 Total displayed LSPs: 5 (Up: 5, Down: 0)
10
11 jcluser@vMX-PE4> show spring-traffic-engineering lsp
12 To State LSPname
13 2.2.2.1 Up Path-Intent-99DB0JqdS4KFuuJT0ByUVg
14 1.1.192.1 Up Path-Intent-Dbg3a_SCSCS4Z0FrdJl-fQ
15 1.1.192.0 Up Path-Intent-eUOHnCY_Tp062ik32FMcVw
16 2.2.2.2 Up Path-Intent-pkMy1fDWRbCik4noVLzKmQ
17 1.1.192.2 Up Path-Intent-qm3BZhgdTPaCYEpere2qWw
18
19 Total displayed LSPs: 5 (Up: 5, Down: 0)
```

We can see how easy and fast it is to build full mesh tunnels in the network.

1.5 Conclusion

In this Techpost, we described how network automation and optimization can be managed by Routing Director. RD will improve day-to-day operation and ultimately reduce the probability of human error in the network. From creating a new LSP for a specific service with different constraints, delegating LSP from routers to RD, transport network slicing with Flex-algo, to full-mesh tunnel automation provisioning... All were demonstrated and proven in this Techpost article.

1.6 Useful links

- <https://www.juniper.net/documentation/us/en/quick-start/software/juniper-routing-director2.5.0/rd-quick-start-guide/>
- <https://www.juniper.net/documentation/us/en/software/juniper-routing-director2.5.0/user-guide/index.html>
- <https://www.juniper.net/content/dam/www/assets/datasheets/us/en/network-automation/paragon-automation-datasheet.pdf>
- <https://www.juniper.net/us/en/products/network-automation/routing-director.html>
- <https://www.juniper.net/content/dam/www/assets/datasheets/us/en/network-automation/routing-director-datasheet.pdf>

1.7 Glossary

- RD: Routing Director
- MPLS: MultiProtocol Label Switching
- SR: Segment Routing
- LSP: Label Switched Path
- Flex-algo: Flexible Algorithm
- SID: Segment-ID
- BGP-LS: Border Gateway Protocol – Link State
- NETCONF: Network Configuration Protocol

- IGP: Interior Gateway Protocol
- GUI: Graphical User Interface

1.8 Acknowledgements

Thank you to Darshan Sreenivas and Henry Cheung for the discussion, especially to Darshan for helping me with JCL Sandbox troubleshooting.



DC – AI – Routing – Switching – Security – Wireless – Automation

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty.

Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgments, if needed. All third-party marks are the property of their respective owners.

HEWLETT PACKARD ENTERPRISE

HPE.com

