

Shelly Pro 3EM 120A V2

Three-phase energy meter

EAN code: 3800238073862



Product description


The Shelly Pro 3EM 120A V2 is a DIN-rail three-phase energy meter that uses current transformers to measure power, current, voltage and power factor on three individual phases at loads up to 120 A per phase, with up to 99% accuracy (Class B, IEC 62053-21).

It performs 4-quadrant, real-time measurement at one-minute resolution and is photovoltaic-ready, suitable for monitoring both consumption and PV production. Recorded data is stored on the device and can be exported as CSV or via RPC.

The meter connects over Wi-Fi, Ethernet (LAN) and Bluetooth and is Matter-ready via firmware update. It has no built-in relay; local contactor control is available by adding the Pro 3EM Switch Add-on.

Technical data

Physical	
Size (HxWxD):	94 x 19 x 69 mm / 3.70 x 0.75 x 2.71 in
Weight:	62 g / 2.19 oz
Mounting:	DIN rail
Screw terminals max torque:	0.4 Nm / 3.5 lbin
Conductor cross section:	0.5 to 2.5 mm ² / 20 to 14 AWG
Environmental	
Ambient working temperature:	-20 °C to 40 °C / -5 °F to 105 °F
Humidity:	30 % to 70 % RH
Max. altitude:	2000 m / 6562 ft
Electrical & metering	
Power supply:	100-260 V~, 50/60 Hz
Power consumption:	< 3 W
Measurement:	3-phase, 4-quadrant (via CT)
Current range:	0 - 120 A per channel
Accuracy:	±1 % (V); ±1 % (2-120 A)
Accuracy class:	Class B (IEC 62053-21)
Data storage:	At least 45 days in 1-min intervals
External protection:	B/C char., 16 A, 6 kA, class 3
Connectivity	
Wi-Fi / LAN / BT:	802.11 b/g/n 2.4 GHz · RJ45 Ethernet · Bluetooth 4.2
Matter / protocols:	Matter-ready (firmware) · MQTT · Modbus TCP

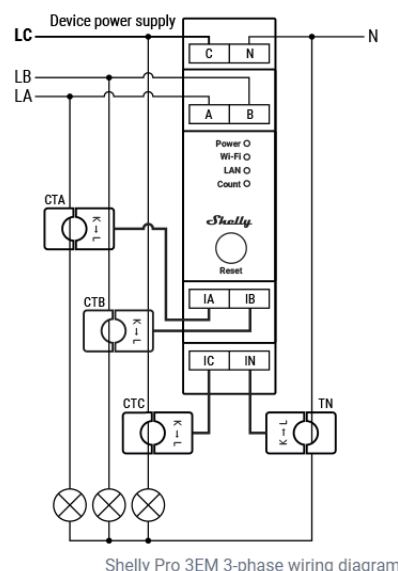

Shelly Pro 3EM 3-phase wiring diagram