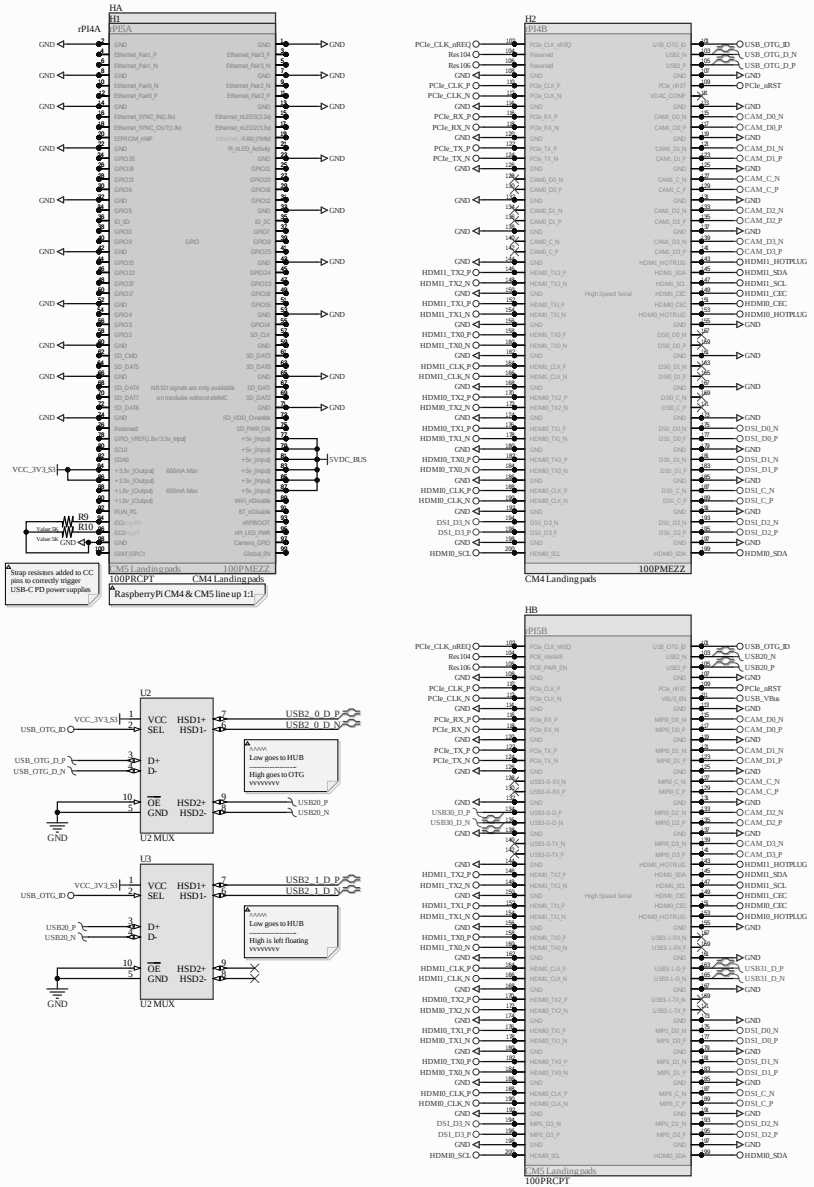
HA
H1
rPI4A
rPI5A
CM5 Landing pads
100PRCPT
CM4 Landing pads
100PMEZZ
Strap resistors added to CC pins to correctly trigger USB-C PD power supplies
Raspberry Pi CM4 & CM5 line up 1:1
H2
rPI4B
CM4 Landing pads
100PMEZZ
HB
rPI5B
CM5 Landing pads
100PRCPT
U2
U2 MUX
Low goes to HUB
High goes to OTG
U3
U2 MUX
Low goes to HUB
High is left floating
Single USB2 lane from CM4 is expanded via Hub. Downstream USB2 lanes from CM5 carrier are populated; USB3 lanes are left floating
U1
USB2 Hub - USB251xBI-AEZG
LED1

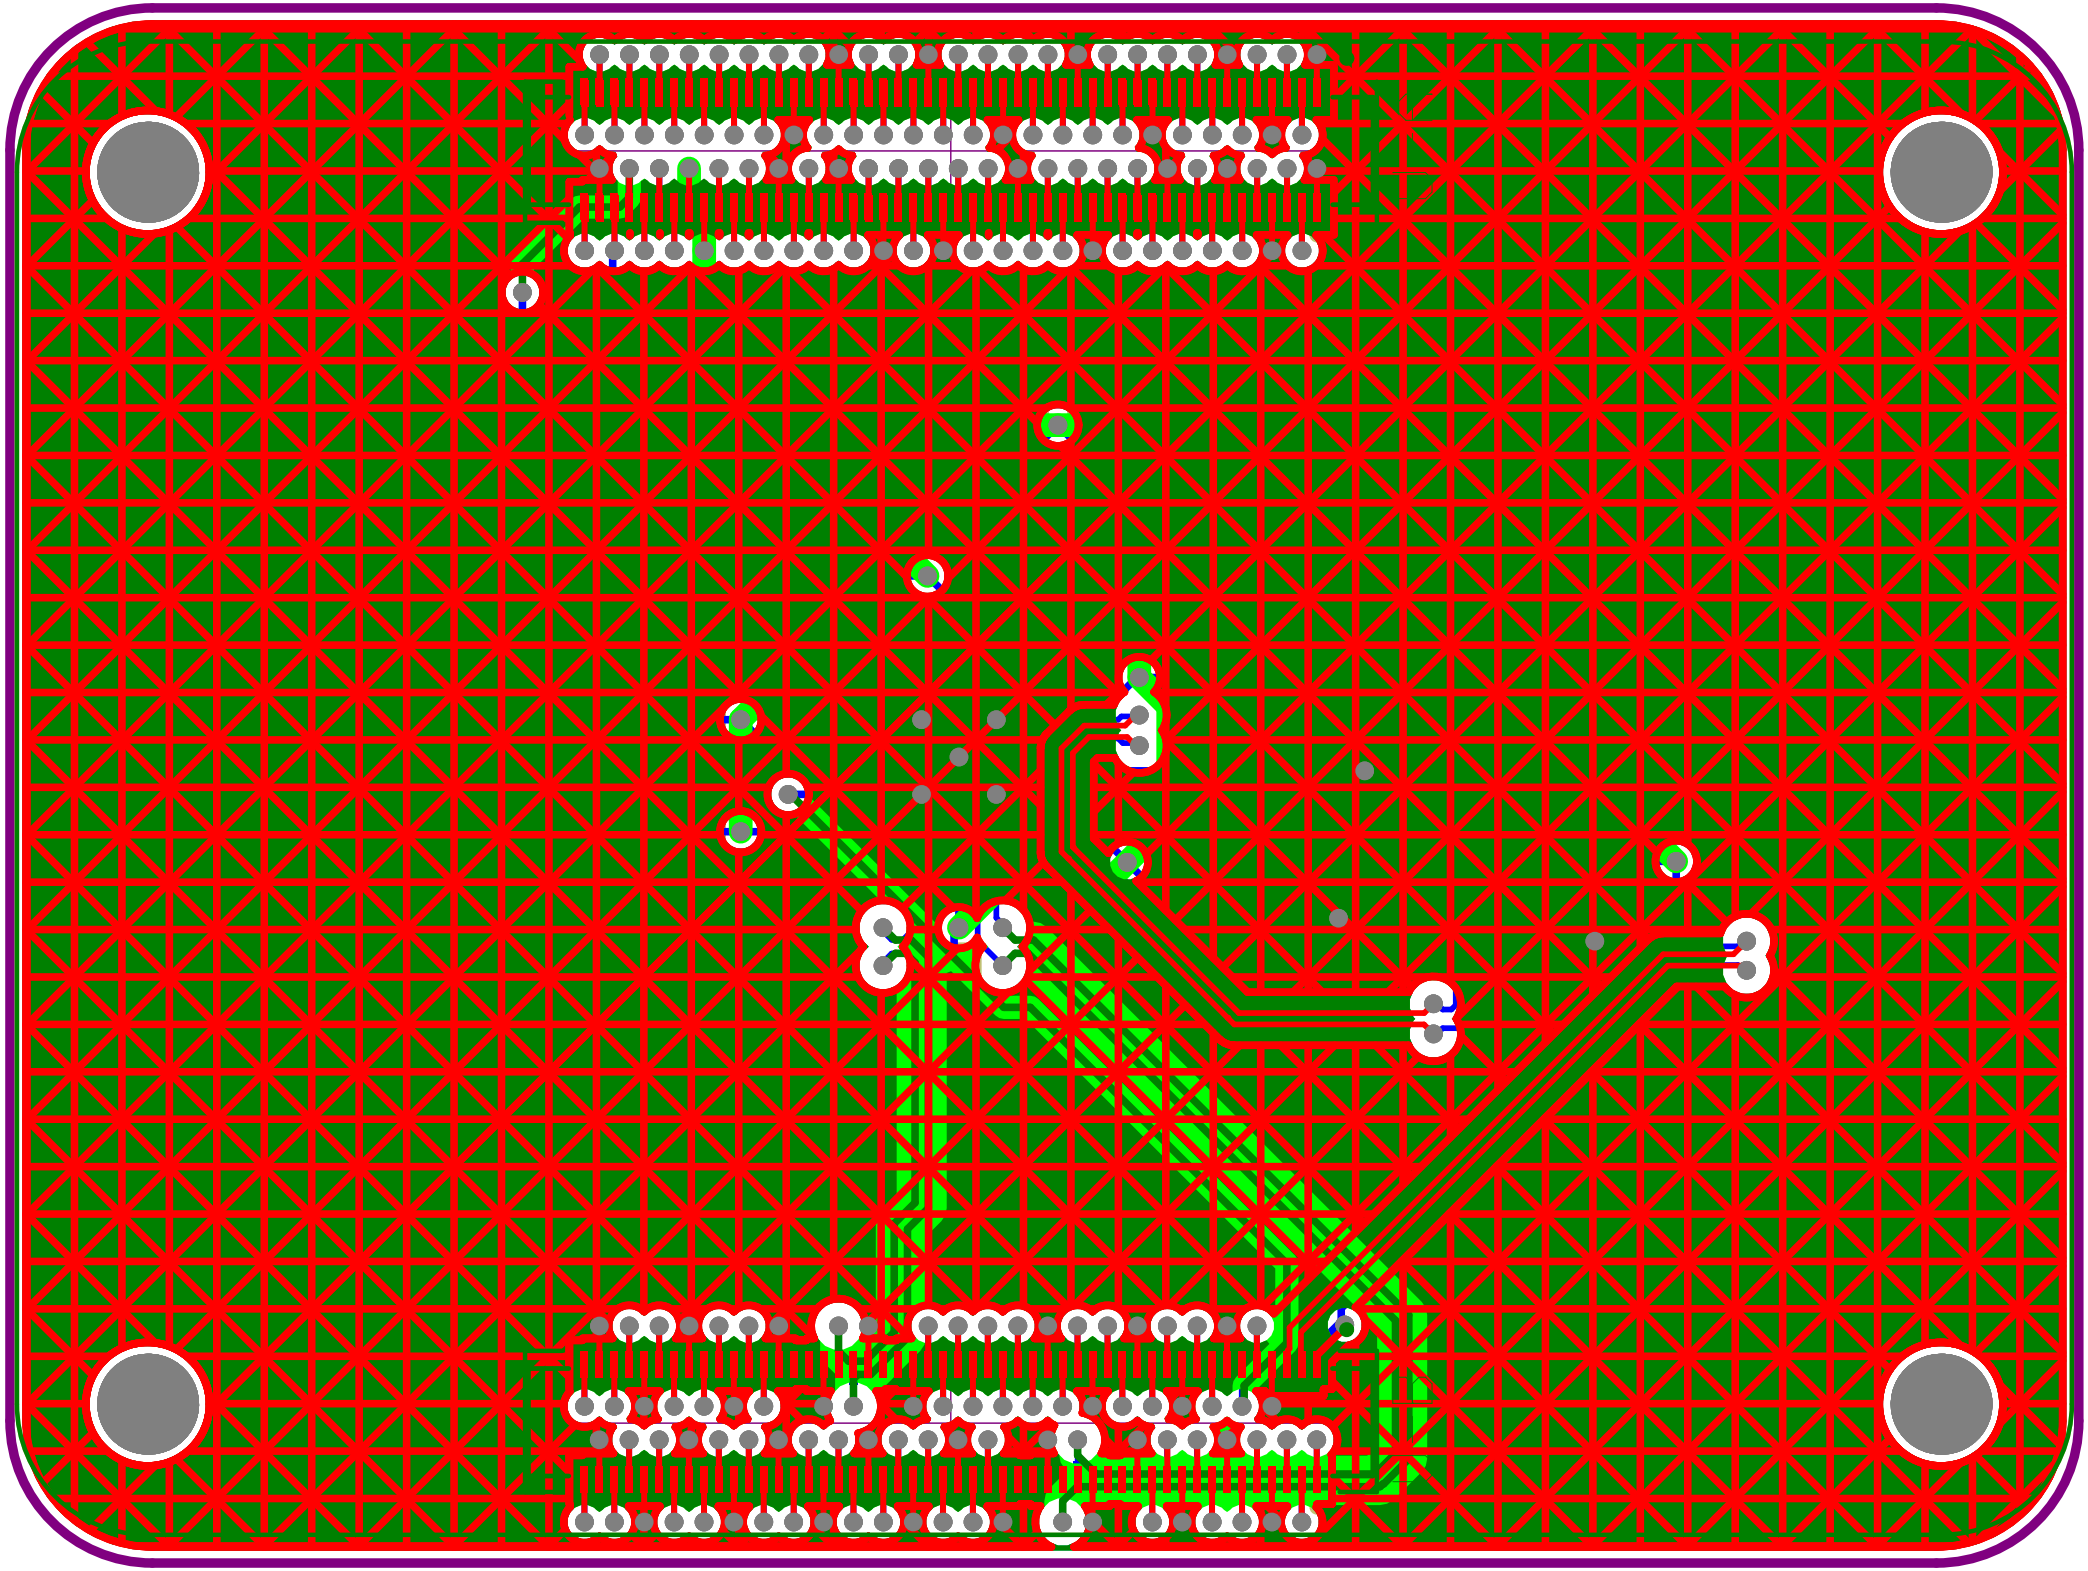

Designator	LibRef	Footprint	Value	LCSC PN
C1	Generic Capacitor	0603	1uF	
C2	Generic Capacitor	0603	1uF	
C3	Generic Capacitor	0603	1uF	
C4	Generic Capacitor	0603	1uF	
C5	Generic Capacitor	0603	1uF	
C6	Generic Capacitor	0603	1uF	
C7	Generic Capacitor	0603	1uF	
C8	Generic Capacitor	0603	18pF	
C9	Generic Capacitor	0603	18pF	
H1	DF40-100DS RCPT_1	DF40C-100DS-0.4V(51)		C597931
H2	DF40-100DS RCPT_1	DF40C-100DS-0.4V(51)		C597931
HA	DF40-XX-100DS RCPT	DF40C-100DP-0.4V(51)		C19089239
HB	DF40-XX-100DS RCPT	DF40C-100DP-0.4V(51)		C19089239
LED1	CMP-013-000000-1	0603 (1608 Metric) Concave		
R1	Generic Resistor	0603	12K	
R2	Generic Resistor	0603	100k	
R3	Generic Resistor	0603	100	
R4	Generic Resistor	0603	100K	
R5	Generic Resistor	0603	2.2K	
R6	Generic Resistor	0603	10K	
R7	Generic Resistor	0603	10K	
R8	Generic Resistor	0603	10K	
R9	Generic Resistor	0603	5K	
R10	Generic Resistor	0603	5K	
rPI4	RP-CM4	rP-200P-CM-FTPD		
rPI5	RP-CM5-Rep	rP-200P-CM-REP (top)		
U1	USB251xBI-AEZG	36-QFN (6x6)		C16251
U2	FSUSB42MUX	MSOP-10		C11355
U3	FSUSB42MUX	MSOP-10		C11355
Y1	CM4024M00020001	SMD2520-4P		C20885032