



Portable Propeller-type Current Meter

Indicator	VR-401-E VR-401V-E
Detector	VR3T-2-20N-E VR3T-3-20N-E VR3T-4-20N-E VR3T-2-20K-E VR3T-3-20K-E VR3T-4-20K-E

Main unit is less than postcard size

Power source is 2 AA batteries

Drive continuously for 50 hours or more

Automatic power off function



VR3T-2-20N-E



VR-401-E

[Accessories]

VR-401-E

Alkaline AA batteries	2
Strap	1
Instruction manual	1

VR-401V-E

Alkaline AA batteries	2
Strap	1
Instruction manual	1
Output Cable (1.5m)	1

VR3T-2-20N-E VR3T-2-20K-E

Connection cable (2m)	1
Certificate of inspection	1
Storage case	1


* □□K storage case is a wooden box.

[Specifications]

Indicator :	VR-401-E	VR-401V-E
Measurement direction	1-axis /1-direction	
Measurement range	0 - 400cm/s *By detector	
Measurement mode	Auto (Hold function)	
Average time	6 levels (1, 5, 10, 20, 40, 60 seconds)	
Output display	LCD 4 digits (Flow velocity display: 000.0 cm/s)	
Auto Power off	No operation for 5 minutes	None
Voltage output	None	0 - 4V (400cm/s) , 0 - 2V (200cm/s)
Power source	2 alkaline AA batteries	
Continuous Use	About 50 hours	
Construction	Drip-proof construction (equivalent to IP67)	
Operating conditions	0 - +40°C , 20 - 80 % RH (without condensation)	
External dimensions	88W x 146D x 33H mm (protruding parts not included)	
	Approx.230g (without batteries and strap)	

Detector :	VR3T-2-20N-E VR3T-2-20K-E	VR3T-3-20N-E VR3T-3-20K-E	VR3T-4-20N-E VR3T-4-20K-E
Detection method	Magnet - Hall IC		
Measurement range	3 - 200cm/s	3 - 300cm/s	3 - 400cm/s
Measurement precision	Within ± 3 cm/s		
Resolution	8 pulses per rotation		
Propeller material	ϕ 20mm 4-blade polypropylene resin		
Pressure resistance	196 KPa (2 atmospheric pressure)		
Operating temperature	5 - 55°C (Without freezing)		
Length	VR3T-□-20N-E : 350mm, VR3T-□-20K-E : 680mm		

[External view of detector]

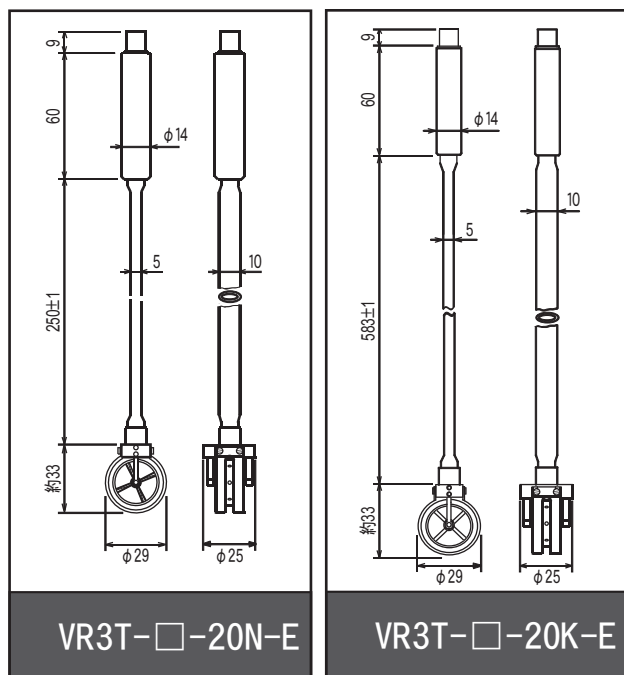

* The contents of this catalog are subject to change without notice.

CAT.No.200617

KENEK Corporation

2-8-1, Musashino, Akishima-Shi,
Tokyo, 196-0021, Japan
TEL:+81-42-544-1011

株式会社ケネック

〒196-0021 東京都昭島市武蔵野2-8-1
TEL:042-544-1011 FAX:042-544-4748
<http://www.kenek-co.com> E-mail:sales@kenek-co.com