通过组合:达尔优键(2 FN)+功能键，得到相应功能。

1、组合多媒体功能按键

| Constant Lighting Mode | Breathing Mode | Snake Mode | Reactive Mode | Ripple Mode | LEDS Off | LED Mode Dec | LED Mode Inc |
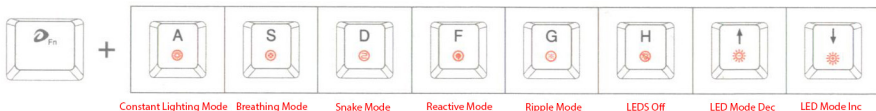
Multiple device bluetooth connection profiles

Toggle Wired/Bluetooth Modes
Yellow LED for Wired
Red LED - Waiting for bluetooth
Blue LED - Bluetooth Connected

| Bluetooth Search Mode | Device 1 | Device 2 | Device 3 | Device 4 | Device 5 |

畅享有线连接

插上电源线，连接笔记本、台式机即可实现
有线接收，轻轻松松畅享游戏乐趣。

（键盘出厂默认：有线模式）

If you wish to use wired mode, plug usb cable into
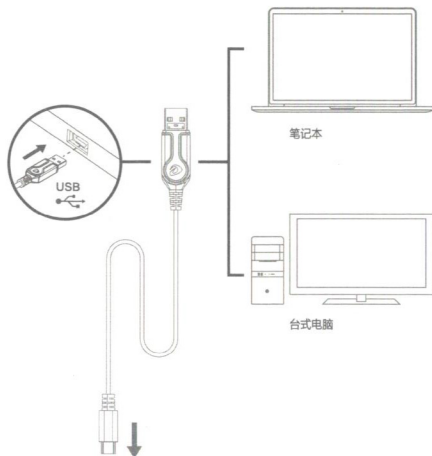keyboard and the other end into the device you wish to use it with.

组合发光模式

Fn+A=常亮模式 | Fn+S=呼吸模式
Fn+D=跑马模式 | Fn+F=单点亮模式
Fn+G=涟漪模式 | Fn+H=关闭灯光

（备注：键盘仅在有线模式下全键发光）

Note: LEDs will only light up in wired mode to conserve power.

笔记本

USB

台式电脑

DAREU
Connect

To connect to keyboard over bluetooth

To connect to keyboard over Bluetooth:

1. Turn the switch on the top of the keyboard to "ON" position.
2. Press and hold FN+Del for 3 seconds. This toggles the board to Bluetooth connection mode. (Indicator LED will flash for 5 seconds and then shut off)
3. Choose connection profile (Default connection profile is Device 1 FN+Q)
A. Press and hold FN + Ins for 3 seconds to set keyboard into Bluetooth search mode.
(In Bluetooth search mode, Indicator LED will flash once per second. After 60 seconds, if no device has been connected, Bluetooth search mode will automatically terminate and keyboard will enter hibernation state.
B. On the device which you wish to connect to keyboard, begin searching for Bluetooth devices.
The keyboard should show up on device as "EK820 68 Key Bluetooth keyboard"
(After successful Bluetooth connection, indicator LED will flash 3 times in rapid succession and then shut off.
If Bluetooth connection is unsuccessful, Bluetooth search will automatically terminate. Indicator LED will shut off.)
4. In step 3, before connecting to a device, a Bluetooth connection profile can be selected by pressing and holding FN+(W/E/R/T). A total of 5 bluetooth connection profiles can be stored in the keyboard for convenient switching between devices.
5. To connect to a previously connected device, simply select the appropriate Bluetooth connection profile with FN+(Q/W/E/R/T) and keyboard will automatically connect to the device.
6. To connect back in USB wired mode, press and hold FN+Del. Then turn the switch on the top of the keyboard to the "OFF" position.

Indicator Lights

Notes:
Low voltage: (Red LED) If the battery is less than 3.2V the indicator light will flash red once per second. If USB cable is not plugged in within 10 seconds, indicator light will shut off. Upon pressing any key, indicator light resume flashing to indicate low voltage.

Charging indication: (Red LED) While battery is charging, indicator light will continuously light up red. Once battery fully charged, indicator light will shut off.
If battery is being used: When switch on top of the keyboard is switched to the "ON" position, indicator will continuously light for 3 seconds. Once Bluetooth connection is successful, indicator light will flash 3 times in succession and then shut off.

Troubleshooting:
If keyboard has issues connecting to a device or suddenly stops working while connected to device, connect keyboard to another device and then reconnect to original device.

异常处理

A: 如键盘使用过程中出现异常，请更换不同的设备进行测试。

B: 如更换不同的设备测试后仍不能正常使用，请拨打达尔优全国服务热线： 4006-810-510

温馨提示：如发现实物与图片部分不符，可能是由于产品进行升级，请以实物为准，敬请谅解！