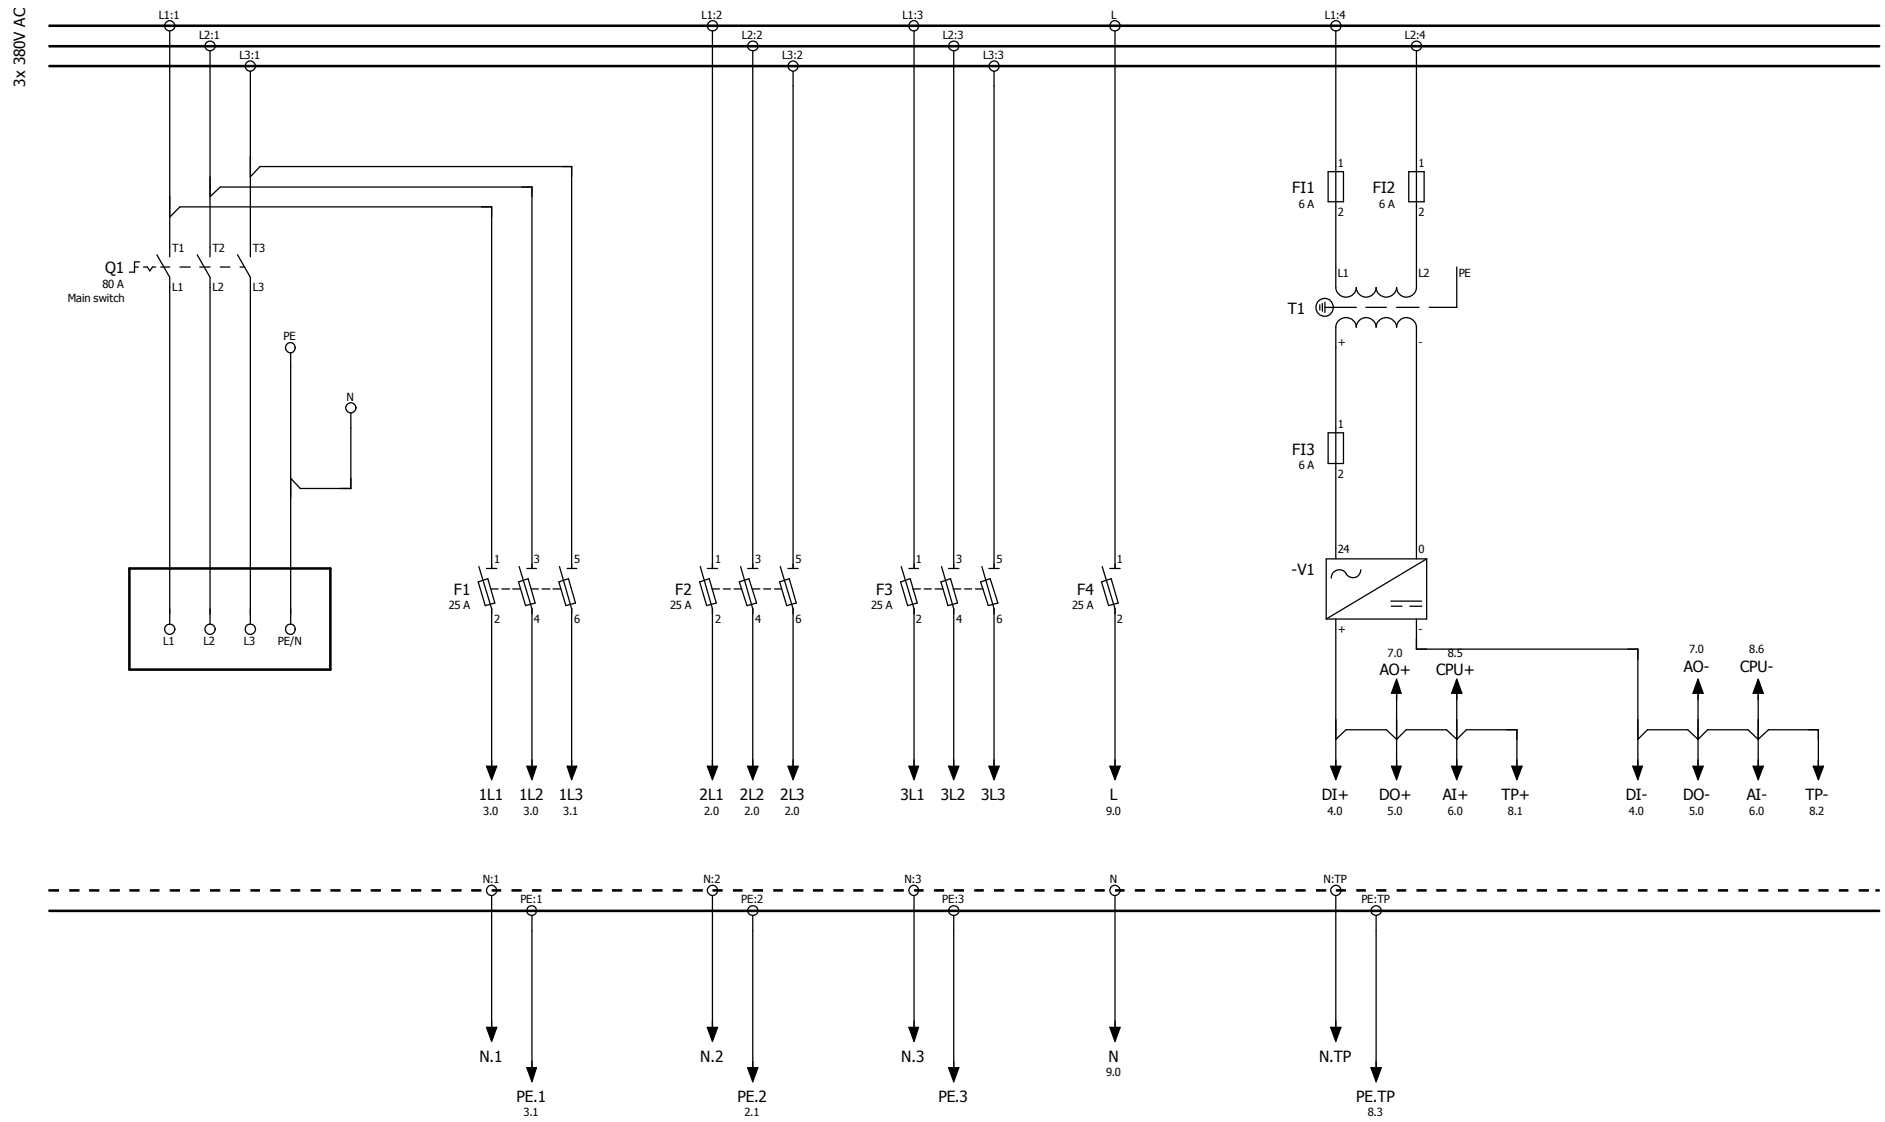

2

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Napajanje		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	1
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

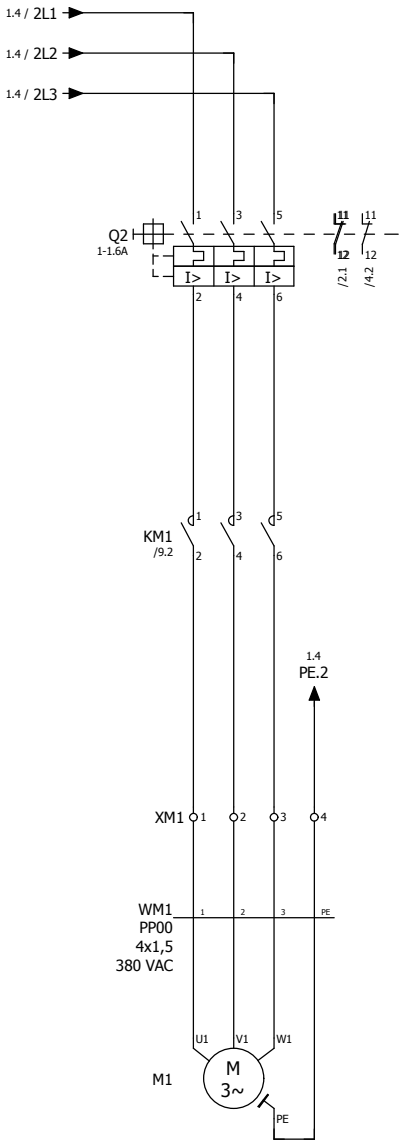

Motor pumpe

1 3

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Elektromotorni pogon		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	2
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

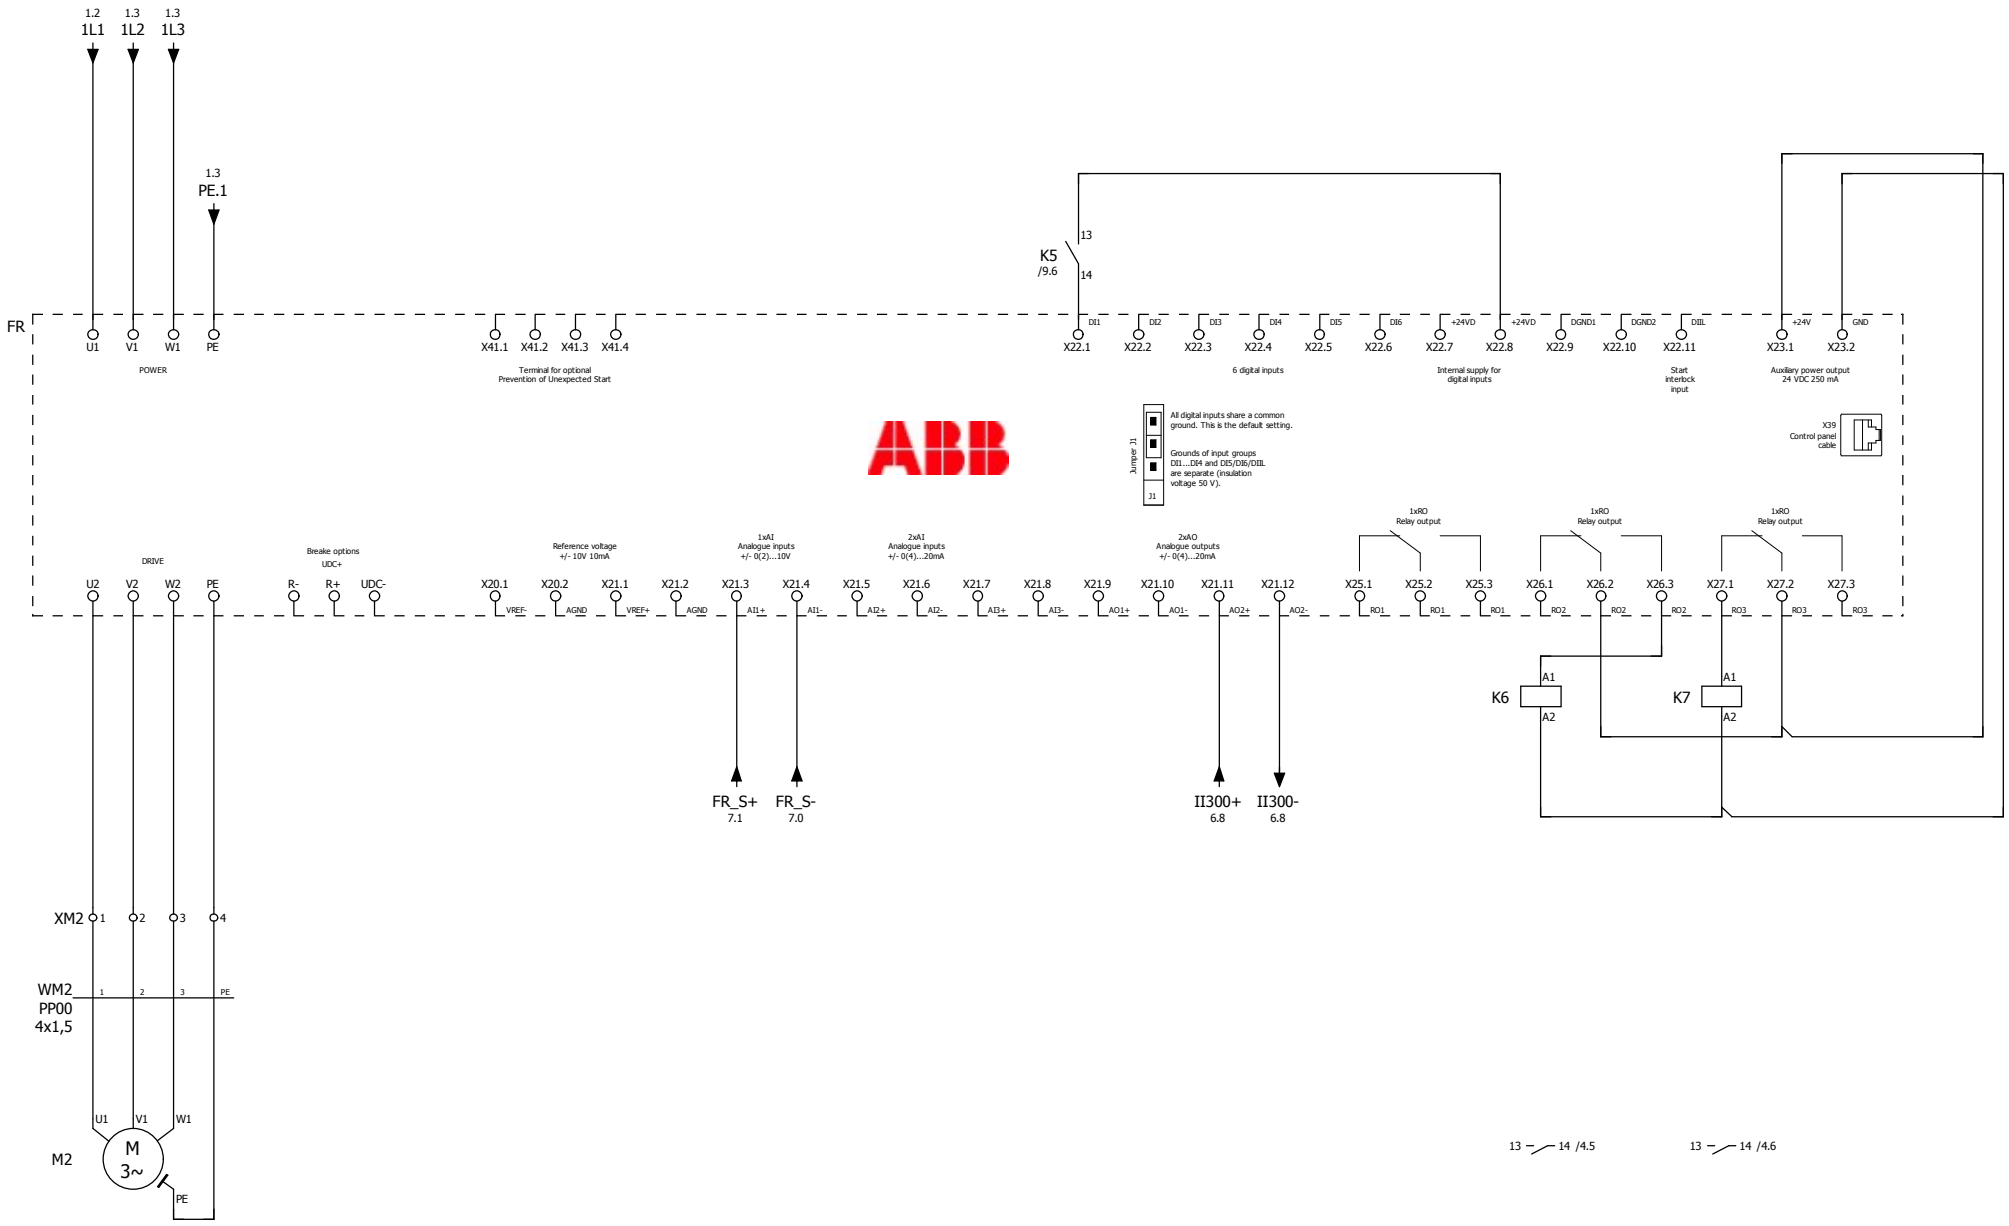

Motor filtera

2 4

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Motor sa FR		= POST		
			Ed.	Filip Komarica					+ EO01		
			Appr		Basic project with IEC identifier structure			IEC_bas001		Page	3
Modification	Date	Name	Original		Replacement of	Replaced by				Page	39

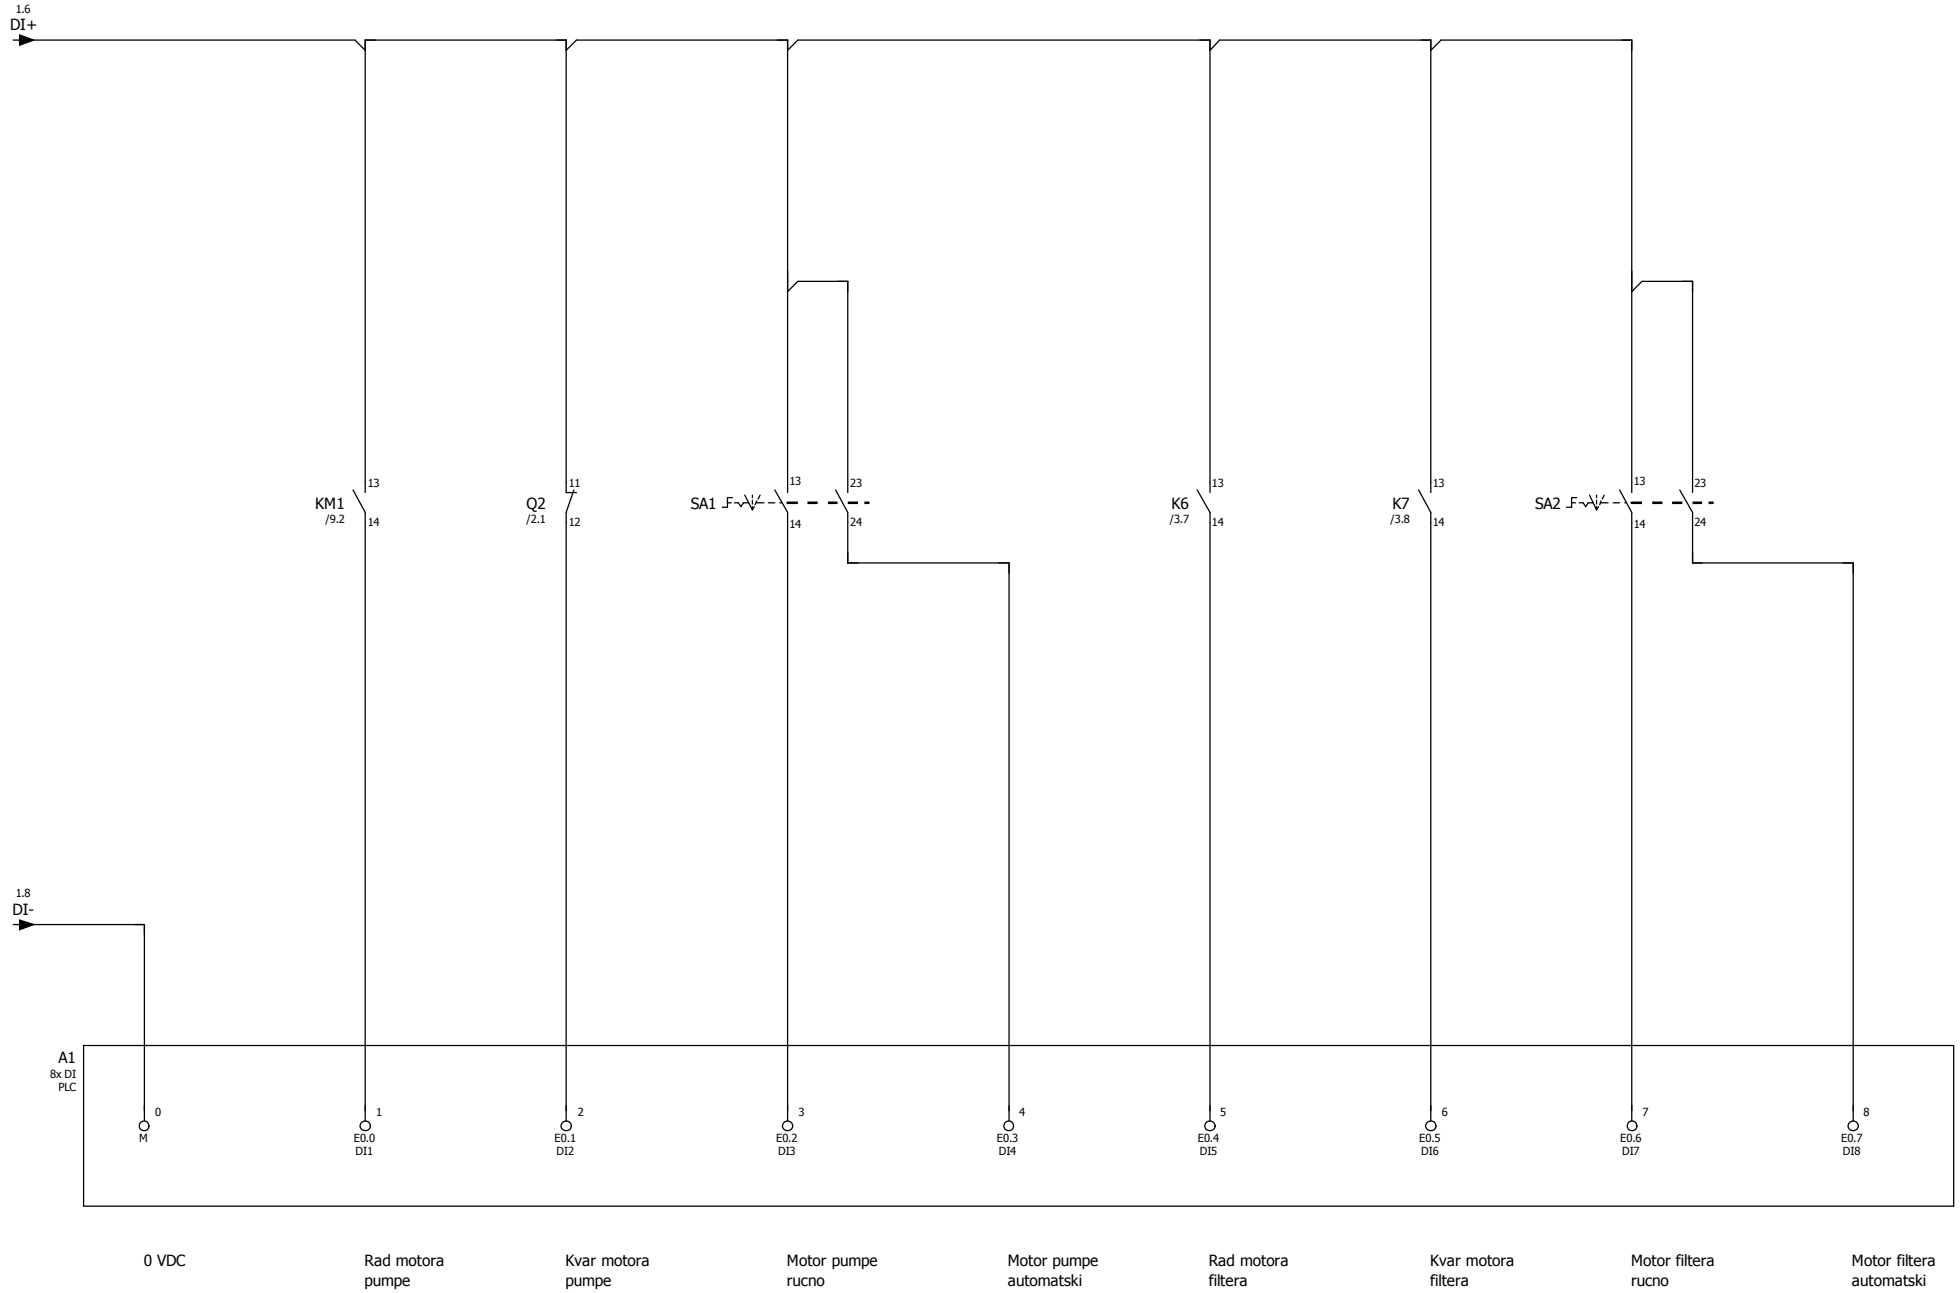
1.6
DI+
KM1
/9.2
13
14
Q2
/2.1
11
12
SA1
13
14
23
24
K6
/3.7
13
14
K7
/3.8
13
14
SA2
13
14
23
24
1.8
DI-
A1
8x DI
PLC
0
M
1
E0.0
DI1
2
E0.1
DI2
3
E0.2
DI3
4
E0.3
DI4
5
E0.4
DI5
6
E0.5
DI6
7
E0.6
DI7
8
E0.7
DI8
0 VDC
Rad motora pumpe
Kvar motora pumpe
Motor pumpe rucno
Motor pumpe automatski
Rad motora filtera
Kvar motora filtera
Motor filtera rucno
Motor filtera automatski

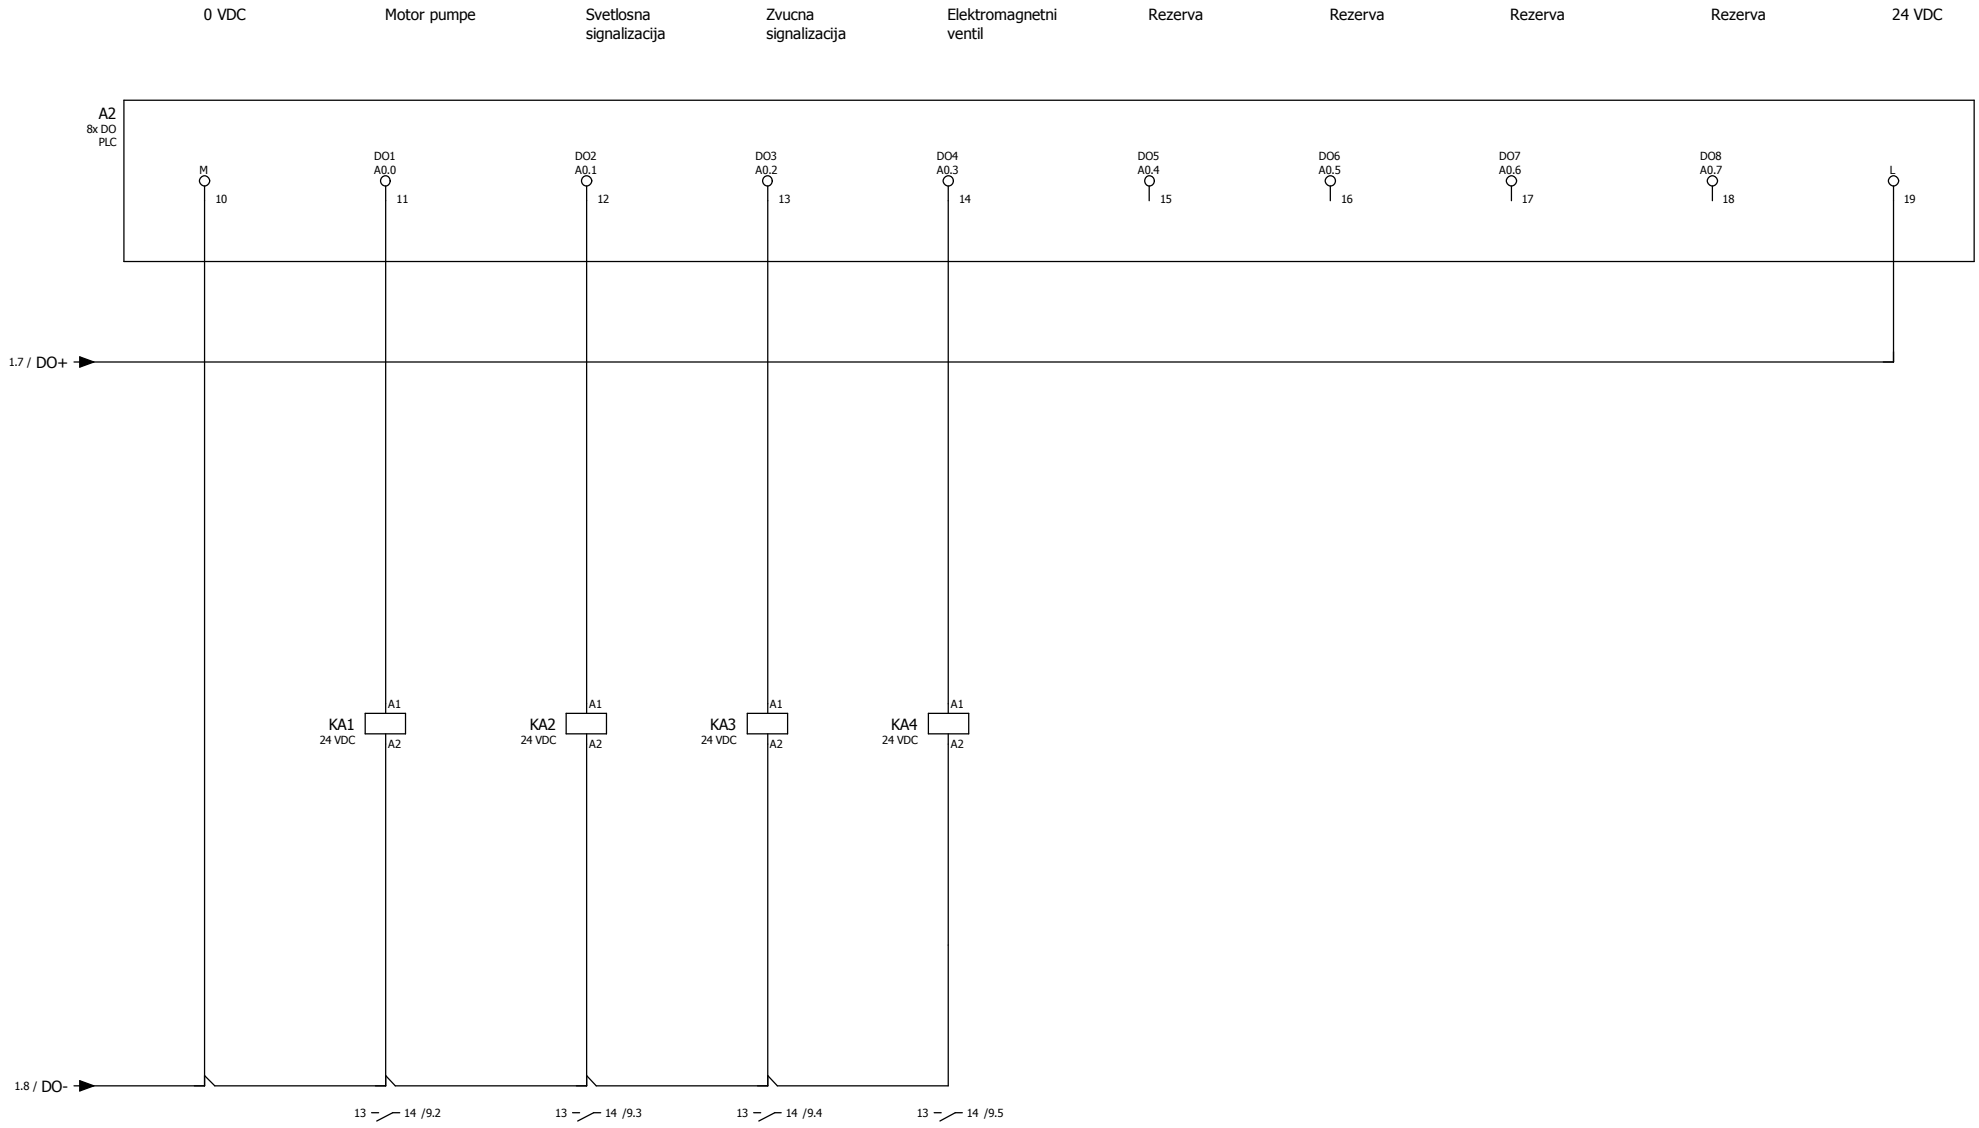

4 6

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	PLC DO		= POST	
			Ed.	Filip Komarica	Basic project with IEC identifier structure				+ EO01	
			Appr					IEC_bas001	Page	5
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

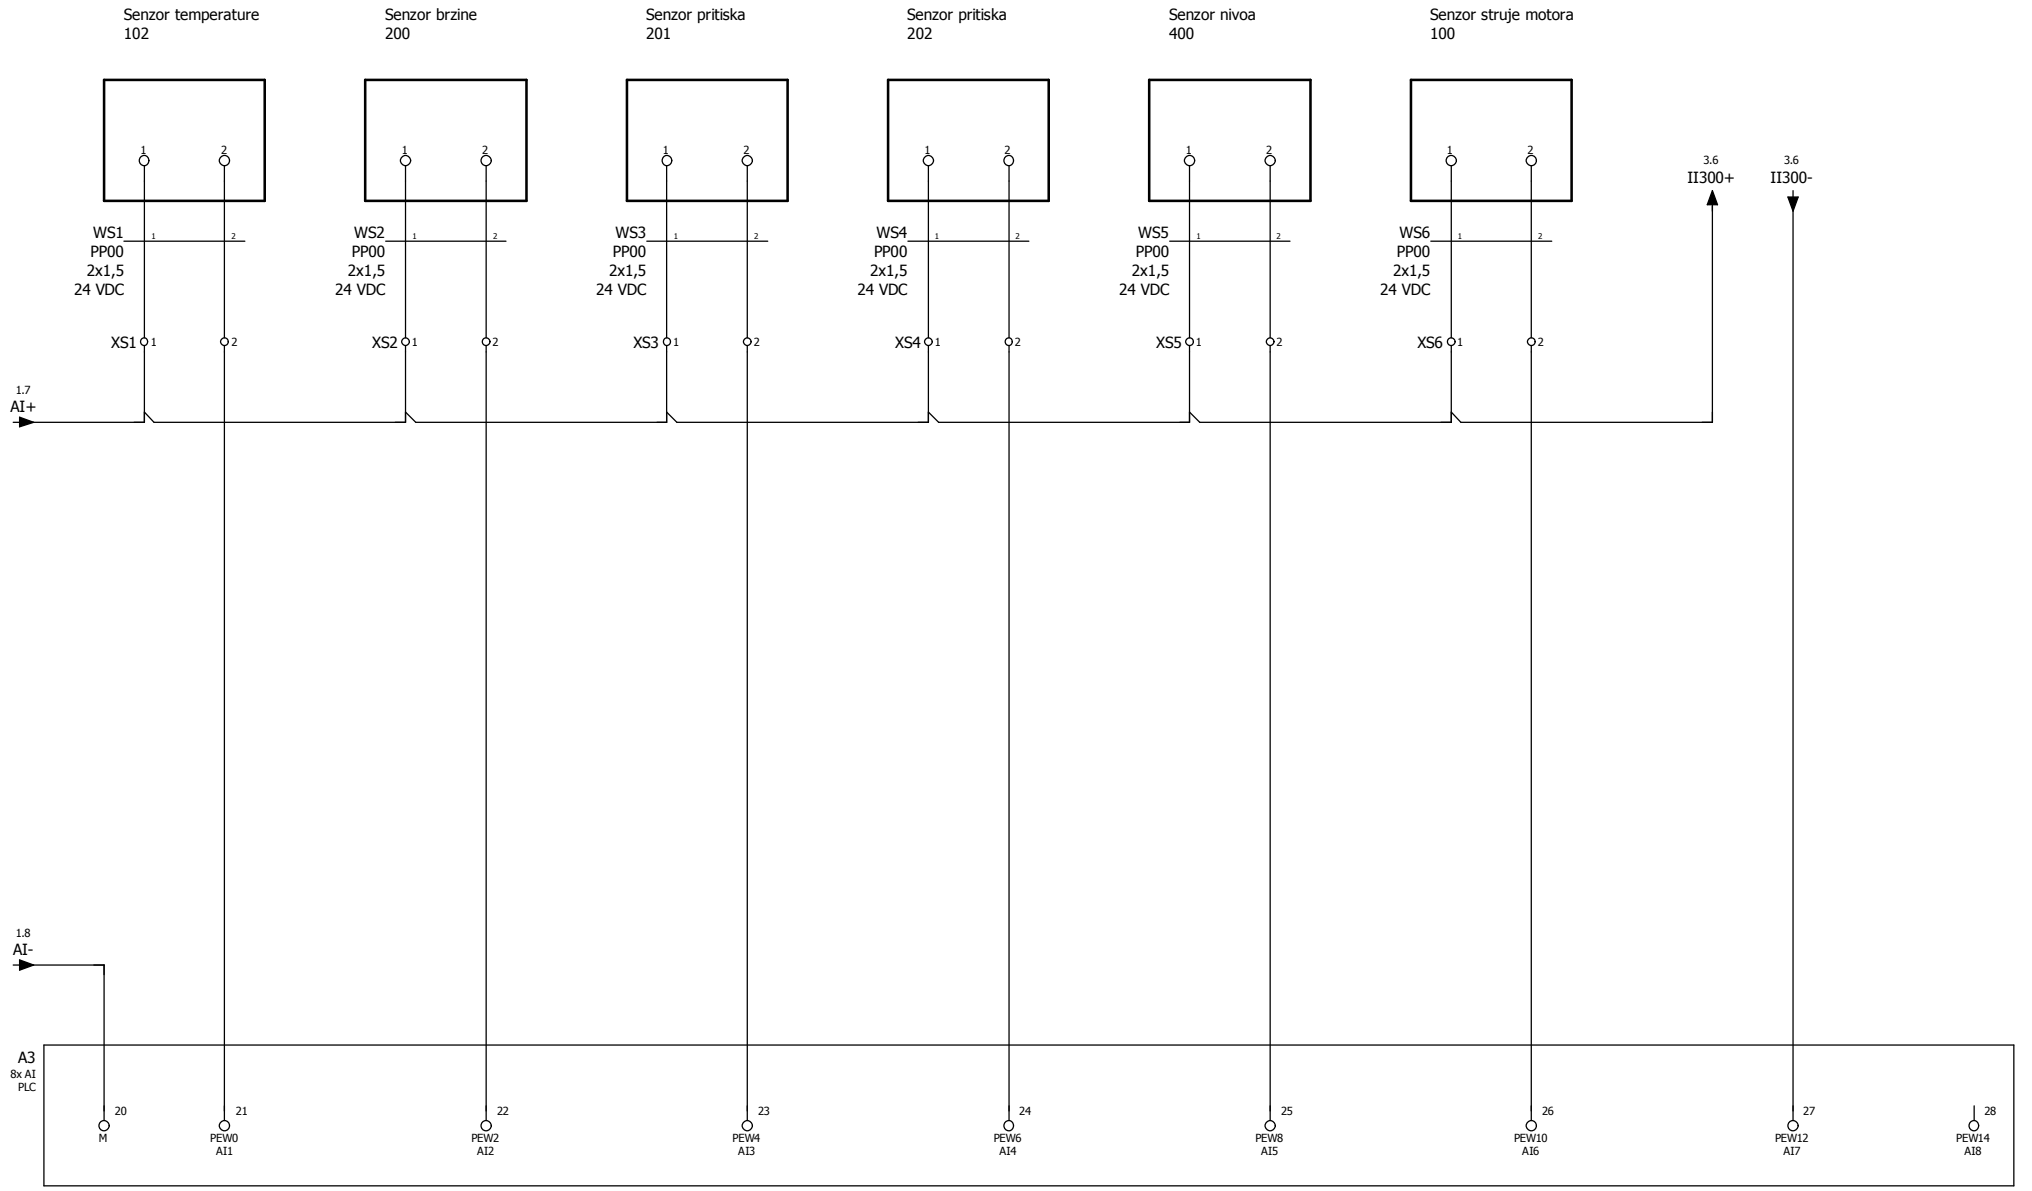

5 7

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	PLC AI		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	6
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

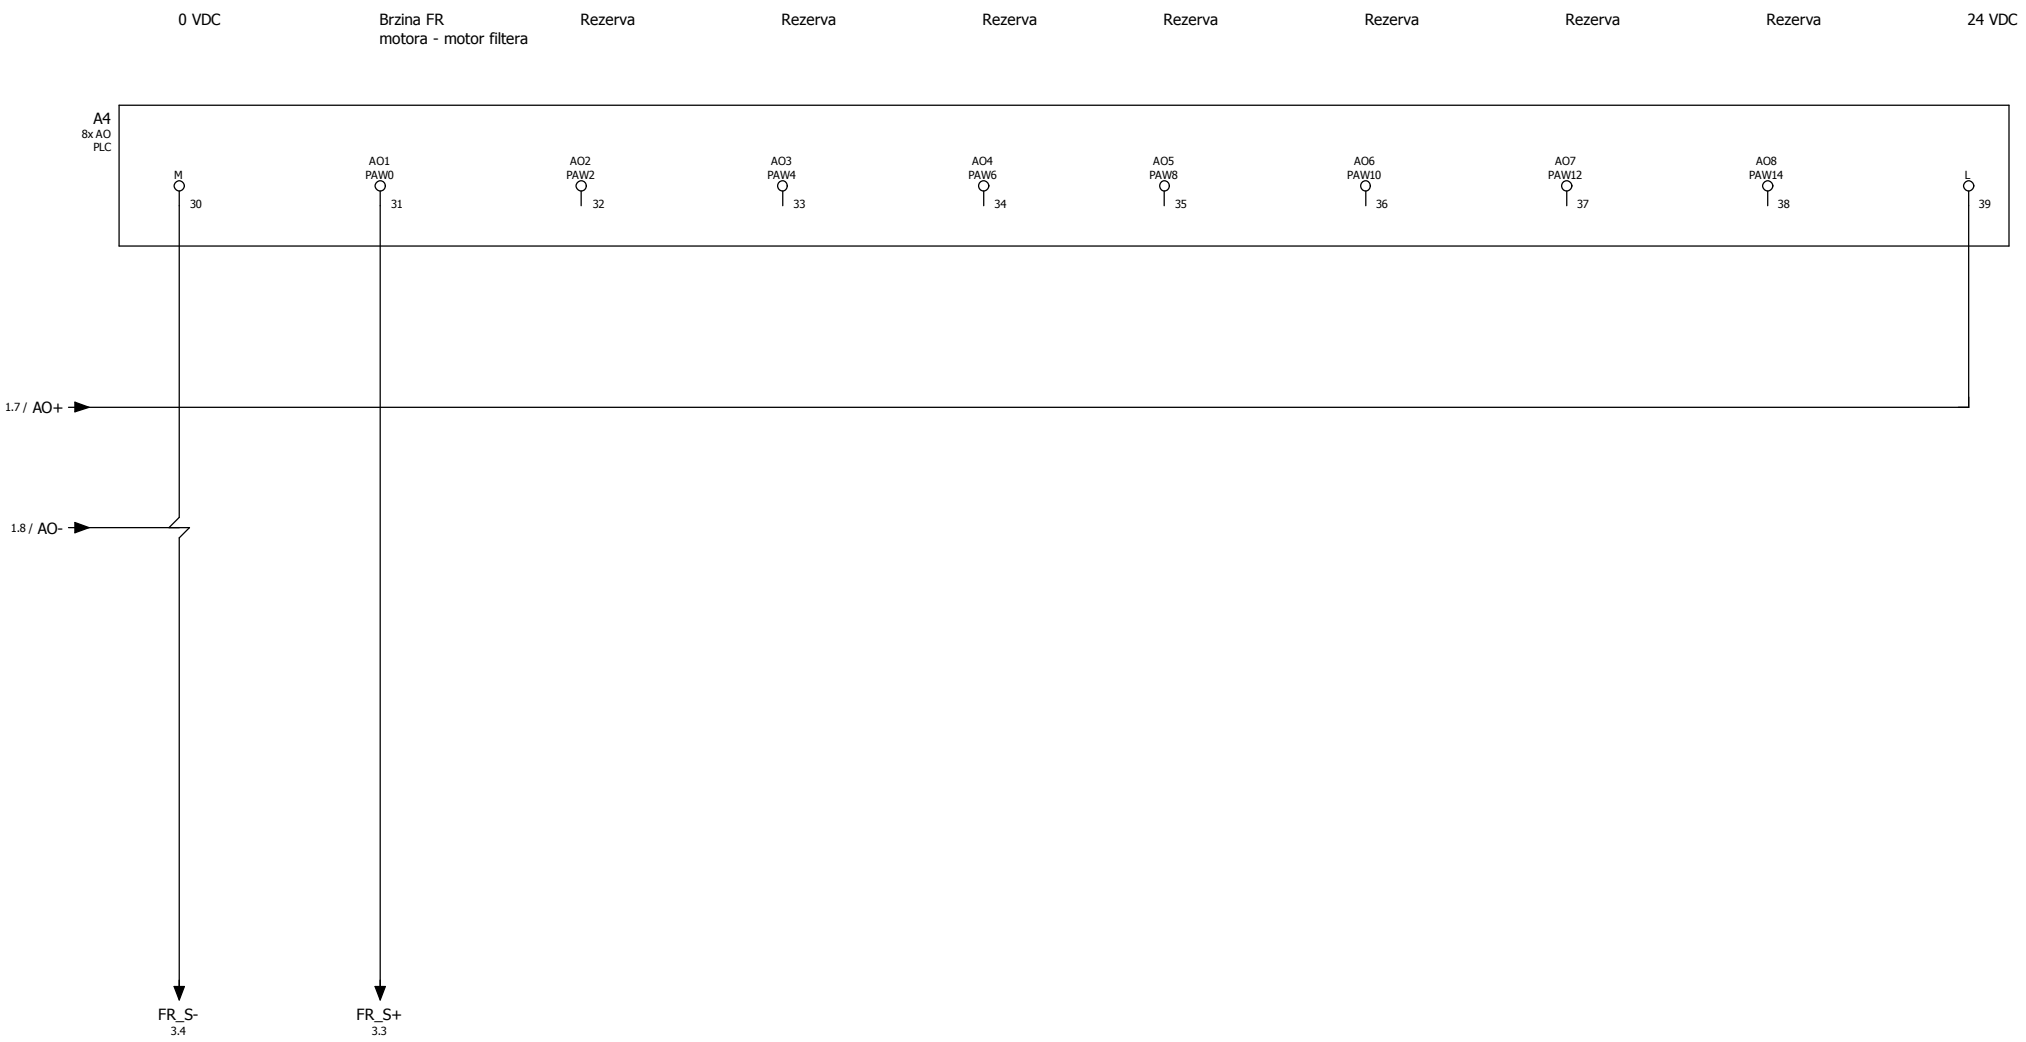

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	PLC AO		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	7
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

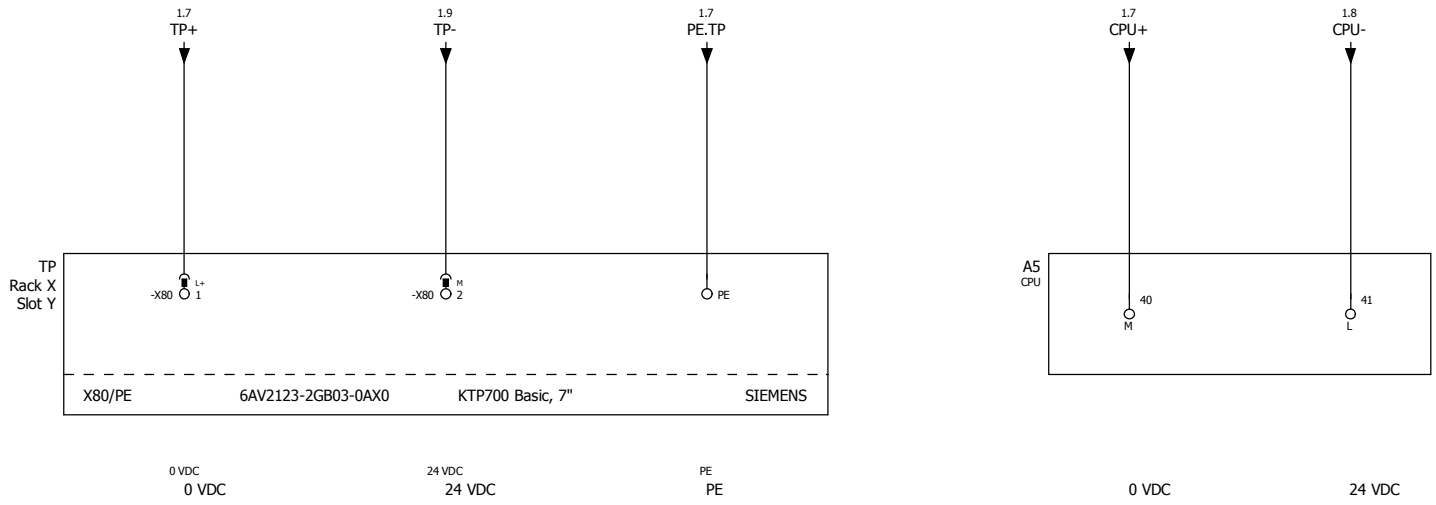

7 9

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	CPU & Panel		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	8
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

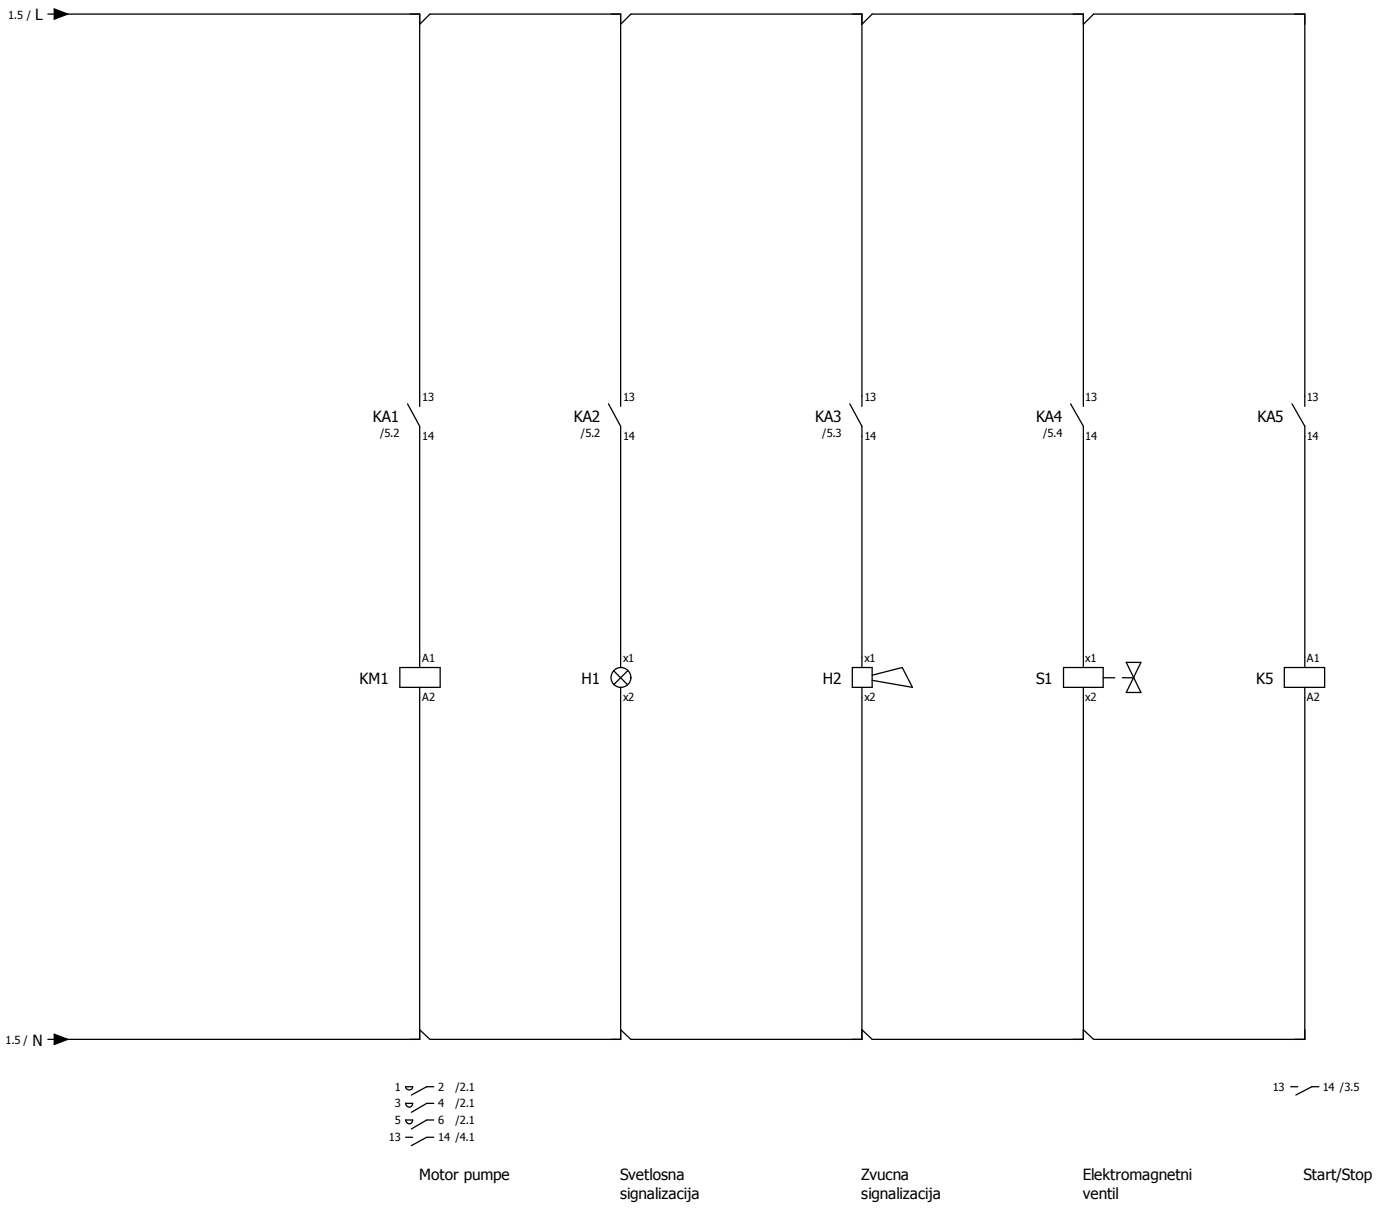

8

+NS/1

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Upravljanje		= POST	
			Ed.	Filip Komarica					+ EO01	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	9
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

EPLAN Software & Service
GmbH & Co. KG

An der alten Ziegelei 2
D-40789
Phone. 02173/3964-0 Monheim

Kompanija	EPLAN
Opis projekta	Basic project with IEC identifier structure
Broj projekta	IEC_bas001
Komisija	EPLAN

Proizvođač (Kompanija)	EPLAN Software & Service GmbH & Co. KG
Putanja	EPLAN sample project
Ime projekta	Projekat13
Tip	AT78
Mesto instalacije	+ET1
Odgovorni za projekat	

Kreirano	8.2.2026.		
Editovano	11.2.2026.	by Filip Komarica	Broj stranica

Table of contents

Column X: An automatically generated page was edited

F06_001

Page	Page description	supplementary page field	Date	Edited by	X
=POST+EO01/1	Napajanje		11.2.2026.	Filip	
=POST+EO01/2	Elektromotorni pogon		11.2.2026.	Filip	
=POST+EO01/3	Motor sa FR		11.2.2026.	Filip	
=POST+EO01/4	PLC DI		11.2.2026.	Filip	
=POST+EO01/5	PLC DO		11.2.2026.	Filip	
=POST+EO01/6	PLC AI		11.2.2026.	Filip	
=POST+EO01/7	PLC AO		11.2.2026.	Filip	
=POST+EO01/8	CPU & Panel		11.2.2026.	Filip	
=POST+EO01/9	Upravljanje		11.2.2026.	Filip	
=POST+NS/1	Naslovna		11.2.2026.	Filip	X
=POST+NS/2	Table of contents : =POST+EO01/1 - =POST+IZV/19		11.2.2026.	Filip	
=POST+NS/2.a	Table of contents : =POST+IZV/20 - =POST+IZV/25		11.2.2026.	Filip	
=POST+IZV/1	Terminal-strip overview : =POST+EO01-XM1 - =POST+EO01-XS7		11.2.2026.	Filip	
=POST+IZV/2	PLC card overview : =POST+EO01-A1 - =POST+EO01-A2		11.2.2026.	Filip	
=POST+IZV/2.a	PLC card overview : =POST+EO01-A3 - =POST+EO01-A4		11.2.2026.	Filip	
=POST+IZV/2.b	PLC card overview : =POST+EO01-A5 - =POST+EO01-TP		11.2.2026.	Filip	
=POST+IZV/3	PLC diagram : =POST+EO01-A1 - =POST+EO01-A1		11.2.2026.	Filip	
=POST+IZV/4	PLC diagram : =POST+EO01-A2 - =POST+EO01-A2		11.2.2026.	Filip	
=POST+IZV/5	PLC diagram : =POST+EO01-A3 - =POST+EO01-A3		11.2.2026.	Filip	
=POST+IZV/6	PLC diagram : =POST+EO01-A4 - =POST+EO01-A4		11.2.2026.	Filip	
=POST+IZV/7	PLC diagram : =POST+EO01-A5 - =POST+EO01-A5		11.2.2026.	Filip	
=POST+IZV/8	PLC diagram : =POST+EO01-TP - =POST+EO01-TP		11.2.2026.	Filip	
=POST+IZV/9	Cable overview		11.2.2026.	Filip	
=POST+IZV/10	Cable diagram =POST+EO01-WM1		11.2.2026.	Filip	
=POST+IZV/11	Cable diagram =POST+EO01-WM2		11.2.2026.	Filip	
=POST+IZV/12	Cable diagram =POST+EO01-WS1		11.2.2026.	Filip	
=POST+IZV/13	Cable diagram =POST+EO01-WS2		11.2.2026.	Filip	
=POST+IZV/14	Cable diagram =POST+EO01-WS3		11.2.2026.	Filip	
=POST+IZV/15	Cable diagram =POST+EO01-WS4		11.2.2026.	Filip	
=POST+IZV/16	Cable diagram =POST+EO01-WS5		11.2.2026.	Filip	
=POST+IZV/17	Cable diagram =POST+EO01-WS6		11.2.2026.	Filip	
=POST+IZV/18	Terminal diagram =POST+EO01-XM1		11.2.2026.	Filip	
=POST+IZV/19	Terminal diagram =POST+EO01-XM2		11.2.2026.	Filip	

Table of contents

Column X: An automatically generated page was edited

F06_001

Page	Page description	supplementary page field	Date	Edited by	X
=POST+IZV/20	Terminal diagram =POST+EO01-XS1		11.2.2026.	Filip	
=POST+IZV/21	Terminal diagram =POST+EO01-XS2		11.2.2026.	Filip	
=POST+IZV/22	Terminal diagram =POST+EO01-XS3		11.2.2026.	Filip	
=POST+IZV/23	Terminal diagram =POST+EO01-XS4		11.2.2026.	Filip	
=POST+IZV/24	Terminal diagram =POST+EO01-XS5		11.2.2026.	Filip	
=POST+IZV/25	Terminal diagram =POST+EO01-XS6		11.2.2026.	Filip	

Terminal-strip overview

F14_001

terminal strip	Terminal strip definition text	Terminals					Graphical page of terminal diagrams
		first	last	Total PE	Total N	Total number	
+EO01-XM1		1	4	0	0	4	=POST+IZV/18
+EO01-XM2		1	4	0	0	4	=POST+IZV/19
+EO01-XS1		1	2	0	0	2	=POST+IZV/20
+EO01-XS2		1	2	0	0	2	=POST+IZV/21
+EO01-XS3		1	2	0	0	2	=POST+IZV/22
+EO01-XS4		1	2	0	0	2	=POST+IZV/23
+EO01-XS5		1	2	0	0	2	=POST+IZV/24
+EO01-XS6		1	2	0	0	2	=POST+IZV/25

PLC card overview

F20_001

+EO01-A1

M		0	+EO01/4.0	0 VDC
DI1	E0.0	1	+EO01/4.1	Rad motora pumpe
DI2	E0.1	2	+EO01/4.2	Kvar motora pumpe
DI3	E0.2	3	+EO01/4.3	Motor pumpe rucno
DI4	E0.3	4	+EO01/4.4	Motor pumpe automatski
DI5	E0.4	5	+EO01/4.5	Rad motora filtera
DI6	E0.5	6	+EO01/4.6	Kvar motora filtera
DI7	E0.6	7	+EO01/4.7	Motor filtera rucno
DI8	E0.7	8	+EO01/4.8	Motor filtera automatski

+EO01-A2

M		10	+EO01/5.1	=
DO1	A0.0	11	+EO01/5.2	Motor pumpe
DO2	A0.1	12	+EO01/5.2	Svetlosna signalizacija
DO3	A0.2	13	+EO01/5.3	Zvucna signalizacija
DO4	A0.3	14	+EO01/5.4	Elektromagnetni ventil
DO5	A0.4	15	+EO01/5.5	Rezerva
DO6	A0.5	16	+EO01/5.6	Rezerva
DO7	A0.6	17	+EO01/5.7	Rezerva
DO8	A0.7	18	+EO01/5.8	Rezerva
L		19	+EO01/5.9	24 VDC

PLC card overview

F20_001

+EO01-A3

M		20	+EO01/6.0	0 VDC
AI1	PEW0	21	+EO01/6.1	Senzor temperature 102
AI2	PEW2	22	+EO01/6.2	Senzor brzine 200
AI3	PEW4	23	+EO01/6.3	Senzor pritiska 201
AI4	PEW6	24	+EO01/6.4	Senzor pritiska 202
AI5	PEW8	25	+EO01/6.6	Senzor nivoa 400
AI6	PEW10	26	+EO01/6.7	Senzor struje motora 100
AI7	PEW12	27	+EO01/6.8	Senzor struje motora 300
AI8	PEW14	28	+EO01/6.9	Rezerva

+EO01-A4

M		30	+EO01/7.0	=
AO1	PAW0	31	+EO01/7.1	Brzina FR motora - motor filtera
AO2	PAW2	32	+EO01/7.2	Rezerva
AO3	PAW4	33	+EO01/7.3	Rezerva
AO4	PAW6	34	+EO01/7.4	Rezerva
AO5	PAW8	35	+EO01/7.5	Rezerva
AO6	PAW10	36	+EO01/7.6	Rezerva
AO7	PAW12	37	+EO01/7.7	Rezerva
AO8	PAW14	38	+EO01/7.8	=
L		39	+EO01/7.9	24 VDC

PLC card overview

F20_001

+EO01-A5

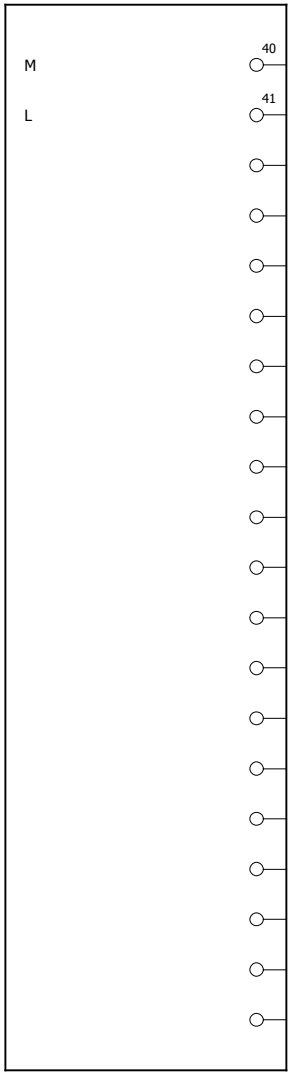

+EO01/8.5	0 VDC
+EO01/8.6	24 VDC

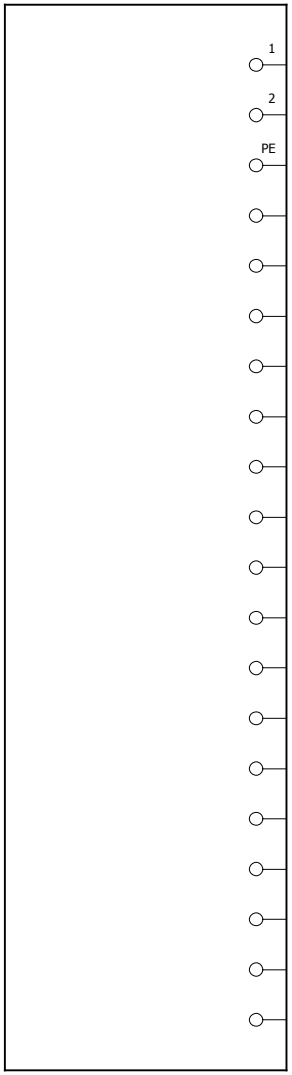

+EO01/8.1	=
+EO01/8.2	=
+EO01/8.3	PE

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
=POST+EO01-A1		/4.0	0 VDC			M	0
	E0.0	/4.1	Rad motora pumpe			DI1	1
	E0.1	/4.2	Kvar motora pumpe			DI2	2
	E0.2	/4.3	Motor pumpe rucno			DI3	3
	E0.3	/4.4	Motor pumpe automatski			DI4	4
	E0.4	/4.5	Rad motora filtera			DI5	5
	E0.5	/4.6	Kvar motora filtera			DI6	6
	E0.6	/4.7	Motor filtera rucno			DI7	7
	E0.7	/4.8	Motor filtera automatski			DI8	8

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
=POST+EO01-A2		/5.1	0 VDC			M	10
	A0.0	/5.2	Motor pumpe			DO1	11
	A0.1	/5.2	Svetlosna signalizacija			DO2	12
	A0.2	/5.3	Zvucna signalizacija			DO3	13
	A0.3	/5.4	Elektromagnetni ventil			DO4	14
	A0.4	/5.5	Rezerva			DO5	15
	A0.5	/5.6	=			DO6	16
	A0.6	/5.7	=			DO7	17
	A0.7	/5.8	=			DO8	18
		/5.9	24 VDC			L	19

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
=POST+EO01-A3		/6.0	0 VDC			M	20
	PEW0	/6.1	Senzor temperature 102			AI1	21
	PEW2	/6.2	Senzor brzine 200			AI2	22
	PEW4	/6.3	Senzor pritiska 201			AI3	23
	PEW6	/6.4	Senzor pritiska 202			AI4	24
	PEW8	/6.6	Senzor nivoa 400			AI5	25
	PEW10	/6.7	Senzor struje motora 100			AI6	26
	PEW12	/6.8	Senzor struje motora 300			AI7	27
	PEW14	/6.9	Rezerva			AI8	28

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
=POST+EO01-A4		/7.0	0 VDC			M	30
	PAW0	/7.1	Brzina FR motora - motor filtera			AO1	31
	PAW2	/7.2	Rezerva			AO2	32
	PAW4	/7.3	=			AO3	33
	PAW6	/7.4	=			AO4	34
	PAW8	/7.5	=			AO5	35
	PAW10	/7.6	=			AO6	36
	PAW12	/7.7	=			AO7	37
	PAW14	/7.8	=			AO8	38
		/7.9	24 VDC			L	39

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
=POST+EO01-A5		/8.5	0 VDC			M	40
		/8.6	24 VDC			L	41

PLC diagram

F19_001

Project name Projekat13

Device tag PLC	Address	Placement	function text	Rack	module	Symbolic address	terminal
		/8.1	0 VDC				1
		/8.2	24 VDC				2
		/8.3	PE				PE

Cable overview

F10_001

Cable name	Source (from)	Target (to)	cable type	all conductors	Conductors used	Cross-section [mm]	Length [m]	function text	Graphical page of cable diagram
+EO01-WM1	+EO01-XM1	+EO01-M1	PP00	4	4	1,5		Motor pumpe	=POST+IZV/10
+EO01-WM2	+EO01-XM2	+EO01-M2	PP00	4	4	1,5		Motor filtera	=POST+IZV/11
+EO01-WS1	+EO01-XS1	1	PP00	2	2	1,5		Senzor temperature 102	=POST+IZV/12
		2							
+EO01-WS2	+EO01-XS2	1	PP00	2	2	1,5		Senzor brzine 200	=POST+IZV/13
		2							
+EO01-WS3	+EO01-XS3	1	PP00	2	2	1,5		Senzor pritiska 201	=POST+IZV/14
		2							
+EO01-WS4	+EO01-XS4	1	PP00	2	2	1,5		Senzor pritiska 202	=POST+IZV/15
		2							
+EO01-WS5	+EO01-XS5	1	PP00	2	2	1,5		Senzor nivoa 400	=POST+IZV/16
		2							
+EO01-WS6	+EO01-XS6	1	PP00	2	2	1,5		Senzor struje motora 100	=POST+IZV/17
		2							

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WM1	PP00	4	1,5		Motor pumpe

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Motor pumpe	/2.1	-XM1	1	1	-M1	U1	/2.1	
=	/2.1	-XM1	2	2	-M1	V1	/2.1	
=	/2.1	-XM1	3	3	-M1	W1	/2.1	
=	/2.1	-XM1	4	PE	-M1	PE	/2.1	

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WM2	PP00	4	1,5		Motor filtera

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Motor filtera	/3.0	-XM2	1	1	-M2	U1	/3.0	
=	/3.0	-XM2	2	2	-M2	V1	/3.0	
=	/3.1	-XM2	3	3	-M2	W1	/3.0	
=	/3.1	-XM2	4	PE	-M2	PE	/3.0	

Cable diagram

F09_001

Cable name	cable type		no. of conductors		cross-section	cable length		function text
=POST+EO01-WS1	PP00		2		1,5			Senzor temperature 102
function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor temperature 102	/6.0	-XS1	1	1	1		/6.0	
=	/6.1	-XS1	2	2	2		/6.1	

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Cable diagram =POST+EO01-WS1		= POST
			Ed.	Filip Komarica					+ IZV
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page 12
Modification	Date	Name	Original		Replacement of / Replaced by				Page 39

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WS2	PP00	2	1,5		Senzor brzine 200

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor brzine 200	/6.2	-XS2	1	1	1		/6.2	
=	/6.2	-XS2	2	2	2		/6.2	

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Cable diagram =POST+EO01-WS2		= POST	
			Ed.	Filip Komarica					+ IZV	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	13
Modification	Date	Name	Original		Replacement of	Replaced by			Page	39

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WS3	PP00	2	1,5		Senzor pritiska 201

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor pritiska 201	/6.3	-XS3	1	1	1		/6.3	
=	/6.3	-XS3	2	2	2		/6.3	

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Cable diagram =POST+EO01-WS3		= POST	
			Ed.	Filip Komarica					+ IZV	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	14
Modification	Date	Name	Original		Replacement of / Replaced by				Page	39

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WS4	PP00	2	1,5		Senzor pritiska 202

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor pritiska 202	/6.4	-XS4	1	1	1		/6.4	
=	/6.4	-XS4	2	2	2		/6.4	

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WS5	PP00	2	1,5		Senzor nivoa 400

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor nivoa 400	/6.5	-XS5	1	1	1		/6.5	
=	/6.6	-XS5	2	2	2		/6.6	

Cable diagram

F09_001

Cable name	cable type	no. of conductors	cross-section	cable length	function text
=POST+EO01-WS6	PP00	2	1,5		Senzor struje motora 100

function text	X-Ref	Target designation from	Connection point	conductor	Target designation to	Connection point	X-Ref	function text
Senzor struje motora 100	/6.7	-XS6	1	1	1		/6.7	
=	/6.7	-XS6	2	2	2		/6.7	

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Cable diagram =POST+EO01-WS6		= POST	
			Ed.	Filip Komarica					+ IZV	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page	17
Modification	Date	Name	Original		Replacement of / Replaced by				Page	39

Terminal diagram

F13_001

function text	-WM1	Cable name	Strip =POST+EO01-XM1					Cable name					Page / column
	PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type				
Motor pumpe	1		-M1	U1	1	,	-KM1	2					/2.1
=	2		-M1	V1	2	,	-KM1	4					/2.1
=	3		-M1	W1	3	,	-KM1	6					/2.1
=	PE		-M1	PE	4	,	PE:2						/2.1

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Terminal diagram =POST+EO01-XM1	= POST	
			Ed.	Filip Komarica	Basic project with IEC identifier structure			+ IZV	
			Appr					IEC_bas001	Page 18
Modification	Date	Name	Original		Replacement of	Replaced by			Page 39

Terminal diagram

F13_001

function text								-WM2	Cable name	Strip =POST+EO01-XM2						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Motor filtera								1		-M2	U1	1	,	-FR	U2						/3.0
=								2		-M2	V1	2	,	-FR	V2						/3.0
=								3		-M2	W1	3	,	-FR	W2						/3.1
=								PE		-M2	PE	4	,	-FR	PE						/3.1

Terminal diagram

F13_001

function text								-WS1	Cable name	Strip =POST+EO01-XS1						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor temperature 102								1		1		1	,	-A2	19						/6.0
														-A5	40						
														-XS2	1						
														-TP	-X80:1						
Senzor temperature 102								2		2		2	,	-A3	21						/6.1

			Date	11.2.2026.	EPLAN	EPLAN Software & Service GmbH & Co. KG	Terminal diagram =POST+EO01-XS1	= POST	
			Ed.	Filip Komarica				+ IZV	
			Appr		Basic project with IEC identifier structure			IEC_bas001	Page 20
Modification	Date	Name	Original		Replacement of / Replaced by				Page 39

Terminal diagram

F13_001

function text								-WS2	Cable name	Strip =POST+EO01-XS2						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor brzine 200								1		1		1	,	-XS1	1						/6.2
														-XS3	1						
Senzor brzine 200								2		2		2	,	-A3	22						/6.2

Terminal diagram

F13_001

function text								-WS3	Cable name	Strip =POST+EO01-XS3						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor pritiska 201								1		1		1	,	-XS2	1						/6.3
														-XS4	1						
Senzor pritiska 201								2		2		2	,	-A3	23						/6.3

Terminal diagram

F13_001

function text								-WS4	Cable name	Strip =POST+EO01-XS4						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor pritiska 202								1		1		1	,	-XS3	1						/6.4
														-XS5	1						
Senzor pritiska 202								2		2		2	,	-A3	24						/6.4

Terminal diagram

F13_001

function text								-WS5	Cable name	Strip =POST+EO01-XS5						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor nivoa 400								1		1		1	,	-XS4	1						/6.5
														-XS6	1						
Senzor nivoa 400								2		2		2	,	-A3	25						/6.6

Terminal diagram

F13_001

function text								-WS6	Cable name	Strip =POST+EO01-XS6						Cable name					Page / column
								PP00	cable type	Target designation	Connection point	terminal	jumper	Target designation	Connection point	cable type					
Senzor struje motora 100								1		1		1	,	-XS5	1						/6.7
														-FR	X21.11						
Senzor struje motora 100								2		2		2	,	-A3	26						/6.7