QUICK START GUIDE

USB-C Triple
Display Docking Station

www.wavlink.com/en_us/product/WL-UMD29-Pro


Enter the Link to View the Full User Guide and Driver

WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

EN

WL-UMD29-Pro

OVERVIEW

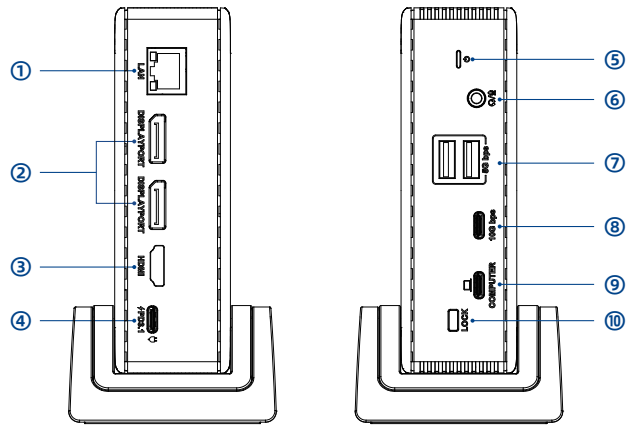

①RJ45 Gigabit LAN
②DisplayPort
(Single 8K@30Hz or 4K@144Hz)
③HDMI (Single 8K@30Hz or 4K@144Hz)
④USB-C IN (140W MAX)
⑤Power LED
⑥Audio/Mic Jack
⑦USB-A 5G
⑧USB-C 10G
⑨Upstream USB-C
(Host)
⑩Lock


DRIVER INSTALLATION

For Windows 10/11/Later and MAC OS, it is Plug and Play, so Driver installation can be installed automatically. If the Network Driver cannot be installed automatically or the network port cannot be recognized, please visit www.wavlink.com/en_us/WL-UMD29-Pro or www.wavlink.com >SUPPORT>Driver>WL-UMD29-Pro to download and manually install the Driver.

HOW TO USE

Note: Before connecting to the Dock, please ensure the USB-C port of the PC/Laptop supports PD and DP ALT MODE. Failure to meet this requirement will result in non-functional charging and video ports.

Step 1: Connect the power adapter to the dock's USB-C PD IN port.
Step 2: Connect the USB-C upstream port on the docking station to your laptop.
Step 3: Connect the external monitors to the DP1/DP2/HDMI port.
Step 4: Connect USB peripherals to USB-A/USB-C ports according to your needs.

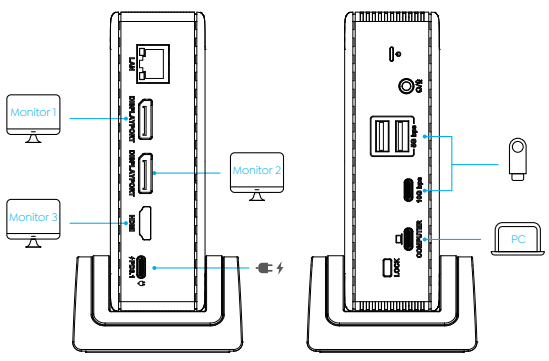

DISPLAY RESOLUTION

Single Display

Items		HDMI/DP 1/DP 2
Windows MST	DP 1.4 (DSC 1.2)	7680×4320@30Hz or 3840×2160@144Hz
	DP 1.4	3840×2160@60Hz
	DP 1.2	3840×2160@30Hz
Mac SST		DP1/DP2:3840x2160@144Hz HDMI:3840x2160@60Hz

Dual Display

Items		HDMI+DP/Dual DP
Windows MST	DP 1.4 (DSC 1.2)	3840×2160@60Hz
	DP 1.4	3840×2160@30Hz+1920×1080@60Hz
	DP 1.2	1920×1080@60Hz+1920×1080@60Hz
Mac SST		DP1+DP2:3840x2160@144Hz HDMI+DP1/DP2:3840x2160@60Hz


Triple Display

Items		HDMI+DP 1+DP 2
Windows MST	DP 1.4 (DSC 1.2)	3840×2160@60Hz+3840×2160@30Hz+3840×2160@30Hz
	DP 1.4	1920×1080@60Hz+1920×1080@60Hz+1920×1080@60Hz
	DP 1.2	1920×1080@60Hz+1920×1080@30Hz+1920×1080@30Hz
Mac SST		3840×2160@60Hz+3840×2160@60Hz+3840×2160@60Hz

* The above resolutions are factory test results; The resolution may be different depending on the actual situation of the computer and monitor.

Note: If you want to use the 3 displays with your PC/laptop simultaneously, please make sure that the Graphics card supports at least 4 displays, including your PC's own screen. Check with your PC manufacturer on this.

Remarks for Mac based PC/laptops:
- Mac OS supports Single-Stream Transport mode, so only one video source can be output such as ABB or ABBB(A is the primary display).



Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

FAQ

Q1. What should I do if the monitors connected to the docking station do not work?
- Please make sure that the USB-C port on your laptop supports video output. Not all USB-C ports have this capability.
- Please use the USB-C cable included with your WAVLINK device.

Q2. Why do my external monitors show the same content when I connect the WAVLINK device to my MacBook?
- This is expected behavior due to a limitation in macOS. macOS does not fully support MST, so the external monitors may mirror each other instead of extending independently.

Q3. Why isn't my laptop charging when I connect the power adapter to the hub?
- Please make sure that the USB-C port on your laptop supports charging. Not all USB-C ports support this function.

Q4. When I connect three monitors to the docking station, one monitor does not turn on. What should I do?
- Please make sure that your GPU supports 4 displays (including the built-in laptop screen), as not all GPUs can support 4 displays simultaneously. If your GPU supports a maximum of 3 displays, try closing the laptop lid to enable all three external monitors.
- If you encounter any issues, feel free to contact our support team.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 6:00 pm (UTC-5)