QUICK START GUIDE

USB-C 10G Triple Display Docking Station

kb.wavlink.xyz/docs/WL-UMD01M-Pro/v100/

Click the Link to View the Full User Guide


WAVLINK (@WavlinkOfficial)
WAVLINK SUPPORT (@WavlinkTechSupport)

EN

WL-UMD01M Pro

HOW TO USE

Step 1. Before connecting to the Dock, please ensure the USB-C port of the PC/Laptop supports PD and DP ALT MODE. Failure to meet this requirement will result in non-functional charging and video ports.
Step 2. Connect the DC IN port to a compatible power source. Press the power button; the LED indicator will illuminate blue.
Step 3. Connect the upstream USB-C port to your host PC/laptop.
Step 4. Connect your monitor(s) to the video ports. You may then configure the display modes as needed.

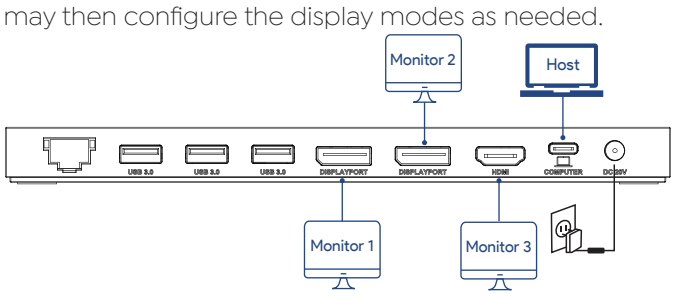

DISPLAY RESOLUTION

1. Single Display

		DP1	DP2	HDMI
Windows MST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz
Mac OS SST	HBR2 (DP1.2)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@30Hz
	HBR3 (DP1.4)	3840 x 2160@30Hz	3840 x 2160@30Hz	3840 x 2160@60Hz
	HBR3+DSC (DP1.4)	3840 x 2160@144Hz	3840 x 2160@144Hz	3840 x 2160@60Hz


2. Dual Display

		Dual DP	DP+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@60Hz	Dual 1920 x 1080@60Hz
	HBR3 (DP1.4)	Dual 2560 x 1440@60Hz	Dual 2560 x 1440@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@60Hz	Dual 3840 x 2160@30Hz
Mac OS SST	HBR2 (DP1.2)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3 (DP1.4)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz	Dual 3840 x 2160@30Hz


3. Triple Display

		DP1+DP2+HDMI
Windows MST	HBR2 (DP1.2)	Dual 1920 x 1080@30Hz + One 1280 x 720@60Hz
	HBR3 (DP1.4)	Triple 1920 x 1080@60Hz
	HBR3+DSC (DP1.4)	Dual 3840 x 2160@30Hz + One 1920 x 1080@60Hz
Mac OS SST	HBR2 (DP1.2)	Triple 3840 x 2160@30Hz
	HBR3 (DP1.4)	Triple 3840 x 2160@30Hz
	HBR3+DSC (DP1.4)	Triple 3840 x 2160@30Hz

OVERVIEW

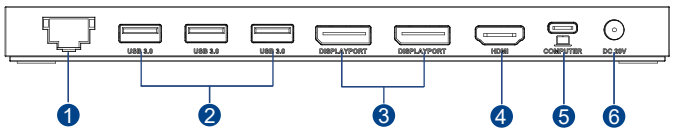


1. Gigabit Ethernet port
2. 5Gbps USB-A port
3. DisplayPort
4. HDMI port
5. Upstream USB-C port
6. DC IN (20V/6.5A)

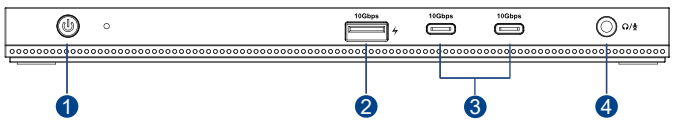

1. Power button
2. 10Gbps USB-A with BC1.2 fast charging
3. 10Gbps USB-C
4. 4-pole phone jack

Note:
- The above resolutions are factory test results; The resolution may be different depending on the actual situation of the computer and monitor.
- If you want to use the 3 displays with your PC/laptop simultaneously, please make sure that the Graphics card supports at least 4 displays, including your PCs own screen. Check with your PC manufacturer on this.
- Mac OS supports single-stream transport, so only one video source can be output, such as ABBB (A is the primary display).



Scan the QR code or visit the link on the manual's first page for detailed Display Settings steps.

FAQ

Q1. What should I do if the monitors connected to the docking station do not work?
A1. Please make sure that the USB-C port on your laptop supports video output. Not all USB-C ports have this capability.

Q2. Why do my external monitors show the same content when I connect the WAVLINK device to my MacBook?
A2. This is expected behavior due to a limitation in macOS. macOS does not fully support MST, so the external monitors may mirror each other instead of extending independently.

Q3. Why isn't my laptop charging when I connect the power adapter to the hub?
A3. Please make sure that the USB-C port on your laptop supports charging. Not all USB-C ports support this function.

Q4. When I connect three monitors to the docking station, one monitor does not turn on. What should I do?
A4. Please make sure that your GPU supports 4 displays (including the built-in laptop screen), as not all GPUs can support 4 displays simultaneously. If your GPU supports a maximum of 3 displays, try closing the laptop lid to enable all three external monitors.
If you encounter any issues, feel free to contact our support team.

Thank you for purchasing WAVLINK product!

Need help?

We're here for you!

www.wavlink.com

Online support: wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

support@wavlink.com
Available Mon-Fri 8:30 am-5:30pm (UTC+8)

+1 8889730883
Mon-Fri 9:00 am - 6:00 pm (UTC-5)