STP LAB:

LET US ASSUME WE HAVE 3 Switches
First of all we will check the lowest priority number but here all the switches having same priority number.
Now election will be done on the basis of Lowest MAC Address.
In which the lowest MAC Address will be Sw0, having MAC 0001.96A9.E707 be the Root Bridge, which will be the central focal Point of the network

To check the status you have to put a Command

Switch#show spanning-tree

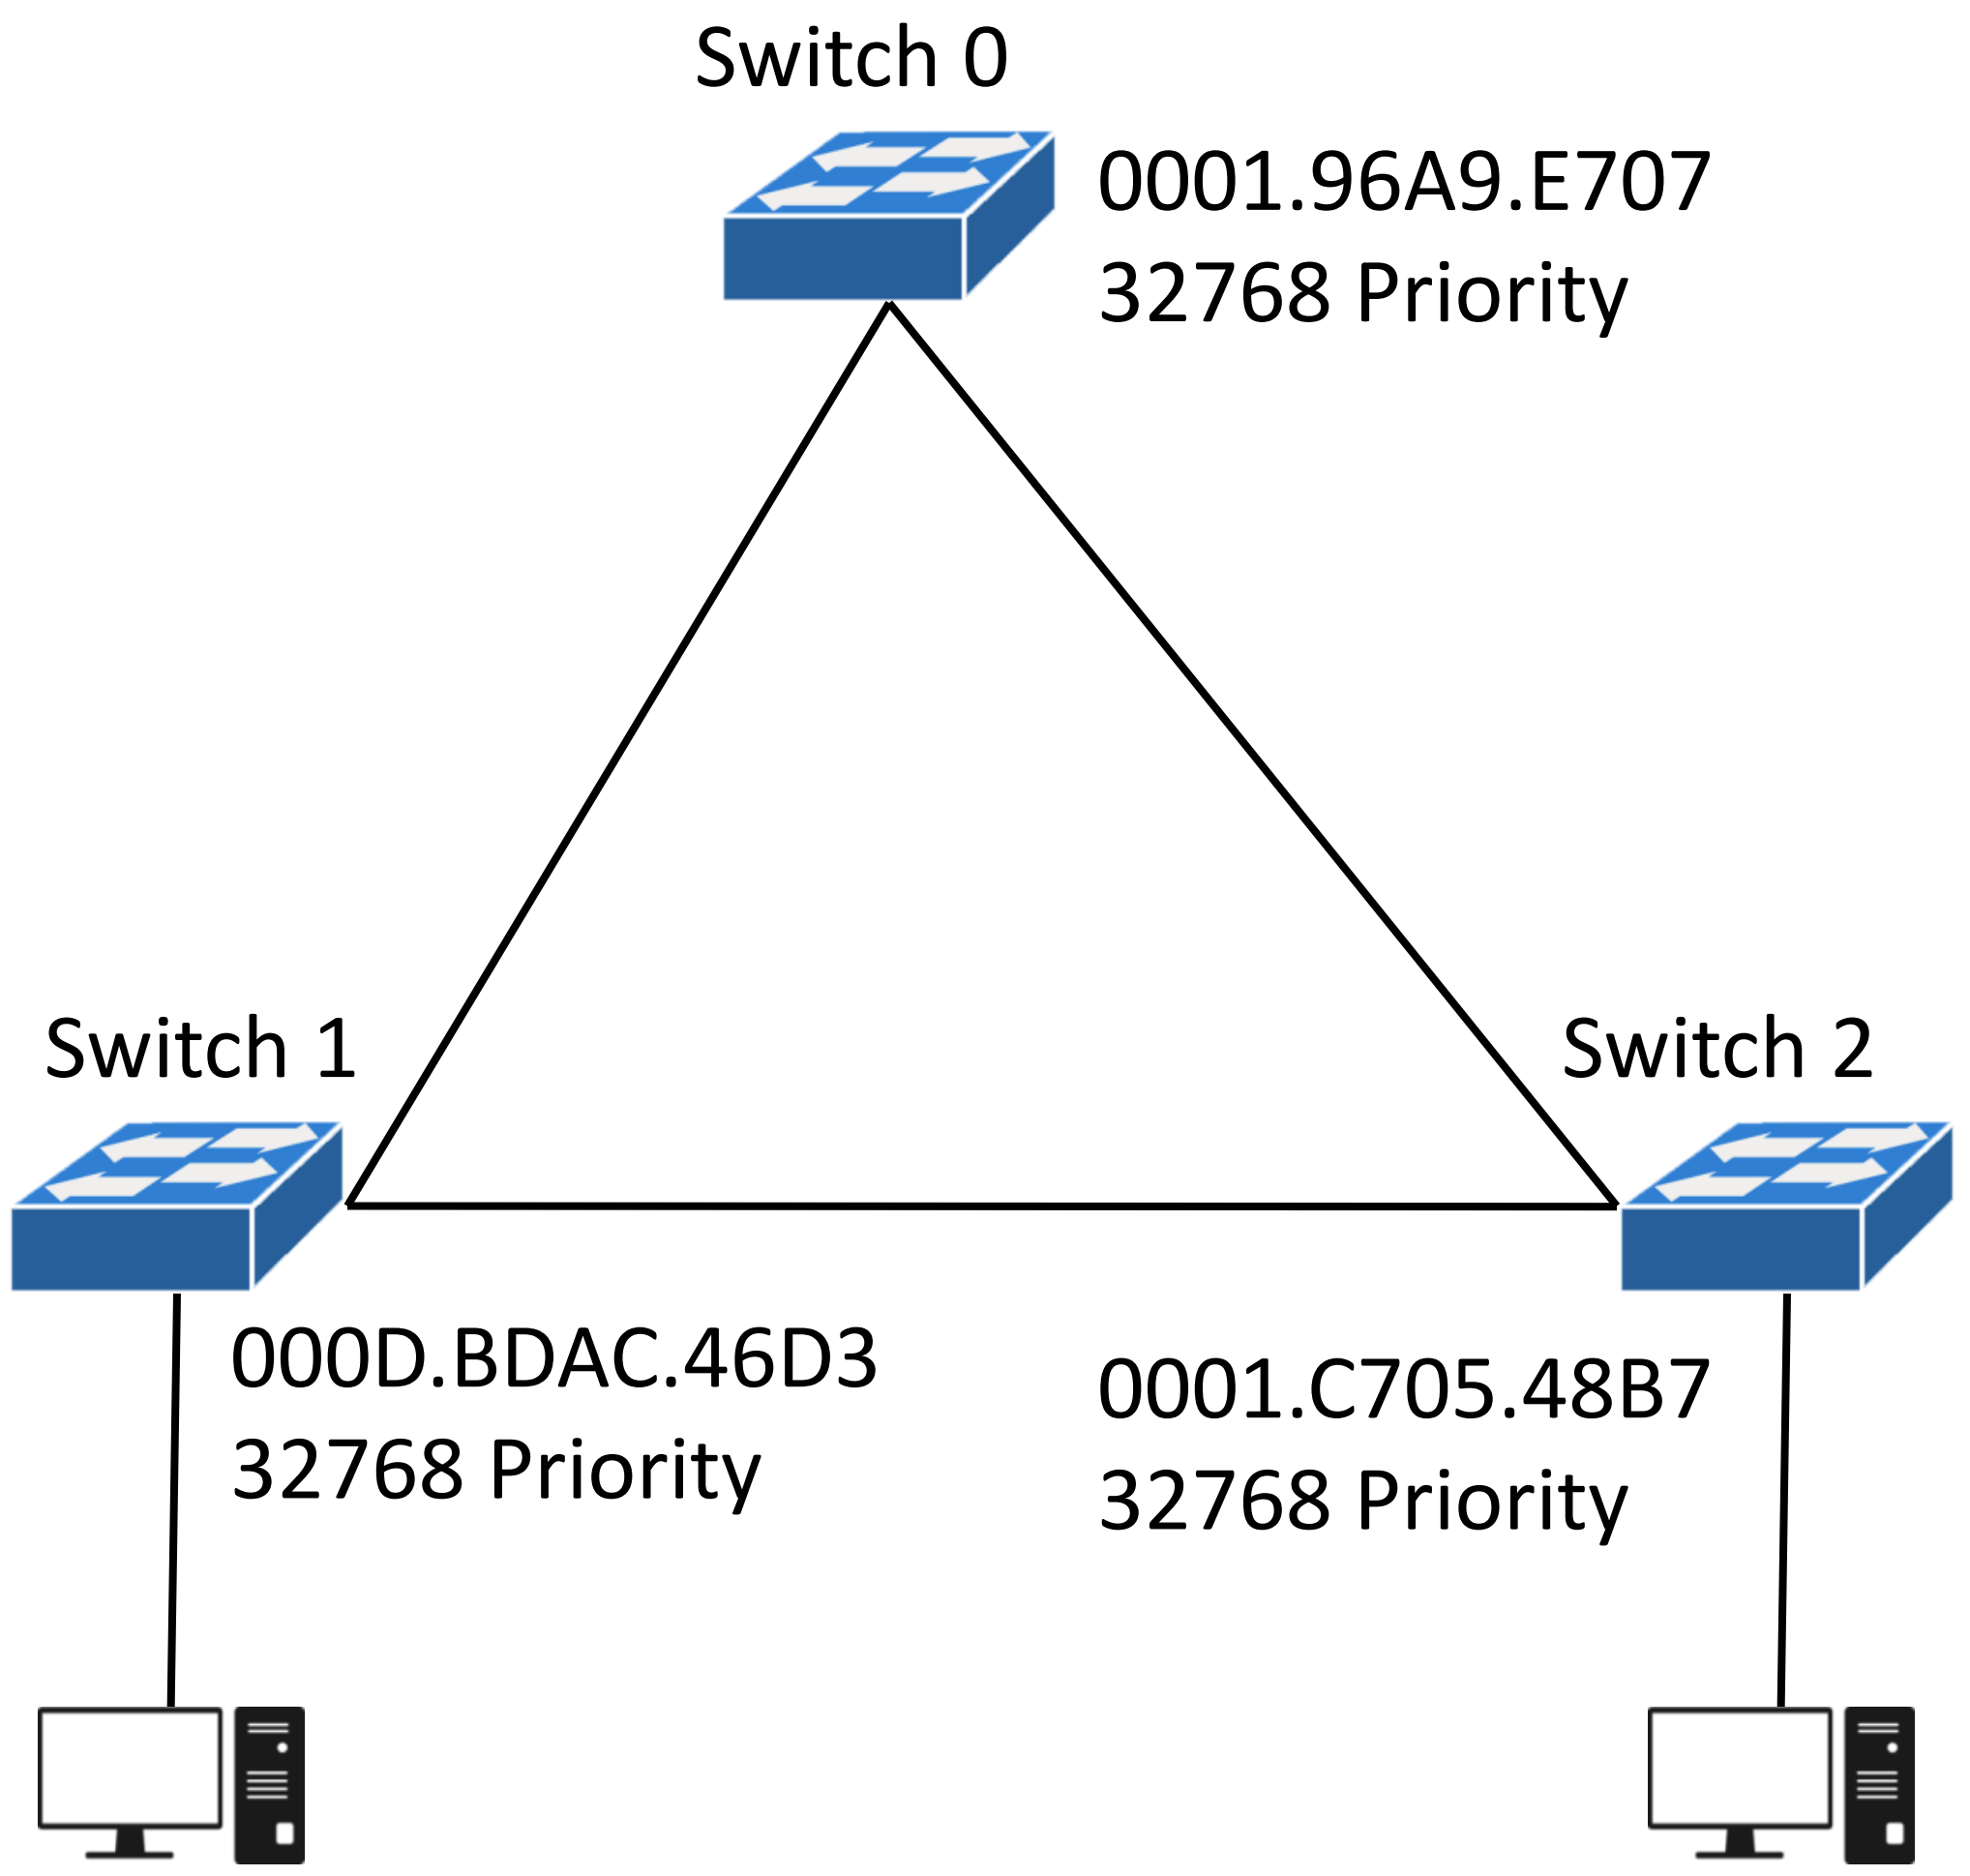

https://www.youtube.com/@techwithravish

Check STP Status:

https://www.youtube.com/@techwithravish

Switch#show spanning-tree

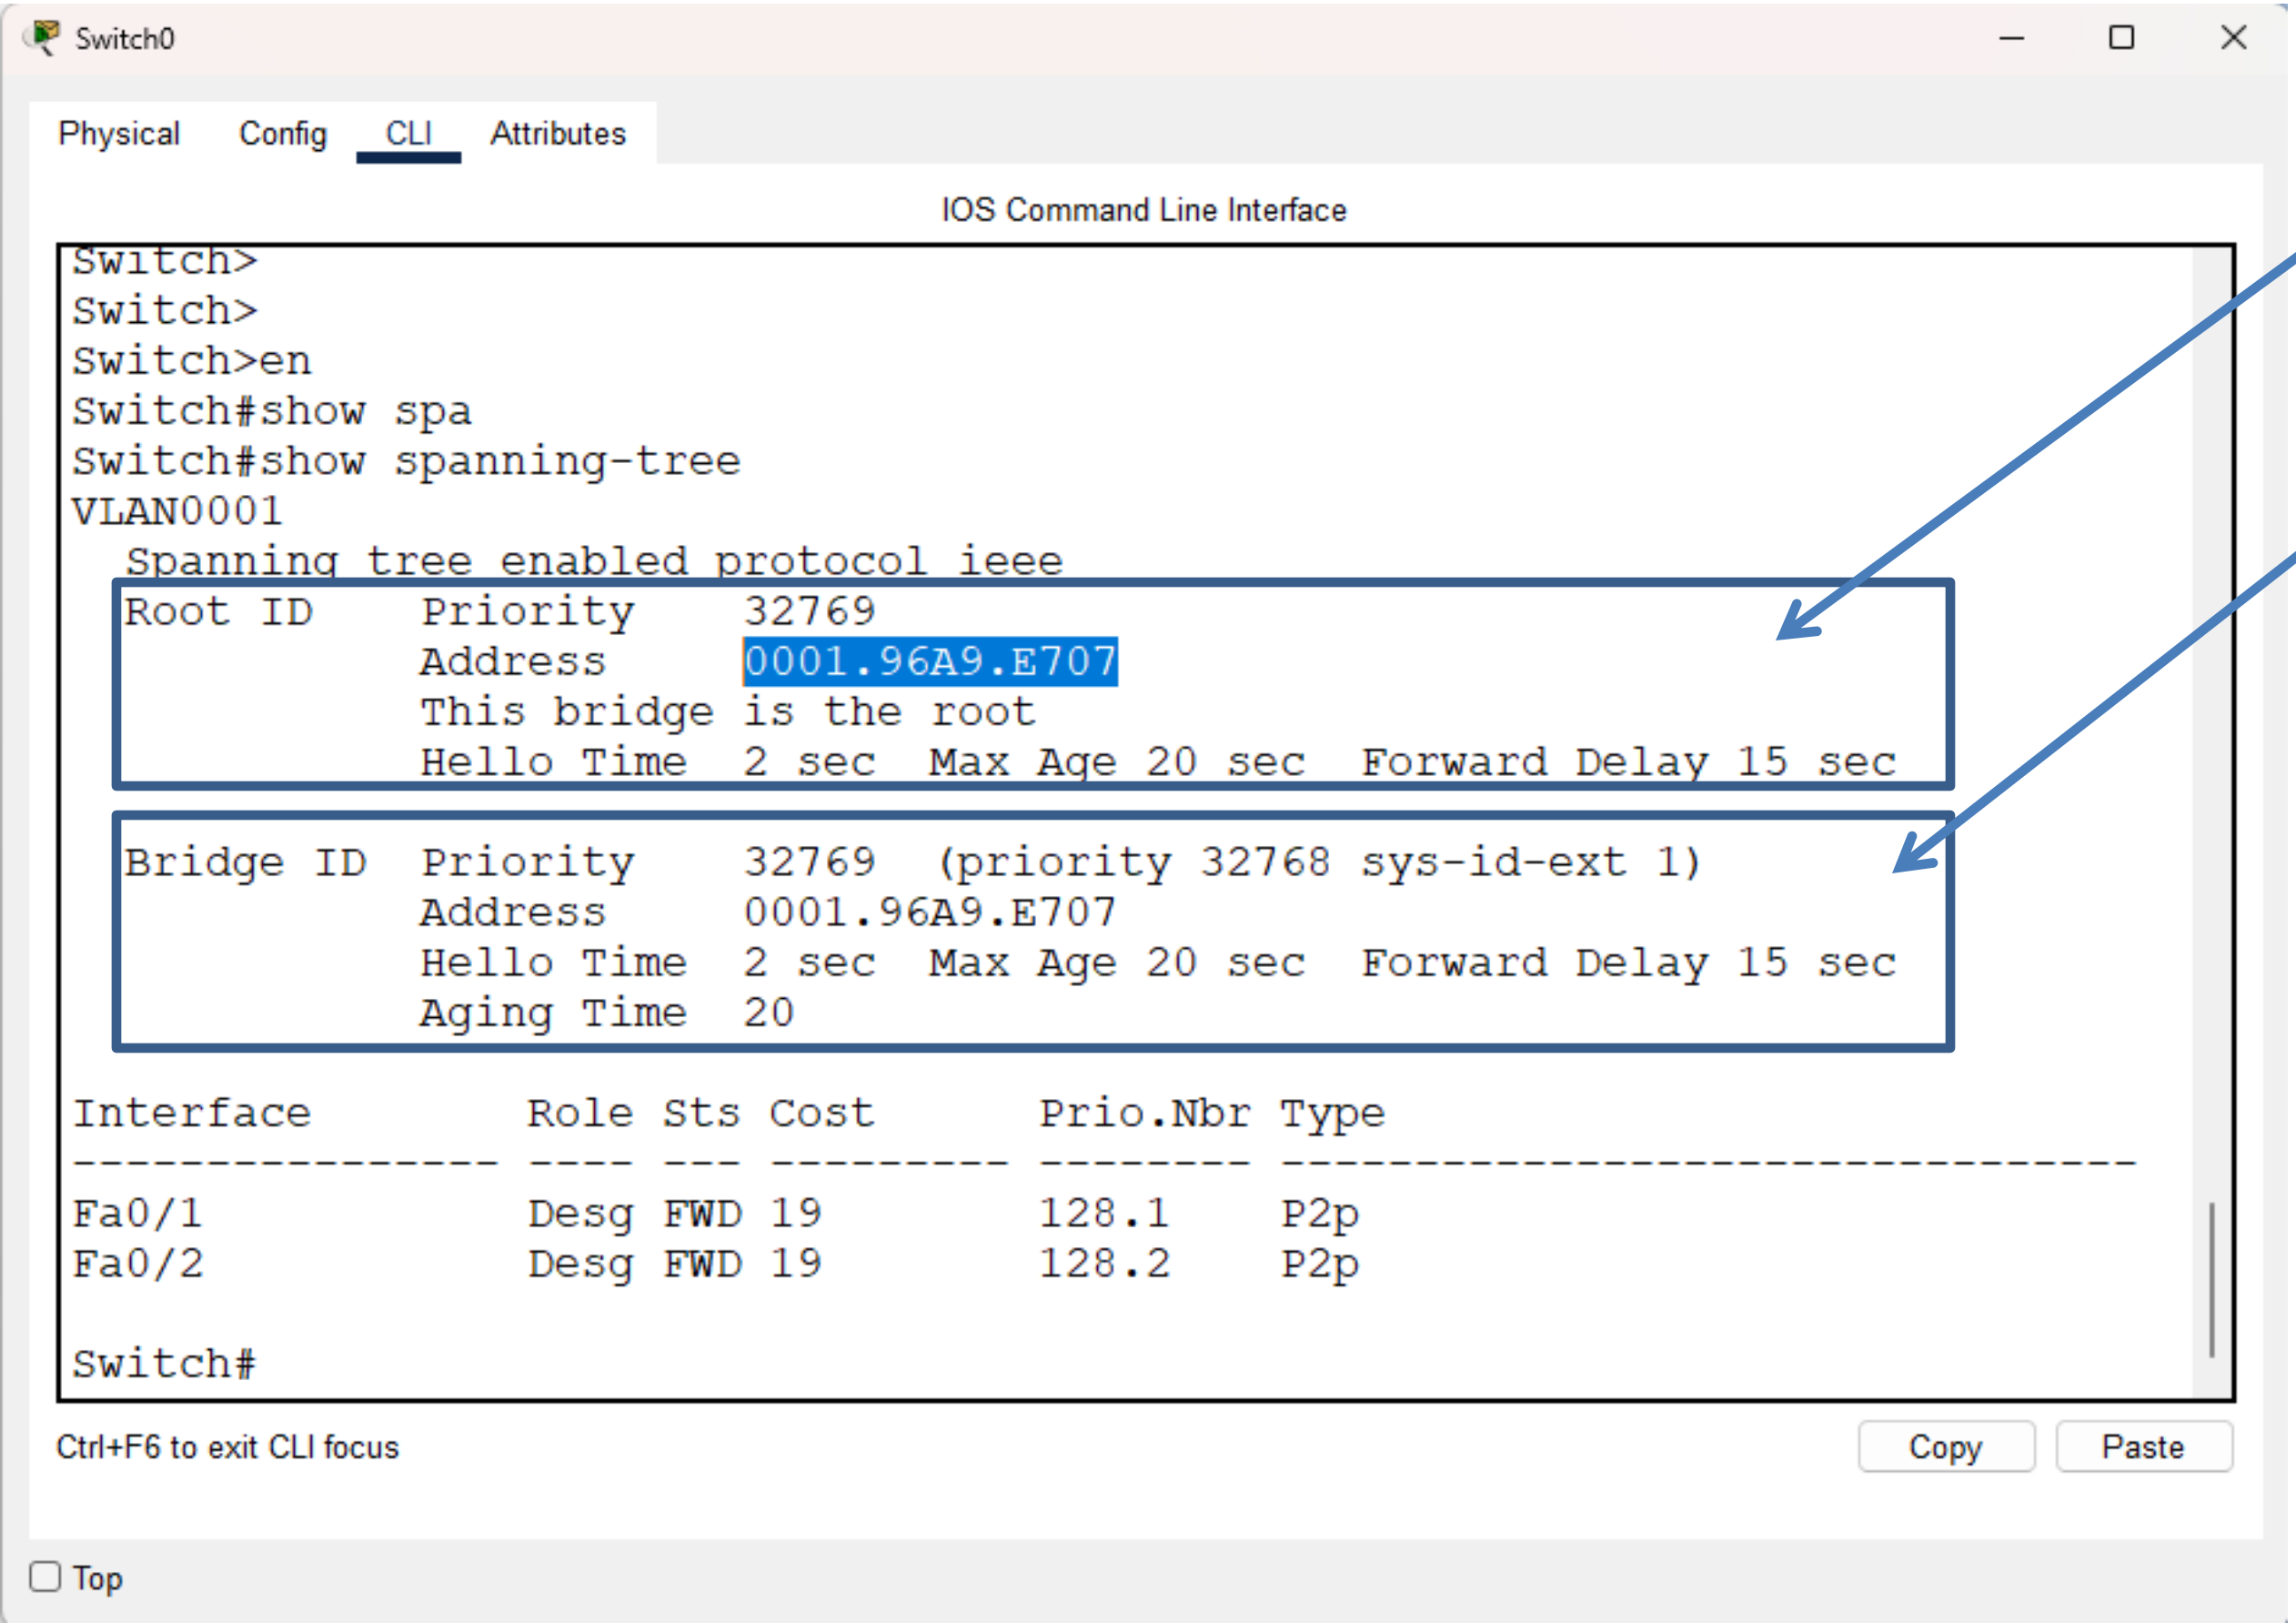

ROOT ID

BRIDGE ID

NOTE: The Switch havings same Root ID and the Bridge ID will be identified as the Root Bridge

Change Root bridge:

Lets change the priority number of switch and the switch having lowest priority number will become the Root Bridge.

Switch1>enable
Switch1#conf t
Switch1(config)#spanning-tree vlan 1 priority 4096

It can be changed in the multiple of 4096

Now Switch 1 will become the Root Bridge

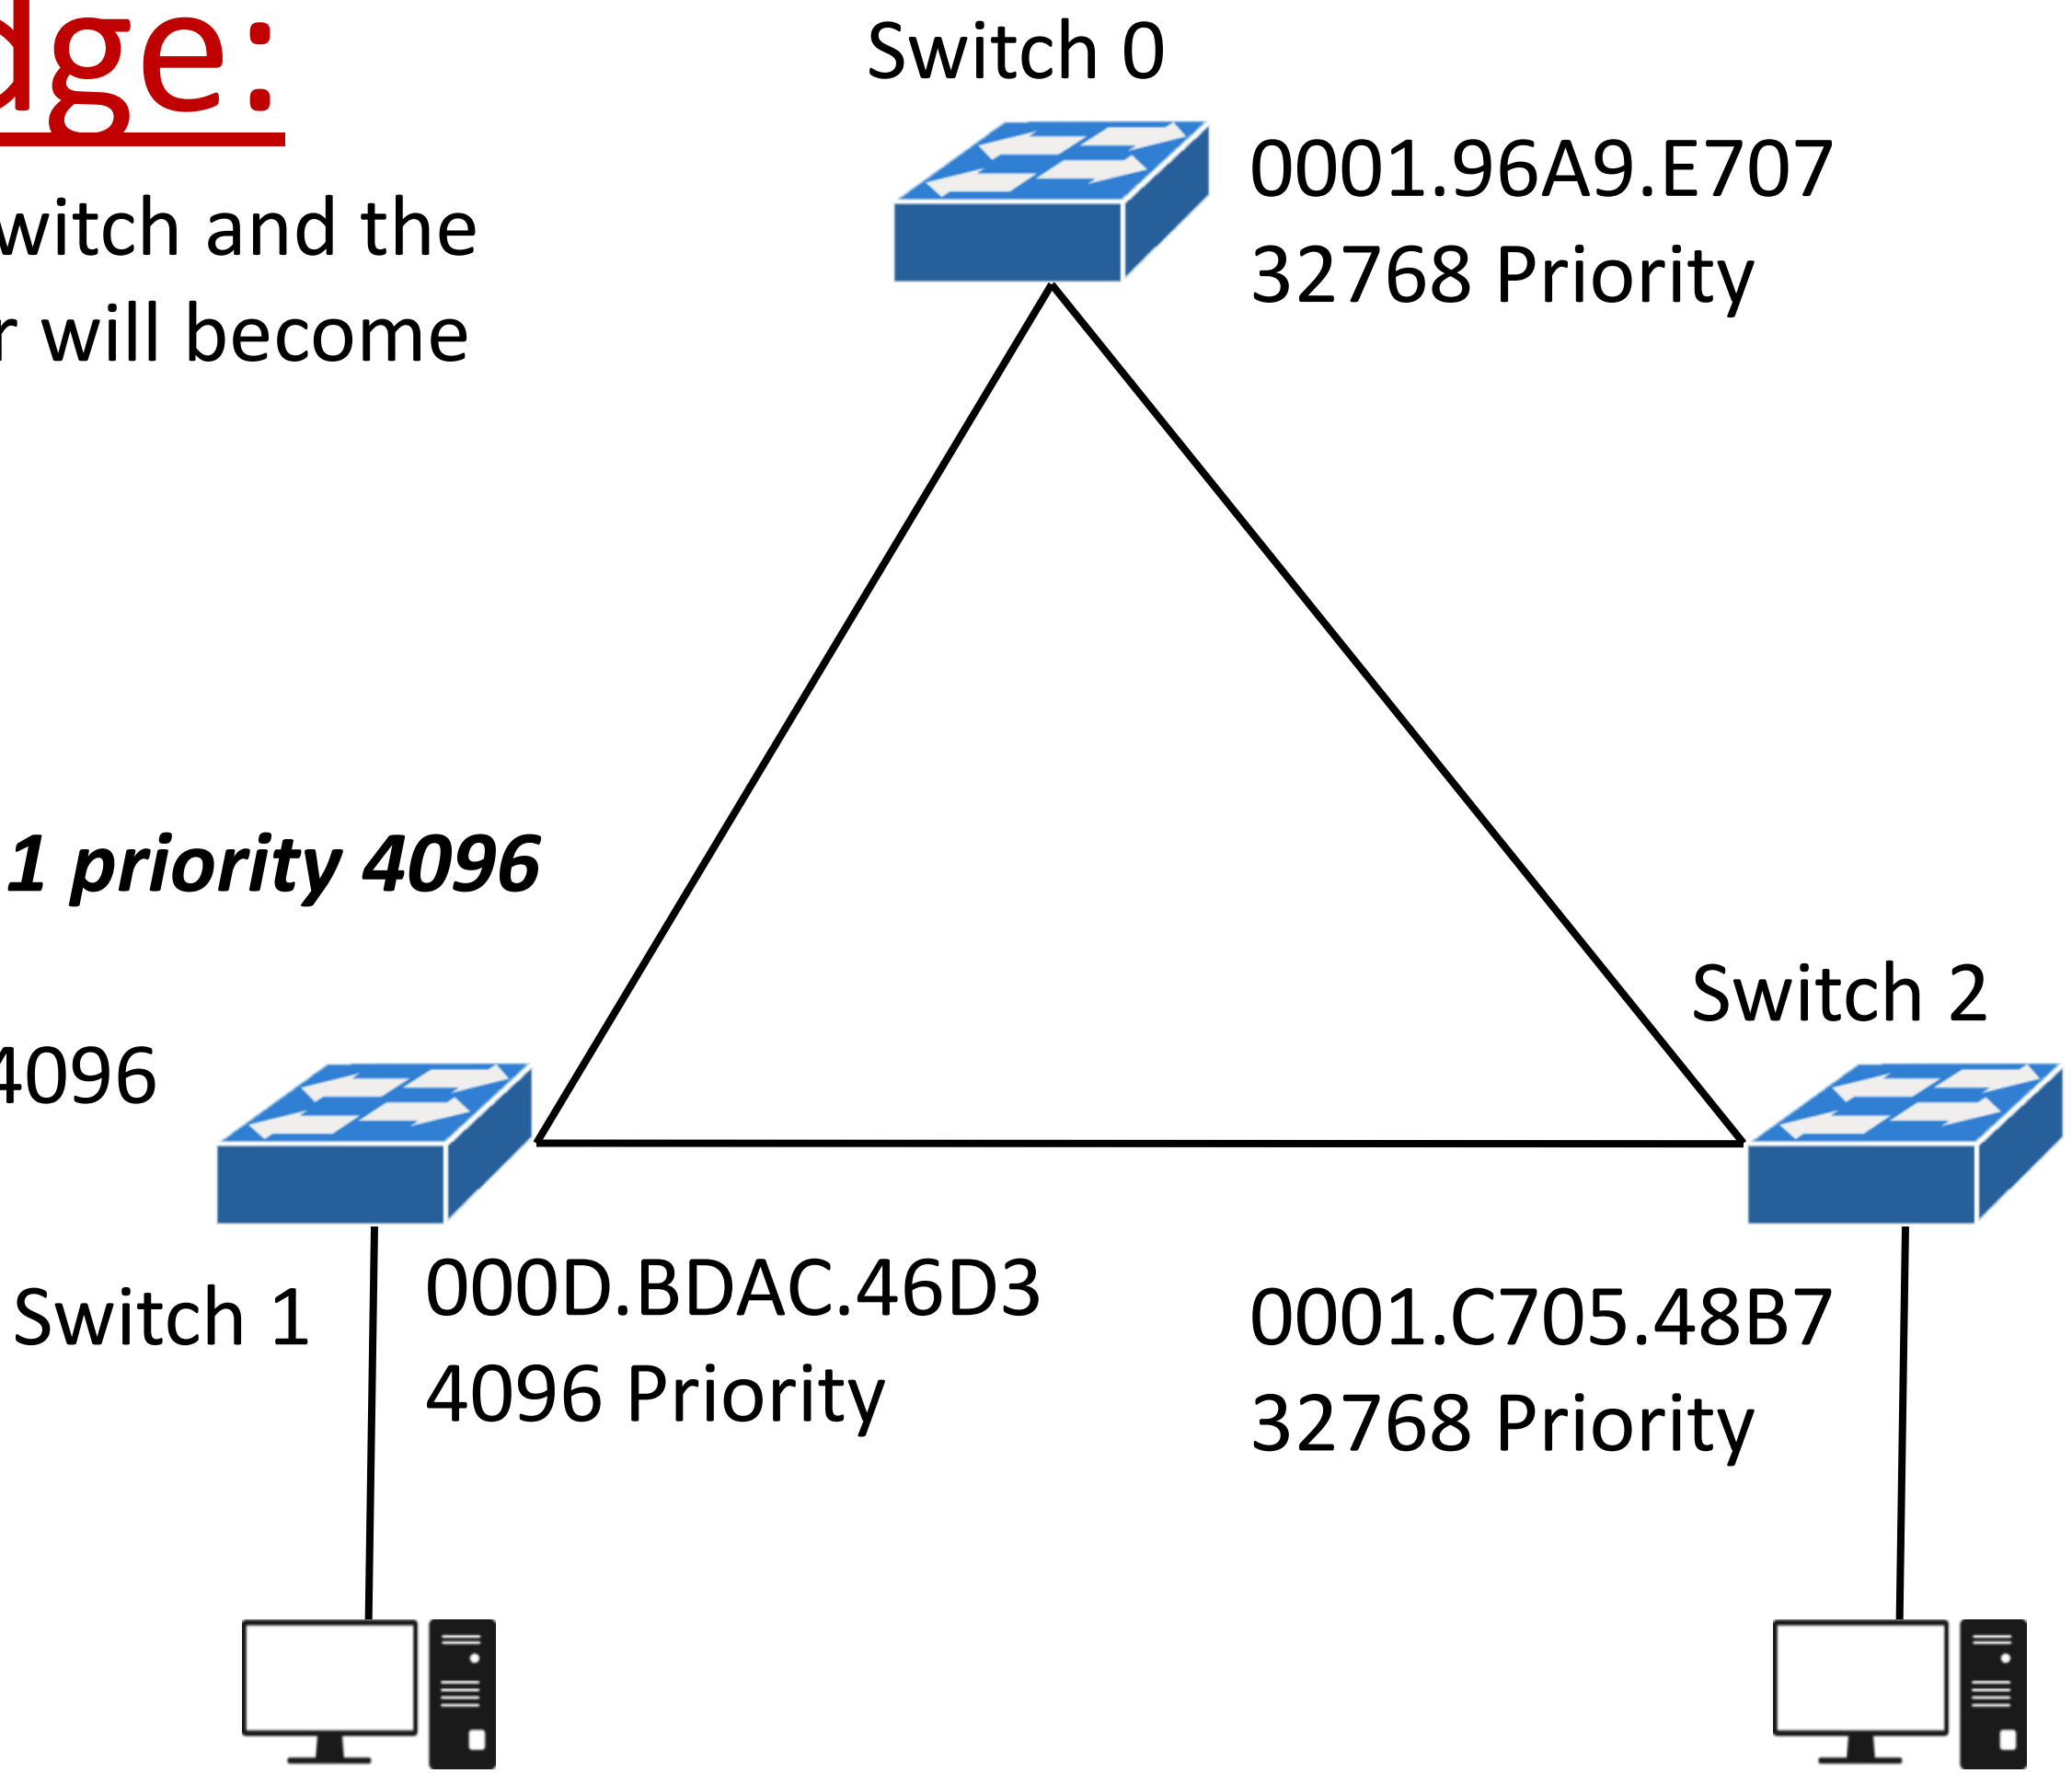

https://www.youtube.com/@techwithravish