

RSTP Configuration:

Switch 0:

```
Switch#conf t
```

```
Switch(config)#spanning-tree mode rapid-pvst
```

Switch 1:


```
Switch#conf t
```

```
Switch(config)#spanning-tree mode rapid-pvst
```

Switch 2:

```
Switch#conf t
```

```
Switch(config)#spanning-tree mode rapid-pvst
```

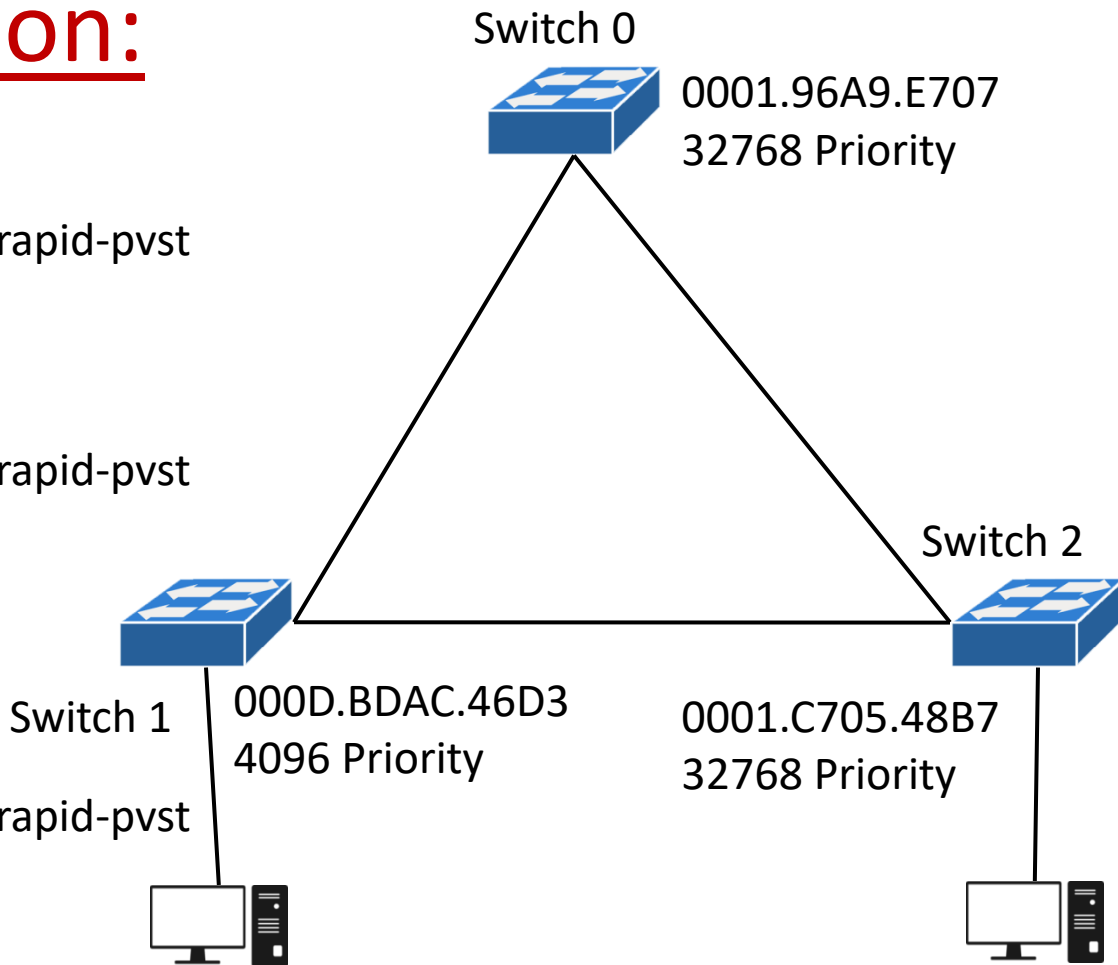

Check STP Status:

Switch#show spanning-tree

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
Switch>
Switch>
Switch>en
Switch#show spa
Switch#show spanning-tree
VLAN0001
Spanning tree enabled protocol ieee
Root ID      Priority      32769
Address      0001.96A9.E707
This bridge is the root
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

Bridge ID    Priority      32769 (priority 32768 sys-id-ext 1)
Address      0001.96A9.E707
Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
Aging Time   20

Interface    Role Sts Cost      Prio.Nbr Type
-----
Fa0/1        Desg FWD 19        128.1    P2p
Fa0/2        Desg FWD 19        128.2    P2p

Switch#
```

ROOT ID

BRIDGE ID

NOTE: The Switch having same Root ID and the Bridge ID will be identified as the Root Bridge