Update firmware

Note

- You can only update the firmware from a PC/Mac.

Download the update file

1 Copy the new SW version (s9110.102.1010_bcd.bcd or s9110.102.3710_bcd.bcd) on your PC/MAC.

3710 is for /37 version, 1010 is for /10 /12 version.

Update from the configuration page

Warning

- Always connect your AD7000W to AC power for firmware upgrade. Never power off your AD7000W during firmware upgrade.

Note

- To use an Internet browser other than Apple Safari on your PC/Mac, remember to go to the Wi-Fi router configuration page and write down the IP address of your AD7000W. See the user manual of your Wi-Fi router for how to find the IP addresses of devices connected to the Wi-Fi router.
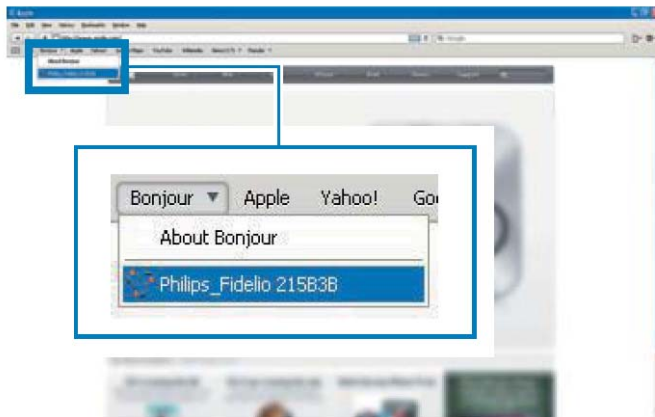
1 Power on AD7000W

  ↳ It takes about 35 seconds for the unit to boot up. During boot-up, the **WI-FI SETUP** indicator on the back of the unit blinks green quickly.

  ↳ After boot-up, you can hear a beep and the **WI-FI SETUP** indicator turns to green steadily. AD7000W is connected to the last configured Wi-Fi network automatically.

2 Make sure that AD7000W and your PC/Mac are connected to the same Wi-Fi router.

3 Open Apple **Safari** on your PC/Mac, then select 'Philips_Fidelio XXX' from the Bonjour pull-down list.
  • Or open any other Internet browser on your PC/Mac, then type in the IP address of AD7000W (available on the Wi-Fi router configuration page) at the address bar.
      ↳ The AD7000W configuration web page is displayed.

4 Follow the on-screen instructions to complete the firmware update.

> **Note**
>
> - In case the firmware update fails, you can try the above procedures again.
> - After successful firmware update, if there is any problem with the Wi-Fi connection, press and hold ⏻ on AD7000W for more than 5 seconds to reset the device, and then try to set up the Wi-Fi network for AD7000W again (see 'Connect to your home Wi-Fi network for AirPlay' on IFU page 10).