
TASK 2 | FULL INCOMING ROUTE AND RING RETURN DETAIL

REV03 | F1 / Office 1 | Locator viewport 1:170; electrical detail not to scale

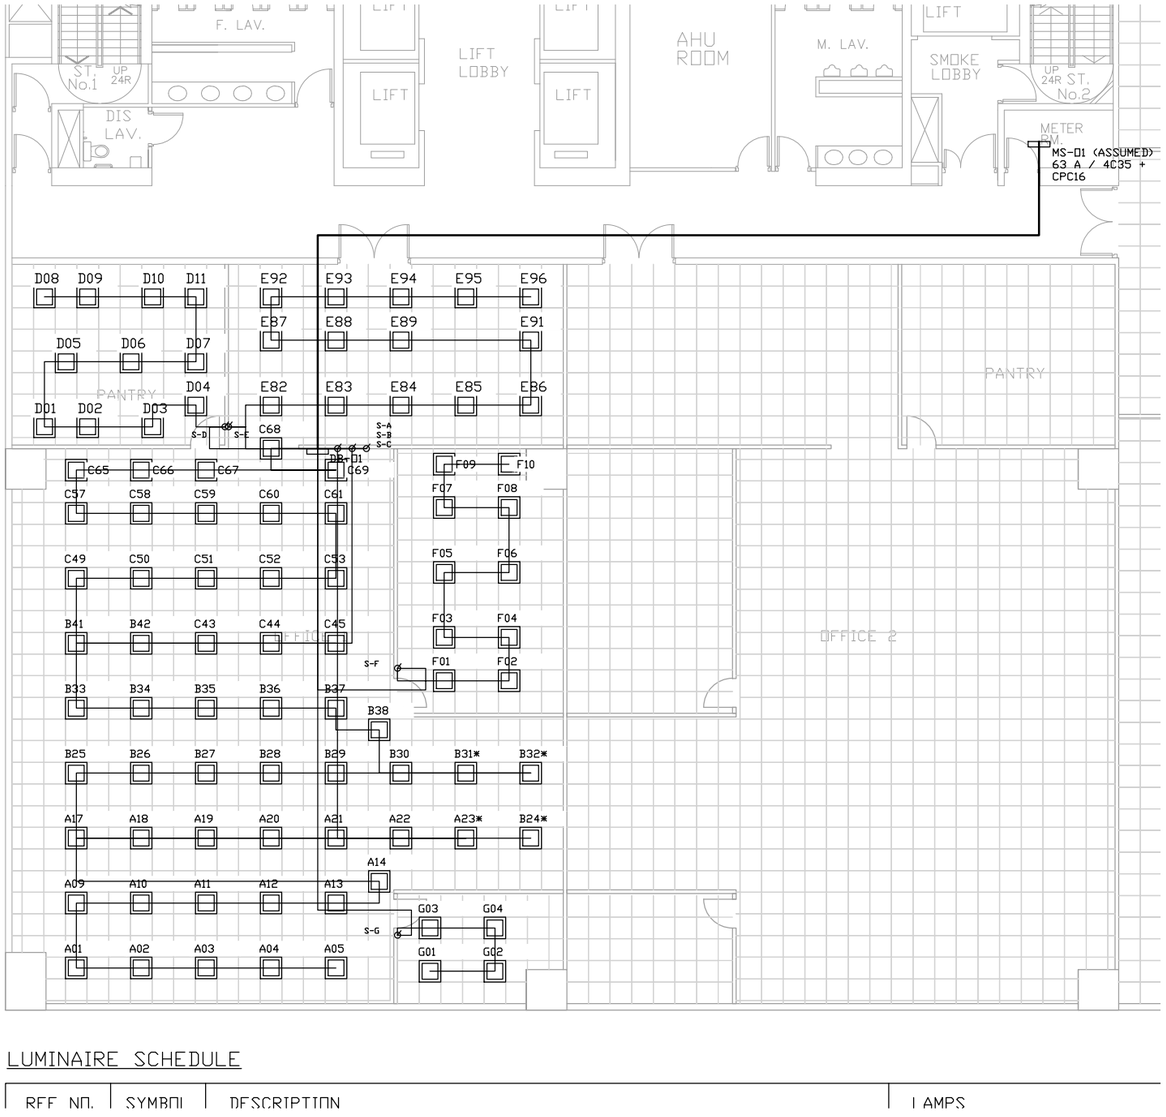

LUMINAIRE SCHEDULE

REF NO.	SYMBOL	DESCRIPTION	AMPS

MS-O1 -> DB-O1 | complete proposed route

Plan: 2.600 + 20.000 + 5.9119 = 28.5119 m.
Add 3.000 m vertical/meter-tail allowance.
Design length = 31.5119 m; not as-built.
Source and DB positions are proposed on supplied plan.
Origin -> F1 tap: separate 28 m busway allowance;
not inferred from this tenant-plan viewport.

4C35 PVC Cu + CPC16 | TM63D 63 A at MS-O1
CLP meter follows source MCCB; DB has 4P isolation.

P1-P4 | L, N AND CPC RINGS

Both ends return to the SAME circuit terminals.

L OUT OF RCBO | 6 mm2



N OUT OF SAME RCBO | 6 mm2




CPC TO PE BAR | 6 mm2



Two individually fused taps per ring; no unfused additions.

EACH FLOORBOX / SOCKET TAP



Fuse in L; N linked to DP isolation; PE continuous.
After FCU: 4 mm2 L/N/CPC, 0.5 m allowance.
P7 is a separate radial: 10 A DP FCU -> WH01.
Do not mix RCBO neutrals or circuit ring ends.
Verify L/N/CPC ring continuity before energising.

PROTECTION REFERENCE
Main diagram and Task3 govern the MS-O1 MCCB,
manufacturer backup, fault bounds and earthing.
This sheet adds route visibility and connection detail;
device and circuit counts remain 112 / 15.