1. Download Project File Steps

Step 1. Create a New Project.

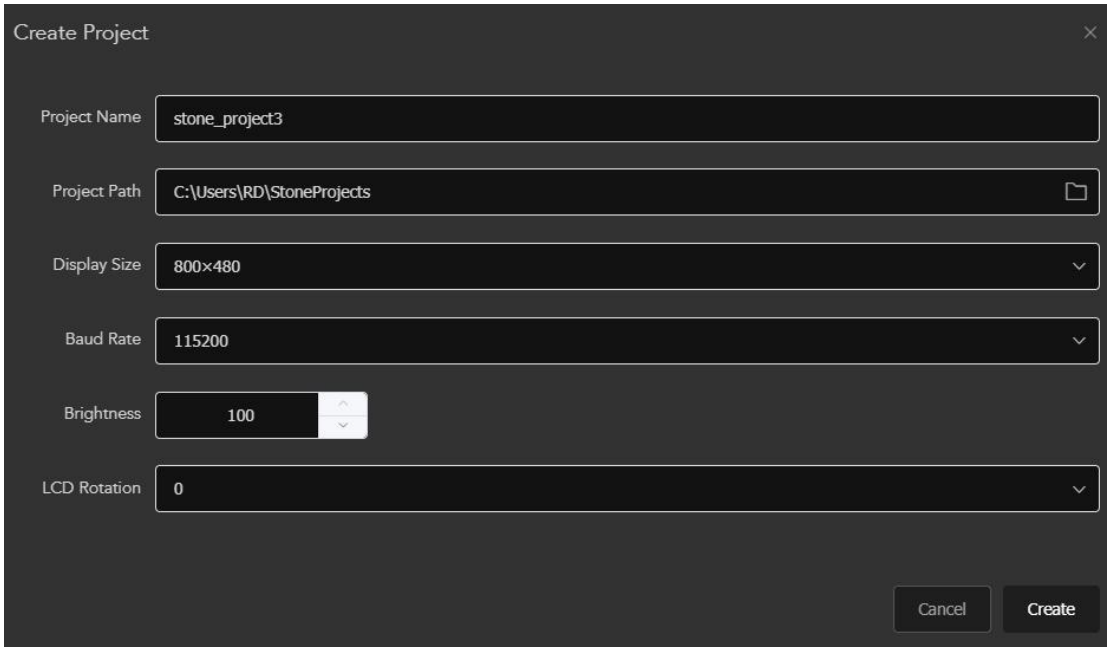

Step 2. Define the New Project.

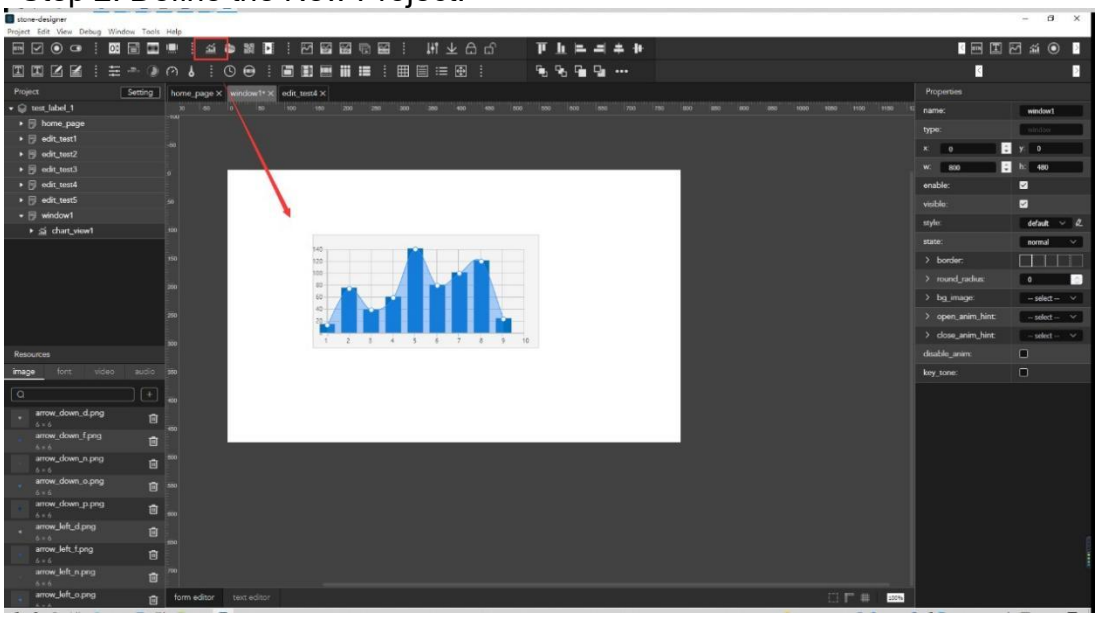

Step 3. Create the Downloading file----- “default” folder

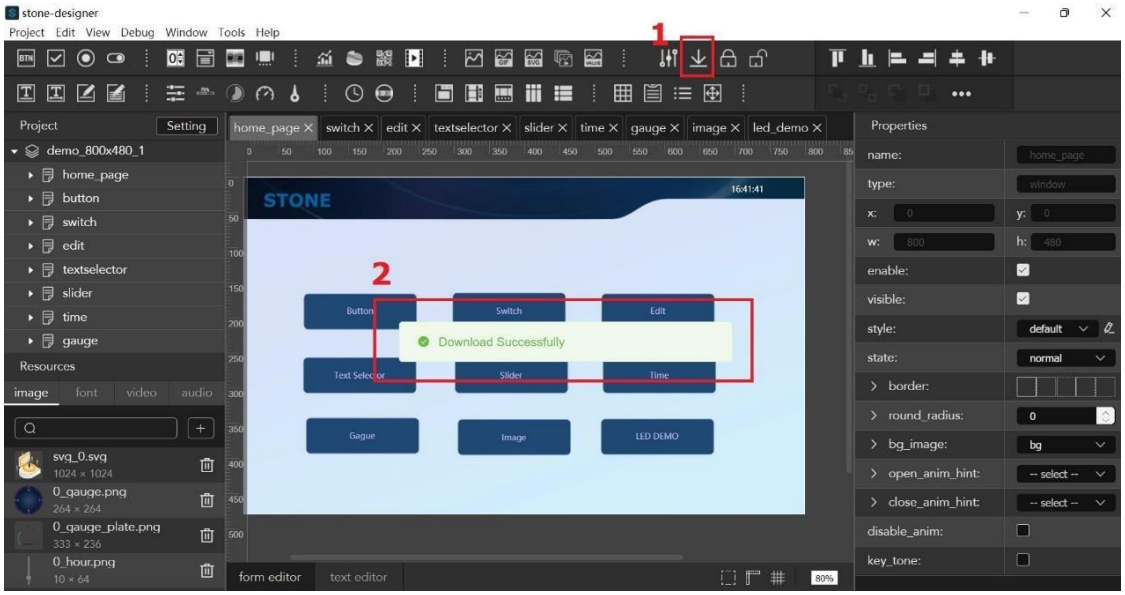

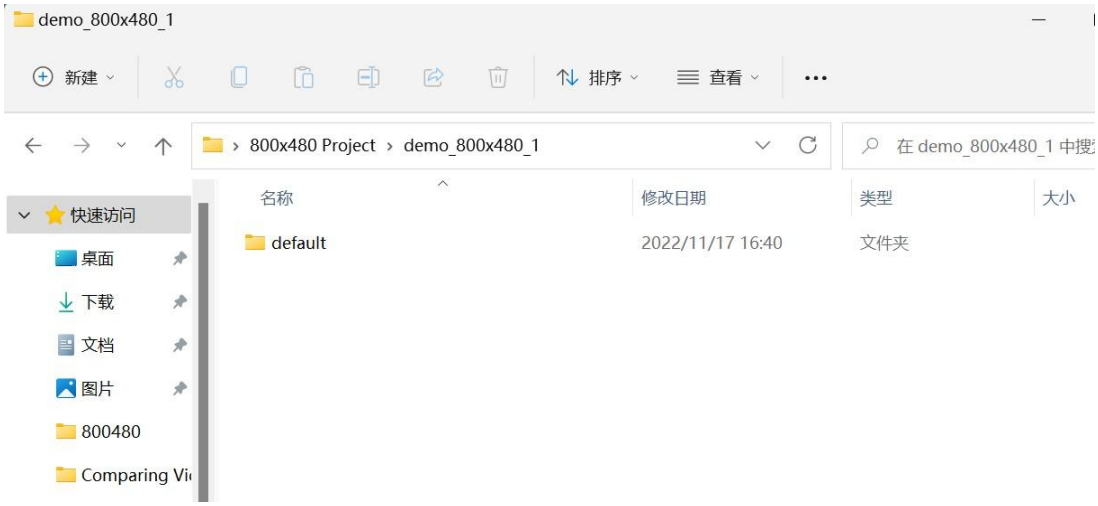

Step 4. Downloading the Project

1. Choose the “U-Disk” switch on the PCB.
2. Create a “STONE/project” folder like DEMO (Case matters),Then copy “default” folder into “STONE/project” folder.

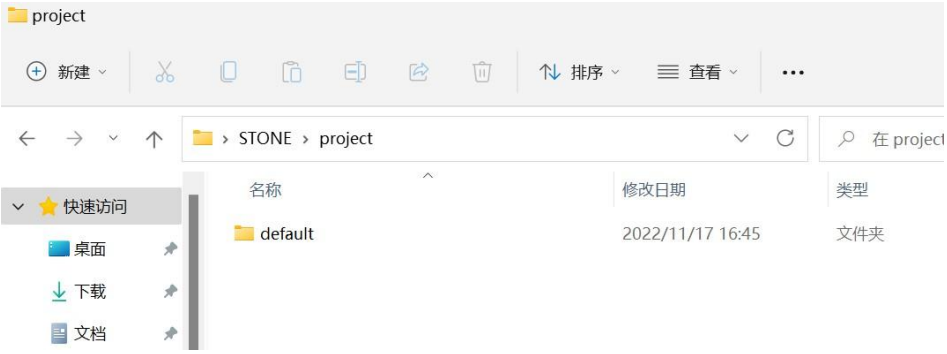

3. Only copy “STONE” folder into U storage disk.
4. Plug the U storage disk on the USB port, Automatic download.

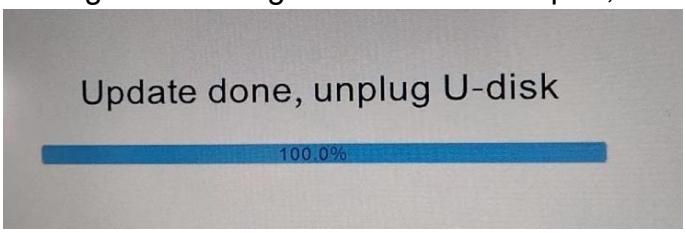

5. After updating, take out the U disk, Auto Reboot.

Note: the corresponding path of configuration files is below.

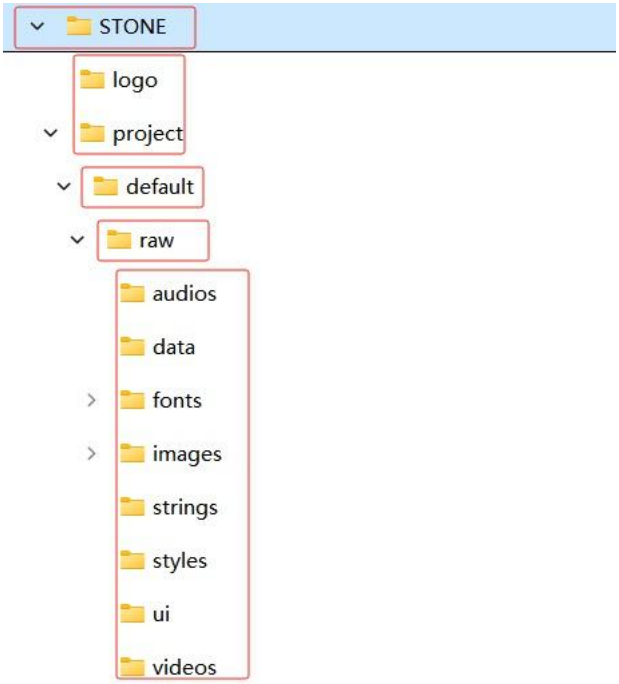

2. Update Logo file Steps

Step 1. It only can update the booting logo by U storage disk. (FAT32 Format!)

Step 2. Name your logo image file as “logo.bmp” (Case matters!), See DEMO.
Note: The logo image file should be 8 bit or 24 bit bmp format.
& The resolutions of logo image should be same with the screen.

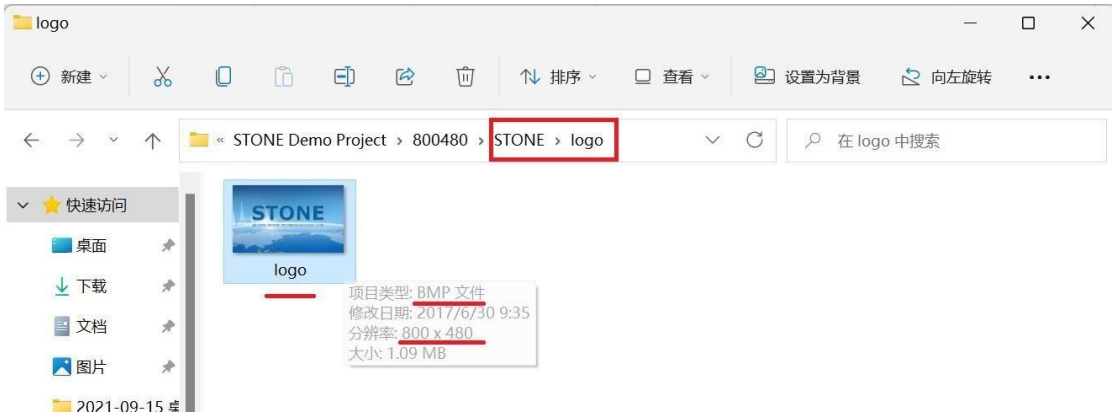

Step 3. Create a “STONE/logo” folder like DEMO (Case matters!), See DEMO.
Then copy “logo.bmp” file into “STONE/logo” folder.

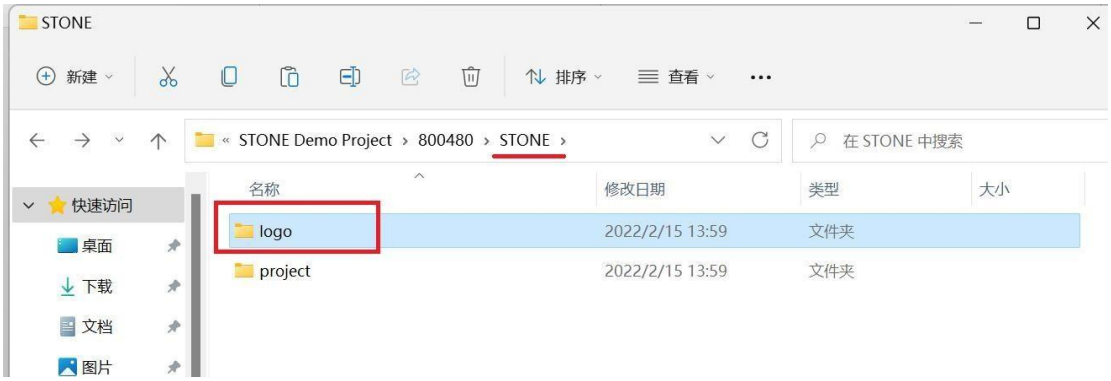

Step 4. Updating

1. Only copy “STONE” folder into U storage disk.
2. Choose the “U-Disk” switch on the PCB
3. Plug the U storage disk on the USB port, Automatic update.
4. After updating, take out the U disk, Auto Reboot

3. Update Firmware file Steps

If updating the latest firmware file, it also needs to create a “firmware” folder under “STONE” folder, then put the corresponding firmware file into “STONE/firmware” folder. Such as: **STONE\firmware\stoneHMI.bin**