DC input
Remote control

US002-01VR-2

1. DC input
2. Automatic On/off control with Daylight sensor.
3. Compact sized suitable for ceiling light, troffer , triproof light, LED tube and etc.
4. Remote control.
5. 3 year warranty.

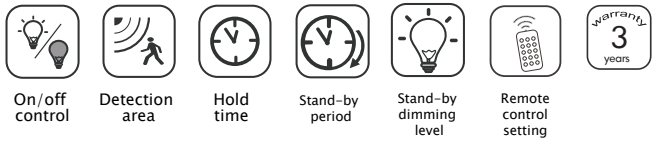

Technical data

Operating voltage	10.5-15V DC (supply current>50mA)
Operating current	<30mA
Output	DIM/1-10V
Stand-by power	<0.5W
Detection area	Narrow/ Wide
Hold-time	30s/1min/2min/5min
Daylight threshold	50Lux/Disable
Stand-by period	0s/1min/5min/∞
Stand-by dimming level	10%/30%
Microwave frequency	5.8GHz±75MHz
Microwave power	<0.3mW
Mounting height	4.8m/16' (ceiling mounted)
Detection range	W: +/-5' Radius; N: +/-2.5' (ceiling mounted)
Detection angle	360°(ceiling mounted); <150° (Wall Mounted)
Operating termperature	-40°C~+80°C
Size	66*20.5*12.1mm
IP rating	IP 20
Control line	Cable length 300mm , Black 12V, Purple DIM+, Yellow DIM-
Warranty	3 years

Note: Different applications and places will make different detection distance, our result is just for your information.

Detection coverage (Unit: m)

This figure indicates the maximum distance at the highest mounting height with 100% sensitivity.

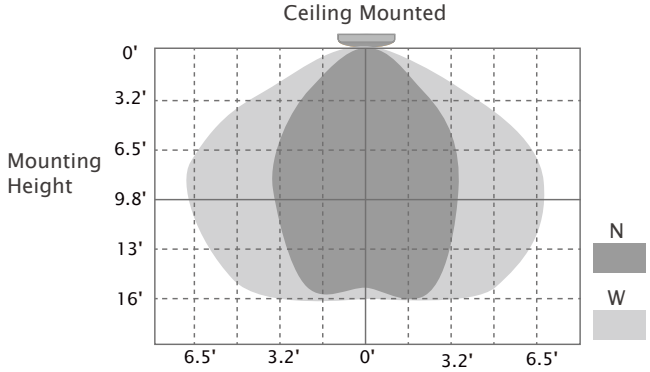

Mechanical structure

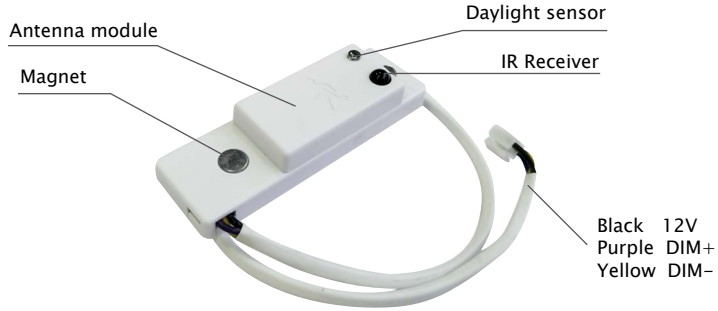

Dimensions (Unit: mm)

Wiring diagram

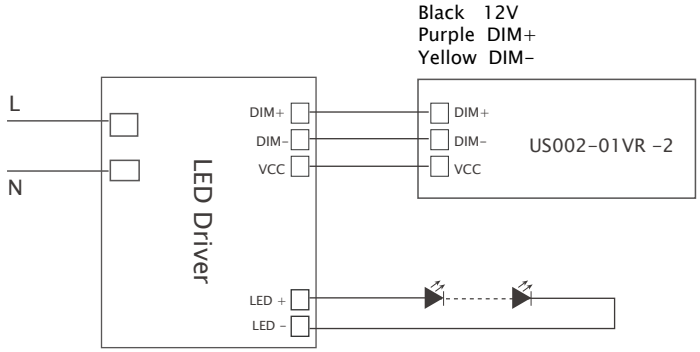

Installation Method

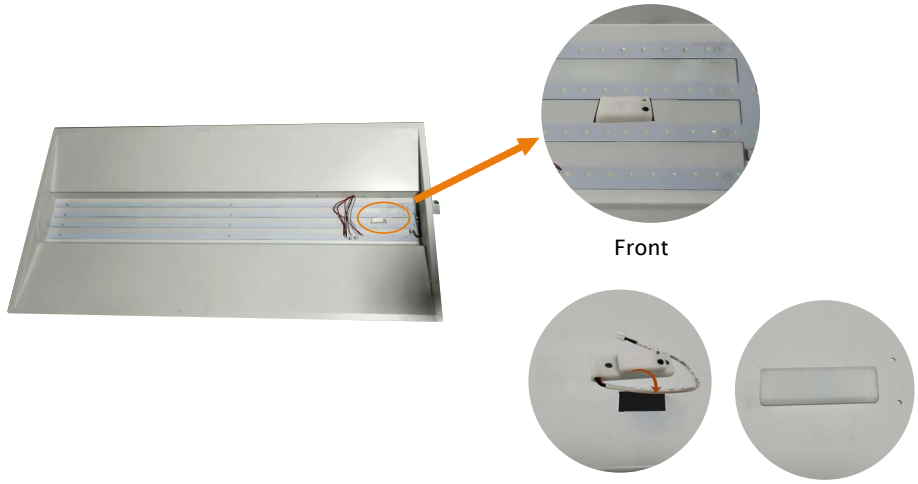

Front

Back

Suitable fixtures:

ceiling light, troffer, triproof light, batten light, linear light, LED tube and etc.

Application

1. Automatically ON/OFF function:

The Stand-by period is set to "0s".
Light on when detect movement and off after people leave at night. Applications: Corridor, Staircase.



With sufficient daylight, even when motion detected, light remains OFF.



With insufficient daylight, when motion detected, light ON.



After the last detection and the present hold time elapsed, light OFF.

2. No daylight function

The daylight threshold is set to "Disable".
Light on when detect movement, After people leave, Light off after stand-by period.
Applications: Dim places such as Basement Parking, Underpass.



When motion is detected, the sensor will switch on the light to 100% brighteness.



After people leave the detection area, light remains 100% brightness within hold time.



After the last detection and the present hold time elapsed, light OFF.

3. Function Demo - Dimmable control/Corridor function

With sufficient daylight, even when motion detected, light remains OFF.

With insufficient daylight, when motion detected, light ON.



After last detection, the light will be dimmed down to the stand-by dimming level (10%, 30%) after holdtime.



After the stand-by period, lght OFF.

Attention

1. Please read the instructions carefully before using this product and keep it well for all users to read at any time.
2. The sensor should be installed by qualified electrician and ensure power is off before the installation.
3. We reserve the right to modify any incorrect text, image and necessary technical parameters.
4. Any unauthorized modification is forbidden, otherwise all guarantees will be immediately invalid.

Installation precautions

1. Microwave sensor can be installed in any lamp except the one with full metal shell.
2. The detected surface cannot be shielded by metal objects.
3. Make sure the microwave module is completely exposed outside.
4. The detection surface of the sensor module shall be installed facing the detection area.
5. Should be kept away from the driver to avoid interference generation and lamp flashing.
6. Wiring must be strictly in accordance with the wiring diagram to avoid short circuit.

Application Environment

1. Suitable for indoor installation to avoid false triggering due to external factors such as rain, wind or tree swing.
2. Shall not be installed in the place with all four metal shelters and small space (such as galvanized-iron roof).
3. Shall note be mounted installation, so as to avoid false trigger caused by the lamp itself shaking.
4. Shall not be installed next to large operating machines such as ventilator/ceiling fan to avoid false triggering caused by machine vibration.

User Notes

1.Microwave can penetrate walls or glass thinner than 20cm and attenuate if thicker than 20cm.
2. The driver voltage shall be stable and float within 10%.
3. Detection area will be affected by speed of motion, mounting height and movement volume.
4. Conduct test on sunny days without the lampshade which will affect the tested lux value