ES-TB325-02 STEP-DOWN AUTO-TRANSFORMER

DESCRIPTION

INPUT VOLTAGE: 480Vac ±10% / 347Vac ±10% / 277Vac ±10%

Safety standard:UL 5085-3 listed,for feild installation

Warranty:5 years warranty

MODEL SELECTION TABLE

Product Code	Picture	Ouput wattage	Description
ES-TB325-02		375W MAX.	Input 480V@60HZ Output 208V@60HZ Max Load 465VA (375W) Input 347V@60HZ Output 150V@60HZ Max Load 320VA (270W) Input 277V@60HZ Output 120V@60HZ Max Load 258VA (215W)
		260W MAX.	Input 480V@60HZ Output 208V@60HZ Max Load 325VA (260W) Input 347V@60HZ Output 150V@60HZ Max Load 240VA (188W) Input 277V@60HZ Output 120V@60HZ Max Load 185VA (150W)
		160W MAX.	Input 480V@60HZ Output 208V@60HZ Max Load 200VA (160W) Input 347V@60HZ Output 150V@60HZ Max Load 140VA (110W) Input 277V@60HZ Output 120V@60HZ Max Load 115VA (90W)

DIMENSION

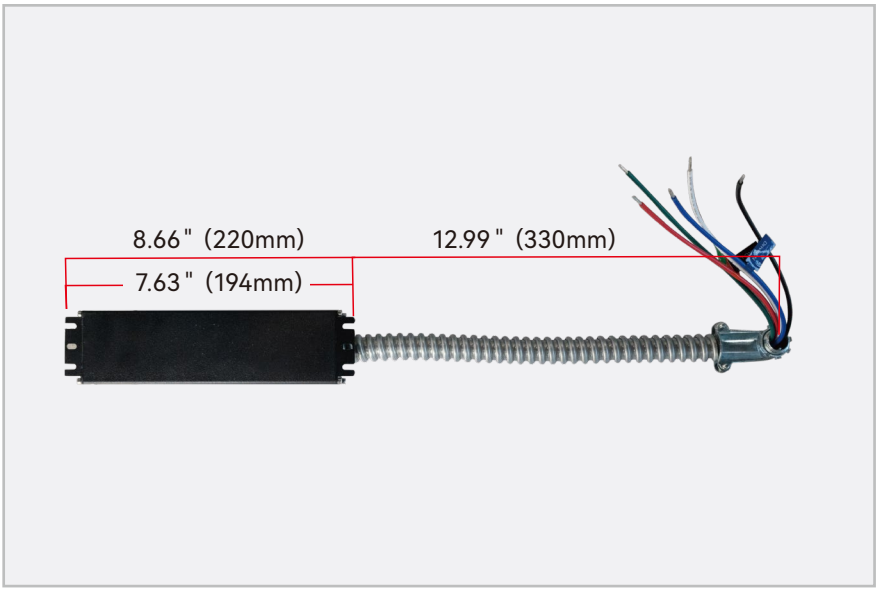

WIRING DIAGRAM

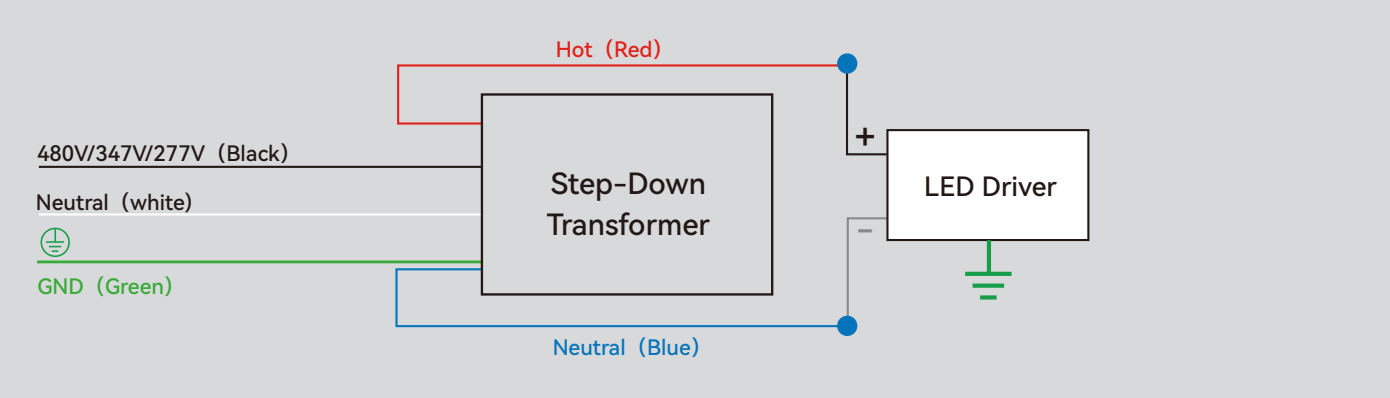

TRANSFORMER COVER BOX

- Attach transformer to cover box.
- Make wiring connections.
- Attach transformer cover box assembly to luminaire driver enclosure.

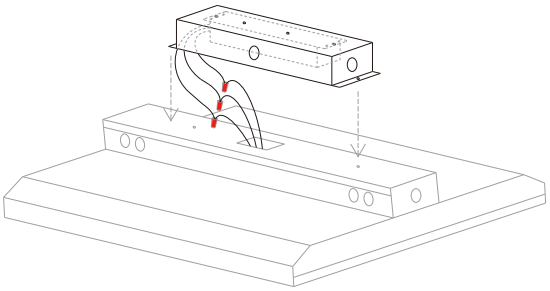

TRANSFORMER BRACKET FOR PANELS
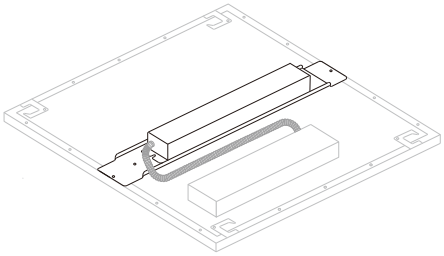
- Attach transformer to bracket.
- Attach transformer bracket to panel.
- Make wiring connections .