


Model Description of Amass Products

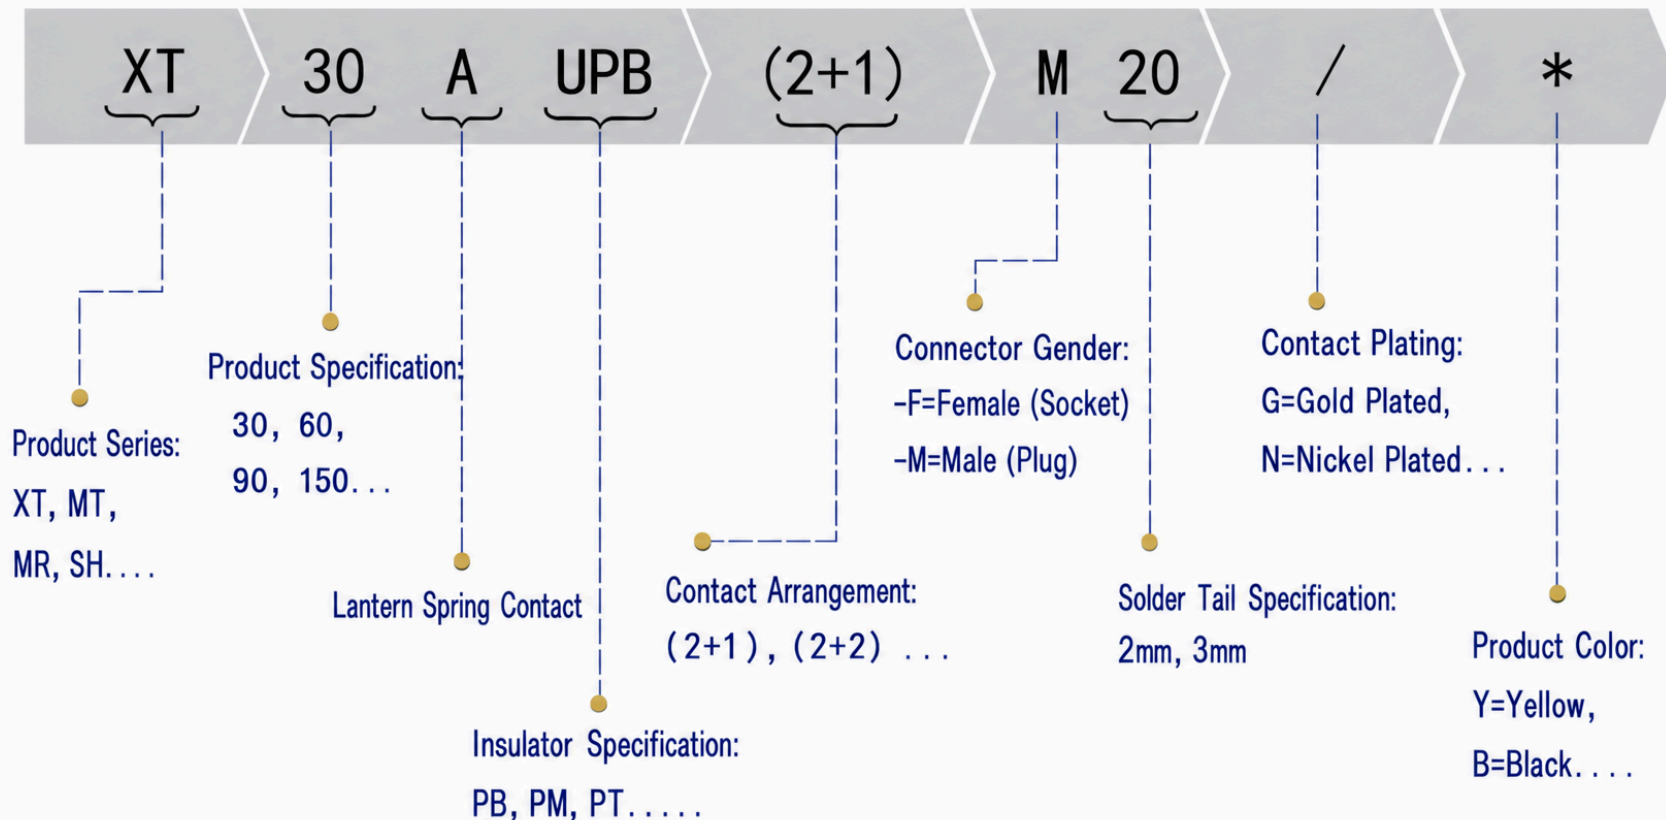

Amass Product Specification


1. Product Description

Right-angle 2PIN connector providing integrated solutions for PCB assembly in horizontal space.
Available in gold-plated and nickel-plated options, with two housing choices and wire harness designs.

2. Application Module

☐ Lithium Battery ☐ Motor ☒ Controller ☐ Charger ☐ Other

3. Product Drawing

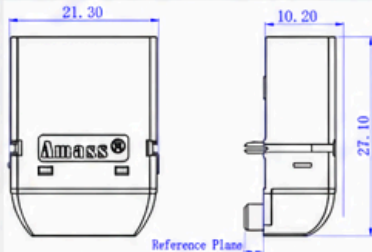Product Image	Dimensional Drawing
	
Part Number	Soldering Height
XT90PW30-M. G. *	3.0mm

4. Specifications

Material	Standard	Plating	Thickness
Metal Parts	H59-1	G: Gold Plated (Au)	0.03μm
Material	Standard	Color	Flame Rating
Plastic Housing	PA66	*: Y=Yellow, B=Black	UL94-V0

5. Characteristics

Electrical Performance	Test Method	Requirement
Rated Voltage	UL1977	DC 500V
Rated Current	UL1977	30A
Contact Resistance	GB/T5095.2	0.40mΩ
Insulation Resistance	GB/T5095.2	2000MΩ
Withstand Current	&A 1min <80℃	60A
Temperature Rise	UL1977	30A 4h <60℃
Minimum Mating Cycles	GB/T2900.18	7.40mm
Mechanical Performance	Standard	Requirement
Insertion Force	GB/T5095.8	3.5kg~6.5kg
Withdrawal Force	GB/T5095.8	3.5kg~6.5kg
Durability	GB/T5095.1	100 times
Protection Class	GB/T4208	IP40
Environmental Performance	Standard	Requirement
Operating Temperature	GB/T 2423.3	-20℃ to 120℃
Salt Spray	GB/T 2423.17	48h

6. Current Carrying Capacity Reference

mm ²	Temperature Rise 60℃	Temperature Rise 85℃
8#	55A	60A
10#	50A	55A
12#	45A	50A


7. Configuration Description

☒ With cover ☐ With latch ☐ Waterproof ☐ Fireproof

8. Certification

☒ UL ☐ CE ☒ RoHS 2.0 ☐ Reach

9. Installation Recommendation

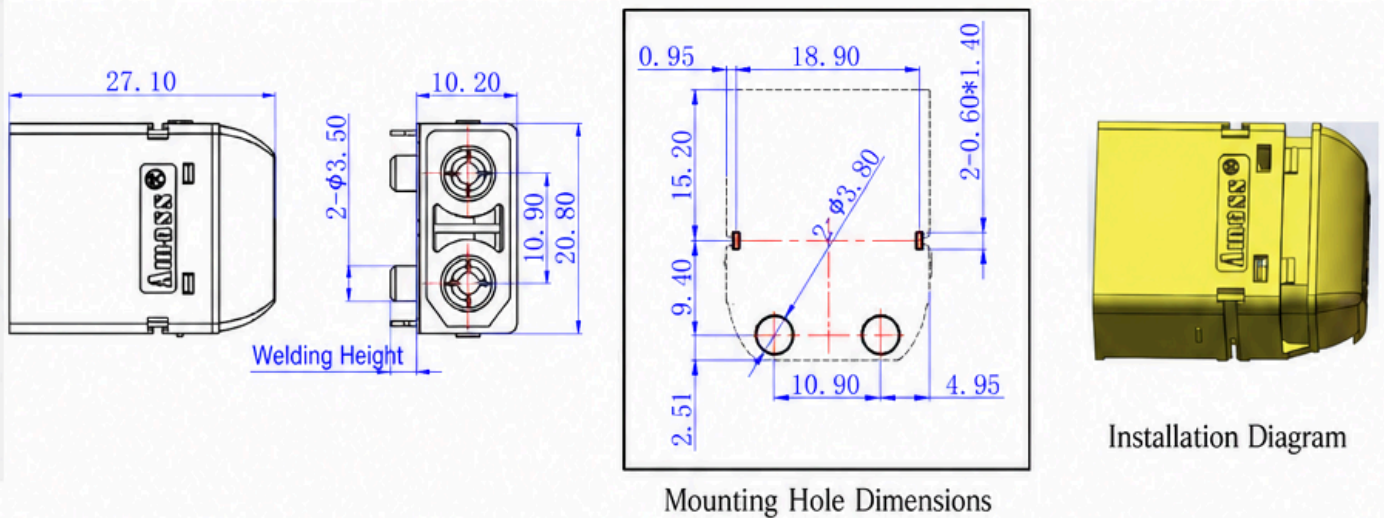

Precautions:

During use, please do not exceed the specified current and voltage.



- Excess current and voltage may cause malfunctions and accidents.
- When the connector is in the mated condition, inserting or unplugging the connector may cause malfunctions and accidents, so please ensure the power is disconnected before plugging or unplugging.

Do not use under external force on the connectors



- Do not use connectors or wires under external force. Excessive external force may cause damage, resulting in malfunctions and accidents, so please do not use under such conditions.
- The connector is designed as an electrical connection component and must not be used as part of the structural components of the enclosure or other structures.

Use in the appropriate environment



- Do not use in environments with high temperature and high humidity.
- If used in environments outside the specified range, it may cause malfunctions and accidents. Therefore, do not use under such conditions.

Handle with care



- This connector is a precision component, so please handle it with care during use.
- Do not open the package until just before use. Even when packaged, subjecting the product to strong impacts may cause terminal deformation, bending, breakage, and other phenomena.

Prepared by:

Checked by:

Approved by: