



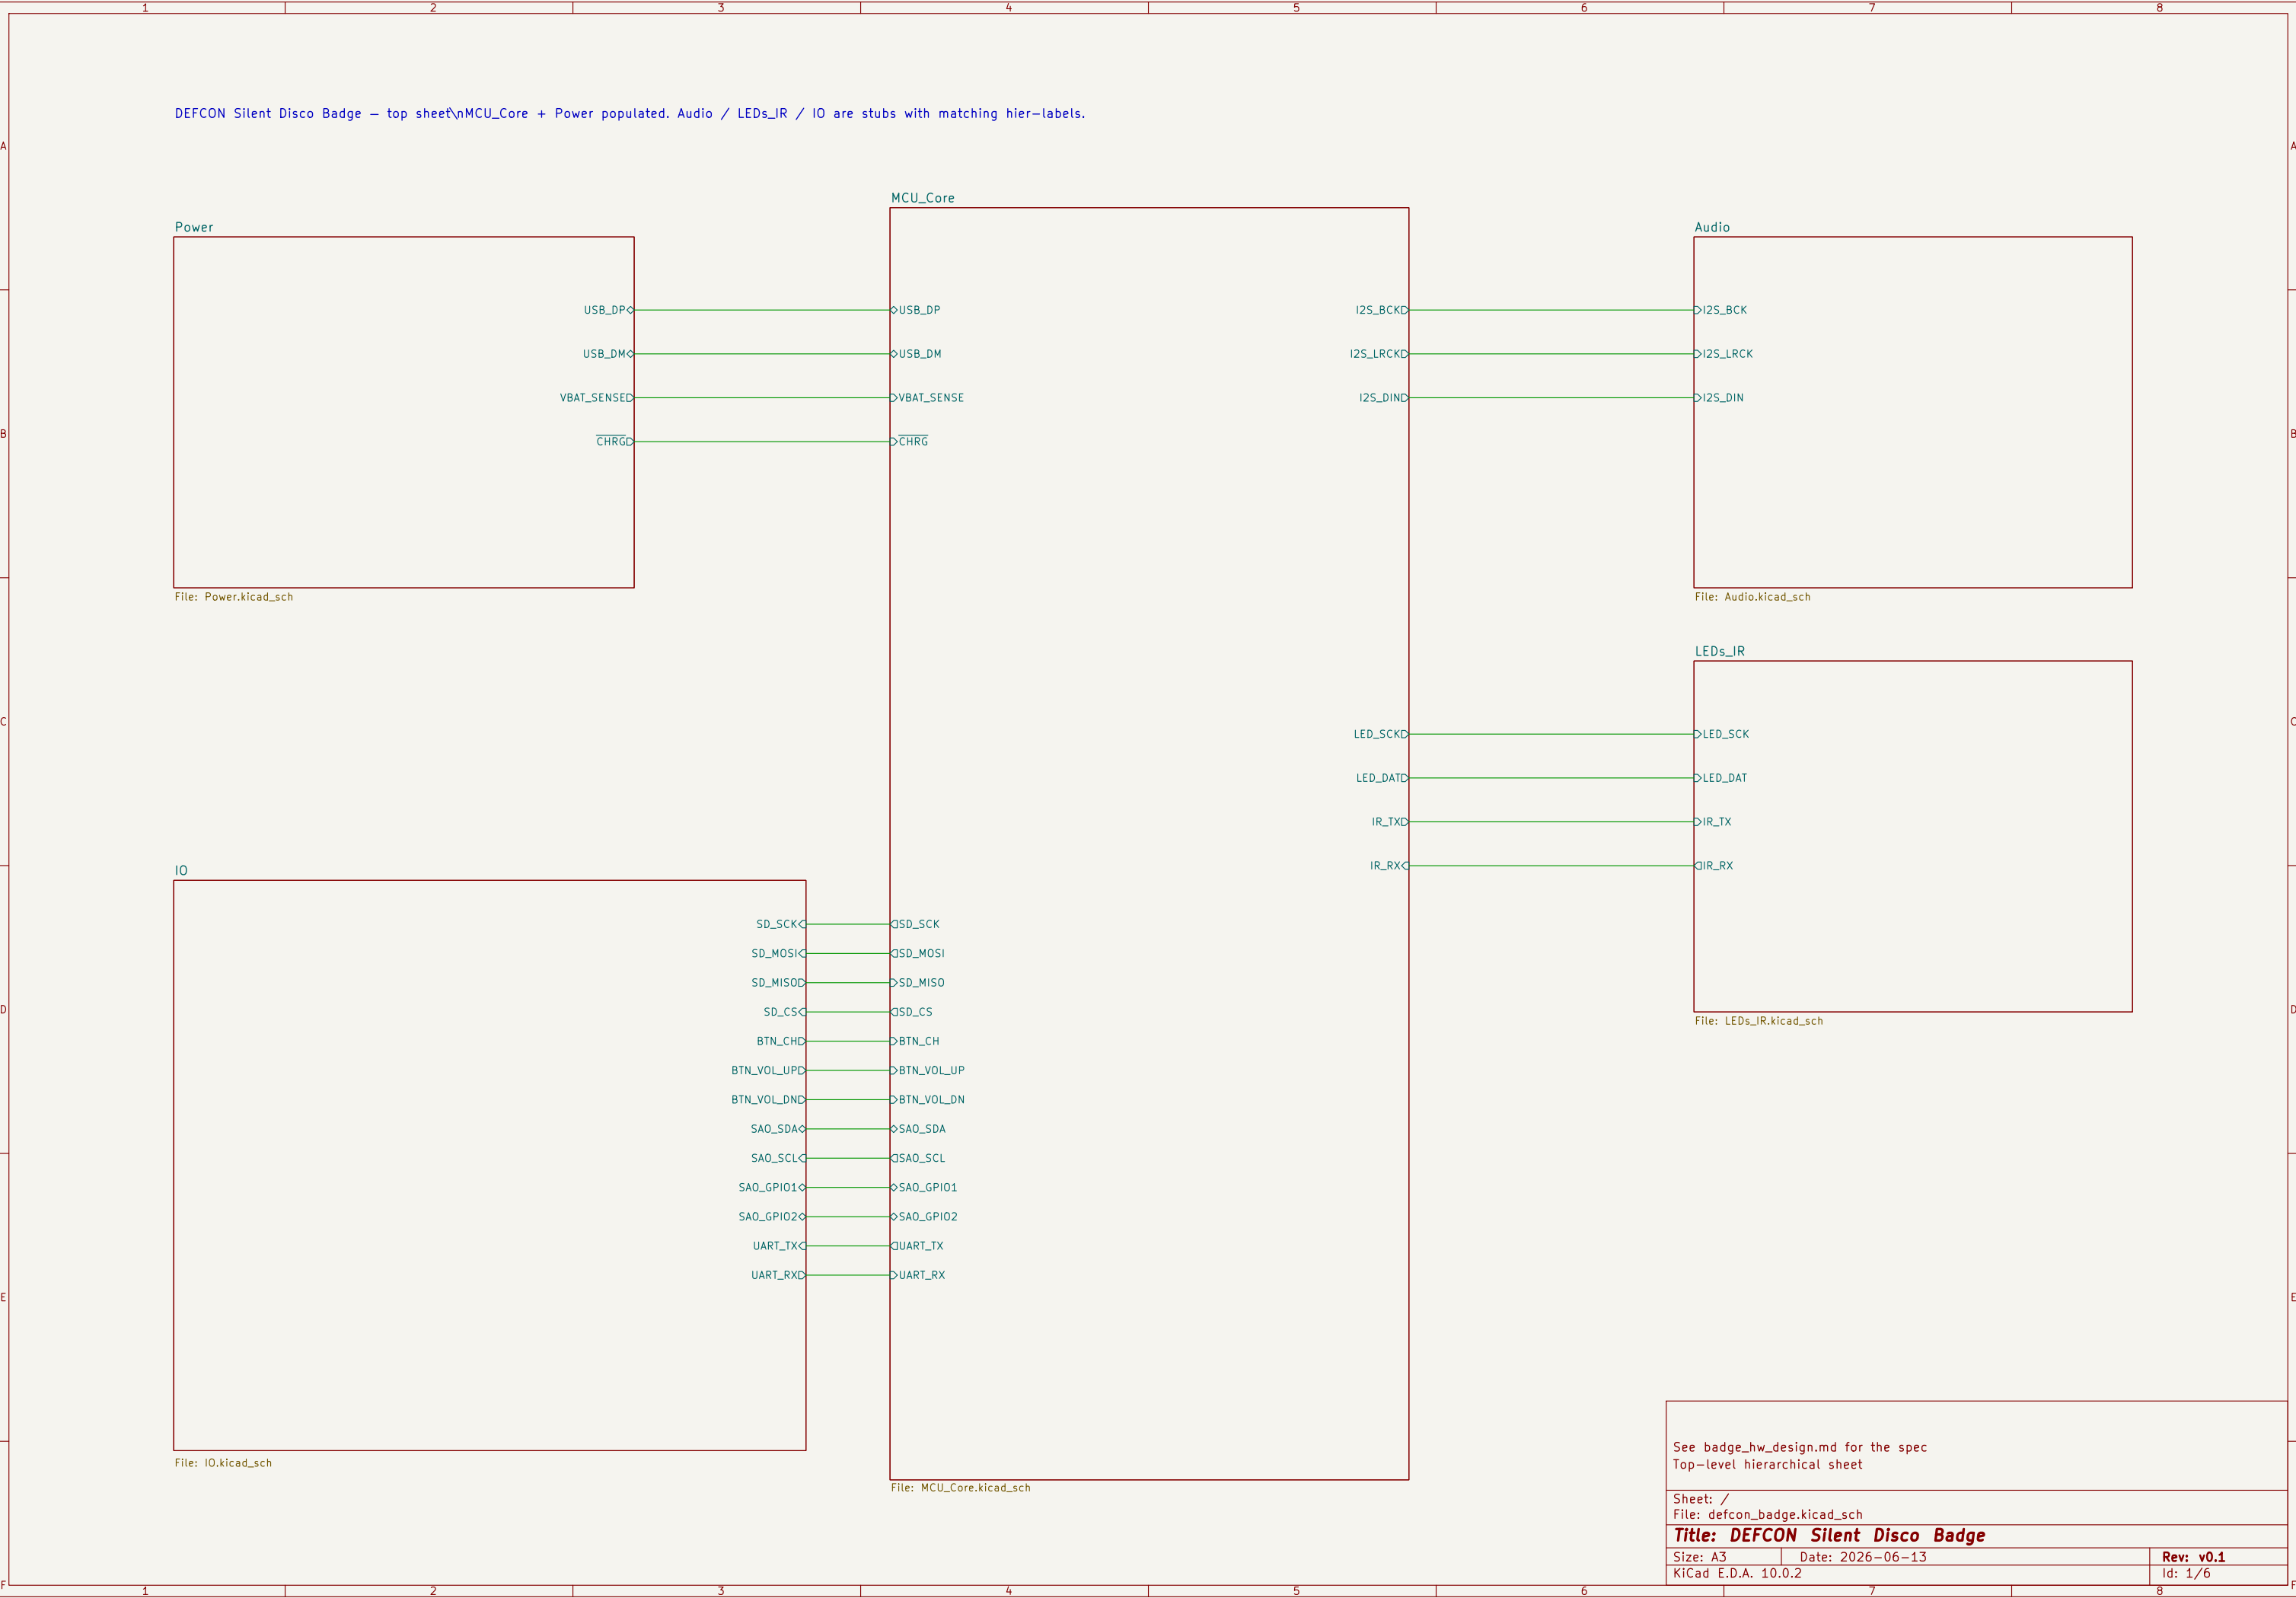

Power tree per badge_hw_design.md \$Power tree.
USB-C VBUS → TP4056 → BAT (cell+ via J11) → slide switch → ME6211C33 → +3V3 rail.
TP4056 PROG = 2.4k → 500 mA charge. VBAT div 100k/100k → VBAT_SENSE → MCU GP26/ADC0.
TP4056 CHRGD → 100k pullup to 3V3 → -CHRG → MCU GP18.
CC1 / CC2 each → 5.1k → GND (UFP advertise).
USB_DP / USB_DM route through 27R series on MCU_Core to RP2040.

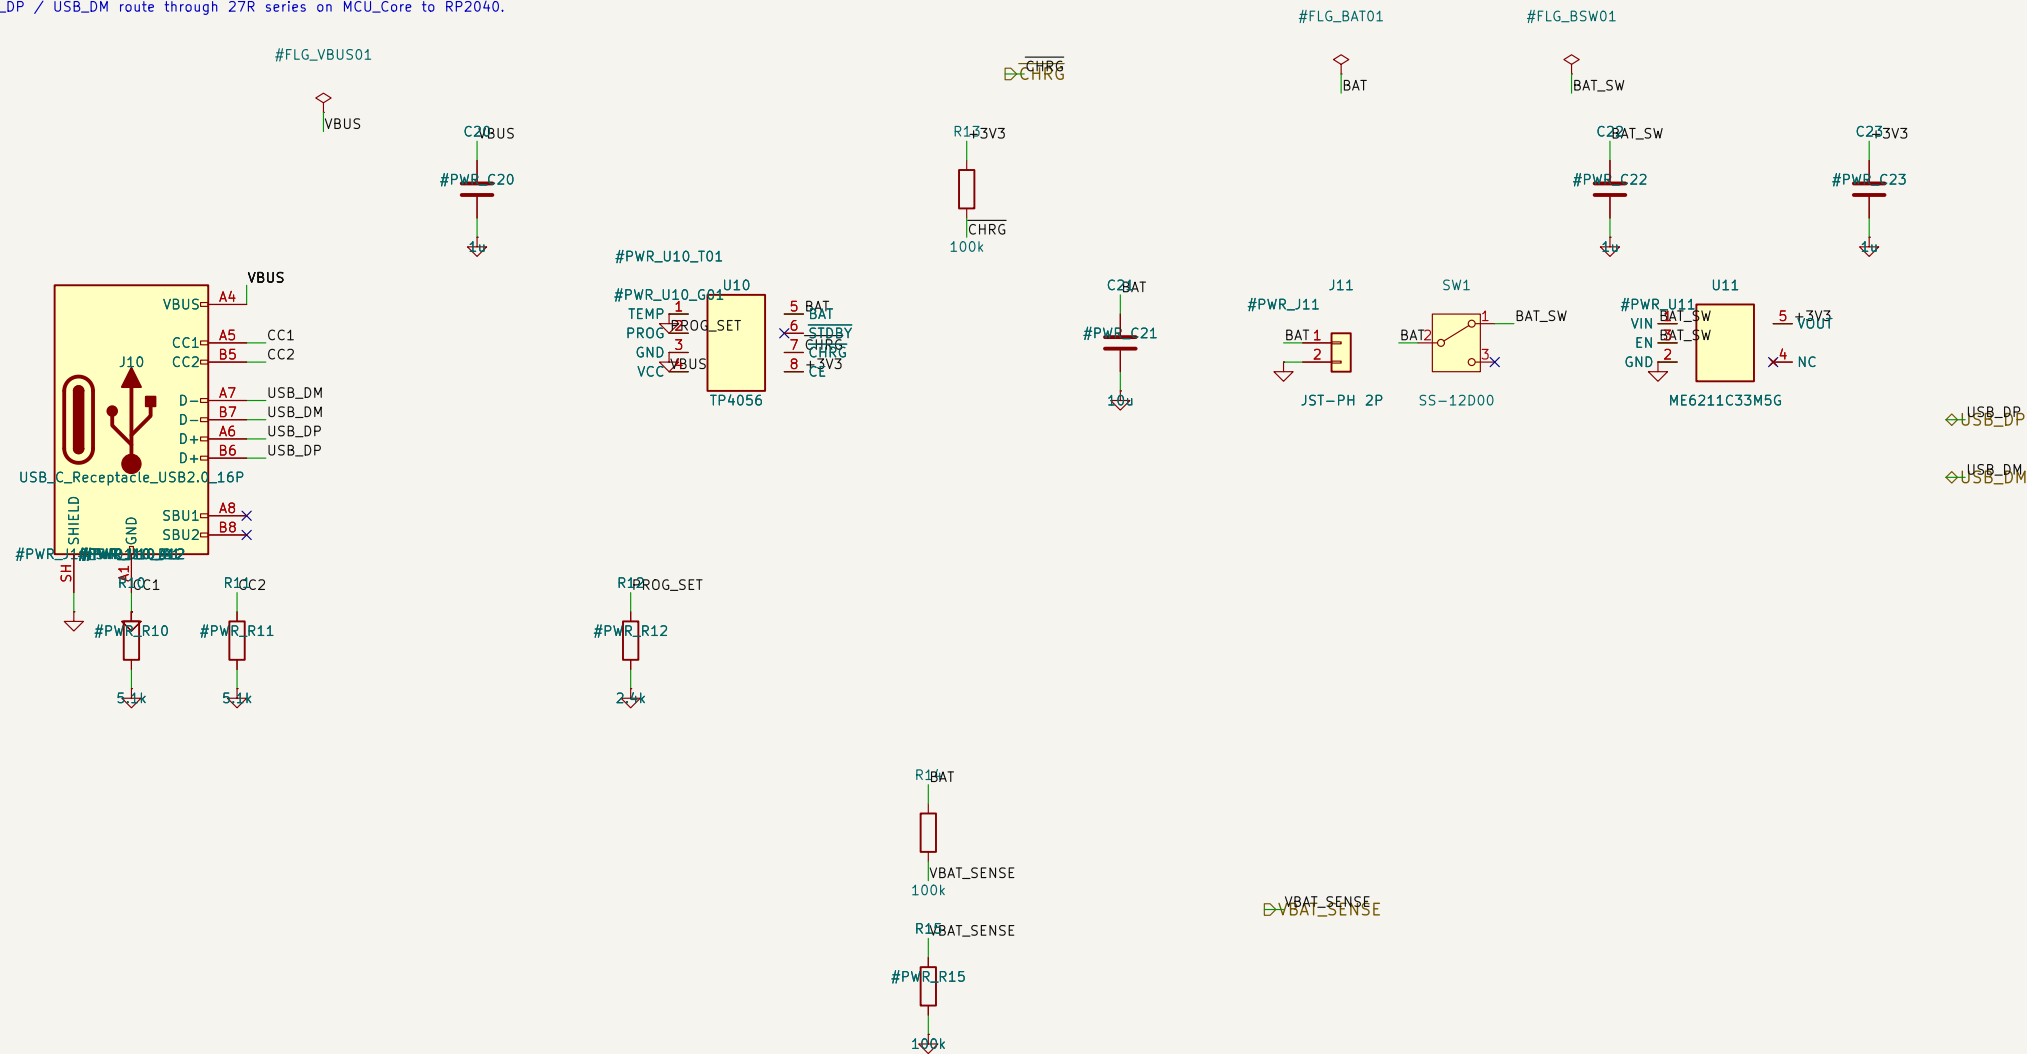

VBAT divider 100k/100k → VBAT_SENSE; TP4056 CHRGD → 100k → +3V3 → -CHRG to MCU GP18
USB-C → TP4056 → LiPo (JST-PH) → SS-12D00 → ME6211C33 → +3V3 rail

Sheet: /Power/ File: Power.kicad_sch		
Title: DEFCON Silent Disco Badge – Power		
Size: A3	Date: 2026-06-13	Rev: v0.1
KiCad E.D.A. 10.0.2		Id: 2/6

A



1

3

11

1

3

F

1

