




ELETRONIC DIVISION

I	ISTRUZIONE D'USO	Apparecchiatura di comando 1 Motore 380Vac
E	INSTRUCCIONES DE USO	Cuadro electronico para 1 motor 380Vac
GB	INSTRUCTION MANUAL	Electronic control panel for a 380Vac drive
F	MODE D'EMPLOI	Dispositif de commande 1 moteur 380Vac
P	INSTRUÇÕES DE USO	Central de controle de 1 motor 380Vac

EURO380 M1 [code E107]

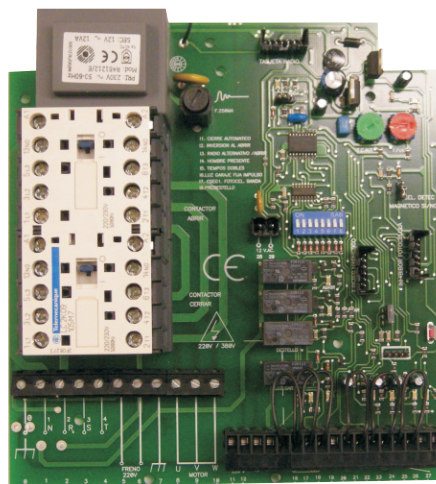

ATTENZIONE!! Prima di effettuare l'installazione, leggere attentamente questo manuale. La VDS declina ogni responsabilità in caso di non osservanza delle normative vigenti.

¡¡ATENCIÓN!! Antes de efectuar la instalación, lea atentamente este manual. La Empresa VDS no se hace responsable caso de no cumplir las normas vigentes en el país donde se lleva a cabo la instalación.

WARNING!! Before the installation read carefully this manual. VDS declines any responsibility in case of not fullfill the current normative of the installation country.

ATTENTION!! Avant d'effectuer l'installation, lire attentivement le présent manuel qui fait partie intégrante de cet emballage. La société VDS décline toute responsabilité en cas de non respect des normes en vigueur.

ATENÇÃO!! Antes de instalar, leia este manual. VDS isenta de qualquer responsabilidade pelo não cumprimento com os regulamentos.

Instruction Manual

(EURO380 M1)

ACCESSORIES				SAFETY				SETTINGS																																																																																													
WIRELESSBAND	●	RADIO CARD	●	LOOP DETECTOR	●	PHOTOCELL INHIBITOR	●	ELECTRO LOCK	+	GARAGE LIGHT		PRE FLASHING		TRAFFIC LIGHT	+	THREEPHASE SWITCH		EMERGENCY STOP		6AMP. FUSES		VARISTOR		ZENER DIODES		PHOTOCELL INPUT		SAFETY EDGE INPUT		DEAD MAN		PHOTOCELL TEST		SAFETY EDGE TEST	●	OPEN CLOSE LIMIT SWITCH		ALTERNATIVE BUTTON		PRESSURE WAVE SWITCH	+	AUTOMATIC DOWN TIME (TEMPORIZER)		OPENING TIME (TEMPORIZER)		CLOSING TIME (TEMPORIZER)	+	DRIVE POWER (TEMPORIZER)	+	DEPHASE(DRIVE 1 & 2 (TEMPORIZER)	+	CLOSE SWITCH		OPEN SWITCH		STOP BUTTON		BUFFER CLOSING	+	CLOSE BY SAFETY CONTACT		AUTOMATIC CLOSING		INHIBITION STOP ON OPENING		DOUBLE TIME		DIGITAL TIME	+	HOURLY IMPULSE	+	PARTIAL / TOTAL INVERSION TIMES	+	AUTOMATIC CLOSING FOR LIMIT SWITCH	+	AUTOMATIC FREQUENCY AGILITY (Bridge S.)	+	12 V OUTPUT		FREE TENSION INPUT		CONTACT 0V	+	RADIO PROGRAMMING BRIDGE SELECTOR	+	FREQUENCY CHANNEL SELECTOR	+	230V		380v		433MHZ	●	868MHZ	●	1 DRIVE		2 DRIVE	+	WIRELESSBAND RECEIVER	+

● OPTIONAL
+ NOT AVAILABLE
□ STANDARD

OPTIONS SELECTOR

OPTION 1 - Automatic closing

ON Door closes automatically after waiting the a.c.time
OFF Door does not close automatically

OPTION 2 - Disable stop on opening

ON Opening the alternative button is disabled
OFF If alternative button is pressed door stops

OPTION 3 - Radio open/Alternative

ON Radio card works as alternative button
OFF Radio card works as a opener

OPTION 4 - DeadMan

ON DeadMan functionality enabled
OFF DeadMan functionality disabled

OPTION 5 - Double time

ON Working time range from 1m10sec to 2m10sec
OFF working time range from 6-8secs to 1m25sec

OPTION 6 - Garage light

ON Garage lights goes on when the door is opening
OFF 2 secs impulse

OPTION 7 - Safety edge photocell

ON Door inverts during 1 sec. During opening and closing.
OFF During opening, safety opening activates

OPTION 8 - Pre-flashing

ON Flashing output ENABLED before starting, open and close
OFF Flashing output DISABLED before starting, open and close

OPERATING INSTRUCTIONS

The control panel can be activated by Test CI P.ALTER), via the radio card, or by the open, close and stop buttons.

Manoeuvres can be finalised via the following: limit switch activation or end of working time

If the ALT button is pushed while the door is opening it stops and does not close the door.

Pressing the STOP button stops the door. It is necessary to push OPEN or CLOSE buttons to reactivate the operation.

If the safety input is activated whilst the door is closing then the door will open.

The garage light contact is activated when the door is opening & deactivated after 2 seconds.

If I4 is ON y I3 ON the control panel gives the order for automatic opening and closing of the dead mans switch.

If I4 is ON y I3 OFF the control panel gives the order to open and close the dead mans switch.

WARNING!!

AN ACCESSIBLE SWITCH, TO TURN OFF THE EQUIPMENT,MUST BE INSTALLED FOR SYSTEMS THAT ARE ALWAYS CONNECTED.




BEFORE INSTALLING MAKE SURE THE SUPPLY VOLTAGE IS SWITCHED OFF.

GB

Instruction Manual

(EURO380 M1)

STANDARD CONTROL PANEL SET UP



BRIDGE SELECTORS

SAFETY EDGE



CONTACT - Normally closed (e.g photocell).
In this case the corresponding led lights up.



RESISTIVE SAFETY EDGE - Normally closed contact . 8K2 safety edge

LOOP DETECTOR



WITHOUT LOOP DETECTOR



WITH LOOP DETECTOR

TIME REGULATIONS

AUTOMATIC CLOSING TIME



Regulates the waiting time before the automatic close
Turn LEFT to decrease and RIGHT to increase

Minimum - 6 to 8sec
Maximum - 110 secs






WORKING TIME





Regulates the opening and closing time
Turn LEFT to decrease and RIGHT to increase

Minimum - 6 to 8sec (1m with DIP5 on)
Maximum - 85 secs (2m with DIP5 on)

POWER SUPPLY








SAFETY EDGE




TECHNICAL SPECIFICATIONS

Power	220V AC +/- 10%
Drive	220V / 380V 3HP
Max Drive Power	1.5HP / 3HP
Power Supply for accessories	12V DC 500mA
Garage door output type	Power free contact
Flashing light output	220V 10A
Working Time	From 8 sec to 80 sec
Automatic closing time	From 5 sec to 120 sec
Radio Card	Optional
Loop Detector Card	Optional
Photocell inhibitor Card	Optional
Working Temperature	0 to 70°


ACCESSORIES POWER SUPPLY



SECURITY SWITCHES



PHOTOCELL TEST



UNI
EN

I nostri prodotti se installati da personale specializzato idoneo alla valutazione dei rischi, rispondono alle normative UNI EN 12453-EN 12445

Nuestros productos tienen que ser instalados por personal cualificado capaz de evaluar los posibles riesgos, cumpliendo con la norma UNI EN 12453, EN 12445

Our products if installed by qualified personnel capable to evaluate risks, complies with UNI EN 12453, EN 12445 normative

Nos produits si installés par personnel qualifié capable d'évaluer les risques, sont conformer à la norme UNI EN 12453, EN 12445

Nossos produtos se instalado por pessoal qualificado, capaz de avaliarrisco, cumprir UNI EN 12453, EN 12445

CE

Il marchio CE è conforme alla direttiva europea CEE 89/336 + 93/68 D.L.04/12/1992 n.476

El marcaje CE indica que cumple con la directiva europea CEE 89/336 + 93/68 D.L.04/12/1992 n.476

The CE mark indicated that complies with EEC European directiva 89/336 + 93/68 D.L.04/12/1992 n.476

Le marque CE est conforme avec la CEE directiva européenne 89/336 + 93/68 D.L.04/12/1992 n.476

A marca CE em conformidade com a Directiva Europeia CEE 89/336 + 93/68 D.L.04/12/1992 n.476

I dati e le immagini sono puramente indicativi

VDS si riserva il diritto di modificare in qualsiasi momento le caratteristiche dei prodotti descritti a suo insindacabile giudizio, senza alcun preavviso.

Los datos y las imágenes son orientativos

VDS se reserva el derecho de modificar en cualquier momento las características de los productos descritos en su única discreción, sin previo aviso.

The data and images are for guidance only

VDS reserves the right to change at any time characteristics of the products described in its sole discretion, without notice.

Les données et les images sont à titre indicatif seulement

VDS réserve le droit de modifier à tout moment les caractéristiques des produits décrits à sa seule discrétion, sans préavis.


Os dados e as imagens são apenas para orientação

VDS reservas o direito de alterar, a qualquer tempo as características dos produtos descritos em seu exclusivo critério, sem aviso prévio.



Via Circolare p.i.p. sn
65010 Santa Teresa di Spoltore (PE) - Italy
Tel. 085-4971946 - Fax 085-4973849
www.vdsproduction.it - vds@vdsproduction.it

F

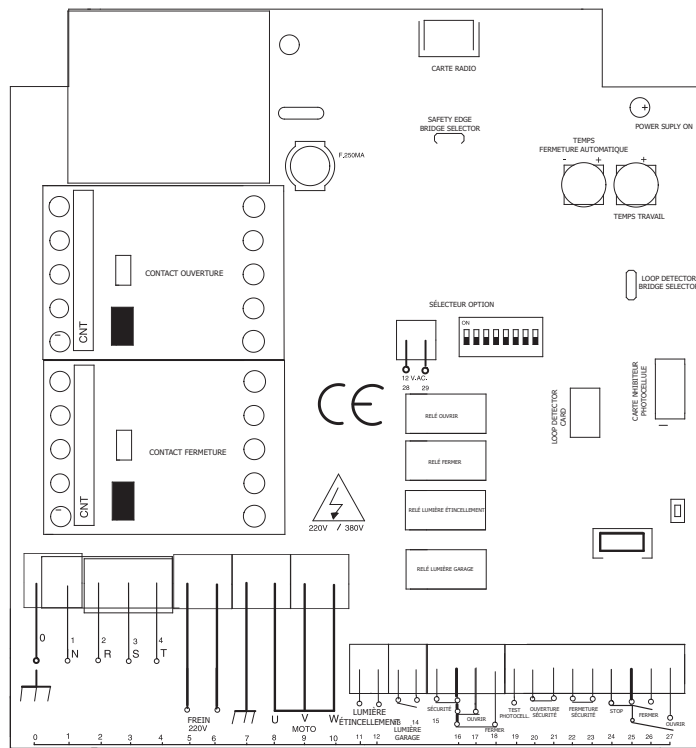

CARACTÉRISTIQUES TECHNIQUES


Alimentation	220V AC +/- 10%
Puissance	220V / 380V 3HP
Puissance max. trans.	1.5HP / 3HP
Alimentation pour accessoires	12V DC 500mA
Mode rendement porte garage	Force contact libre
Led rendement	220V 10A
Temps travail	De 8 sec à 80 sec
Temps fermeture automatique	De 5 sec à 120 sec
Carte-radio	Optionel
Carte detecteur courbe	Optionel
Carte inhibiteur photocellule	Optionel
Température travail	0 à 70°

Mode d'Emploi


(EURO380 M1)

TABLEAU DE COMMANDES


ALIMENTATION



MOTEUR TRIPHASÉ



FIN BOUTONS



PONTS SÉLECTEURS

BANDE SÉCURITÉ



CONTACT - Normalement fermé (e.g photocell).
En ce cas, le led correspondant s'allume.



BANDE SÉCURITÉ RÉISTIVE - Contact normalement fermé . Bande sécurité 8K2

DETECTEUR NOEUD



SANS DETECTEUR NOEUD



AVEC DETECTEUR NOEUD

RÉGLAGE TEMPS

TEMPS FERMETURE AUTOMATIQUE



Il règle le temps d'attente avant la fermeture automatique
Tourner à GAUCHE pour diminuer et DROITE pour augmenter




Minimum - 6 à 8sec
Maximum - 110 secs

TEMPS TRAVAIL





Il règle le temps d'ouverture et fermeture
Tourner à GAUCHE pour diminuer et DROITE pour augmenter
Minimum - 6 à 8sec (1m avec DIP5 on)
Maximum - 85 secs (2m avec DIP5 on)



ALIMENTATION










RÉGULATEUR



BANDE SÉCURITÉ



ACCESSOIRES ALIMENTATION



FREIN

ÉTINCELLEMENT

LUMIÈRE

SÉCURITÉ

INTERRUPTEURS

TEST

SÉCURITÉ PHOTOCELLULE