1. Description

1.1. Project

Project Name	SK-STM32F417_USB_CHID
Board Name	SK-STM32F417_USB_VCP
Generated with:	STM32CubeMX 5.6.0
Date	03/30/2020

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F417ZGTx
MCU Package	LQFP144
MCU Pin number	144

2. Pinout Configuration

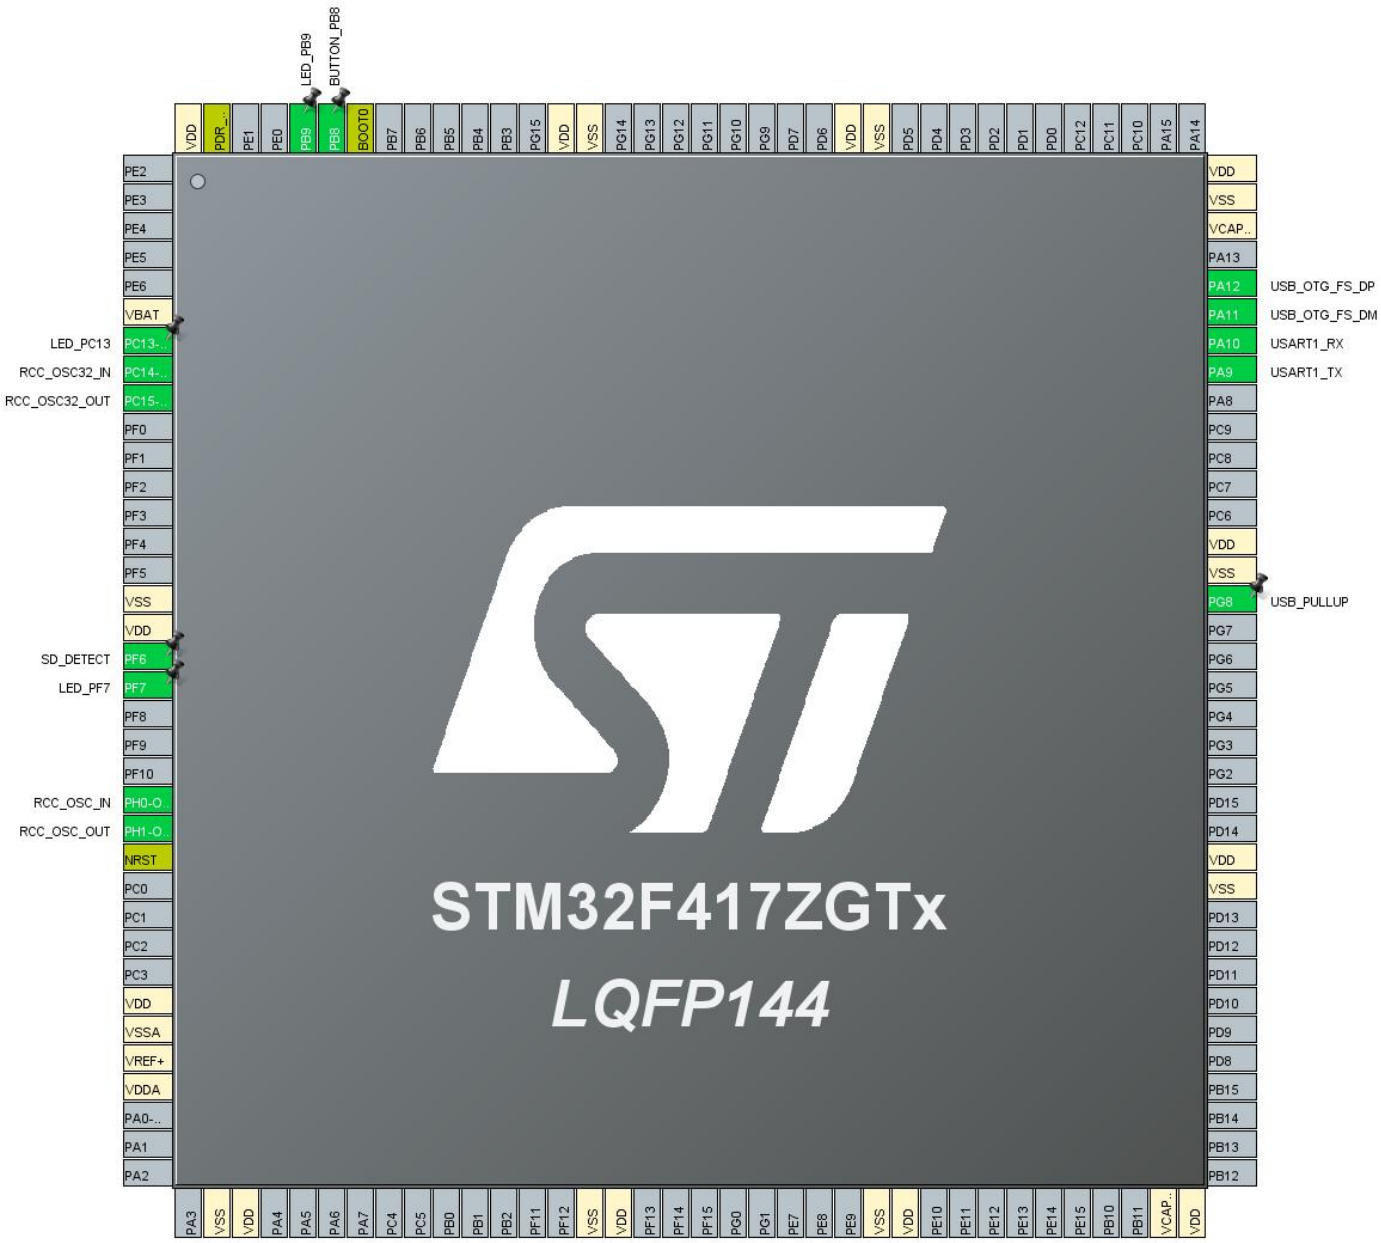

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13-ANTI_TAMP *	I/O	GPIO_Output	LED_PC13
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
16	VSS	Power		
17	VDD	Power		
18	PF6 *	I/O	GPIO_Input	SD_DETECT
19	PF7 *	I/O	GPIO_Output	LED_PF7
23	PH0-OSC_IN	I/O	RCC_OSC_IN	
24	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
38	VSS	Power		
39	VDD	Power		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP_1	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
93	PG8 *	I/O	GPIO_Output	USB_PULLUP
94	VSS	Power		
95	VDD	Power		
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
103	PA11	I/O	USB_OTG_FS_DM	
104	PA12	I/O	USB_OTG_FS_DP	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
120	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
121	VDD	Power		
130	VSS	Power		
131	VDD	Power		
138	BOOT0	Boot		
139	PB8 *	I/O	GPIO_Input	BUTTON_PB8
140	PB9 *	I/O	GPIO_Output	LED_PB9
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

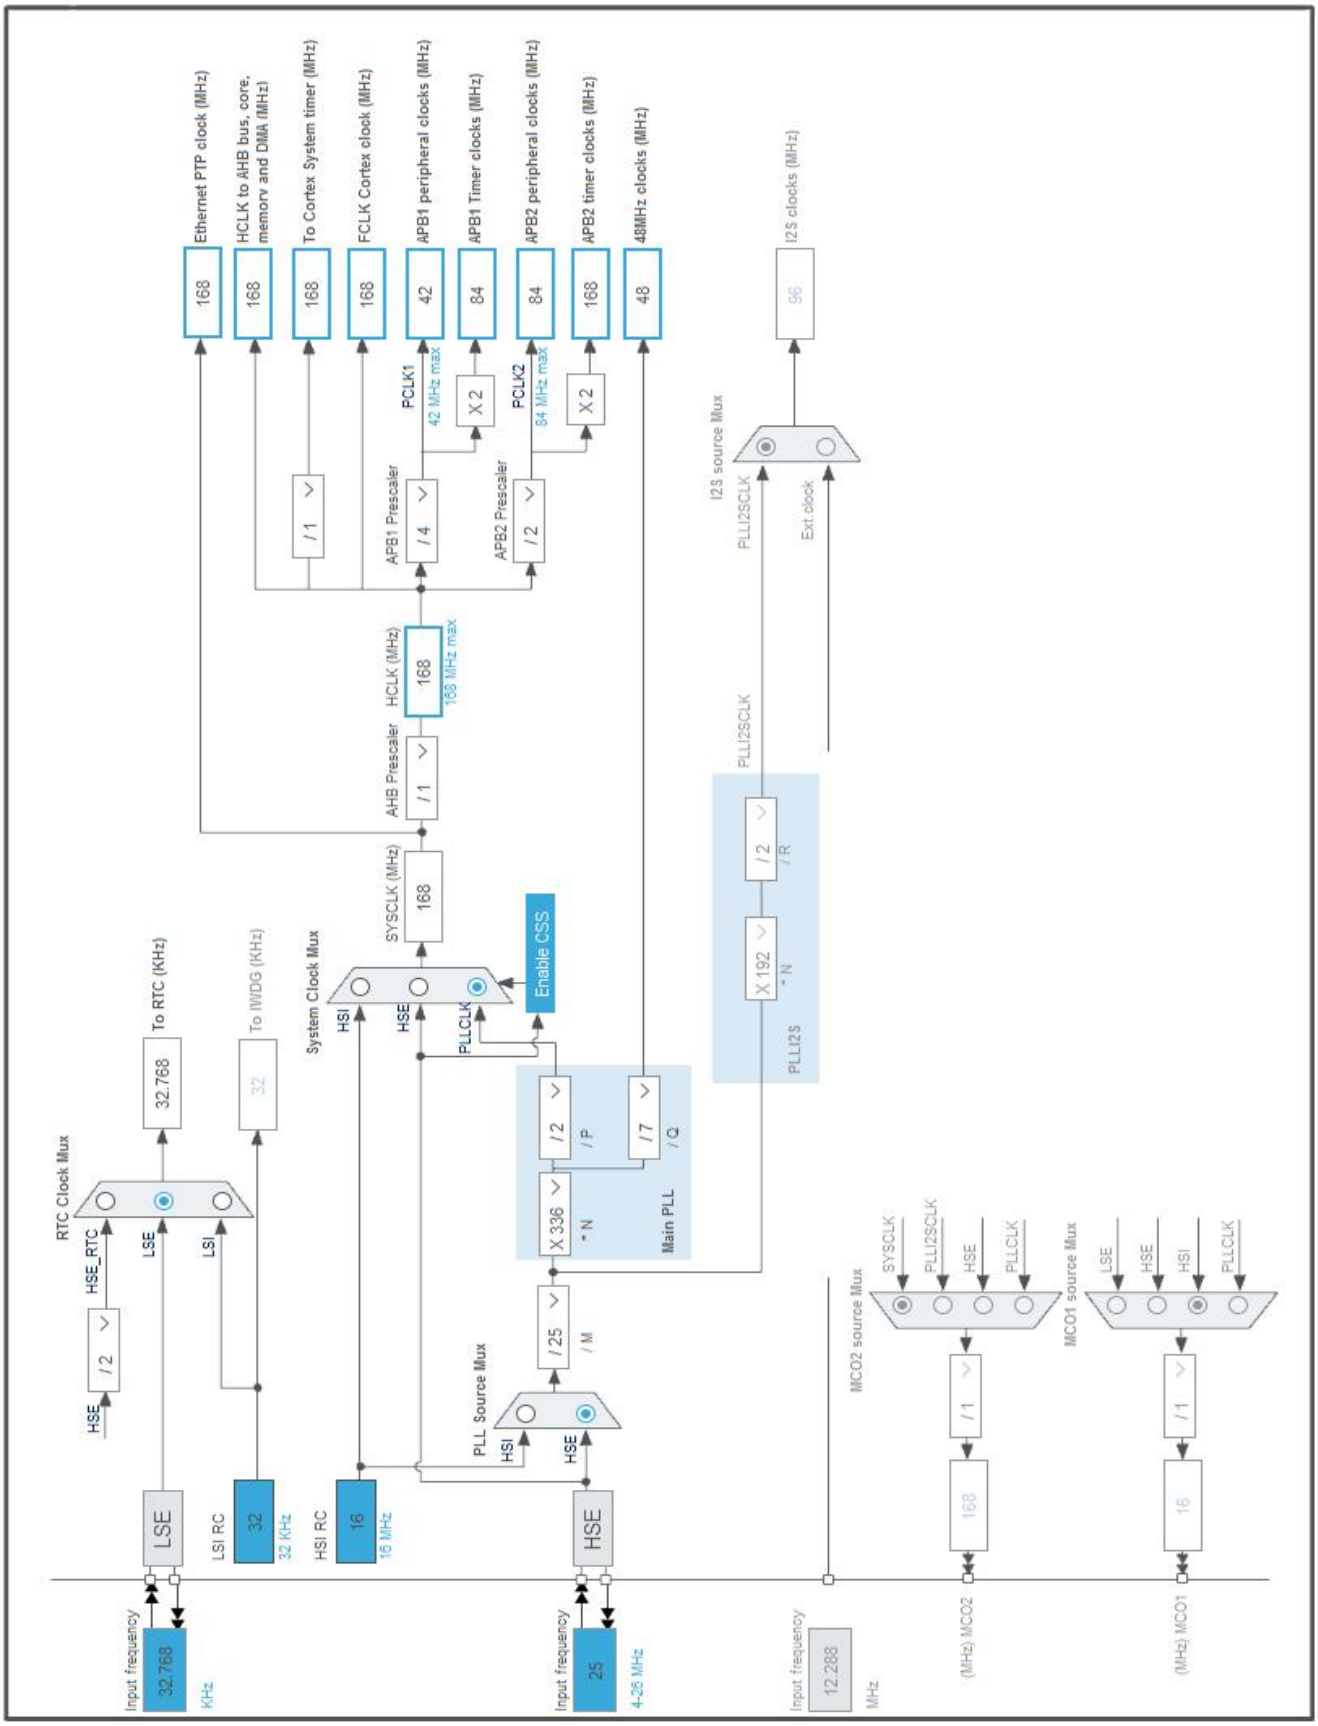

5. Software Project

5.1. Project Settings

Name	Value
Project Name	SK-STM32F417_USB_CHID
Project Folder	D:\projects_home\STM32_CubeMX\SK-STM32F417\SK-
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F417ZGTx
Datasheet	022063_Rev8

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	168 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	280 µA
Duration	0.1 ms	0.9 ms
DMIPS	210.0	0.0
Ta Max	98.93	104.96
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	4.85 mA
Battery Life	29 days, 4 hours	Average DMIPS	210.0 DMIPS

6.6. Chart

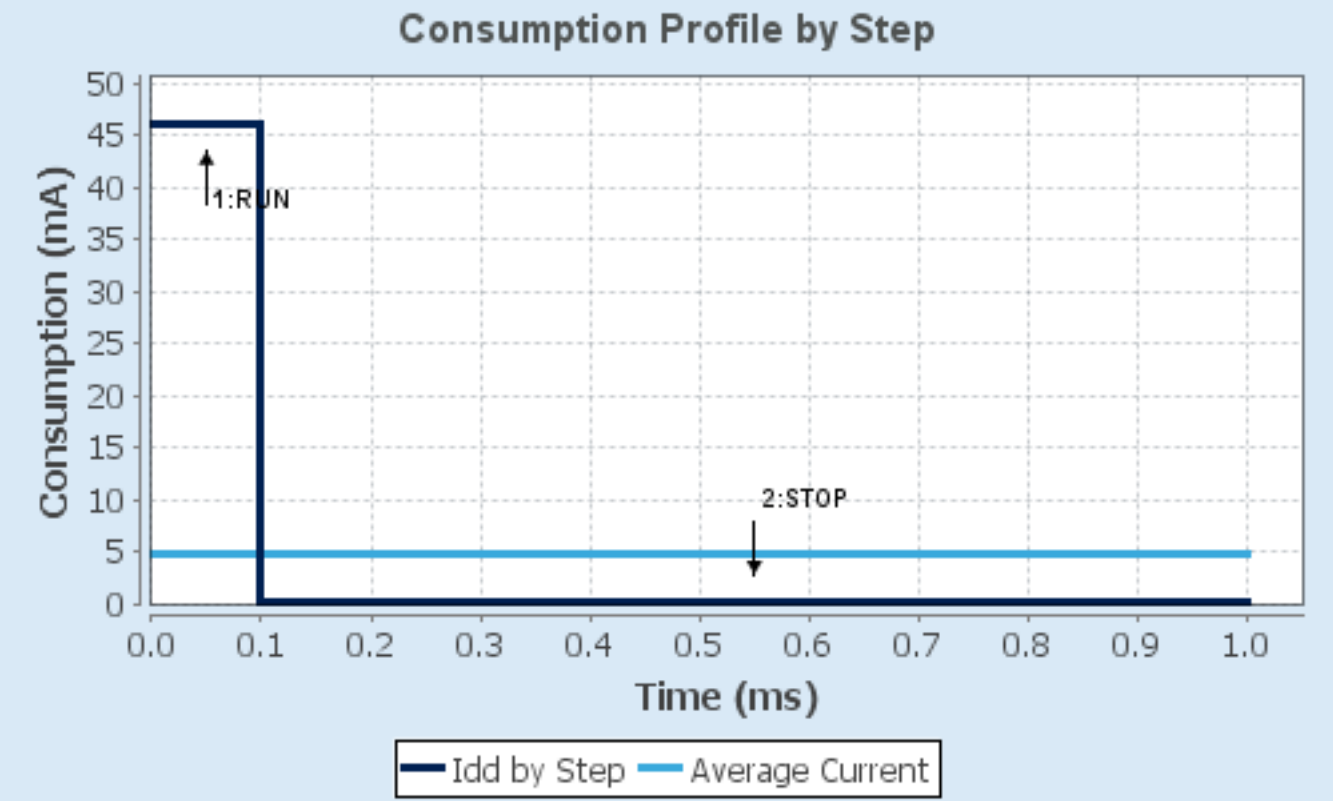
Consumption Profile by Step
Consumption (mA)
50
45
40
35
30
25
20
15
10
5
0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. GPIO

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

7.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	BCD data format
Hours	0
Minutes	0
Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	**20 ***

7.4. SYS

Timebase Source: SysTick

7.5. USART1

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.6. USB_OTG_FS

Mode: Device_Only

7.6.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	Disabled
Signal start of frame	Disabled

7.7. USB_DEVICE

Class For FS IP: Custom Human Interface Device Class (HID)

7.7.1. Parameter Settings:

Class Parameters:

CUSTOM_HID_FS_BINTERVAL	**0x5 ***
USBD_CUSTOM_HID_REPORT_DESC_SIZE (Total length for Report descriptor (IN ENDPOINT))	2
USBD_CUSTOMHID_OUTREPORT_BUF_SIZE (Maximum report buffer size (OUT ENDPOINT))	2

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

7.7.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	**22352 ***
PRODUCT_STRING (Product Identifier)	STM32 Custom Human interface
CONFIGURATION_STRING (Configuration Identifier)	Custom HID Config
INTERFACE_STRING (Interface Identifier)	Custom HID Interface

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
GPIO	PC13-ANTI_TAMP	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_PC13
	PF6	GPIO_Input	Input mode	**Pull-up ***	n/a	SD_DETECT
	PF7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_PF7
	PG8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USB_PULLUP
	PB8	GPIO_Input	Input mode	**Pull-up ***	n/a	BUTTON_PB8
	PB9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_PB9

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB On The Go FS global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

9. Predefined Views - Category view : Current

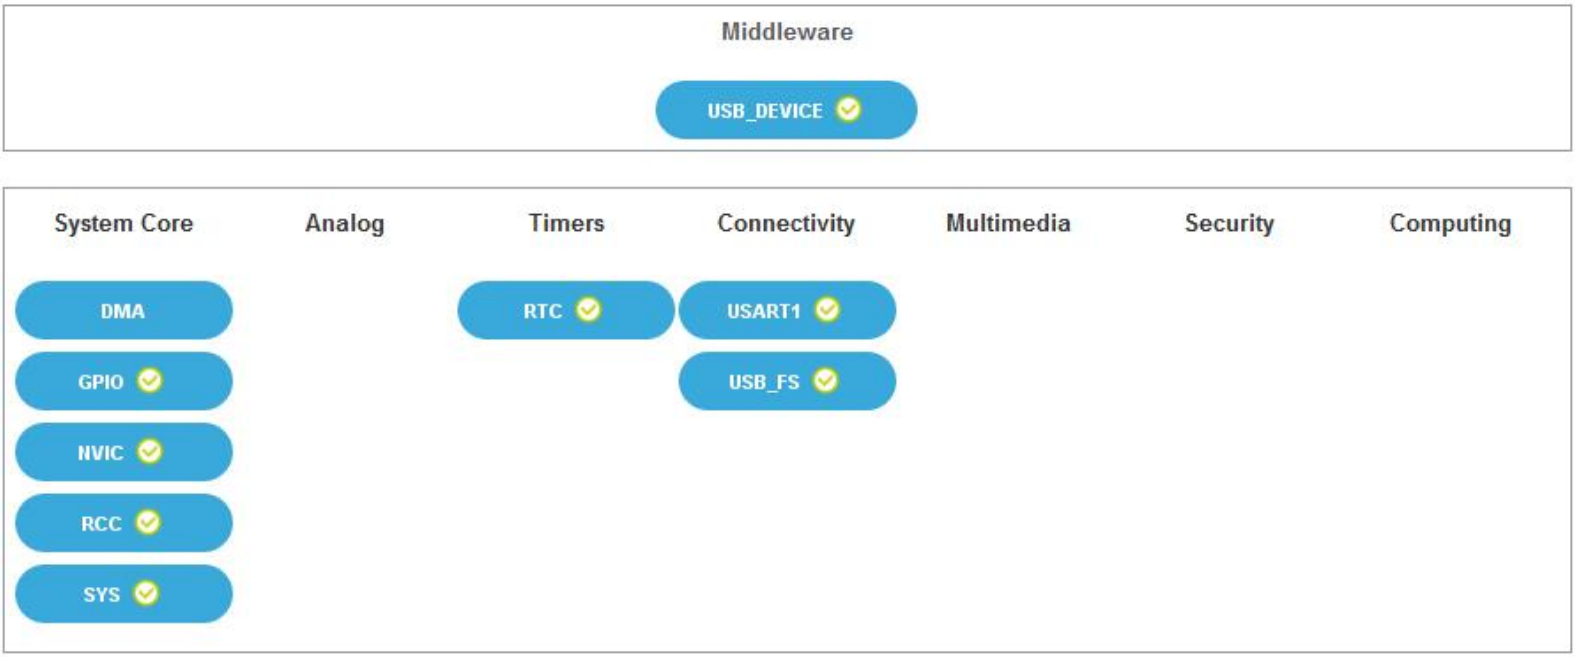

10. Software Pack Report