
M450A ·RTO-144 CONNECTIONS

M450A - Program Amplifier ·ELCO 00-6007-015-940-002 ·15 contacts, single row


REAR CONNECTOR

REAR VIEW ·CARD EDGE ·15 CONTACTS

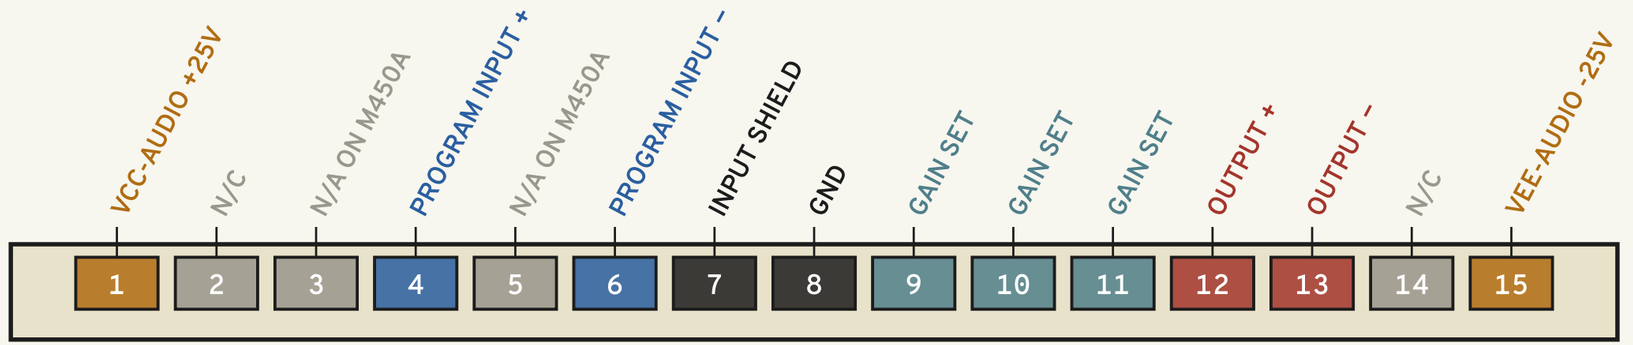

Input · Output · Power · Ground / chassis · Jumper · Not connected

INPUTS AND OUTPUTS

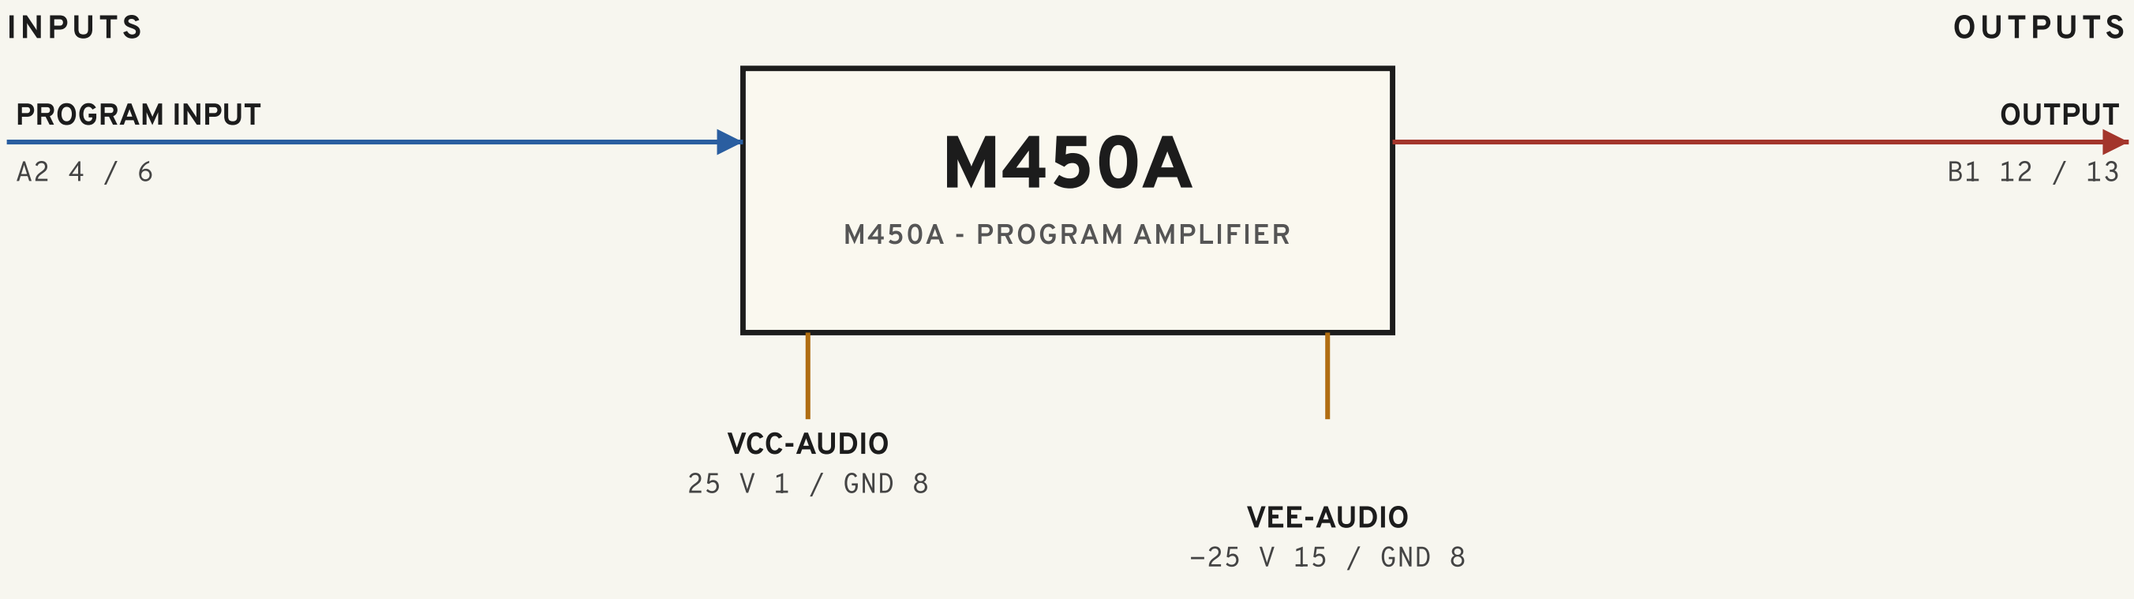

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A2	PROGRAM INPUT	in	4	6	—	—
B1	OUTPUT	out	12	13	—	—

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VCC-AUDIO	—	25	—	1	8	—
VEE-AUDIO	—	-25	—	15	8	—

OTHER PINS

SIGNAL	PINS
INPUT SHIELD	7
COMMON	8
GAIN SET	9, 10, 11
N/C	2, 14
N/A ON M450A	3, 5

Source: Ward-Beck drawing 450-04-001 iss. 2 (June 1976), M450 and M450A connector layout ("summing amp input N/A for M450A"). Verify against the module before wiring.

WBS	WARD-BECK SYSTEMS LTD.		
TITLE	M450A RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 22 2026