
M450B ·RTO-144 CONNECTIONS

M450B Program - Summing Amplifier ·out 600 Ω

REAR CONNECTOR

P2 — REAR VIEW ·CARD EDGE ·44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

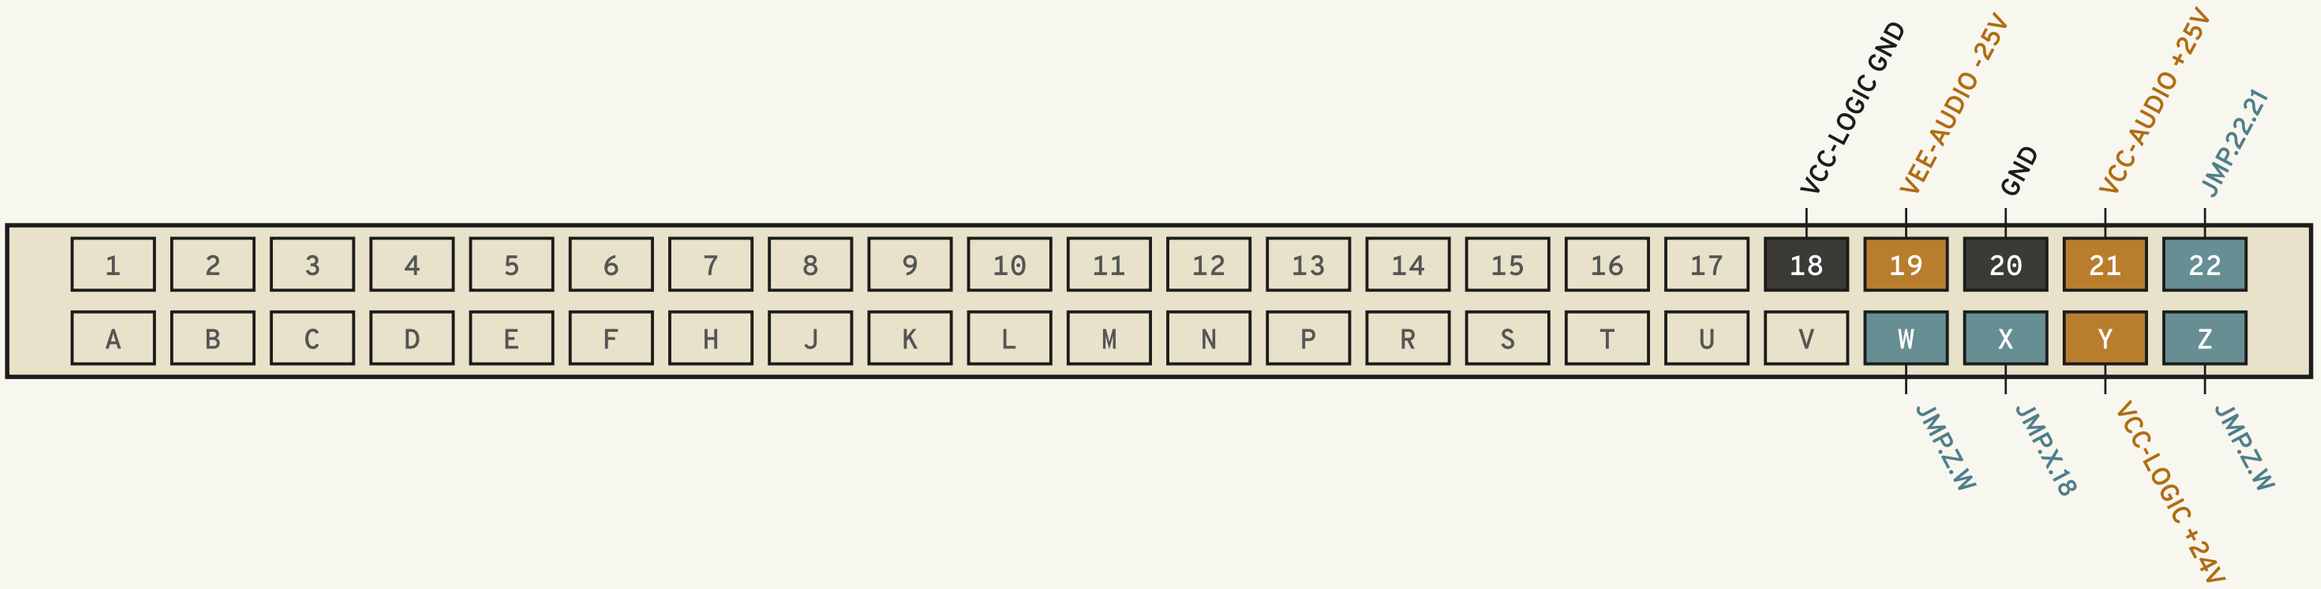


Power Ground / chassis Jumper

INPUTS AND OUTPUTS

INPUTS

OUTPUTS

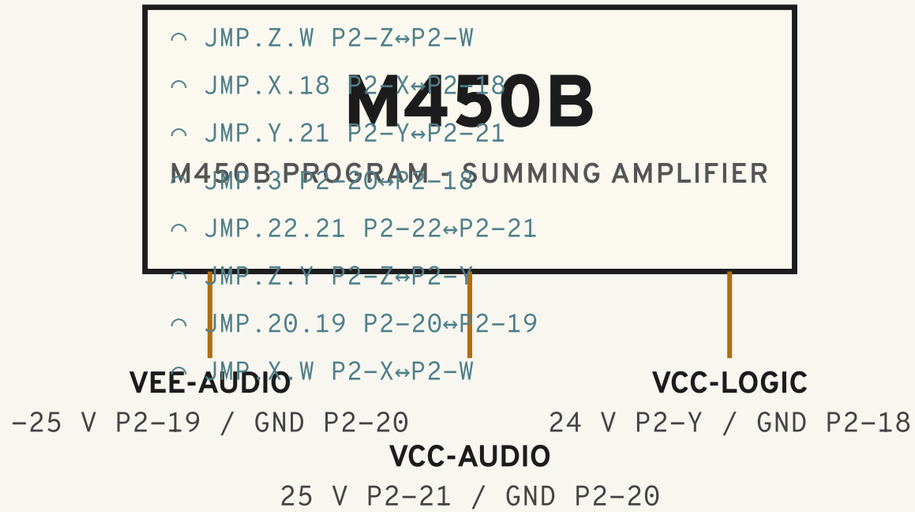

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.1	P2-19	P2-20	2
VCC-AUDIO	NEW	25	0.2	P2-21	P2-20	1
VCC-LOGIC	NEW	24	0.1	P2-Y	P2-18	—

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
CH ON LAMP	JMP.Z.W	P2-Z	P2-W
CH ON GND	JMP.X.18	P2-X	P2-18
24V Jumper	JMP.Y.21	P2-Y	P2-21
CH ON GND	JMP.3	P2-20	P2-18
Insert +	JMP.22.21	P2-22	P2-21
Insert -	JMP.Z.Y	P2-Z	P2-Y
Fader +	JMP.20.19	P2-20	P2-19
Fader -	JMP.X.W	P2-X	P2-W

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M450B RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026