
M473 · RTO-144 CONNECTIONS

M473 Submaster Module - User Guide


REAR CONNECTOR

P2 — REAR VIEW · CARD EDGE · 44 CONTACTS

TOP ROW 1–22: COMPONENT SIDE · BOTTOM ROW A–Z: SOLDER SIDE

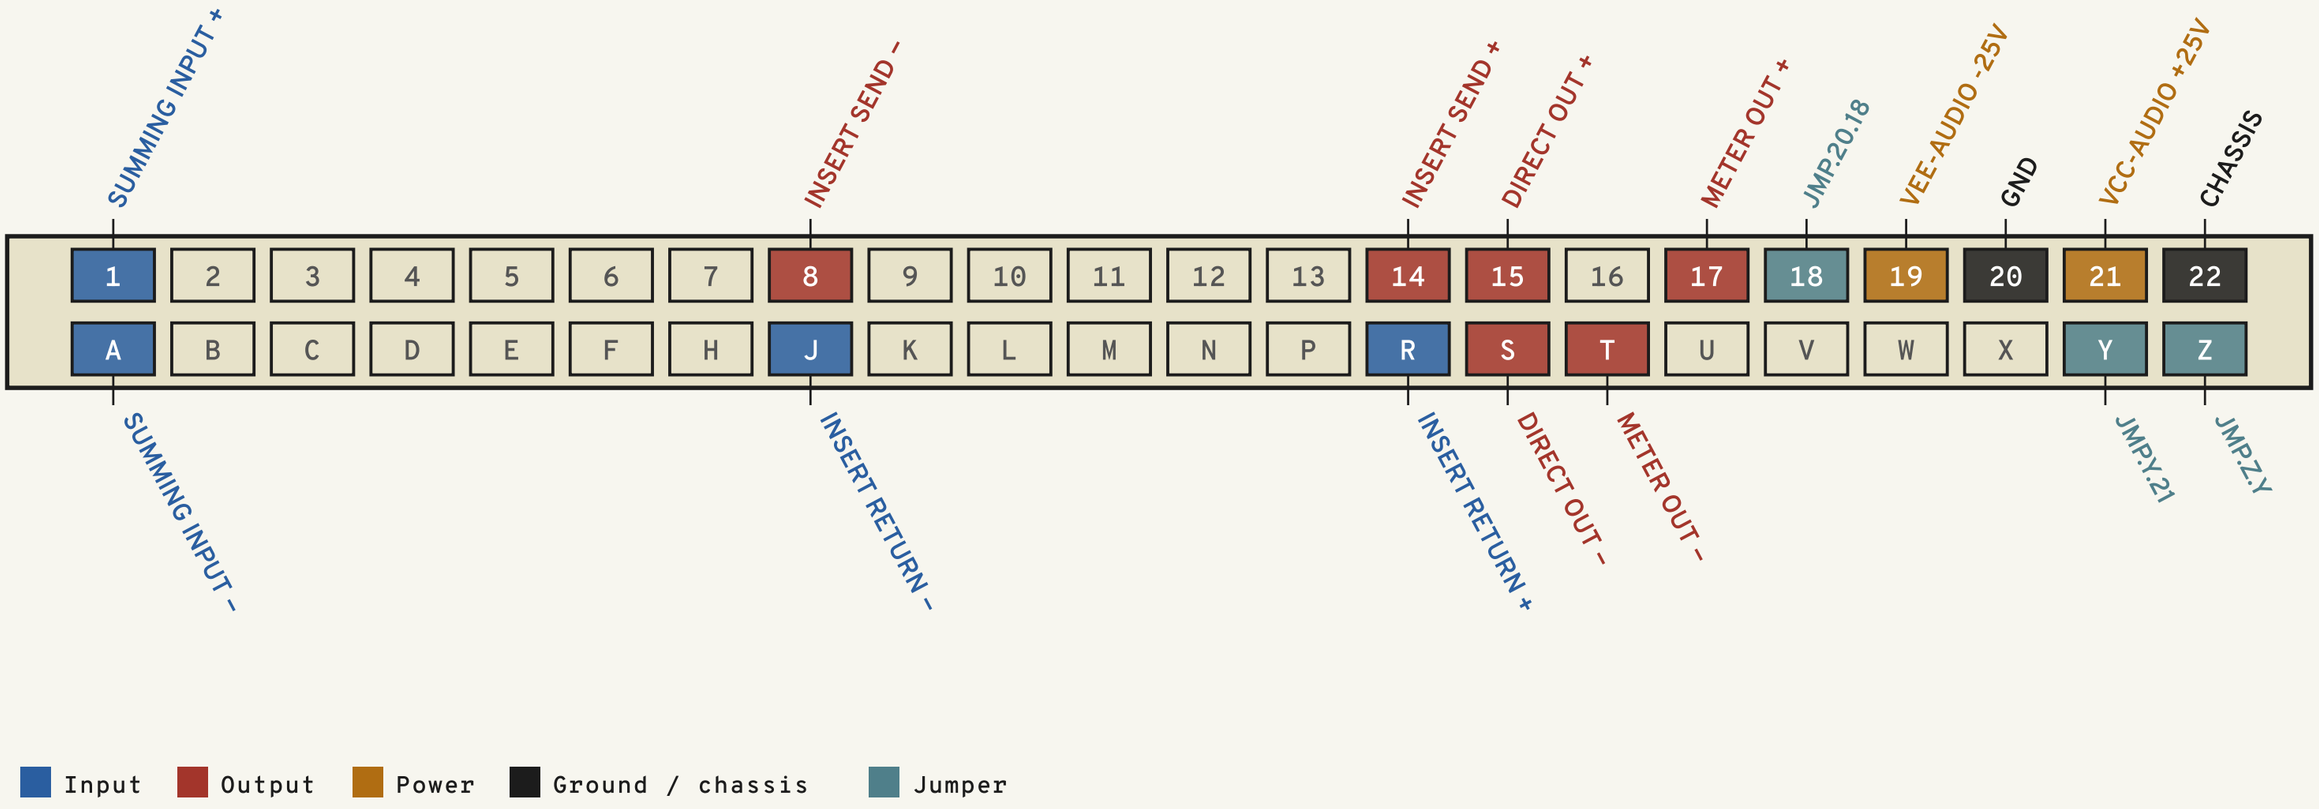

INPUTS AND OUTPUTS

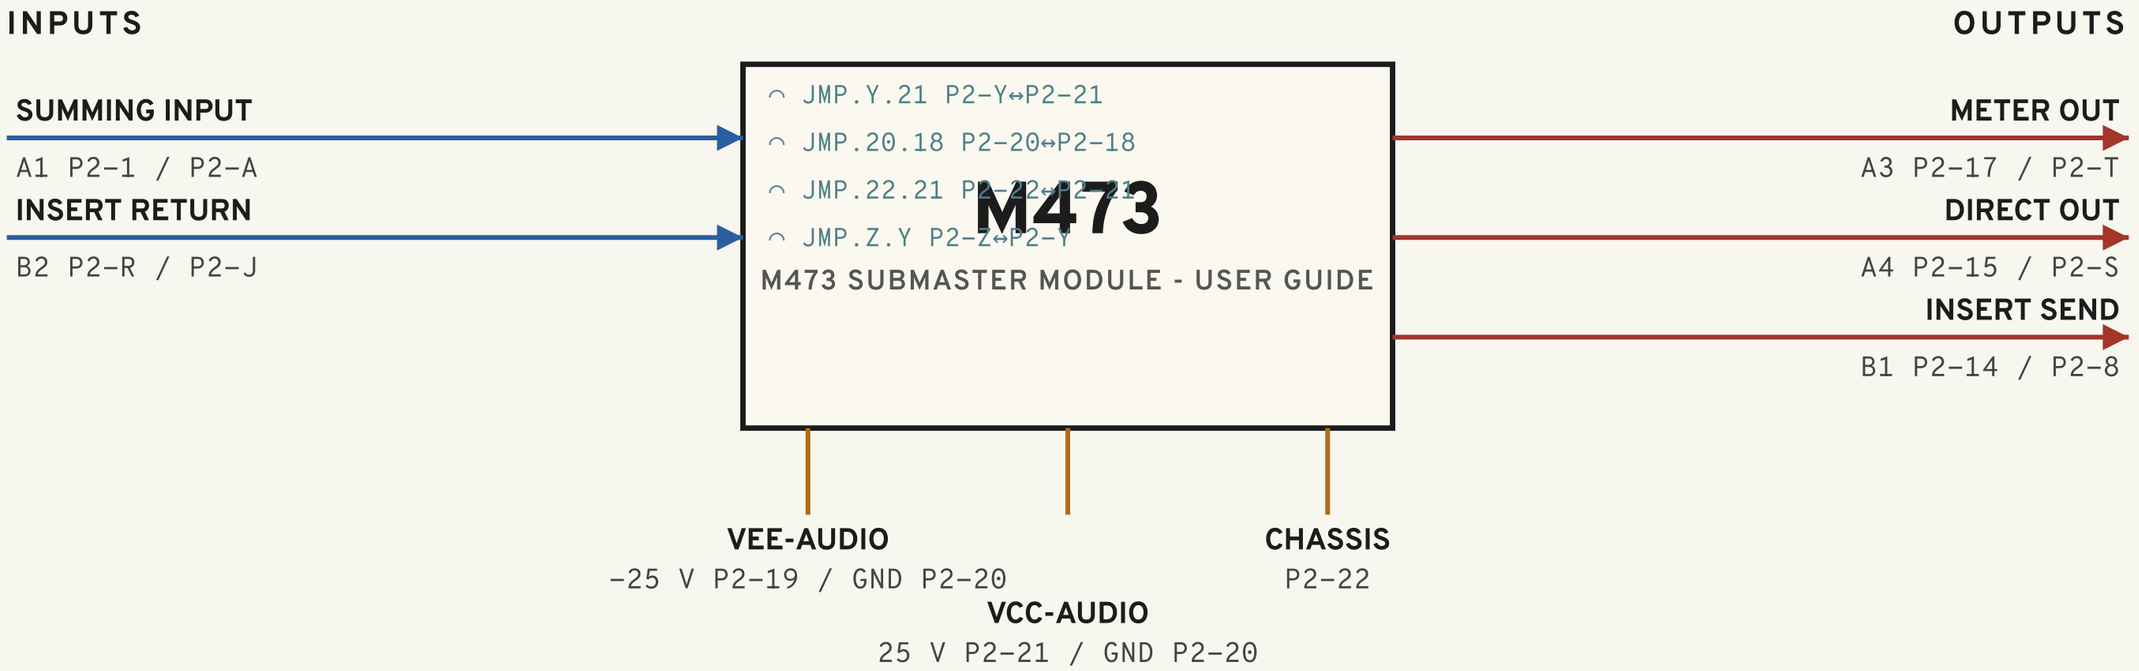

AUDIO CONNECTIONS · RTO-144 A / B

PORT	SIGNAL	DIR	PIN +	PIN −	PAD +	PAD −
A1	Summing Input	in	P2-1	P2-A	1.A.1.P	A.A.1.N
A3	Meter Out	out	P2-17	P2-T	17.A.3.P	T.A.3.N
A4	Direct Out	out	P2-15	P2-S	15.A.4.P	S.A.4.N
B1	Insert Send	out	P2-14	P2-8	14.B.1.P	8.B.1.N
B2	Insert Return	in	P2-R	P2-J	R.B.2.P	J.B.2.N

POWER · BENCH PSU

RAIL	STYLE	VOLTS	MAX A	SUPPLY	GROUND	LINK
VEE-AUDIO	NEW	-25	0.1	P2-19	P2-20	2
VCC-AUDIO	NEW	25	0.2	P2-21	P2-20	1

JUMPERS

FUNCTION	DESIGNATION	FROM	TO
24V Jumper	JMP.Y.21	P2-Y	P2-21
CH ON GND	JMP.20.18	P2-20	P2-18
Insert +	JMP.22.21	P2-22	P2-21
Insert -	JMP.Z.Y	P2-Z	P2-Y

Source: Ward-Beck Systems - Module RTO-144 Jumper calculator.xlsx (Database tab). Pin direction is inferred from the signal name. Verify against the module schematic before wiring.

WBS WARD-BECK SYSTEMS LTD.			
TITLE	M473 RTO-144 CONNECTIONS		
DRN.	MAKE_RTO144.PY	DATE	OCT 17 2026