

Industrial PC

# PPC-A9-190-C



PN: CS14900F190


## Contents

1. PPC-A9-190-C	3
1.1. Product Overview	4
1.2. Ordering Options	5
1.2.1. Operating System	5
1.2.2. Optional Features	6
1.3. Hardware Features	6
1.4. Power Input	7
1.5. Touch Screen	8
1.6. Connectivity	9
1.6.1. RS232/RS485/CAN	9
1.6.2. USB Connectors	11
1.6.3. LAN Connectors	12
1.6.4. WiFi & BT Module	12
1.6.5. 4G/LTE Module	13
1.6.6. GPIO Connector	14
1.7. Audio Connectors	15
1.8. HDMI Connector	15
1.9. Boot DIP Switch	16
1.10. Measurements and Mounting Procedure	17
1.11. Disclaimer	18
1.12. Technical Support	18

## PPC-A9-190-C



Front View

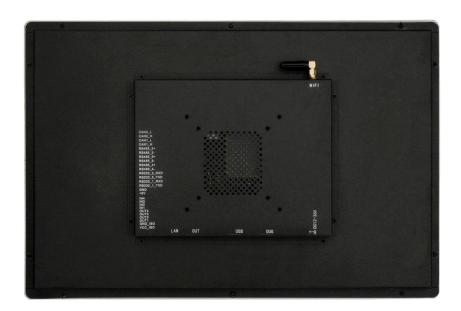


Rear View

PPC-A9-190-C Product Overview



Side View 1

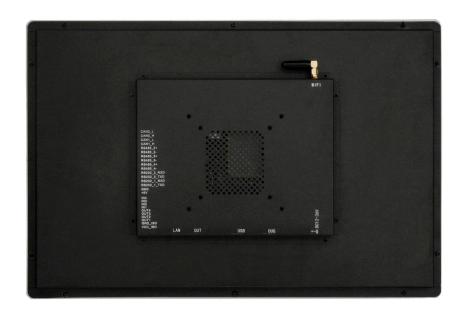

Side View 2

## **Product Overview**

The Cortex $^{\$}$ -A9 series PPC-A9-190-C (PN: CS14900F190) is a rugged, high-quality industrial panel PC. It features a 19" multi-point capacitive touch screen with a resolution of 1440 x 900 pixels.

#### **Key Applications**

- Human Machine Interface HMI
- Process Control
- Process Monitoring

PPC-A9-190-C Ordering Options

- HMI
- Infotainment
- Predictive Maintenance
- Machine Learning
- Machine Vision
- Automotive applications
- ATM...

The PPC-A9-190-C Industrial Panel PC is based around the powerful CS-SOM-iMX6Q System on Module (SoM), powered by the i.MX6Q Arm<sup>®</sup> Cortex<sup>®</sup>-A9 quad-core Application Processor (APU). The i.MX6Q APU represents the latest achievement in integrated multimedia applications processors, delivering high-performance computing, an abundance of integrated peripherals, and high power efficiency.

This product also features a broad range of connectivity options, providing a high level of scalability for various use cases. It is the perfect solution for power-constrained applications on the Edge, acting as a robust control unit for collecting, processing, and aggregating field data. The i.MX6Q APU is part of NXP's EdgeVerse™ edge computing platform.

The NXP i.MX6UL APU does not generate extensive heat, so even the thin aluminum housing on PPC version delivers sufficient thermal dissipation. With its junction temperature from -40 to +125°C, the APU itself is well suited for extended temperature range in both automotive and factory environments.

## **Ordering Options**

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the Hardware Features section provides information about the default options bundled with the product.



Note

You can order The PPC-A9-190-C Industrial Panel PC from the official **Chipsee Store** or from your nearest distributor.

## Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can be also obtained from the Software Documentation section, along with the detailed installation instructions.

Chipsee Linux\*

PPC-A9-190-C **Optional Features** 

- Android 4.3
- Android 6.0
- Android 8.0
- Ubuntu 12.04
- Ubuntu 14.04
- Debian
- Chipsee Linux is based on NXP Yocto framework that has been integrated with:
  - 1. Chipsee Hardware Test Application
  - 2. An initialization script for GPIO/Buzzer/Audio
  - 3. Multiple libraries, such as the libQt5Sql to develop Qt application with SQL
  - 4. Various packages, such as the <a href="ntfs-3g">ntfs-3g</a> to use NTFS file system



#### Warning

The Software Documentation section provides a detailed instruction how to install different OS on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at support@chipsee.com for further assistance

#### **Optional Features**

The PPC-A9-190-C Industrial Panel PC does not include 4G/LTE module by default. The module is optional and can be selected at the Chipsee store during the ordering process.



#### Warning

Installation, repair, and maintenance tasks should be performed by trained personnel only. Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

## Hardware Features

The PPC-A9-190-C Industrial Panel PC offers a board range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the table below.

PPC-A9-190-C		
СРИ	iMX6Q, Arm <sup>®</sup> Cortex <sup>®</sup> -A9, 1GHz	
RAM	2GB DDR3	
еММС	8GB	
Storage	TF Card, Supports up to 32GB SDHC	

PPC-A9-190-C Power Input

PPC-A9-190-C			
Display	19" LCD, 1440 x 900, High Brightness: 500cd/m <sup>2</sup>		
Touch	Capacitive Multi-Point Touch Screen		
USB	4 x USB 2.0 HOST, 1 x USB OTG		
LAN	1 x Channel 1000Mbps LAN		
Audio	3.5mm Audio In/Out Connector, Internal 2W Speaker		
Buzzer	Yes		
RTC	Yes, Powered by CR2032 Button Battery		
RS232	2 x RS232		
RS485	3 x RS4851		
CAN	2 x CAN		
GPIO	8 x Channels		
WiFi/BT	Integrated WiFi/BT Module		
ндмі	1 x HDMI		
SATA	1 x SATA II		
4G/LTE	Optional, Not mounted by default		
Power Input	From 15V to 36V		
Current at 15V	2000mA Max		
Power Consumption	22W Typical		
Working Temperature	From -20°C to +70°C		
OS	Multiple Choices (Operating System)		
Dimensions	466 x 313 x 63mm		
Weight	5200g		
Mounting	Panel		

Table 32 Key Features

1 This product has 5 x UART channels in total. The default configuration is 2 x RS232, 2 x RS485, and 1 x UART for WiFi/BT module. UART can be swapped between RS232 and RS485 modes easily, so if you need different RS232/RS485 configuration, please get in touch with the Chipsee Technical Support at support@chipsee.com

## Power Input

The PPC-A9-190-C Industrial Panel PC can be powered by a wide range of input voltages: From 15V to 36V DC. The power input connector is a **3-pin, 3.81mm terminal**. The polarity

PPC-A9-190-C Touch Screen

and the pinout is clearly marked on the housing of the product as shown on the figure below.

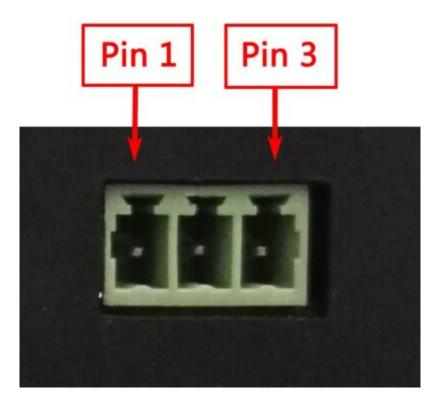


Figure 107: Power Input

Note that the "+" sign represents the positive power input, and it is printed both at the casing and as a silk-screen on a PCB of the embedded version. The "-" terminal is shorted to the ground.

Power Input Definition			
Pin Number	Definition	Description	
Pin 1	Positive Input	DC Power <b>Positive Terminal</b>	
Pin 2	Negative Input	DC Power <b>Negative Terminal</b>	
Pin 3	Ground	Power System Ground	

Table 33 Power Connector



The system ground "**G**" is connected to power negative "-" on board.

## Touch Screen

The PPC-A9-190-C Industrial Panel PC uses a 10-point capacitive touch screen.

PPC-A9-190-C Connectivity

#### Attention

A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:

- 1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
- 2. Make sure that the PPC-A9-190-C Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
- 3. Bad GND problem can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

## Connectivity

There are many connectivity options available on the PPC-A9-190-C industrial PC. It has 2 x HOST USB Type A connectors, 1 x USB OTG Type Mini B, 2 x network connector (RJ45) supporting up to 1 Gbps, and 5 x UART terminals (RS232/485). This device also features two CAN interfaces.

### RS232/RS485/CAN

The serial communication interfaces (RS485, RS482, and CAN) are routed to a **16-pin 3.81mm terminal**, as illustrated in the figure below. Serial communication on both RS485 and RS422 interfaces can reach up to 115200 kbps.

PPC-A9-190-C RS232/RS485/CAN

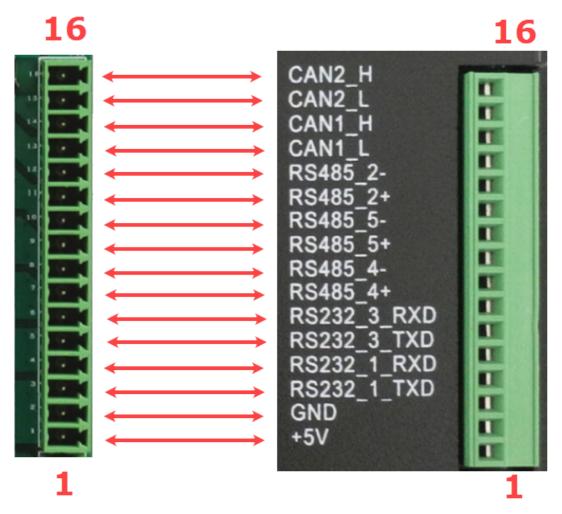


Figure 108: Serial pins connector

The table below offers more detailed description of every pin and its definition:

RS232 / RS485 / CAN Pin Definition:		
Pin Number	Definition	Description
Pin 16	CAN2_H	CPU CAN Channel 2 H signal
Pin 15	CAN2_L	CPU CAN Channel 2 L signal
Pin 14	CAN1_H	CPU CAN Channel 1 H signal
Pin 13	CAN1_L	CPU CAN Channel 1 L signal
Pin 12	RS485_2-	CPU UART2, RS485 –(B) signal 2
Pin 11	RS485_2+	CPU UART2, RS485 +(A) signal 2
Pin 10	RS485_5-	CPU UART5, RS485 –(B) signal
Pin 9	RS485_5+	CPU UART5, RS485 +(A) signal
Pin 8	RS485_4-	CPU UART4, RS485 –(B) signal
Pin 7	RS485_4+	CPU UART4, RS485 +(A) signal
Pin 6	RS232_3_RXD	CPU UART3, RS232 RXD signal
Pin 5	RS232_3_TXD	CPU UART3, RS232 TXD signal
Pin 4	RS232_1_RXD	CPU UART1, RS232 RXD signal

PPC-A9-190-C USB Connectors

Pin 3	RS232_1_TXD	CPU UART1, RS232 TXD signal
Pin 2	GND	System Ground
Pin 1	+5V	System 5V output, up to 1A

Table 34 Connectivity Section

**2(1,2)**UART2 signal is used by the onboard WiFi/BT module, so the I/O port function is disabled by default. If you need the I/O port function instead, please contact Chipsee Technical Support at **support@chipsee.com** for assistance.



 $120\Omega$  termination resistors are not mounted or included with the device.

#### **USB Connectors**

There are 2 x dual Type A **USB HOST connectors** onboard, as shown on the figure below.



Figure 109: USB HOST Connectors



The USB HOST connectors can drive at most 500mA current on each dual port.

There is also 1 x Type Mini B **USB OTG connector**, configured as slave by default.



Figure 110: USB OTG Connector

#### LAN Connectors

**LAN (RJ45) connector** provides Ethernet connectivity over standardized Ethernet cables. The integrated Ethernet interface supports up to 1 Gbps data throughput. Power over Ethernet (PoE) is not supported.



Figure 111: RJ45 LAN Connector



Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

#### WiFi & BT Module

The PPC-A9-190-C Industrial Panel PC is equipped with the popular **Realtek RTL8723 WiFi/BT module** that supports BT/BLE 4.0 (with backward compatibility), as well as 802.11bgn 2.4 GHz Wireless LAN (WLAN). The product includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.

PPC-A9-190-C 4G/LTE Module



Figure 112: WiFi+BT Antenna

#### 4G/LTE Module

The PPC-A9-190-C Industrial Panel PC is equipped with a **mini-PCle connector** that can connect to a 4G/LTE module. The customer will also need a SIM Card Holder and a 4G/LTE Antenna Connector to ensure 4G/LTE works on the PPC-A9-190-C. SIM card does **NOT** support hot plug. **Power off** before inserting or removing SIM card.


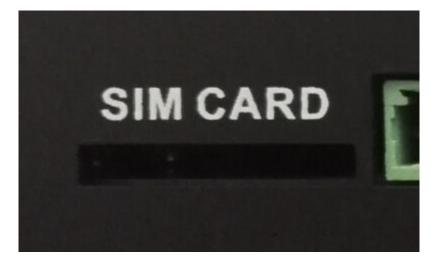


Figure 113: SIM Card Holder



#### SIM Card Direction

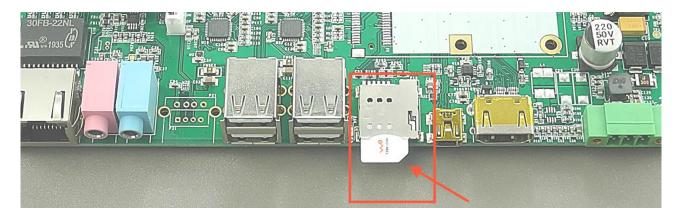

#### Attention

- 1. The product does not come shipped with the 4G/LTE module by default.
- 2. Also, there is no software driver for any kind of 4G/LTE module on Chipsee store.

#### **GPIO** Connector

The PPC-A9-190-C Industrial Panel PC has a 10 Pin 3.81mm **GPIO Connector**, as shown on the figure below, that is labeled as P28 on the PCB. The table below gives details about the definition of every Pin.



Figure 114: GPIO Connector

GPIO Connector Pin Definition:		
Pin Number	Definition Description	
Pin 1	VCC	Isolated Power +5V Output
Pin 2	GND	Isolated Ground
Pin 3	OUT1	Isolated Output 1
Pin 4	OUT2	Isolated Output 2
Pin 5	OUT3	Isolated Output 3
Pin 6	OUT4	Isolated Output 4
Pin 7	IN1	Isolated Input 1
Pin 8	IN2	Isolated Input 2
Pin 9	IN3	Isolated Input 3
Pin 10	IN4	Isolated Input 4

Table 35 GPIO Connector Pin-out

PPC-A9-190-C **Audio Connectors** 

#### Attention

- The GPIO has been Opt-Isolated and it uses the 5V Logic by default. You can use an external isolated power input but the power input range should be from 5V to 24V DC.
- The 4 output channels can drive at most 500mA current on each channel.
- · Since the PCB traces of the port are connected to the processor directly, be careful not to cause electrostatic discharge or over voltage on the pins, as it may damage the processor. Take all the necessary precautions while working with electrostatic-sensitive equipment.

#### **Audio Connectors**

The PPC-A9-190-C Industrial Panel PC features some audio peripherals, as well. It has 1 x **3.5mm audio input jack** and 1 x **3.5mm audio output jack**.

The pink connector is the audio input jack (line-in) and the blue connector is the audio output jack (line-out, typically around -10 dBV) as shown on the figure below.



Figure 115: Audio I/O Connectors

#### **HDMI Connector**

The PPC-A9-190-C Industrial Panel PC is equipped with 1 x **HDMI connector**. The HDMI connector allows connecting an additional (external) monitor. HDMI output resolution can be configured by the software.

PPC-A9-190-C Boot DIP Switch



Figure 116: HDMI Connectors

## **Boot DIP Switch**

The PPC-A9-190-C Industrial Panel PC supports boot from SD card. If you want to re-flash the Operating System (OS), you can use the TF card for that purpose, combined with the **DIP switch** settings as illustrated in the figure below.

There is no need to alter the DIP switch settings during regular operation. However, if you need to reinstall the OS, please refer to the table below. Detailed information on how to reflash the OS can be found in the Software Documentation.

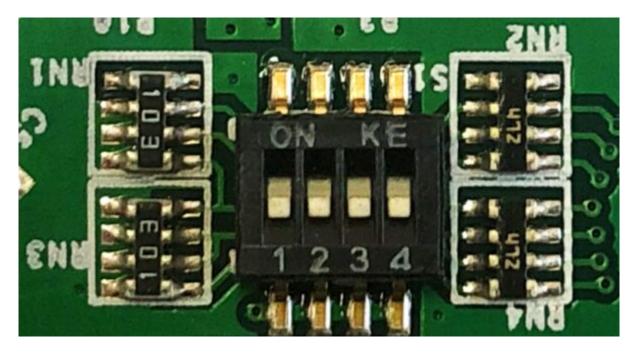


Figure 117: Boot DIP Switch

Boot Config Select				
DIP SW	1	2	3	4
SD	1	0	0	0
еММС	1	1	0	1
Download	0	1	1	0

#### Table 36 Boot Configuration Selection

## Measurements and Mounting Procedure

The outer mechanical dimensions of PPC-A9-190-C are 466 x 313 x 63mm (W x L x H).

The PPC-A9-190-C Industrial Panel PC can be mounted with 8 x M4 screws or 4 x M4 screws using the VESA (100x100cm or 75x75cm) and Panel mounting methods, enabling simplified installation onto any standard mounting fixture.

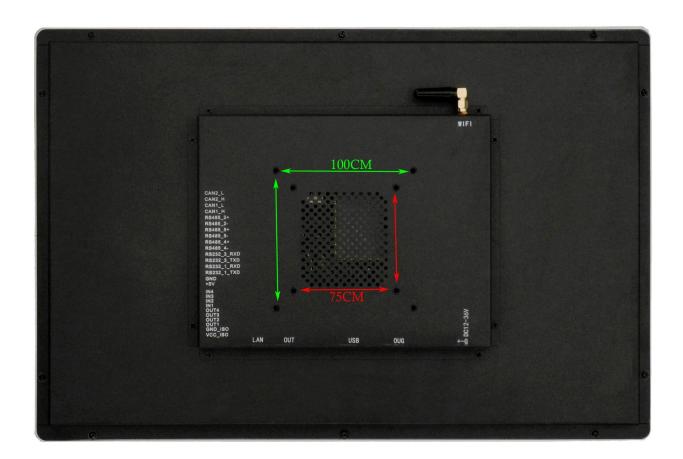


Figure 118: Mounting Method



Please make sure the display is not exposed to high pressure when mounting into an enclosure.

You can find detailed information about mounting in the Mount IPC Guide.

PPC-A9-190-C Disclaimer

## Disclaimer

This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.

While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.

Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.

## **Technical Support**

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at **support@chipsee.com**, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.