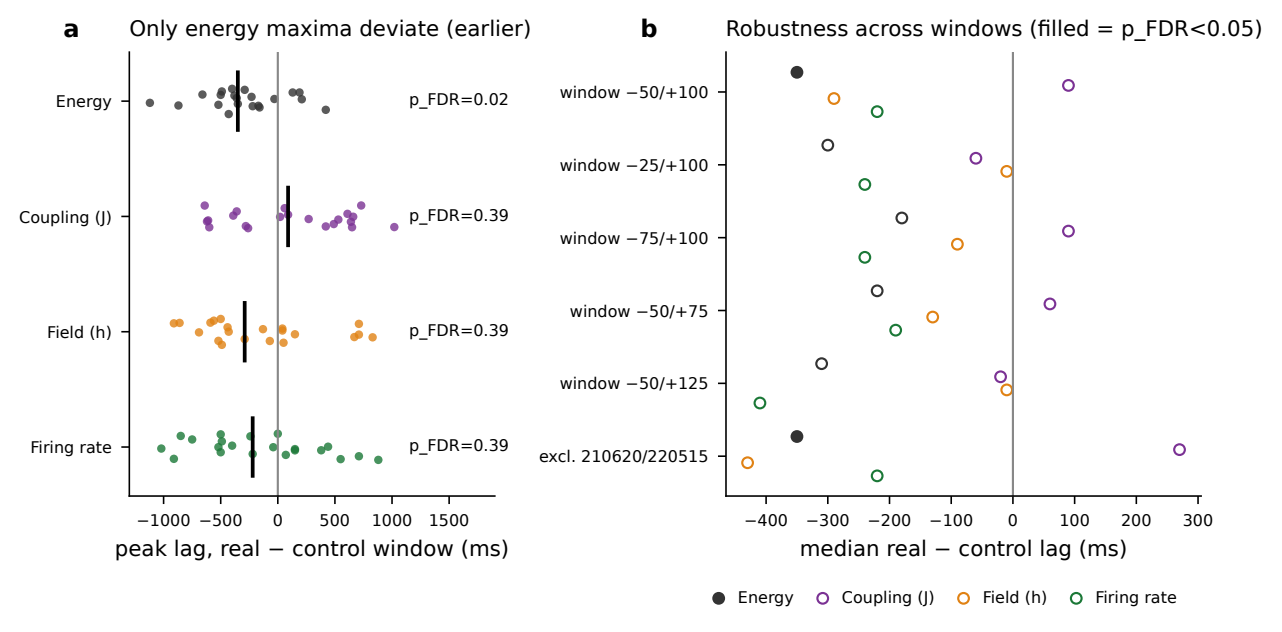
a
Only energy maxima deviate (earlier)
Energy
Coupling (J)
Field (h)
Firing rate
p_FDR=0.02
p_FDR=0.39
p_FDR=0.39
p_FDR=0.39
−1000
−500
0
500
1000
1500
peak lag, real − control window (ms)
b
Robustness across windows (filled = p_FDR<0.05)
window −50/+100
window −25/+100
window −75/+100
window −50/+75
window −50/+125
excl. 210620/220515
−400
−300
−200
−100
0
100
200
300
median real − control lag (ms)
Energy
Coupling (J)
Field (h)
Firing rate