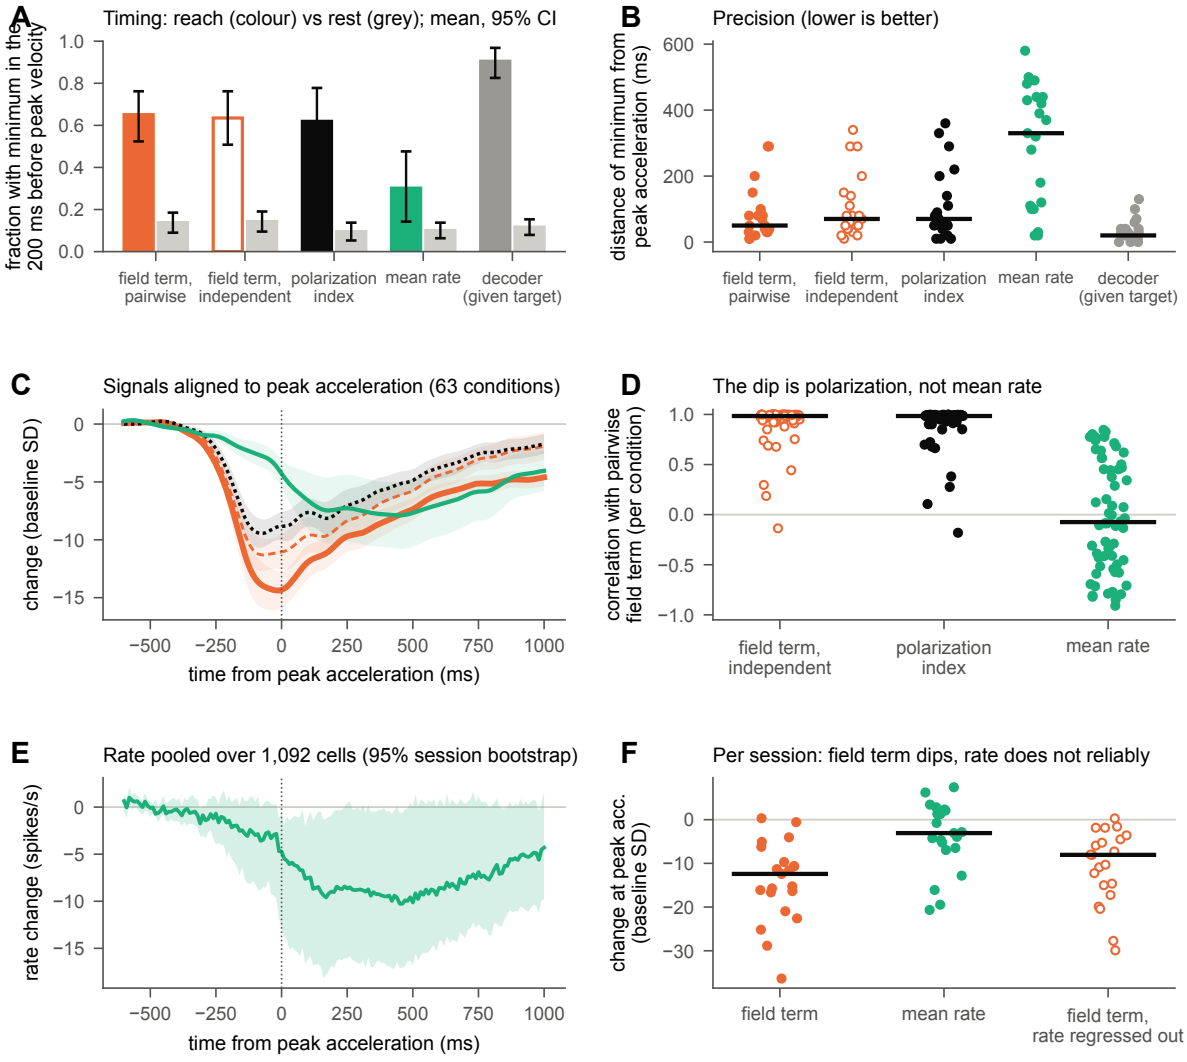

A
Timing: reach (colour) vs rest (grey); mean, 95% CI
fraction with minimum in the 200 ms before peak velocity
1.0
0.8
0.6
0.4
0.2
0.0
field term, pairwise
field term, independent
polarization index
mean rate
decoder (given target)
B
Precision (lower is better)
distance of minimum from peak acceleration (ms)
600
400
200
0
field term, pairwise
field term, independent
polarization index
mean rate
decoder (given target)
C
Signals aligned to peak acceleration (63 conditions)
change (baseline SD)
0
−5
−10
−15
−500
−250
0
250
500
750
1000
time from peak acceleration (ms)
D
The dip is polarization, not mean rate
correlation with pairwise field term (per condition)
1.0
0.5
0.0
−0.5
−1.0
field term, independent
polarization index
mean rate
E
Rate pooled over 1,092 cells (95% session bootstrap)
rate change (spikes/s)
0
−5
−10
−15
−500
−250
0
250
500
750
1000
time from peak acceleration (ms)
F
Per session: field term dips, rate does not reliably
change at peak acc. (baseline SD)
0
−10
−20
−30
field term
mean rate
field term, rate regressed out