



NX-Indicator to NX-Interface Cable		
DESCRIPTON	NX-Interface (J15)	NX-Indicator (J3)
NX_PC_LED-	1	1
UART2_RXD	3	2
UART1_TXD	4	3
SYS_RST_RCV_RTN	7	4
SYS_RESETn	8	5
FORCE_RECOVERY_RTN	9	6
FORCE_RECOVERYn	10	7

- ➡ [Seed Studio J401 Carrier Board](#)
- ➡ [Seed Studio J401 Carrier Board Schematic](#)
- ➡ [Seed Studio J401 Carrier Board Datasheet](#)
- ➡ [J401 Measurements](#)
- ➡ [Samtec 40 pin Elevated Socket](#)



NOTE: PULL DOWN RESITORS
MUST BE GREATER THAN 50k
TO COMPLY WITH LEVEL TRANSLATOR

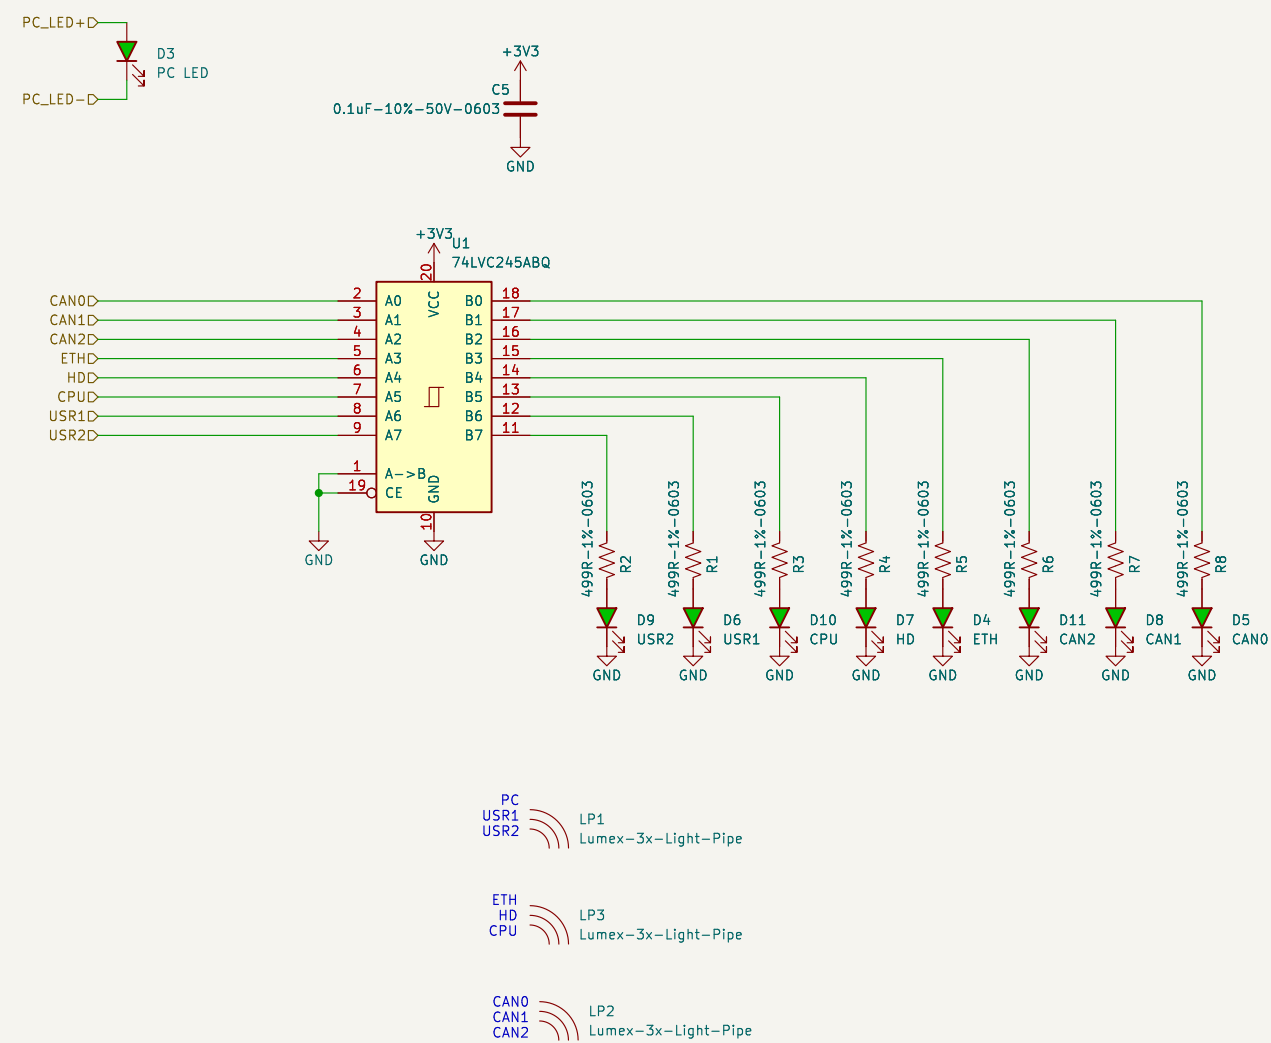



971 Spartan Robotics

Sheet: /LEDs/
File: LEDs.kicad_sch

Title: NX Indicator Board V2

Size: B Date: 2024-07-14
KiCad E.D.A. 8.0.3

Rev: 2
Page: 3/4

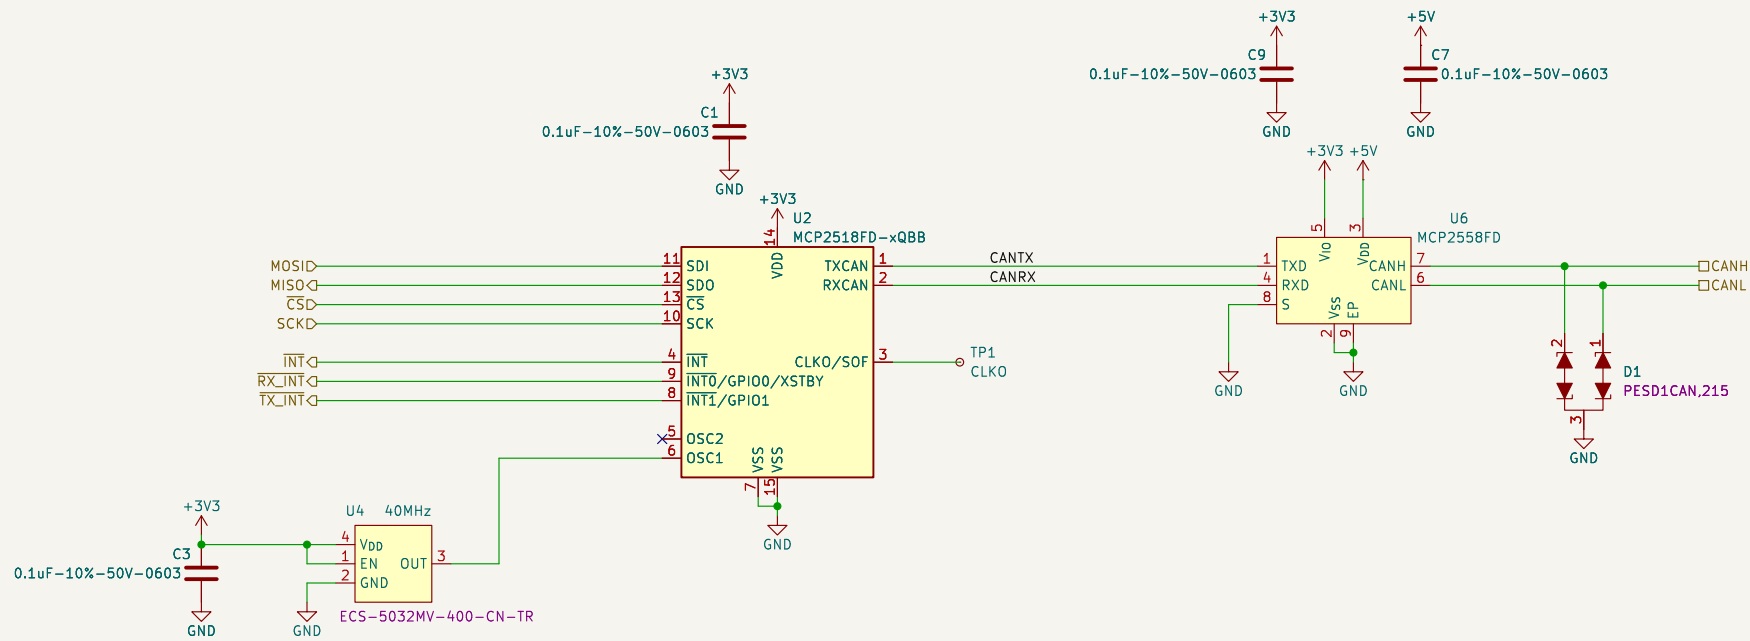



971 Spartan Robotics

Sheet: /SPI-CAN-FD1/
File: spi-canfd.kicad_sch

Title: NX Indicator Board V2

Size: B Date: 2024-07-14
KiCad E.D.A. 8.0.3

Rev: 2
Page: 4/4

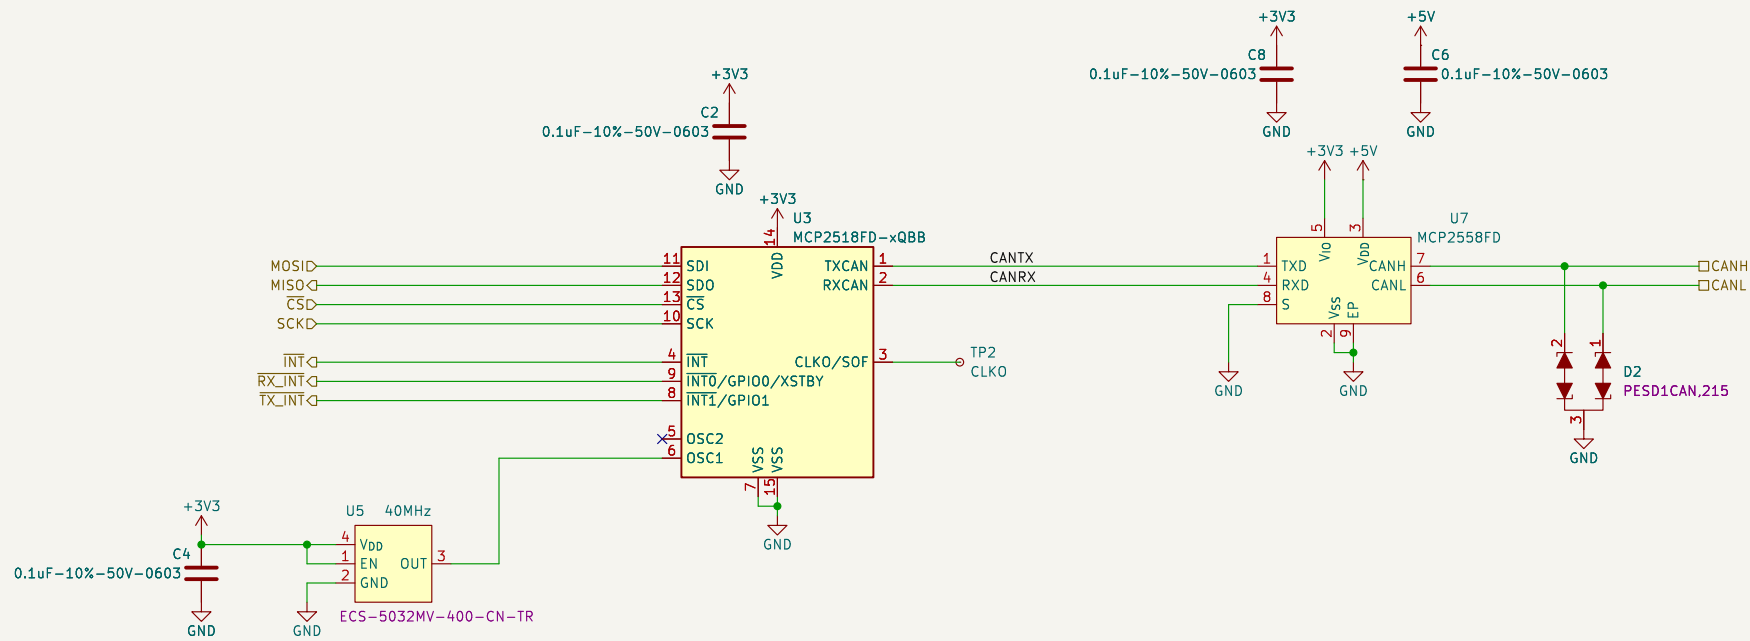

971 Spartan Robotics

Sheet: /SPI-CAN-FD2/
File: spi-canfd.kicad_sch

Title: NX Indicator Board V2

Size: B

Date: 2024-07-14

Rev: 2

KiCad E.D.A. 8.0.3

Page: 5/4