


Toward a biomimetic Johnston's organ for touch localization

Luca Hermes, Volker Dürr and Thierry Hoinville

thierry.hoinville@uni-bielefeld.de

Introduction

Most insects use a pair of antennae to sense their near-range environment. For example, blindfolded stick insects climb obstacles by finding footholds for their front legs using their antennae [1]. Different types of mechano-receptors present on each antenna may contribute to contact localization. One of these receptors – Johnston's organ – might respond to contact-induced vibrations [2]. Prior approaches to construct biomimetic antennae have shown that vibration characteristics can be exploited to estimate the position of a contact along the antenna, the material and texture properties of the obstacle [3,4,5]. For distance estimation, only low-frequency high-amplitude components have been exploited. Besides increasing latency due to the lasting data segments required [4], maintaining extended contact phases in realistic robot scenarios appear not practical [5]. Here, we systematically evaluate which frequency bands result in best distance estimation.

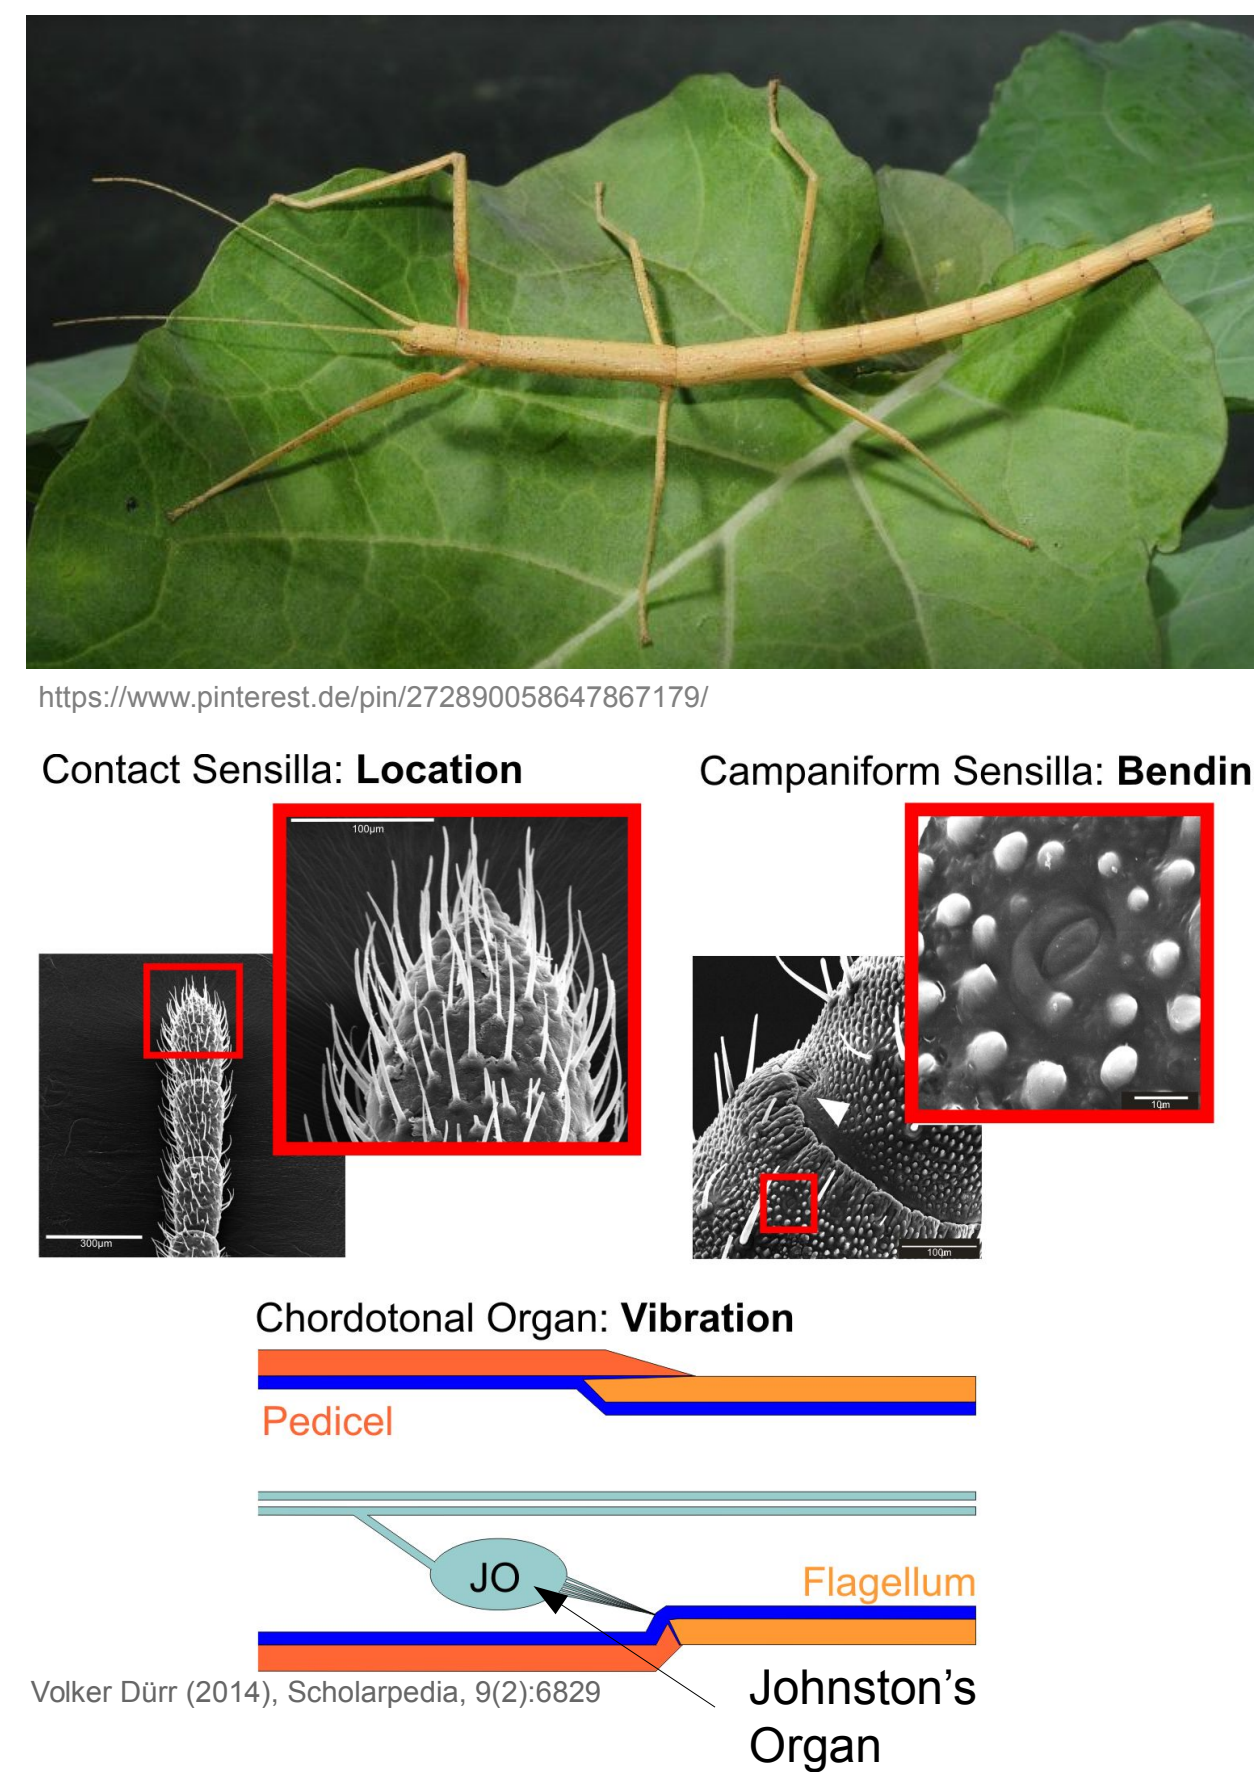

Data acquisition

Experimental Setup



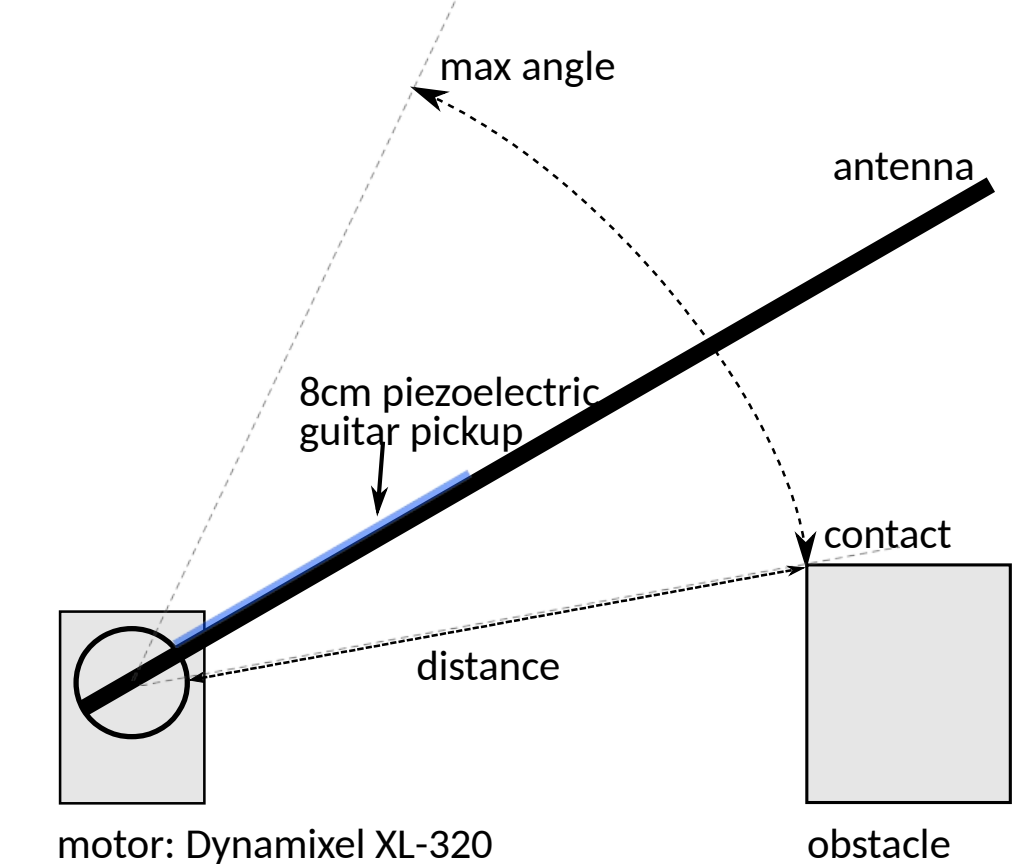



Figure 3: Setup of the antenna and the motor, moving the antenna between obstacle and max angle.

Contact distances	5, 7, 9, ..., 23 cm
Contacts per distance	50
Sample rate	44100 Hz
Sample format	16 bit integer
Antenna	25 cm plastic tube
Voltage buffer	11MΩ input impedance
Audio interface	NI Komplete Audio 6


Finite-state machine controller

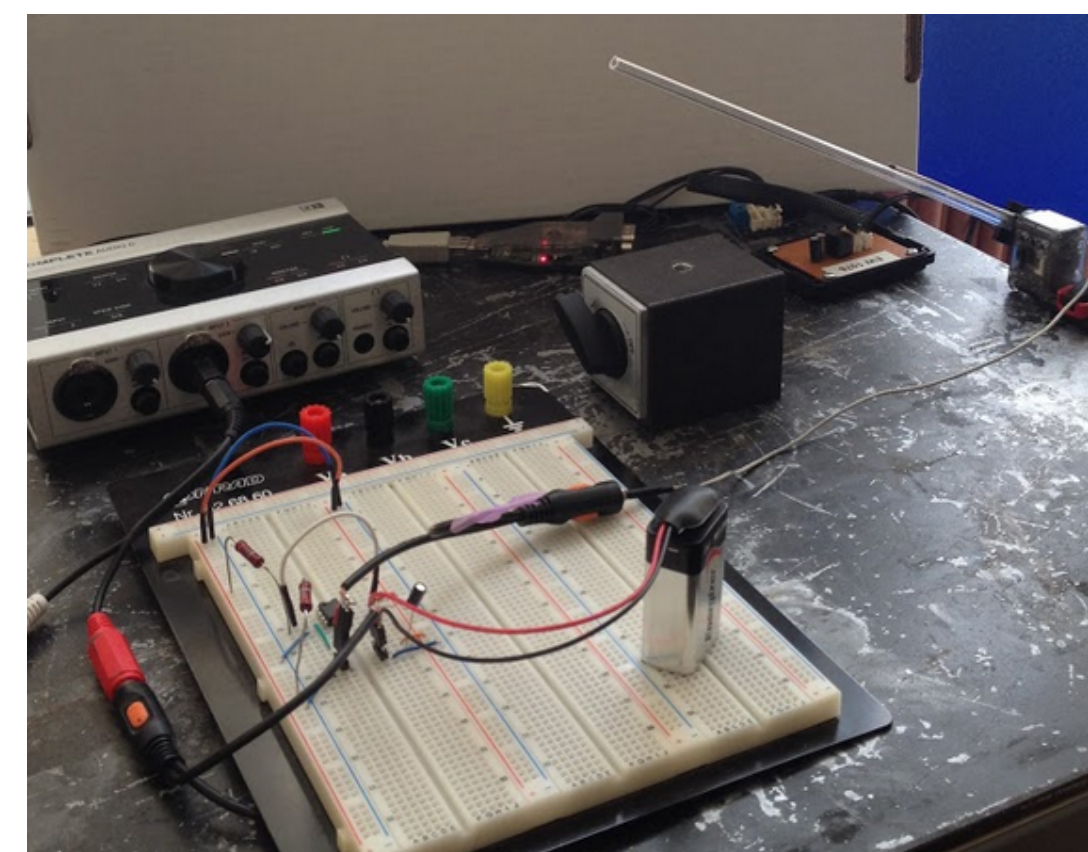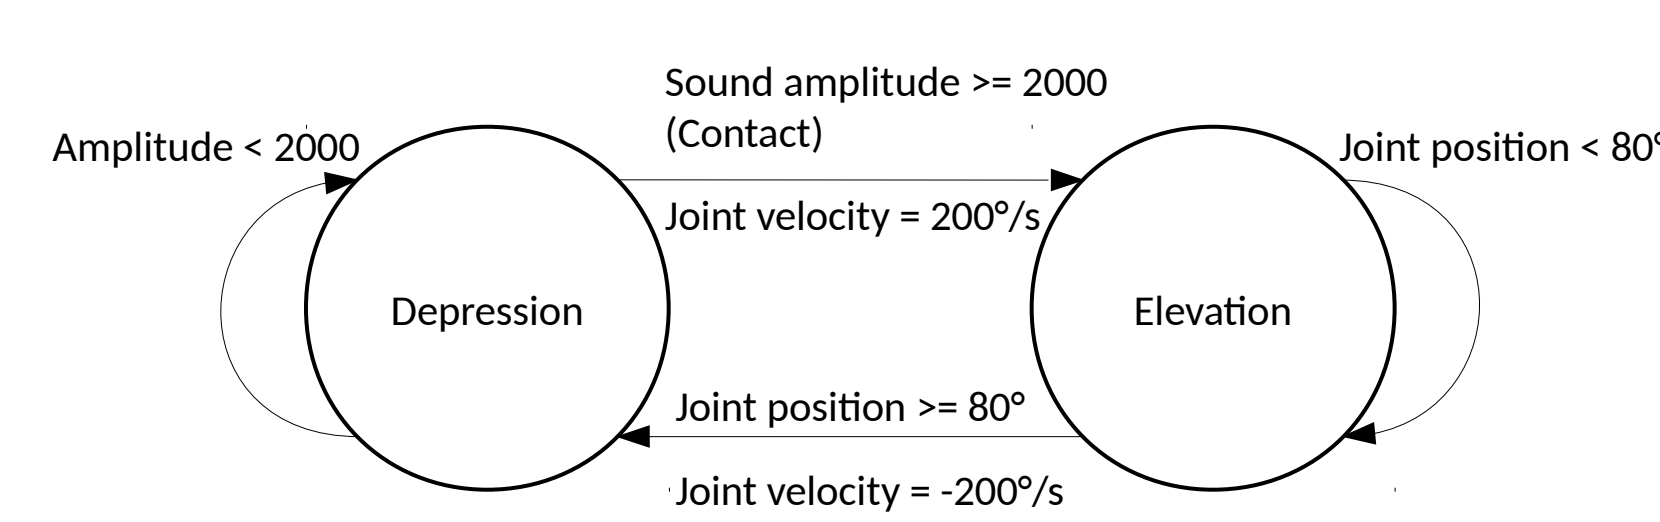

Data processing

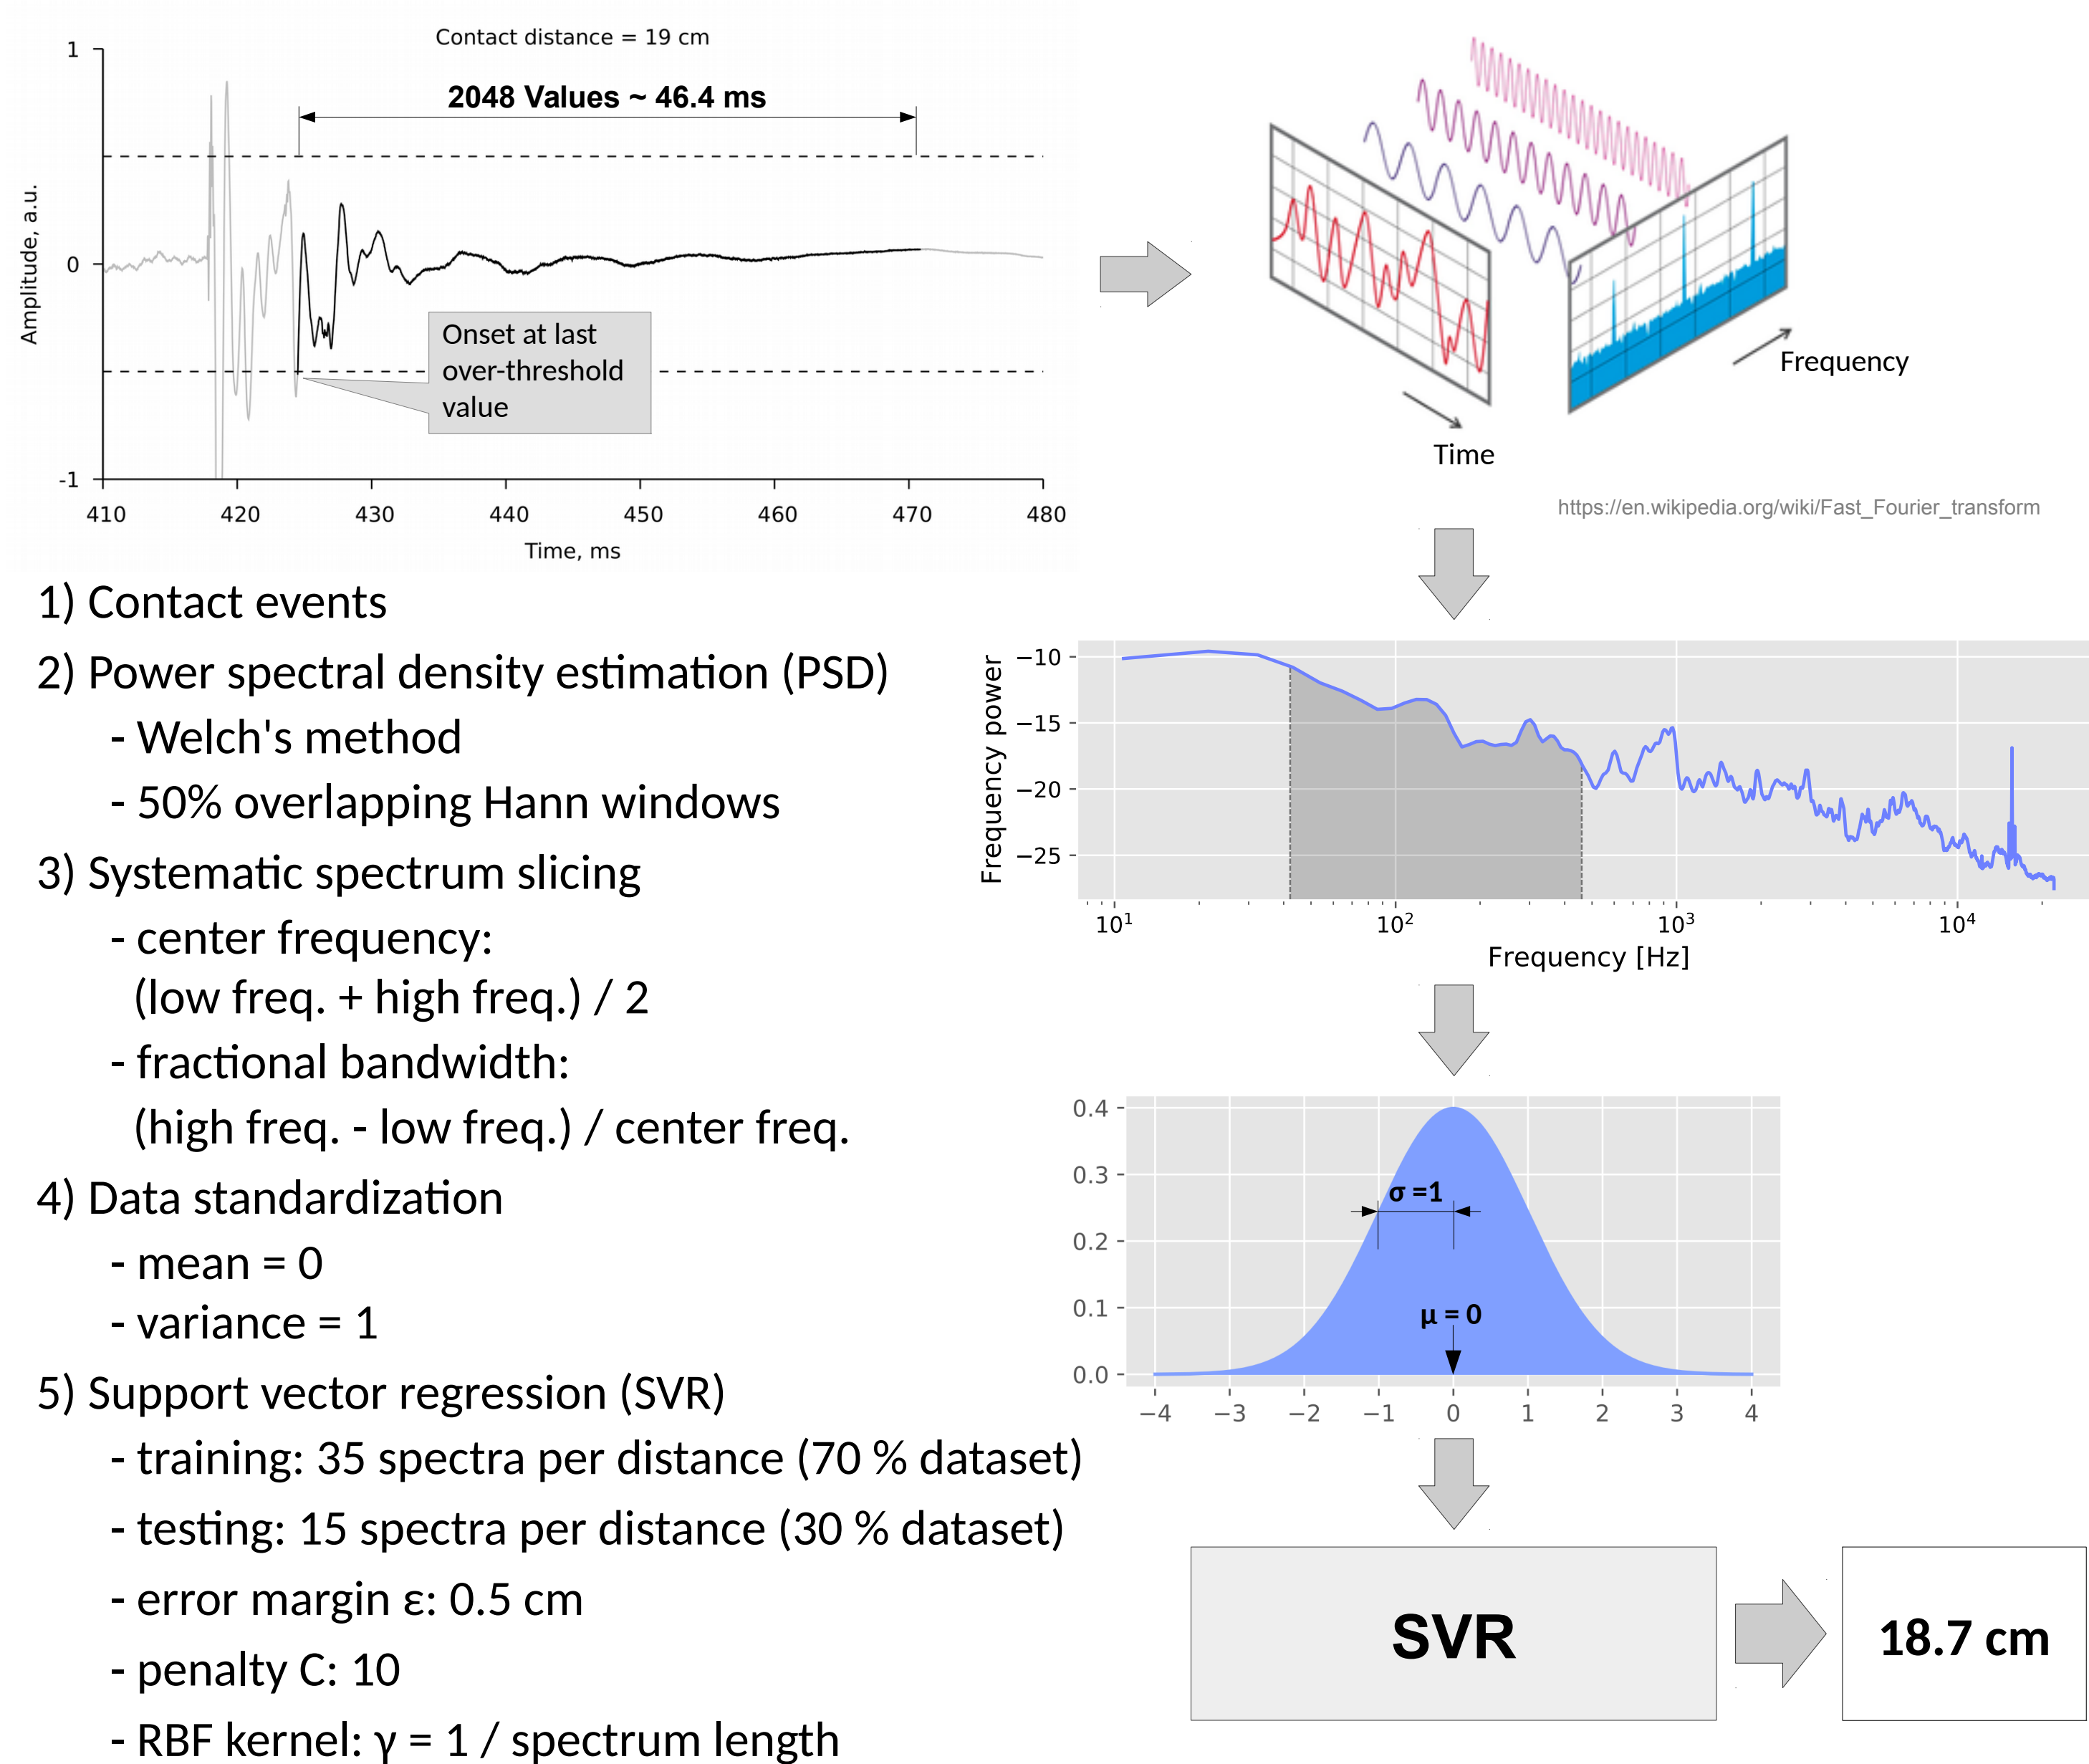


Results

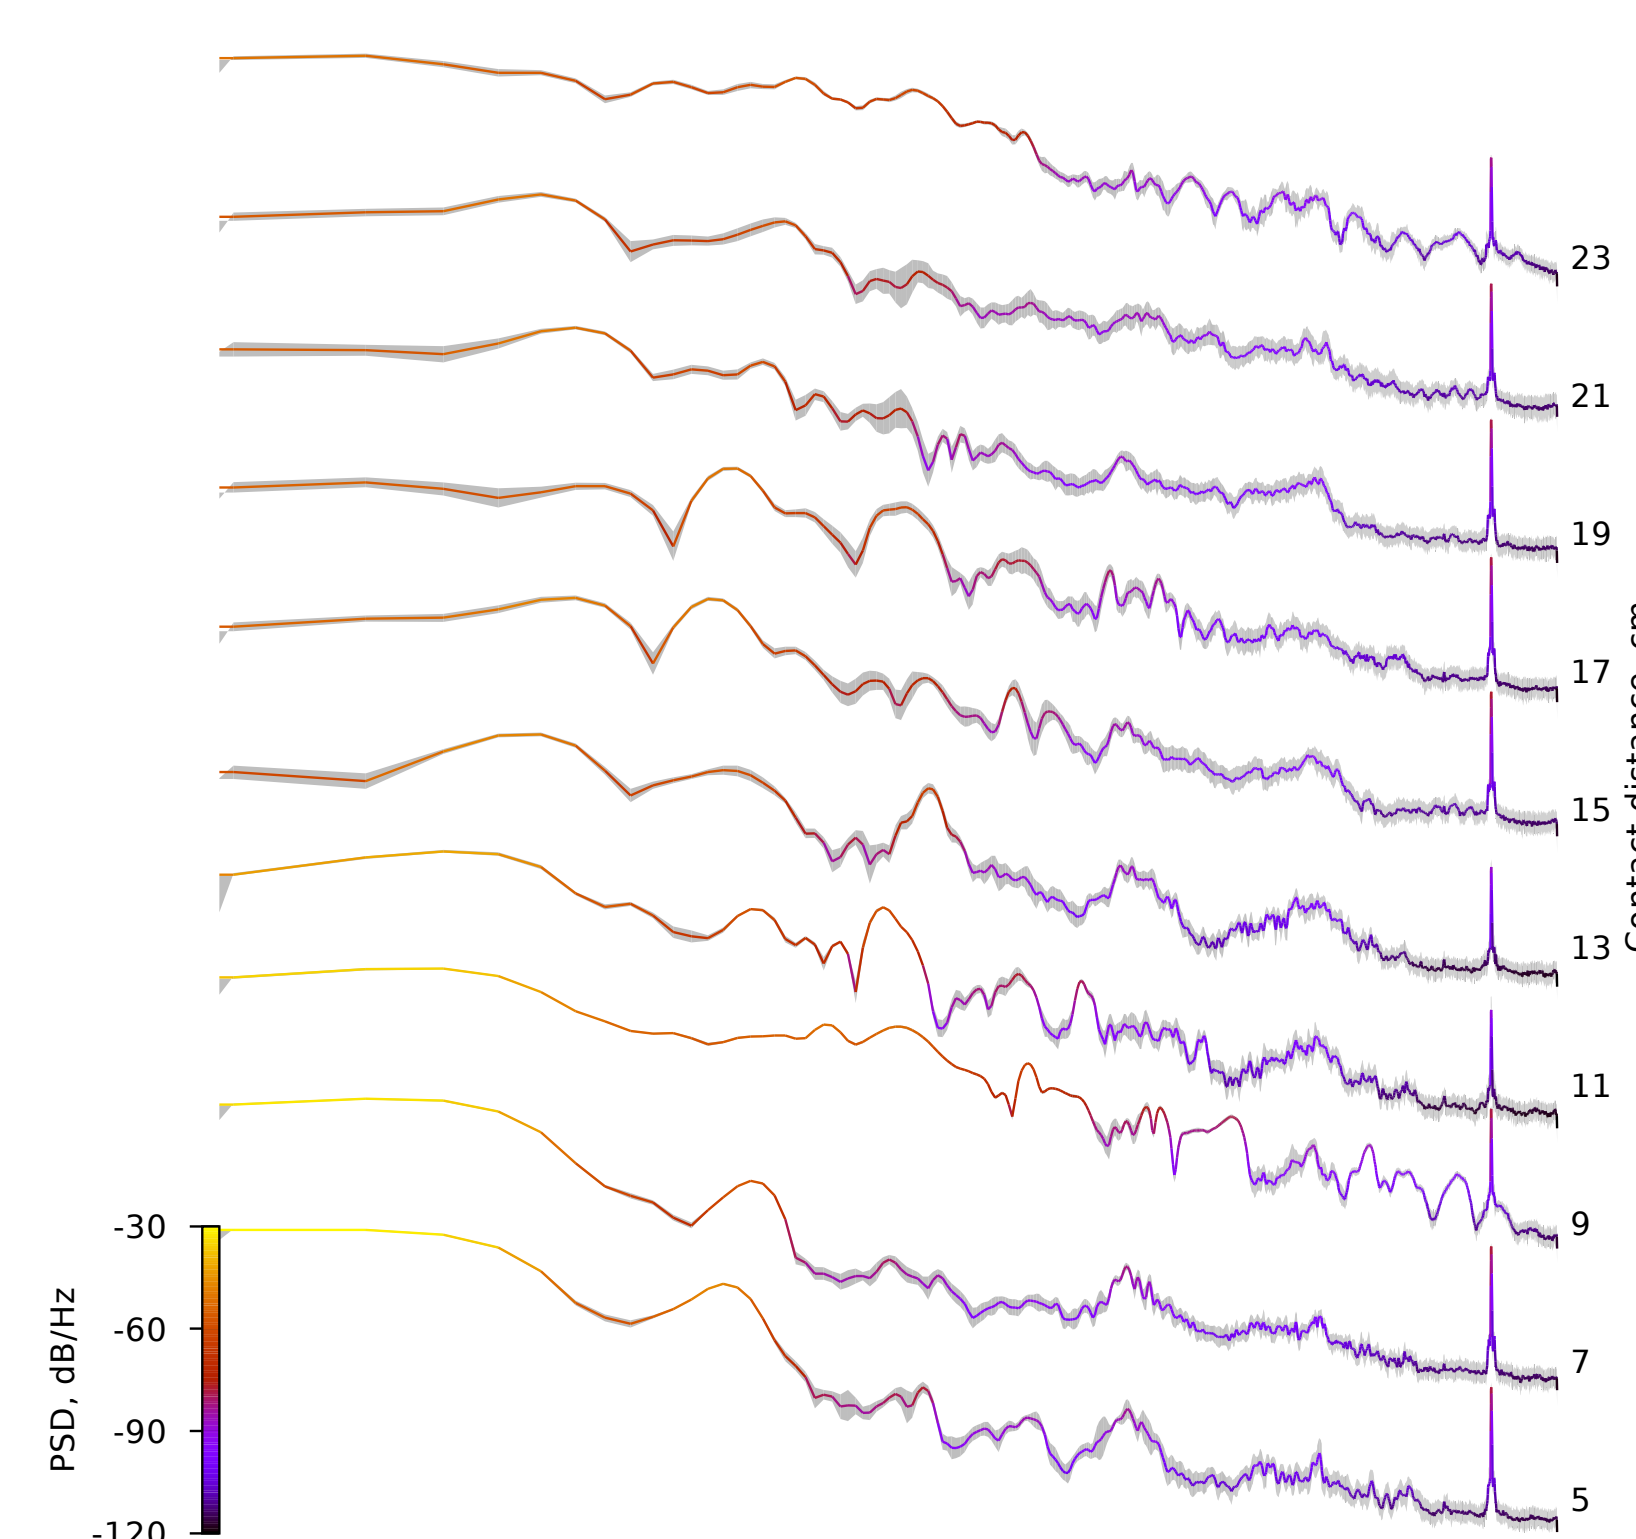


Mean Power Spectral Density (PSD)

- Consistent profile per distance (low standard deviation, grey shades)
- Distance-dependent spectral changes:
 - < 640 Hz smooth transitions
 - 640 – 5000 Hz high variability
 - > 5000 Hz similar low-power plateaus
 - ~16 kHz peak at sensor's resonance frequency

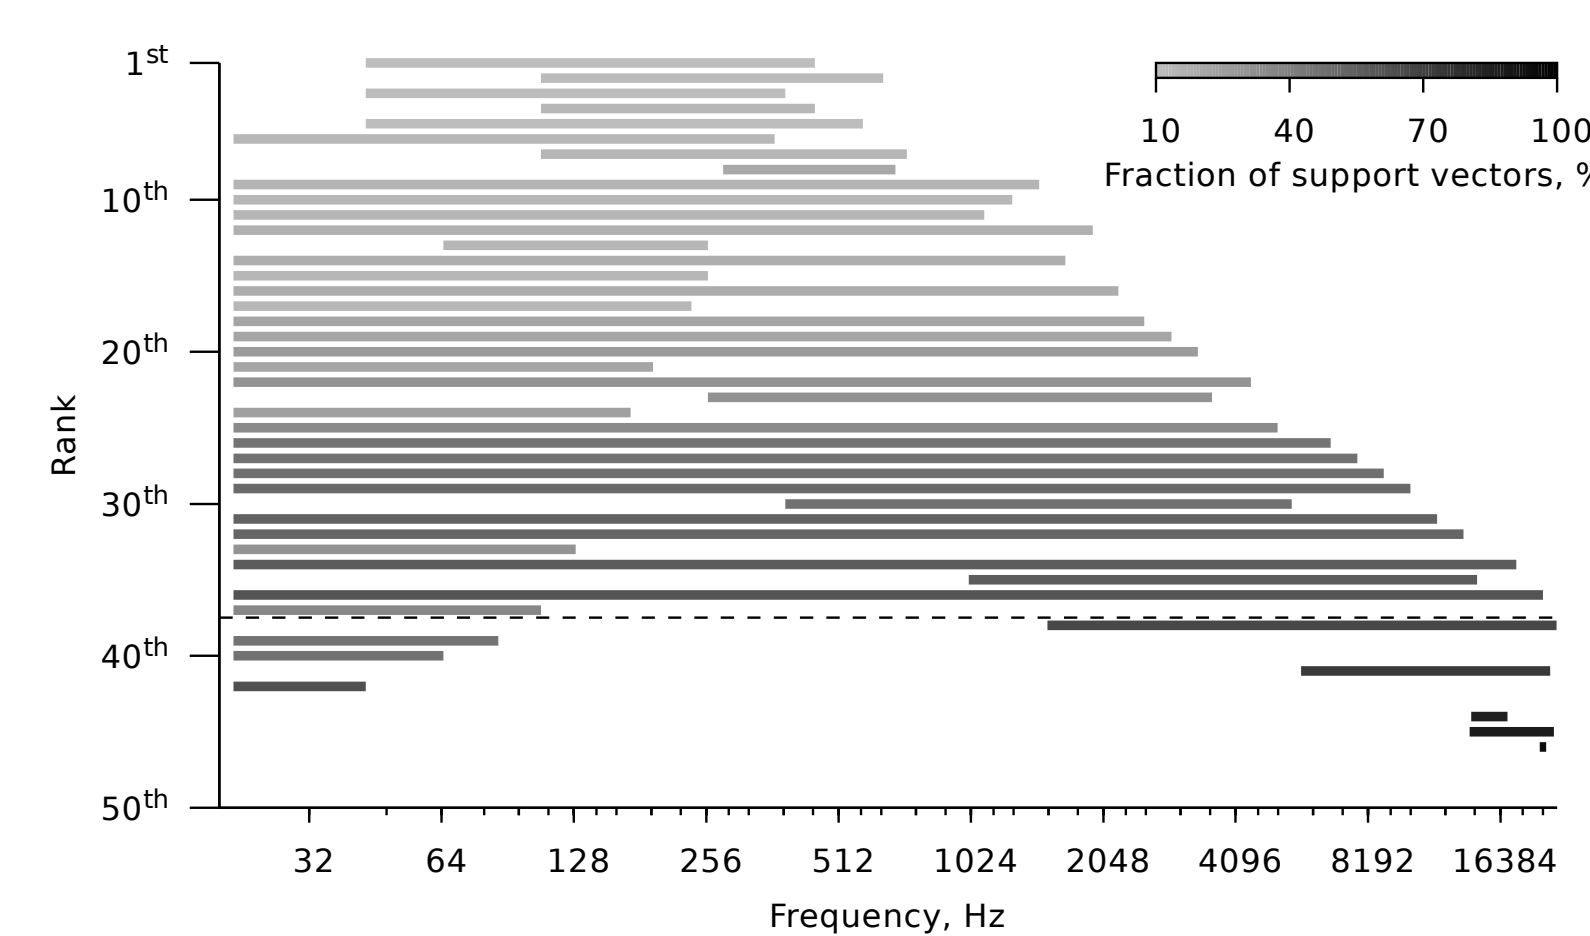

Best frequency bands for prediction

- Best of all: 43 – 452 Hz ($R^2 = 0.996$)
- 8 best bands below 640 Hz
- Only 4 out of 9 bands > 200 Hz with $R^2 > 0.95$
- Few wide bands all starting at 20 Hz

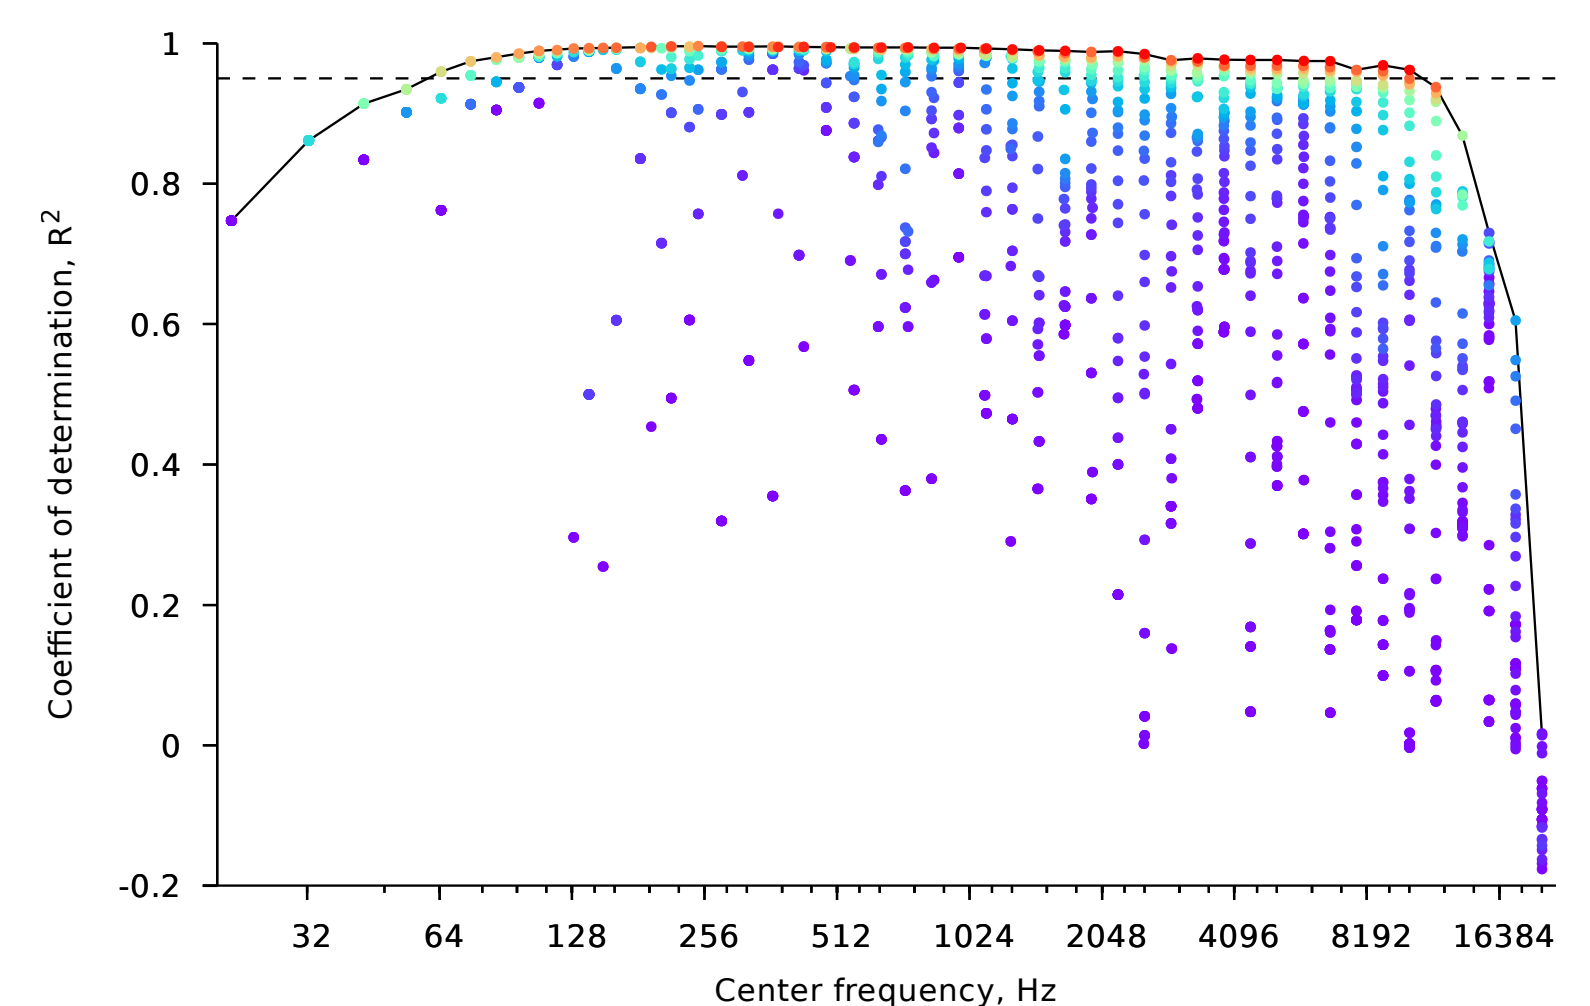


Prediction performance for each frequency band

- High scores ($R^2 > 0.95$) for
 - From narrow bands within low frequencies
 - To wide bands within higher frequencies
- Performance drops in the upper half of the frequency range (center frequency > 10 kHz)

Accuracy and precision of the best band (43-452 Hz)

- Average errors < 0.5 cm
- Estimate spread < 0.5 cm (except at 13 cm)
- 8 best bands below 640 Hz
- Distances < 10 cm higher precision, less accuracy
- Distances > 10 cm lower precision, higher accuracy

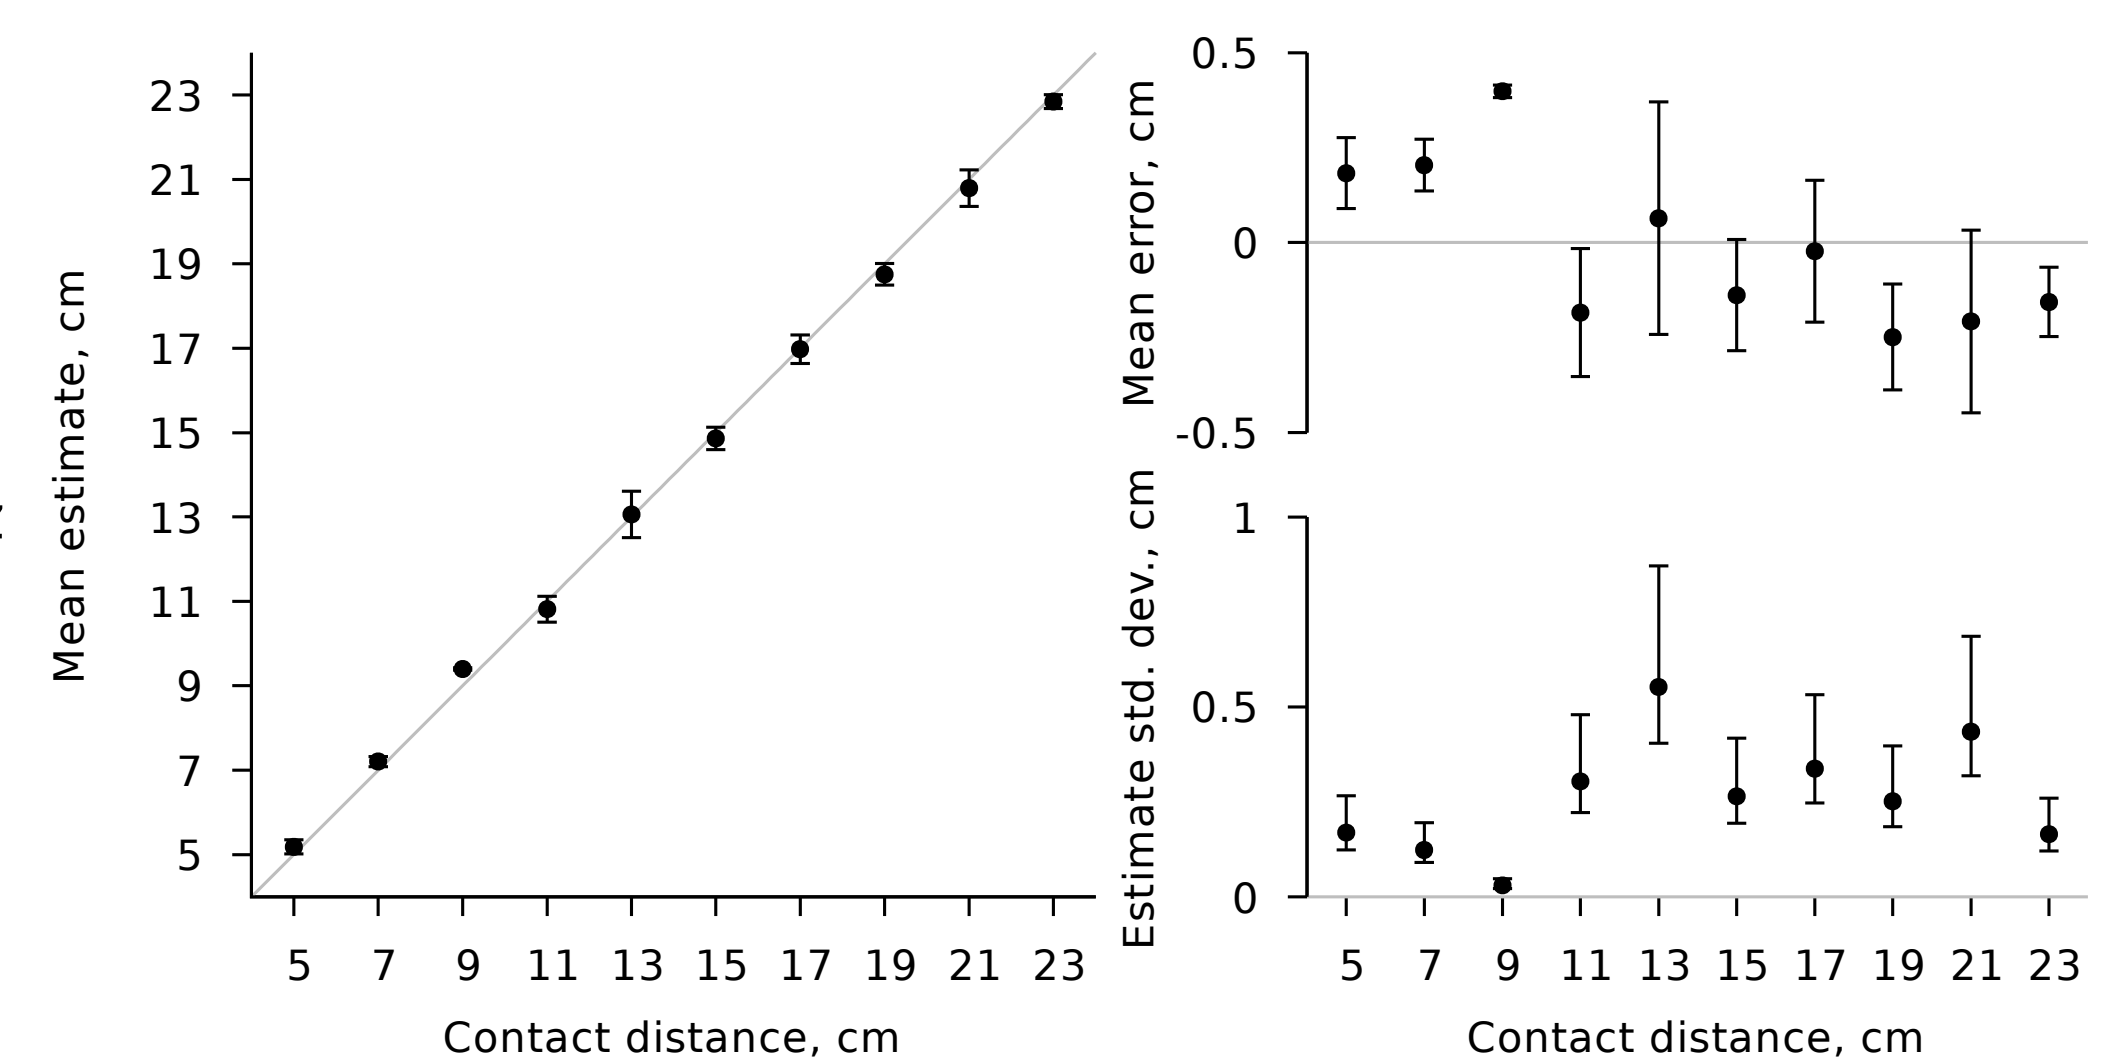

Conclusion and Discussion

- Contact distance can be estimated from various frequency bands, including relatively high-frequency ones.
- Power level also varies with contact distance, this is exploited by SVR
- In realistic scenarios, power level may vary with other unpredictable factors like antennal and/or obstacle speed
- How does our method generalize when antennal speed is varied?

- [1] Schütz, C., Dürr, V. (2011). Active tactile exploration for adaptive locomotion in the stick insect. Proc. R. Soc. Lond. B 366 (1581):2996-3005.
- [2] Staudacher, E; Gebhardt, M J and Dürr, V (2005). Antennal movements and mechanoreception: Neurobiology of active tactile sensors. Advances in Insect Physiology 32: 49-205.
- [3] Kim DE, Möller R (2004) A biomimetic whisker for texture discrimination and distance estimation. From animals to animats, 8, 140-149.
- [4] Hoinville, Harischandra, Krause & Dürr (2014). Insect-inspired tactile contour sampling using vibration-based robotic antennae. Living Machines 2014, 118-129.
- [5] Ueno, Svinin & Kaneko (1998). Dynamic contact sensing by flexible beam. IEEE/ASME Transactions on Mechatronics, 3(4), 254-264.