

ION OF A PERIODIC ACOUSTIC METAMATERIAL FOR MULTI-TONAL NOISE ATTENUATION

her Mechefske ^{†1}, Sebastian Ghinet ^{†1}, Behnam Ashrafi ^{‡2}, and Charly T. Kone ^{‡3}
 cherche Acoustique-Signal-Humain, Université de Sherbrooke, Québec, Canada.
 ical and Materials Engineering, Queen's University, Kingston, Ontario, Canada.
 ice, National Research Council Canada, Ottawa, Ontario, Canada.
 ring Technology Center, National Research Council Canada, Montreal, Canada.

eriodic Helmholtz resona-
 or low-frequency noise at-
 he finite element method
 ion performance of porous
 ic Helmholtz resonators
 in the cavity and multiple
 obtained. Abbad et al. [3]
 ivity Helmholtz resonator
 observed that the TL was
 ince with a degradation of

itic metamaterial based on
 taining a damping material
 is attached is investigated
 shed to the membrane is a
 sed metamaterial presents
 one peak is obtained using
 onstrated that the resonant
 peaks can be controlled by
 the added mass.

nd analysis of
 naterial
 nator with extended neck
 n the form of a membrane
 with cylindrical shape is at-
 ne. The radius of the added
 ness by H. The resonator is
 porous material. Figure 2
 umerical geometry and the
 C).
 ed solid mass are modeled
 the solid mechanics mod-
 ile the air inside the neck is

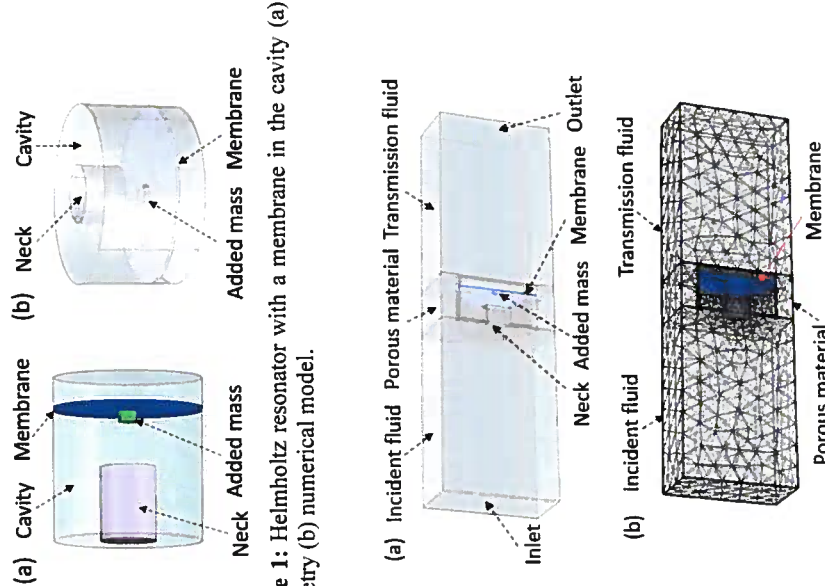


Figure 1: Helmholtz resonator with a membrane in the cavity (a) geometry (b) numerical model.

Figure 2: Cut-out view of the acoustic metamaterial (a) geometry of the PUC (b) mesh of the PUC.

The membrane material is ethylene vinyl acetate rubber with a thickness of 1 mm, Young's modulus of 5 MPa, density of 660 kg/m³ and Poisson's ratio of 0.45. The radius of the neck is set to 15 mm and the diameter of the resonator cavity is 70 mm with a length of 40 mm, which is equal to the thickness of the porous material. Periodic boundary condi-

length of the neck is 15 mm and the membrane is located at 10 mm from the bottom inner wall of the resonator cavity. The TL with a conventional resonator shows one resonant peak of 43 dB at 692 Hz. When a membrane is integrated into the resonator cavity without added mass, the TL shows 2 peaks of 47 dB and 42 dB at 596 Hz and 1044 Hz respectively for membrane free boundary conditions and 5 peaks are observed with membrane fixed boundary conditions.

Figure 4 shows the effect of the added mass size on the TL. The length of the neck is set to 20 mm and the membrane with a thickness of 1 mm is located at 8 mm from the bottom inner wall of the cavity. The added mass is made of steel with a thickness of 2 mm and radius R varying from 1 mm to 6 mm.

With a radius R of 1 mm, the TL resonant frequencies in Fig.4 are 510 Hz, 612 Hz, 884 Hz and 1006 Hz where the TL peaks values are 29 dB, 38 dB, 30 dB and 27 dB respectively. With a radius of 4 mm, the resonant frequencies are 510 Hz, 646 Hz, 956 Hz and 1086 Hz. Apart from the first resonant frequency, the other three resonant frequencies with R= 4 mm have increased compared to R=1 mm. With R=6 mm, 3 resonance frequencies are observed which are respectively higher than the first three resonance frequencies with R=1 mm and R=4 mm. The TL resonance frequencies increase when the radius of the added mass increases. The resonance frequencies can then be controlled by adjusting the radius of the added mass.

Figure 5 illustrates the effect of the added mass material properties on the TL. The distance between the membrane and the bottom wall of the cavity is 8 mm. The length of the neck is 20 mm while R and H are set to 3 mm. The TL in Fig. 5 presents 6 resonant frequencies when the added mass is made of steel and 5 resonant frequencies are observed when the added mass is made of aluminum.

3 Conclusion

The TL of an acoustic metamaterial based on a periodic Helmholtz resonator was investigated using FEM. A membrane was integrated within the resonator cavity to which small solid masses were attached. It was demonstrated that the multiple TL resonant frequencies and peak values generated can be controlled by adjusting the parameters (size and material properties) of the added mass.

Acknowledgments

The authors would like to acknowledge the National Re-

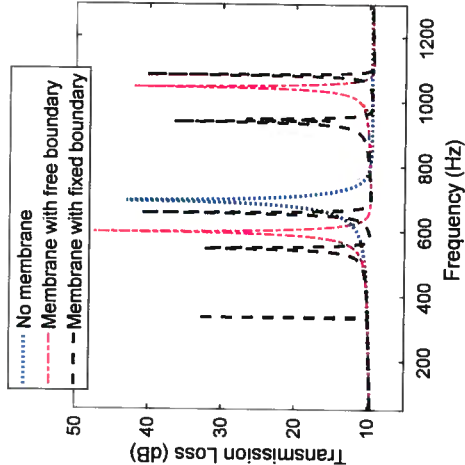


Figure 3: Comparison of the transmission loss.

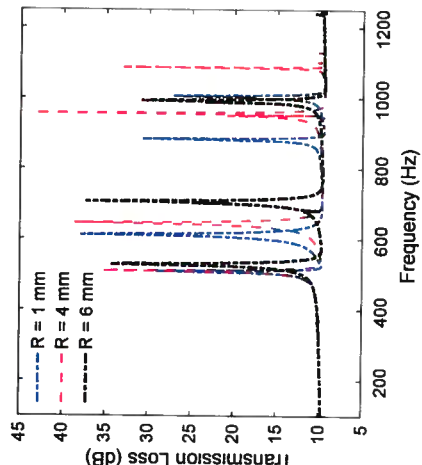


Figure 4: Effect of the added masses on the transmission loss.

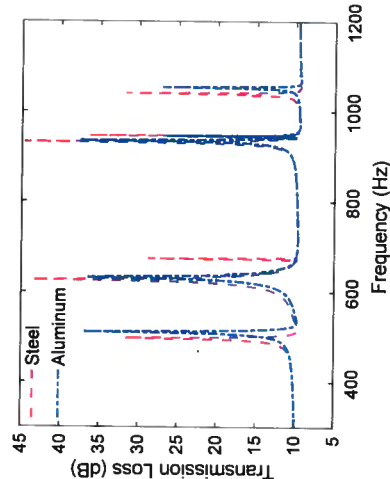


Figure 5: Effect of the added mass material properties on the TL.