



## ECDC WORKING AT HEIGHT POLICY

1. Working at height of 1.8 meters or higher above the ground cannot proceed unless:
  - A fixed platform, scaffold, mobile tower with toe-boards or mid and top handrails are verified and checked by competent person(s) and tagged safe for use.
  - A visual inspection of the scaffold or mobile tower is completed and green scafftag (Safe for Use) is attached to the access of the scaffold;
  - Where available use a mechanized man lifter;
  - Use of ladders should be avoided;
  - Fall arrest equipment, capable of supporting at least a static load of 2275 kg (5000 lbs) per person, is used and has:
    - a. A proper anchor mounted, preferably overhead;
    - b. Full body harness with double latch self-locking snap hook at each connection;
    - c. Synthetic fiber lanyards;
    - d. Shock absorber;
  - Fall arrest equipment shall limit free fall to 2 meters (6 feet) or less;
  - A visual inspection of the fall arrest equipment and system is completed, and any damaged or activated equipment shall be taken out of service.
  - Personnel are competent to perform the work.
  - For man riding winch, make sure the correct PTW procedures are used.

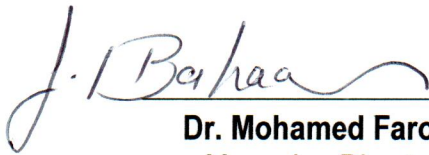

**Dr. Mohamed Farouk**  
Managing Director



**Mr. Xu Yong**  
GM and Managing Director