Features:

1. Support two-way operation, suitable for model boats, tanks and other types of RC models.

2.Support 5A current to ensure strong and stable power output.

3.Adapt 2S/3S lithium batteries to meet different power requirements.

4. Adopting high quality material and heat dissipation structure to ensure long time stable work.

5. Modular design for quick installation, suitable for DIY enthusiasts.

Parameter:

Support voltage: 6V-14V

Support current: single 5A, single peak 7A (for 2/3S lithium batteries)

Each group of motor wires directly connected to the motor, do not connect the wrong, otherwise it will damage the ESC

Function Introduction:

Mixed control mode (default)

(Throttle/steering mode): 2 or 3 channels (2 channels are recommended because 2 channels automatically return to the center) to control the throttle 1 channel (or 4 channels) to control the speed difference steering, throttle ratio 100%, steering ratio 100%, steering priority. Suitable for: Tanks, 4WD cars

Dual independent: equivalent to two independent ESCs.

Dual-channel synchronization: under the mixed control mode, the single yellow wire is not connected, or the single yellow wire is connected to the receiver “-”, the two motors will be synchronized by the throttle control.

With runaway protection (loss of signal (in an accident, the signal line is broken), in order to protect the safety motor, need to throttle back to the center, to re-unlock.

Power-down protection: supply voltage below 4V, ESC restart protection (for example: high-current discharge, poor performance of the battery voltage drop is too large, ESC protection, protection of the motor after the motor stops, and the motor stops after the battery voltage is restored to return to the center, and then hear the motor unlocking sound)


There is overcurrent protection (but the use of repeated overcurrent, there may be burned out short circuit)

Overheating protection (around 130℃)

BEC output: 5V maximum 1.5A to meet the needs of the receiver, flight control power supply (Note: the on-board microcontroller is also 5V power supply, if the 2S lithium plug directly into the receiver, the microcontroller burned in seconds (maximum withstand voltage 6.5V))


Package include:

Brush ESC module *1

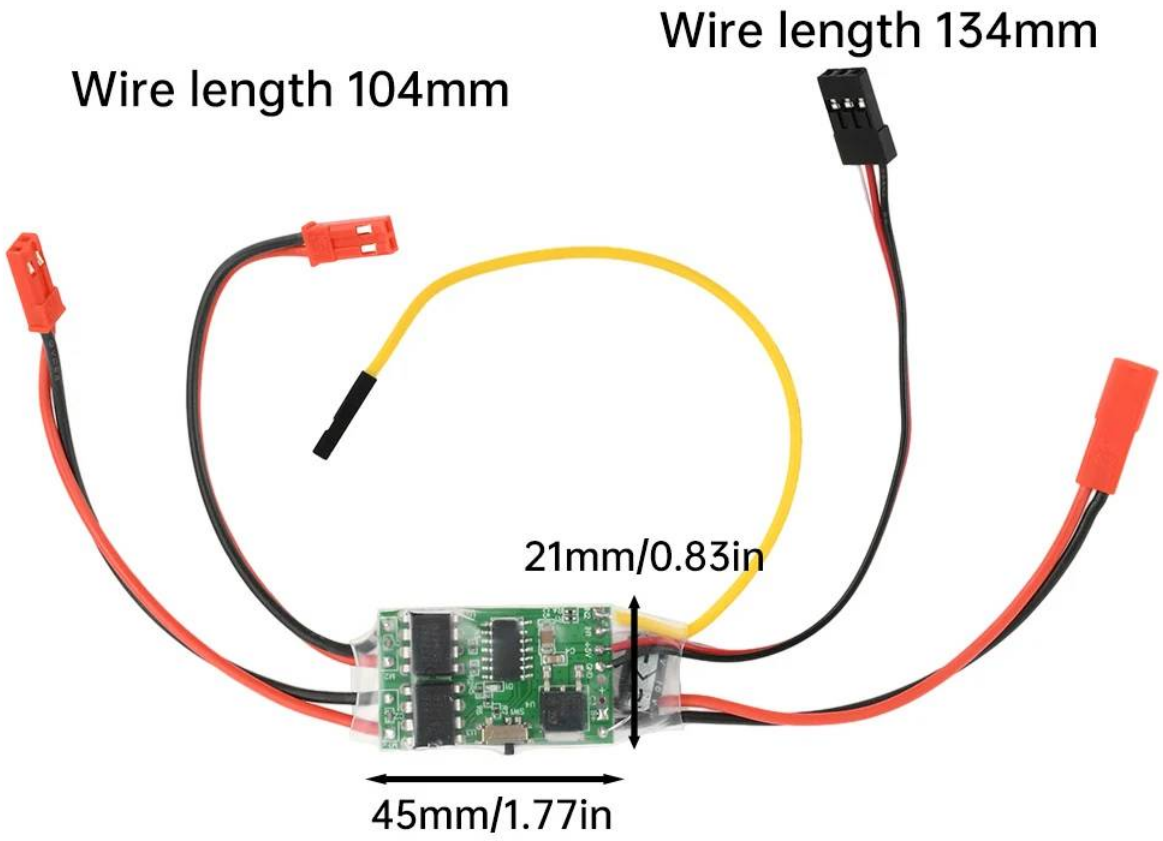


# 2S 3S Li-ion battery 5A

Supports 5A current to ensure strong and stable power output.

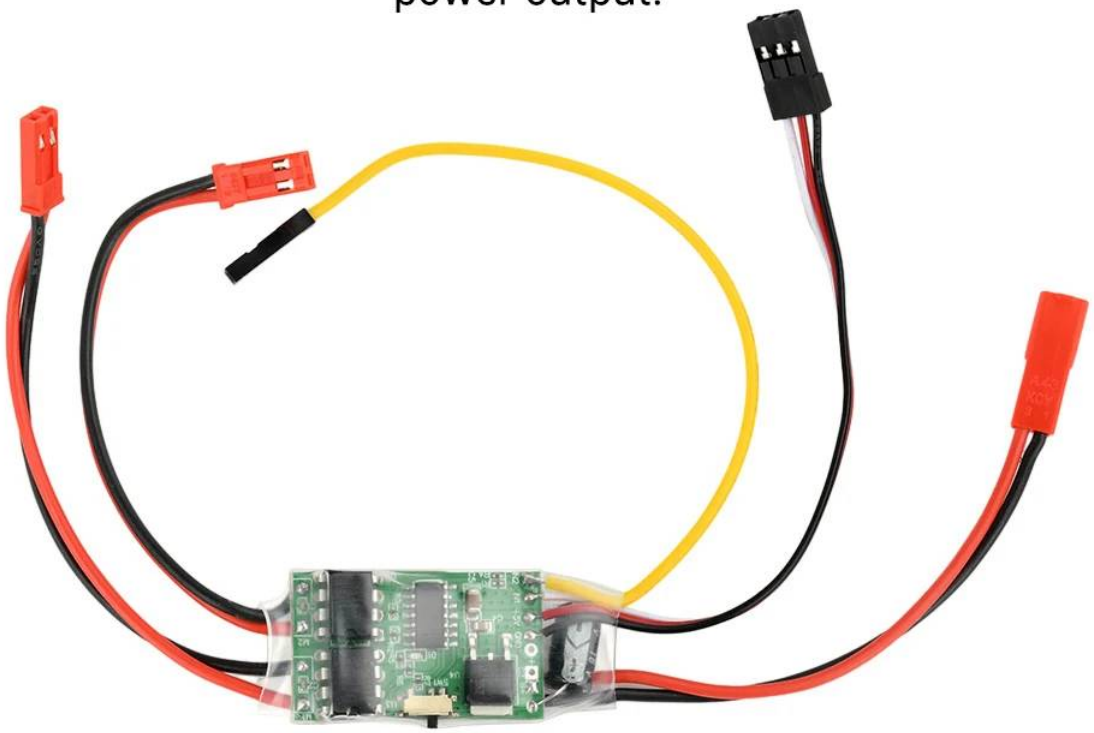


# Toggle Switch

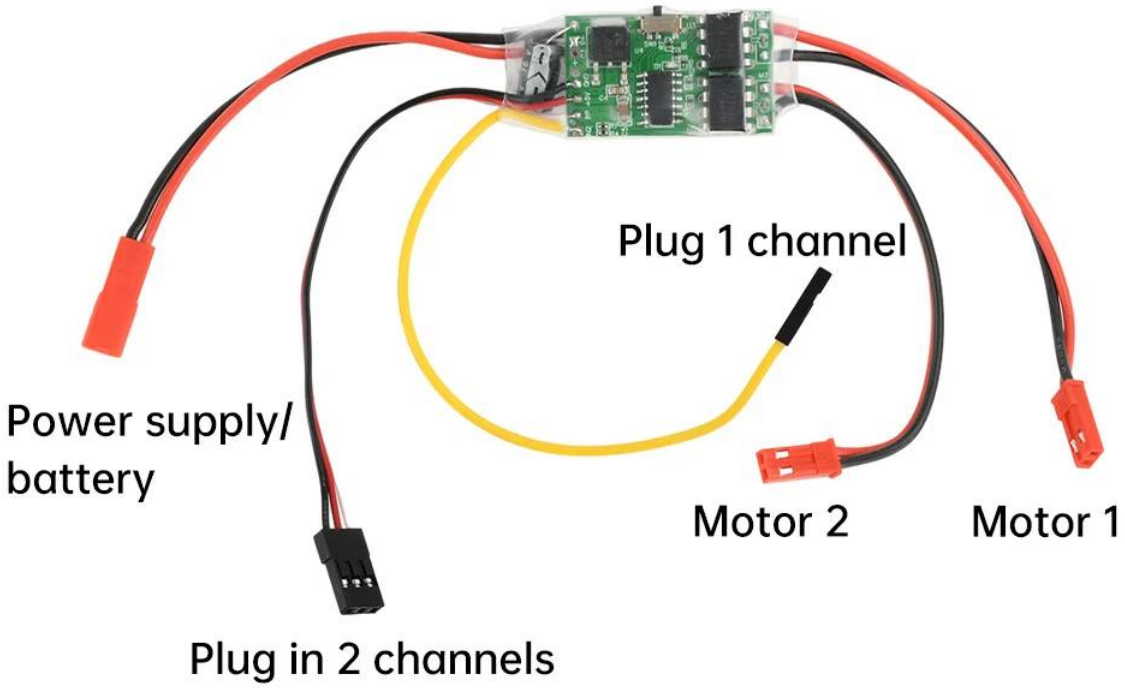


# Dual Bidirectional ESC

Supports bi-directional operation, suitable for model ships, tanks and other types of RC models

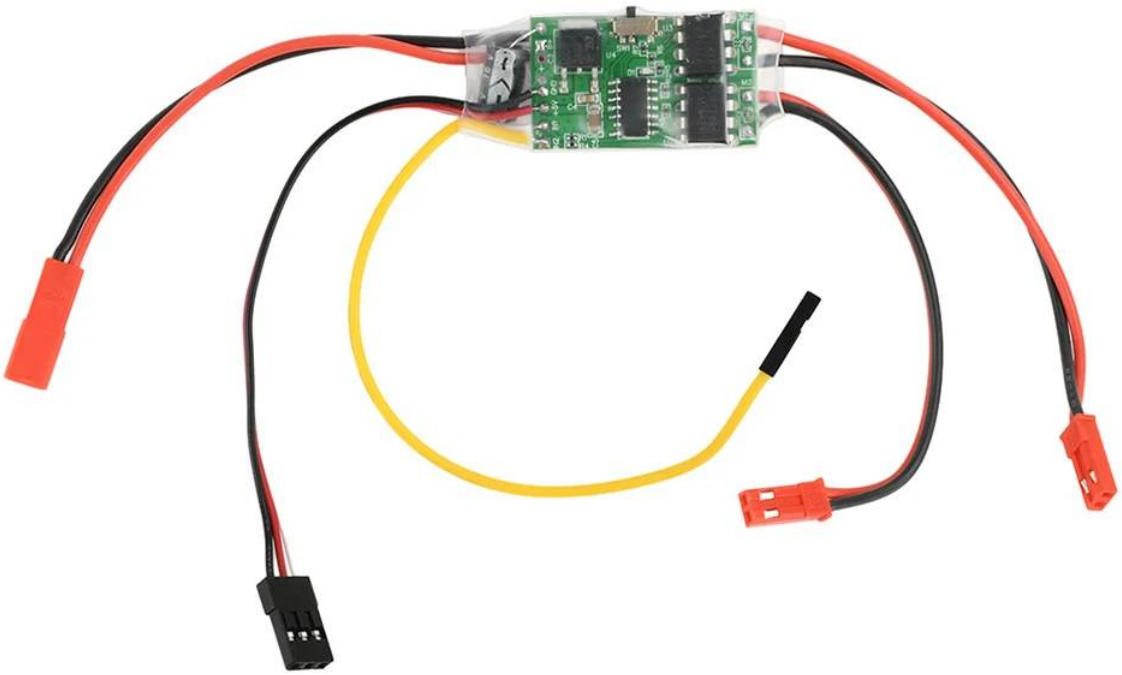

# Brush ESC

Adopting high quality material and heat dissipation structure to ensure long time stable work.

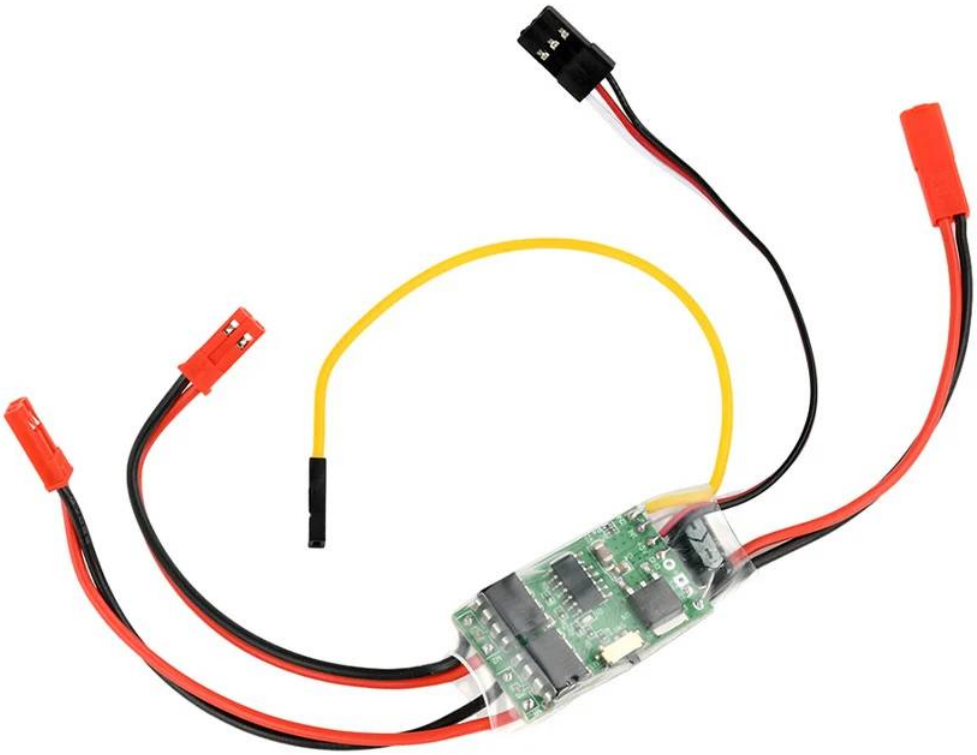


# Product Parameters


Support voltage: 6V-14V

Support current: single 5A, single peak 7A (for 2/3S lithium batteries)

Each group of motor wires directly connected to the motor, do not

connect the wrong, otherwise it will damage the ESC

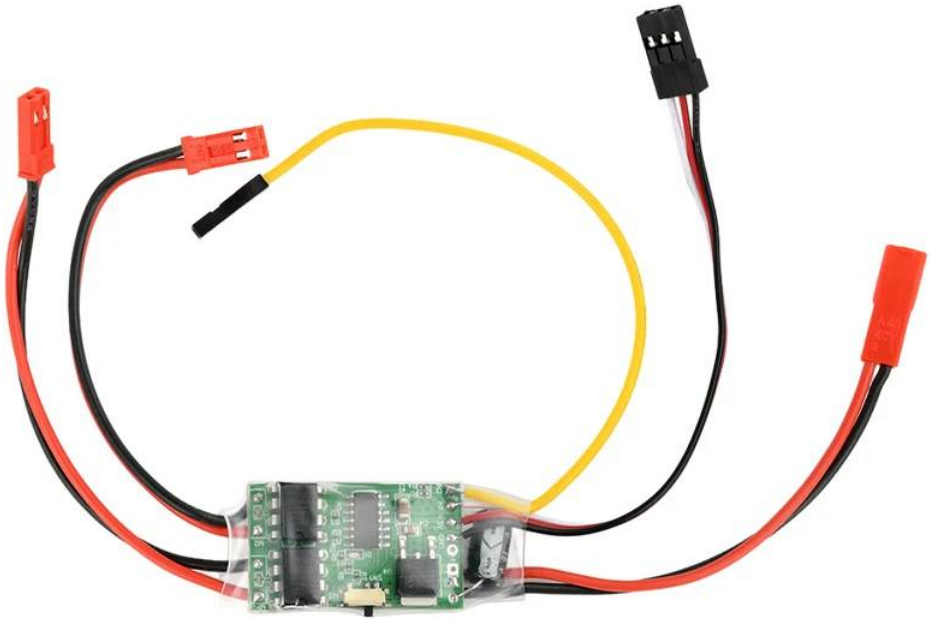


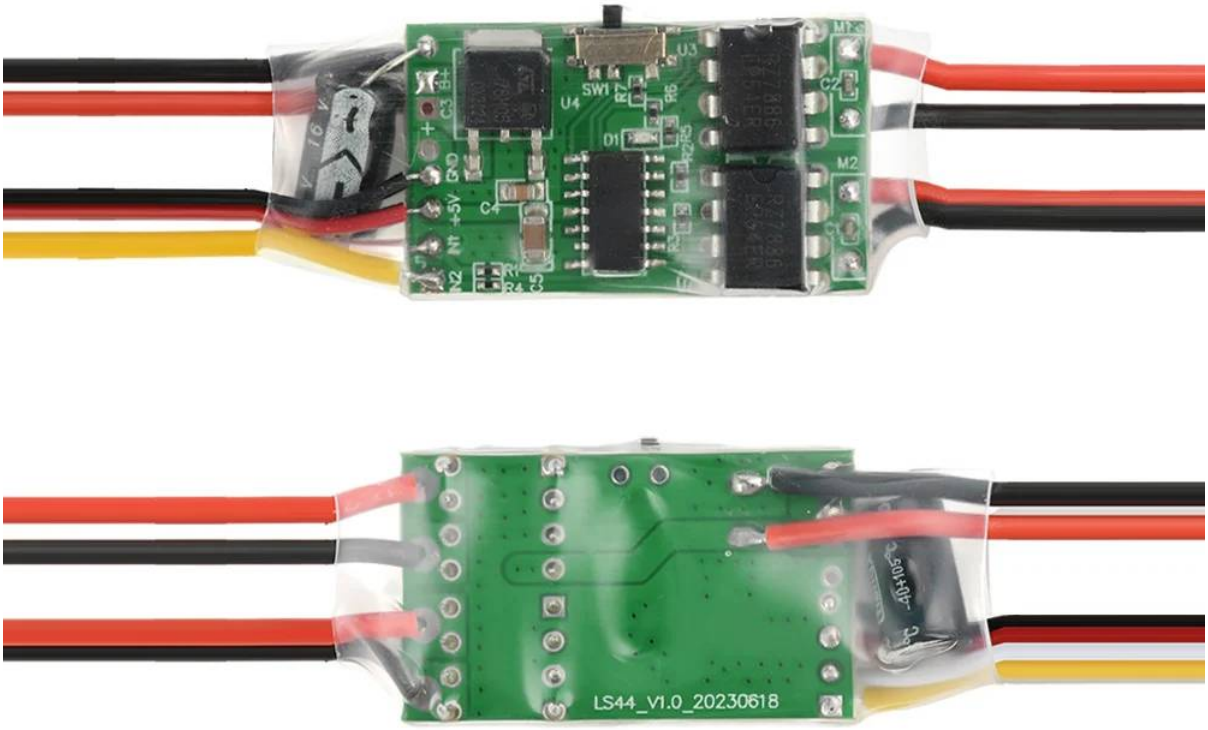
B+
+
GND
+5V
N1
N2
SW1
U4
U3
D1
C4
C2
M1
M2


LS44_V1.0_20230618

# 2S 3S Li-ion battery 5A

Supports 5A current to ensure strong and stable power output.

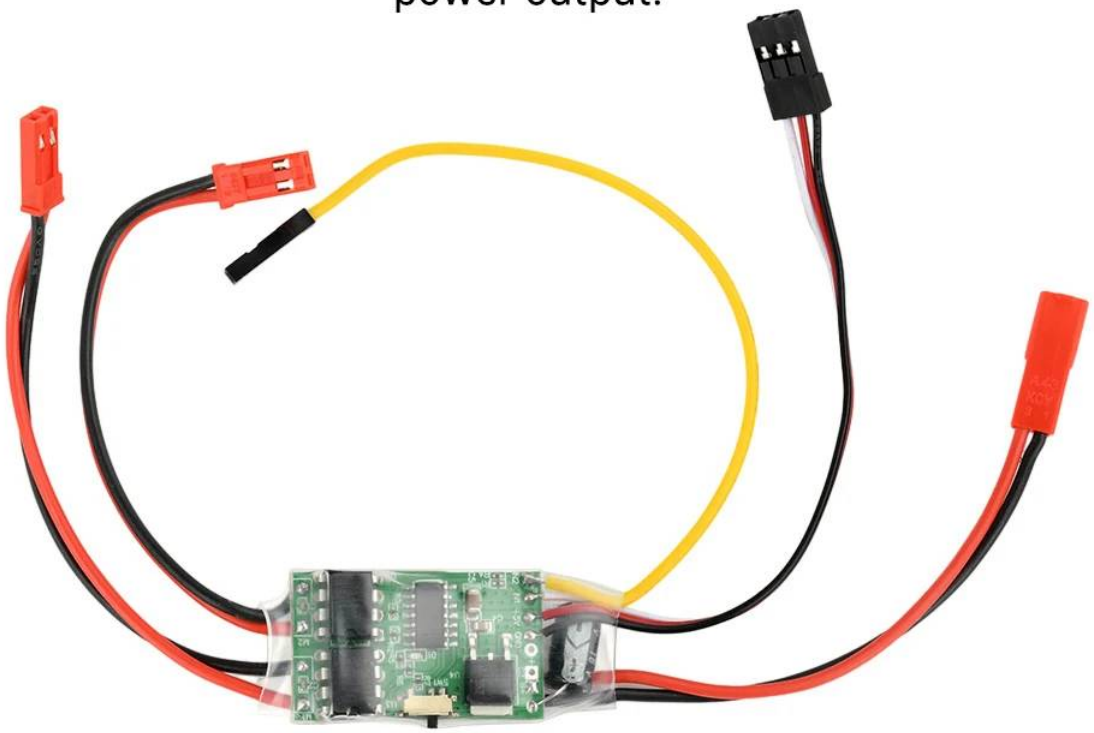


LS44_V1.0_20230618
-40+105°C

# Function Description

Mixed control mode (default)
(Throttle/steering mode): 2 or 3 channels (2 channels are recommended because 2 channels automatically return to the centre) control throttle 1 channel (or 4 channels) control speed difference steering, throttle ratio 100%, steering ratio 100%, steering priority. Suitable for: Tanks, 4WD small cars.

Dual independent: equivalent to two independent ESCs.

Dual-channel synchronisation: in mixed control mode, the single yellow wire is not connected, or the single yellow wire is connected to the receiver '-', the two motors are synchronised to be controlled by the throttle.

With runaway protection (loss of signal (in an accident, the signal line is broken), in order to safe motor protection, need to throttle back to the middle, re-lock.

Power down protection: supply voltage below 4V, ESC restart protection (for example: high current discharge, poor performance battery voltage drop is too large, ESC protection, protection after the motor stops, and the motor stops after the battery voltage recovery, back to the centre, and then hear the motor unlocking sound)

There is overcurrent protection (but the use of repeated overcurrent, there may be burned out short circuit)

Overheating protection (around 130℃)

BEC output: 5V maximum 1.5A to meet the needs of power supply to the receiver, flight control (Note: the on-board microcontroller is also 5V power supply, if the 2S lithium directly into the receiver, the microcontroller burned in seconds (maximum withstand voltage 6.5V)