

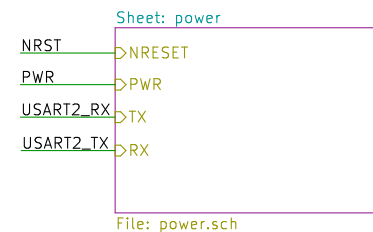









ARM VDD Filtering Requirements: 100nF on each VDD + 4.7uF
ARM VDDA Filtering Requirements: 10nF + 1uF

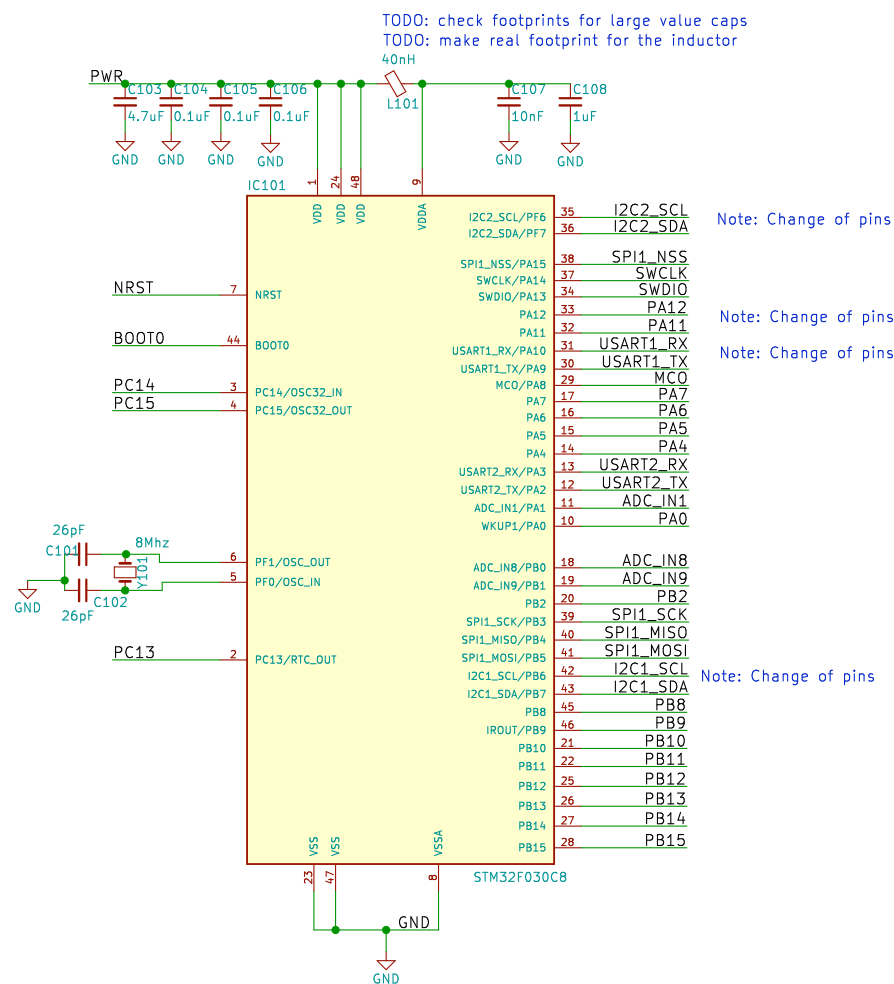

ARM Power Requirements: 2.4V to 3.6V
 FTDI Power Requirements: 4.0V to 5.0V
 Regulator Power Requirements: 3.75V to 6V

FTDI Power Filtering Requirements: 100nF and 4.7uF
 FTDI 3V3 Pin needs 0.1uF cap

Regulator Power Filtering Requirements: 1uF on input and output

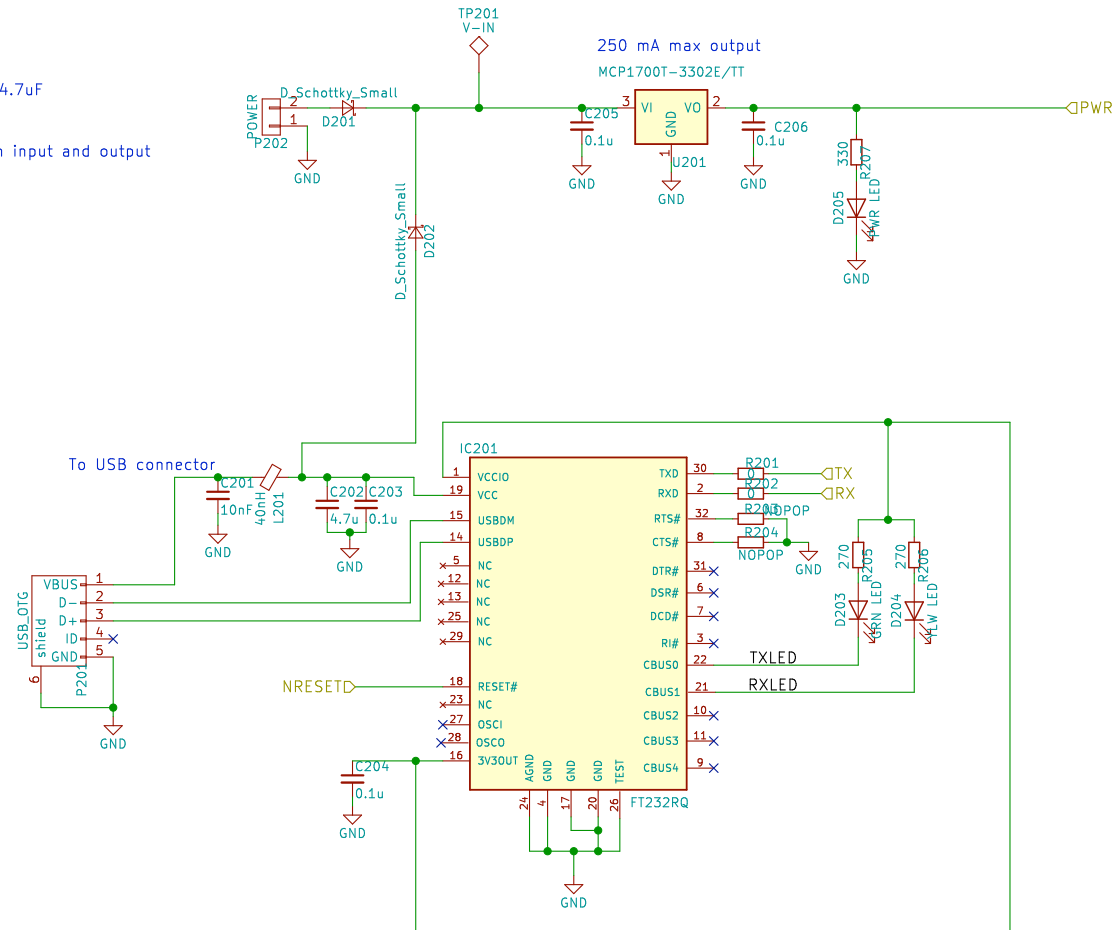

Sheet: /power/
 File: power.sch

Title:

Size: A4 Date:
 KiCad E.D.A. kicad (5.1.4-0-10_14)

Rev:
 Id: 2/3

