

4 NAMES AND FUNCTIONS OF RCU

4.1 Summary

This chapter describes the names and functions of components of the remote control unit (RCU).

CAUTION

- Use finger to press the display keys on the operation panel.
Using a ball point pen or other pointed object can damage the operation panel.

NOTE

- The contents of this section are applicable only when the machine is delivered in the simple substance.

NOTE

- For information on operation procedures and functions of the remote control unit, refer “5 FUNCTIONS AND OPERATIONS OF RCU” .
- For information on production procedures, refer “6 PRODUCTION” .

4.2 Components and Functions of the Remote Control Unit (RCU)

This chapter describes the components and functions of the remote control unit (RCU) using the figure below.

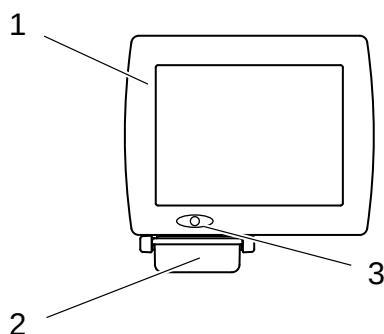


Fig.4-1 Remote Control Unit

Table 4-1 Functional Description of the Remote Control Unit

No.	Name	Functional description
1	Operation panel	Used to input settings and display data.
2	Printer(option)	Used to print out statistical data, product settings, etc.
3	Camera	Used to take photos.

4.3 Operation Panel and Data Entry

To enter numbers, characters and symbols, use the operation panel.
Before entering data, always call up the relevant setting screen.

4.3.1 Operation panel view

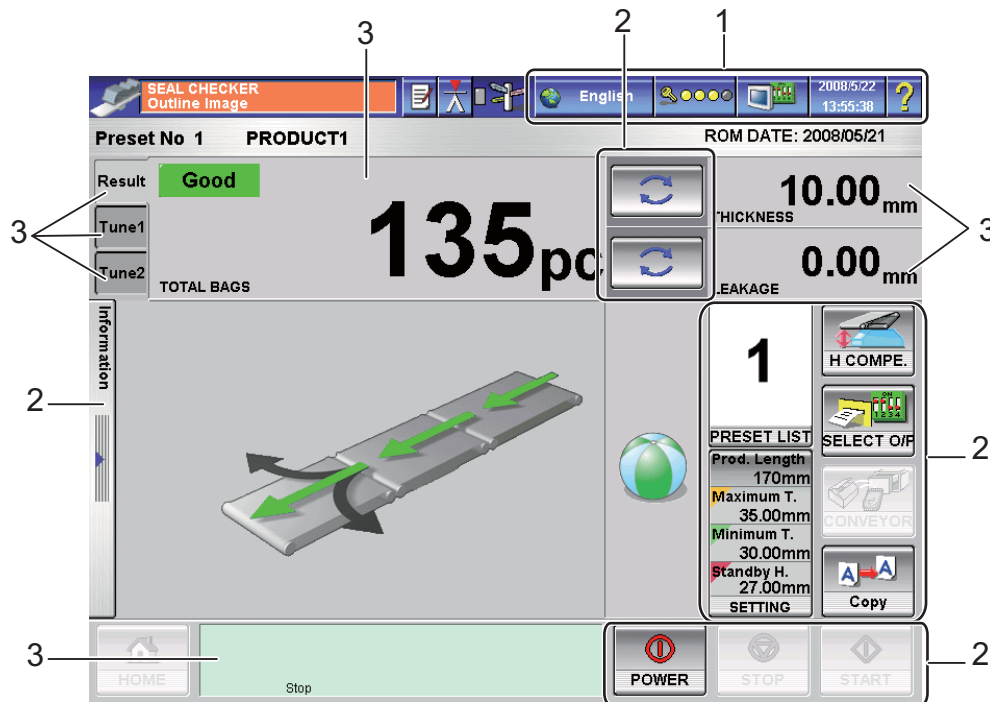


Fig.4-2 Operation Panel View

Table 4-2 Operation Panel Functions

No.	Name	Function
1	Upper setting bar	These are displayed at the top of the screen. These are used to configure the use environment for the operation panel.
2	Menu keys	These are displayed in an embossed frame. By pressing each of these keys, the user can change the screen or operate the equipment.
3	Status displays	These are displayed in a plane frame. These indicate the current operation status and error contents.

NOTE

- The above figure is an example. The menu keys and status displays may be different depending on the current menu and operation level.

< Menu Keys >

Operation keys include the following keys as well as the normal keys.


Table 4-3 Types and Displays of the Main Operation Keys

Type of key	Example of display	Functional description
Lamp key		Lamp turns ON and OFF each time pressing this key. The functions of the key are effective when this lamp is ON.
Content enter key		By pressing this key, the keyboard or ten-key is displayed. Enter letters and numerals via the keyboard and ten-keys. (Refer to 4.3.2 Data entry.") The set letters and numerals are reflected on the key.
Drop-down list key		The selection item list is displayed by pressing this key. Select and press either of the displayed keys, and the list closes. The selected item is reflected on the key.
Pop-up key		The pop-up list is displayed by pressing this key. Select and press either of the displayed keys, and the list closes. The shapes of key varies such as the Mach.SET key and Total select key The pop-up list has a wide range such as operation key display and radio button display (the next item). Each key has a name, but the selection result may be displayed depending on the key.
Radio button		The selection item is displayed in button, and select one of them. The selected button is depressed and displayed in blue.

< Page display key >

When the operation screen is separated into pages, switch the pages by the following step.

Table 4-4 Types and Displays of the Page Select Keys

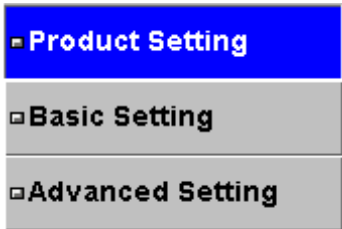Type of key	Example of display	Functional description
Index		It is the item list such as a reserve setting on the right side on the screen. When there are many pages of screens, it is displayed in this style. The relevant screen is displayed when pressing any one. The names of keys are displayed with quotations. Ex: Press "Finish Prdct Setting."
Tab		When the pages of screens are few, the screen is displayed in tab. The relevant screen is displayed when pressing any one.

< Screen scrolling >

When there are many display items in a menu, the hidden part can be displayed by scrolling the screen. In this case, the scroll key and scroll bar are displayed. The scroll key and scroll bar are displayed in the upper/lower or right/left direction depending on the displayed screen.

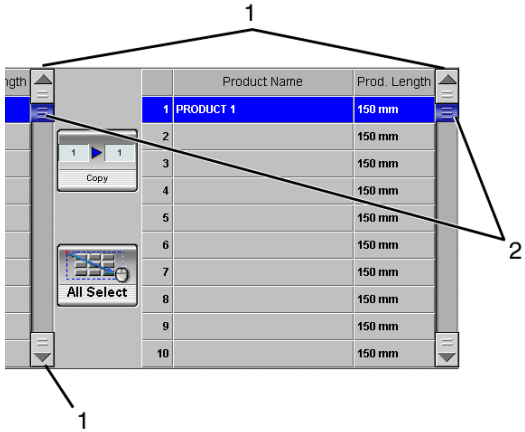


Fig.4-3 Scroll Display

Table 4-5 Key and Functional Description of the Scroll Display

No.	Name	Display	Functional description
1	Scroll key		The screen is scrolled in the key direction while pressing it.
2	Scroll bar		The screen is scrolled quickly when pressing it up/down (right/left). The length and location of the scroll bar shows the portion and position of the viewable screen to the whole screen.

4.3.2 Data entry

Numeric data, product name, etc. are entered via the ten-key pad or the keyboard. The ten-key pad or the keyboard is displayed whenever data entry is required. Enter numeric data via the ten-key pad, and alphabets and numerals via the keyboard.

NOTE

- In this manual, "set XXX " refers to entering numerals, letters, or symbols via the ten-key pad or the keyboard then pressing the return key to register the entered data.

4.3.2.1 Entering a numeral value

The ten-key pad is displayed when entering numeric data.

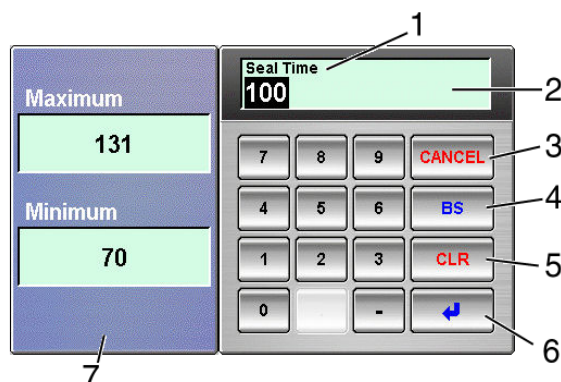


Fig.4-4 Ten-key Pad Screen

Table 4-6 Ten-key Pad Functions

No.	Name	Symbol	Function
1	Set item display field		Displays the entered item.
2	Entry display		Displays the entered numeral.
3	CANCEL key		Cancels the data entry via the ten-key. Ends the ten-key without entering anything.
4	BS key		Deletes one numeral in the display area each time the key is pressed.
5	CLR key		Clears all of the displayed numeric data.
6	Return key		Sets the entered numeric data and returns to the previous screen.
7	Entry guide display area		Displays the settable value range and the entry method.

When entering a numeral value with the ten-key pad, follow the procedure below.

- Press the relevant number keys.
 - The entered numbers are displayed in the entry display.
- Press the Return key .
 - The entered numbers are registered.
 - The ten-key pad disappears.

4.3.2.2 Entering an alphabet, number, or symbol

The keyboard will appear when entering numeric data, alphabetic data, and symbols.
The alphabet keyboard is the keyboard displayed first.

<Keyboard >

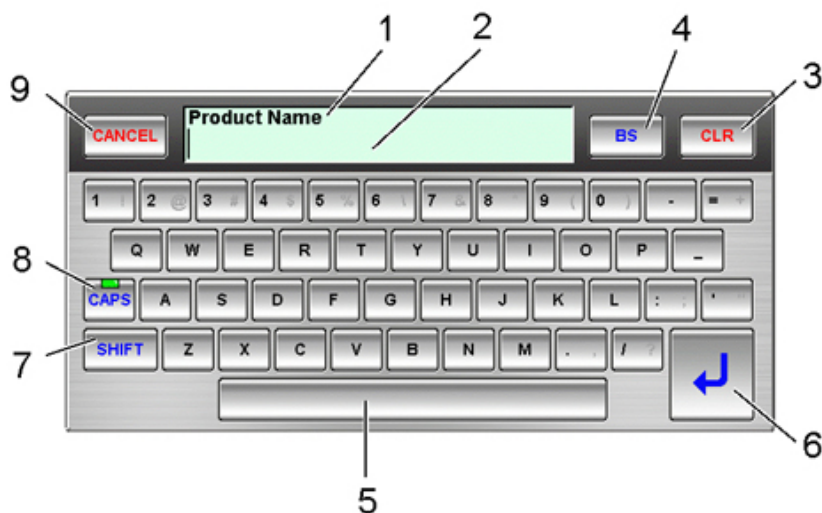


Fig.4-5 Alphabet Keyboard Window

Table 4-7 keyboard

No.	Name	Symbol	Function
1	Set item display field		Displays the currently set item.
2	Entry display		Displays the entered letters.
3	CLR key		Clears all of the displayed data.
4	BS key		Deletes one character each time the key is pressed.
5	Space key		Enters one space between characters.
6	Return key		Sets entered data and returns to the previous screen.
7	SHIFT key		Switches the characters on an identical key. The letters that can be entered are displayed in black.
8	CAPS key		Switches upper and lower case. When the lamp of this key is ON, it is able to type in capital letters.
9	CANCEL key		Cancels the keyboard entry. By pressing this key, terminates the keyboard without entering anything.

To perform setting via the keyboard, proceed as follows:

1. Press the relevant keys.

▶The entered characters are displayed in the entry display.

2. To enter a symbol, press the Shift key  and then press the relevant key.

3. Press the Return key .

▶The entered string is registered.

▶The keyboard disappears.

4.3.3 Correction after Data Entry and Setting

To correct set numerals, letters, or symbols, repeat setting procedure via the ten-key pad or the key pad.