


FC-01

FollowCam - build it

Lay out the complete kit before you begin.

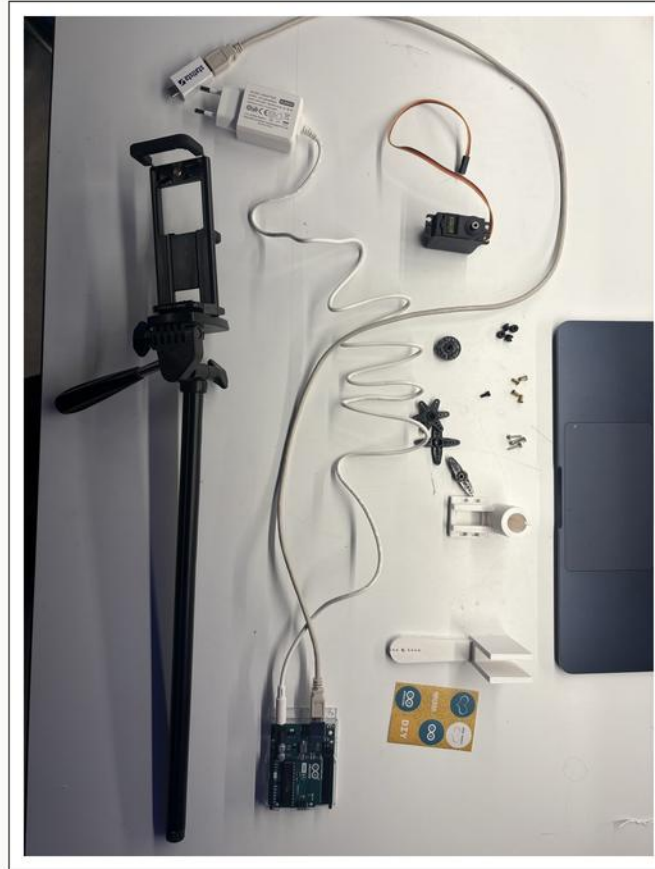

PARTS FOR THIS STEP

printed column clamp	x1
printed fork arm	x1
metal-gear servo	x1
servo horn + screws	x1 set
Arduino Uno R3	x1
USB cable	x1
M3 bolts	x2
zip ties	x6
tripod	x1
phone	x1

1

Flash the firmware


Arduino IDE -> open software/servo_pan/servo_pan.ino -> board Arduino Uno -> Upload.



2

Wire the servo

orange->9, red->5V, brown->GND.

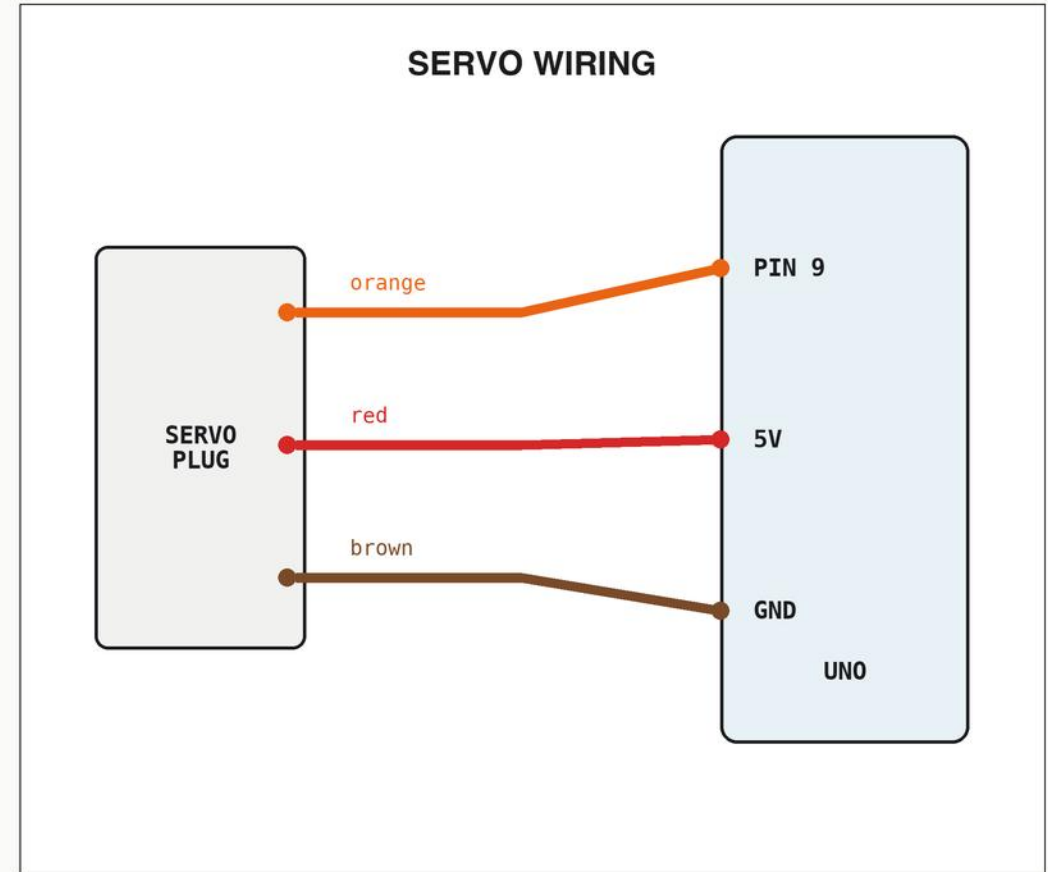

3

Bench test before mounting


python3 software/servo_test.py -> press s -> one smooth 40-140 sweep.



4

Clamp onto the column

Raise the column. Ring around it just below the head, shelf pointing the SAME side as the handle.
2x M3 through the slit bosses - snug.

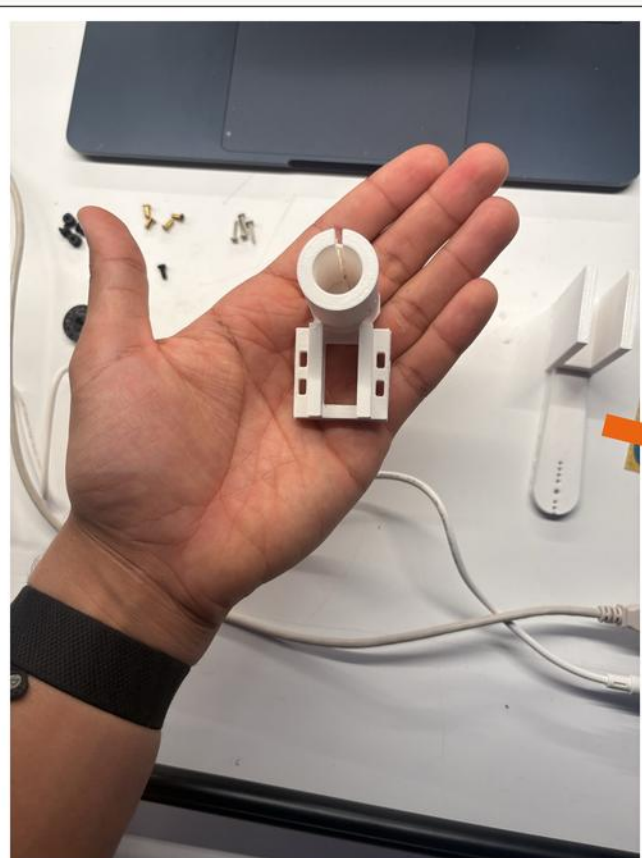

PARTS FOR THIS STEP


column clamp	x1
--------------	----

M3 bolt	x2
---------	----

5

Seat the servo ON the rails

Big servo does not drop in the pocket - it sits ON TOP of the two rails, output shaft UP and toward the column. 2 zip ties through the ledge slots, cinch tight.

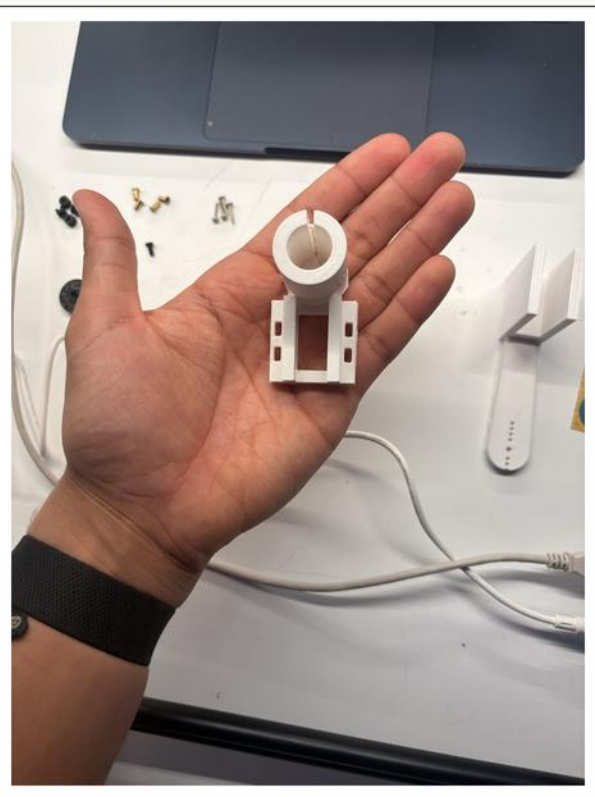

pocket was sized for SG90 - rails carry it, ties hold it



PARTS FOR THIS STEP


metal-gear servo x1

zip ties x2

6

Center, then fit the arm

servo_test.py -> press c (90 deg). Only then press the fork arm onto the horn pointing straight at the pan handle; fix the horn screw.

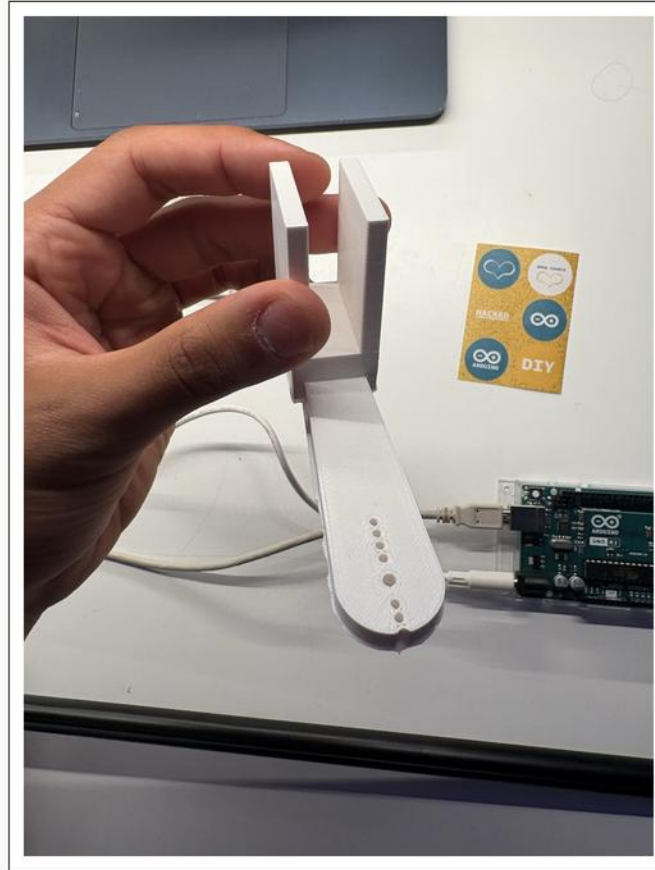

PARTS FOR THIS STEP

fork arm	x1
horn + screw	x1

7

Catch the handle shaft

Drop the tall U-fork over the chrome shaft from below - the window is forgiving, +/-10mm everywhere.



8

Friction + phone


Loosen pan friction to a two-finger glide. Lock tilt **HARD**. Phone into the clamp, camera facing the court.



9

Link and go

Hotspot on -> laptop: `python3 software/pan_bridge.py --port /dev/cu.usbmodem*` -> app: settings, laptop IP, RIG turns blue -> tap a player -> record.

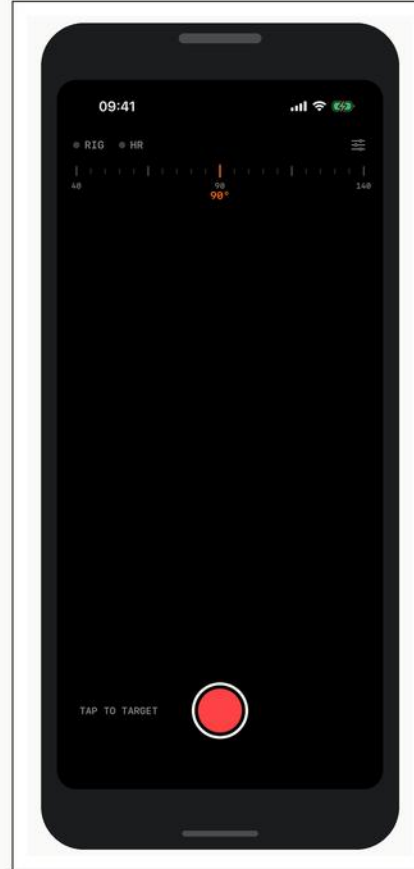

The goal

Every clip you record trains the model. Film wide, vary distance and speed.

FollowCam — printed, assembled, on the tripod

