ECE 485/585
Computer Organization and Design

Lecture 3: Instruction Set Architecture
Fall 2022

Won-Jae Yi, Ph.D.

Department of Electrical and Computer Engineering
Illinois Institute of Technology

Instruction Set

- The repertoire of instructions of a computer
- Different computers have different instruction sets
  - But with many aspects in common
- Early computers had very simple instruction sets
  - Simplified implementation
- Many modern computers also have simple instruction sets

The MIPS Instruction Set

- Used as the example throughout the book
- Stanford MIPS commercialized by MIPS Technologies (www.mips.com)
- Large share of embedded core market
  - Applications in consumer electronics, network/storage equipment, cameras, printers, …
- Typical of many modern ISAs
  - See MIPS Reference Data tear-out card, and Appendixes B and E

Arithmetic Operations

- Add and subtract, three operands
  - Two sources and one destination

```
add a, b, c # a gets b + c
```

- All arithmetic operations have this form
- *Design Principle 1:* Simplicity favors regularity
  - Regularity makes implementation simpler
  - Simplicity enables higher performance at lower cost

Arithmetic Example

- C code:

```
f = (g + h) - (i + j);
```

- Compiled MIPS code:

```
add t0, g, h   # temp t0 = g + h
add t1, i, j   # temp t1 = i + j
sub f, t0, t1  # f = t0 - t1
```

Register Operands

- Arithmetic instructions use register operands
- MIPS has a 32 × 32-bit register file
  - Use for frequently accessed data
  - Numbered 0 to 31
  - 32-bit data called a "word"
    - A fixed-sized data unit by the specific instruction set
- Assembler names
  - $t0, $t1, …, $t9 for temporary values
  - $s0, $s1, …, $s7 for saved variables
- *Design Principle 2:* Smaller is faster
  - c.f. main memory: millions of locations

Register Operand Example

- C code:

```
f = (g + h) - (i + j);
```

  - f, …, j in $s0, …, $s4

- Compiled MIPS code:

```
add $t0, $s1, $s2
add $t1, $s3, $s4
sub $s0, $t0, $t1
```

Memory Operands

LOAD & STORE Arch.

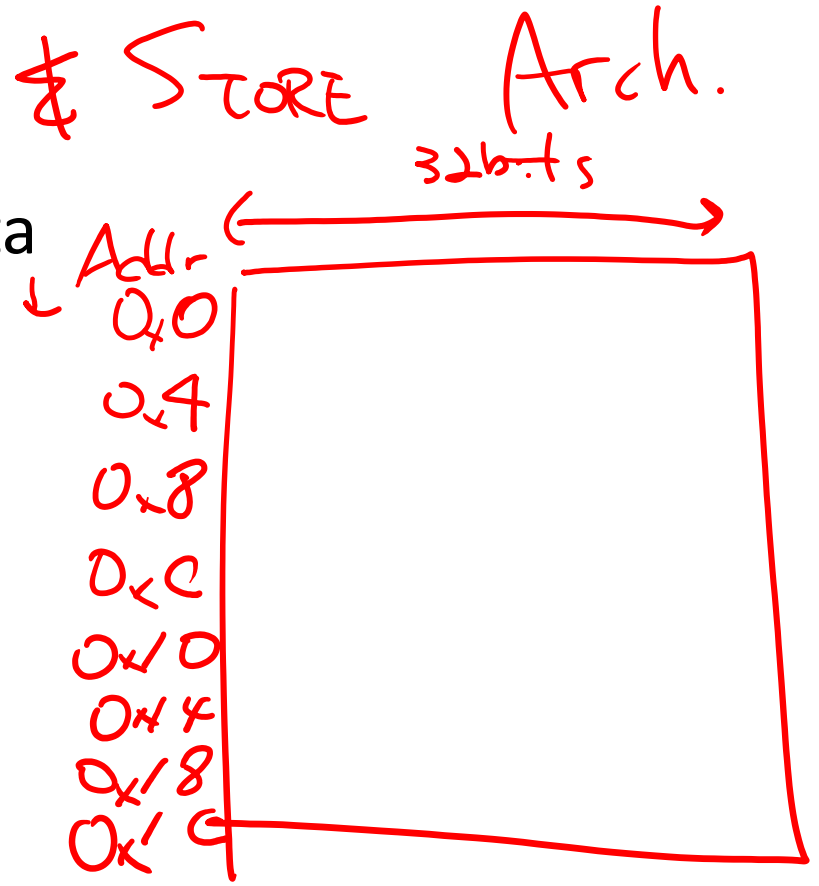

- Main memory used for composite data
  - Arrays, structures, dynamic data
- To apply arithmetic operations
  - Load values from memory into registers
  - Store result from register to memory
- Memory is byte addressed
  - Each address identifies an 8-bit byte
- Words are aligned in memory
  - Address must be a multiple of 4
- MIPS can be either Big Endian or Little Endian
  - Big Endian: Most-significant byte (MSB) at least address of a word
  - Little Endian: Least-significant byte (LSB) at least address of a word

Big Endian Vs little Endian

0x1000 = 0xFF00AA11

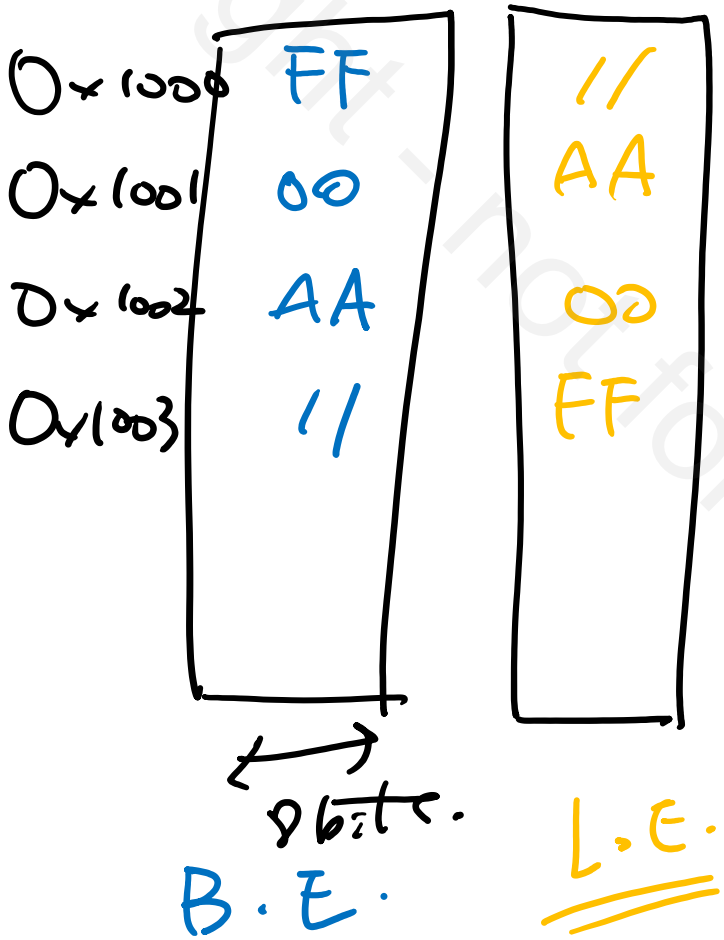

MPS → B.E. L.E.

Memory Operand Example 1

- C code:

```
g = h + A[8];
```

  - g in $s1, h in $s2, base address of A in $s3
- Compiled MIPS code:
  - Index 8 requires offset of 32
    - 4 bytes per word

```
lw  $t0, 32($s3)   # load word
add $s1, $s2, $t0
```

offset

base register

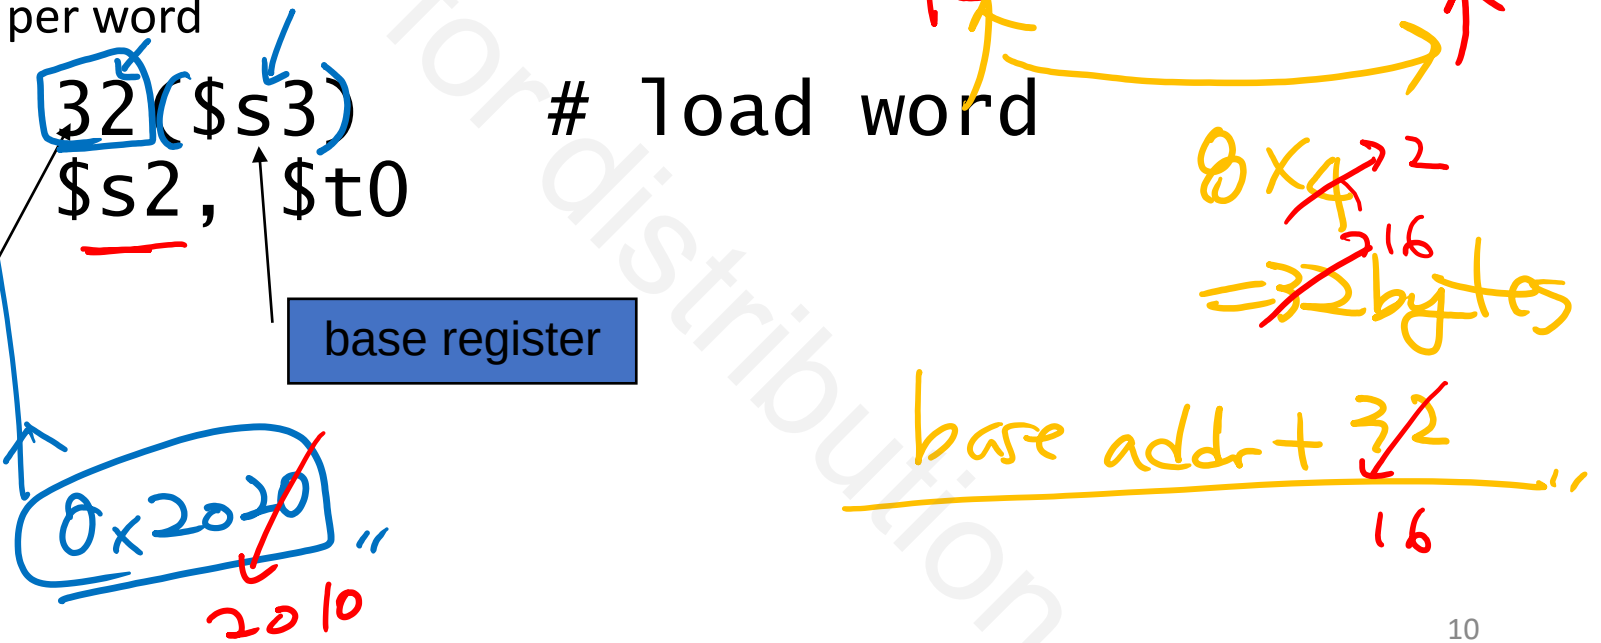

Memory Operand Example 2

- C code:

```
A[12] = h + A[8];
```

  - h in $s2, base address of A in $s3

- Compiled MIPS code:
  - Index 8 requires offset of 32

```
lw  $t0, 32($s3)    # load word
add $t0, $s2, $t0
sw  $t0, 48($s3)    # store word
```

48 = 4 x 12

Register vs. Memory

- Registers are faster to access than memory
- Operating on memory data requires loads and stores
  - More instructions to be executed
- Compiler must use registers for variables as much as possible
  - Only spill to memory for less frequently used variables
  - Register optimization is important!

Immediate Operands

- Constant data specified in an instruction

```
addi $s3, $s3, 4
```

- No subtract immediate instruction
  - Just use a negative constant

```
addi $s2, $s1, -1
```

- *Design Principle 3:* Make the common case fast
  - Small constants are common
  - Immediate operand avoids a load instruction

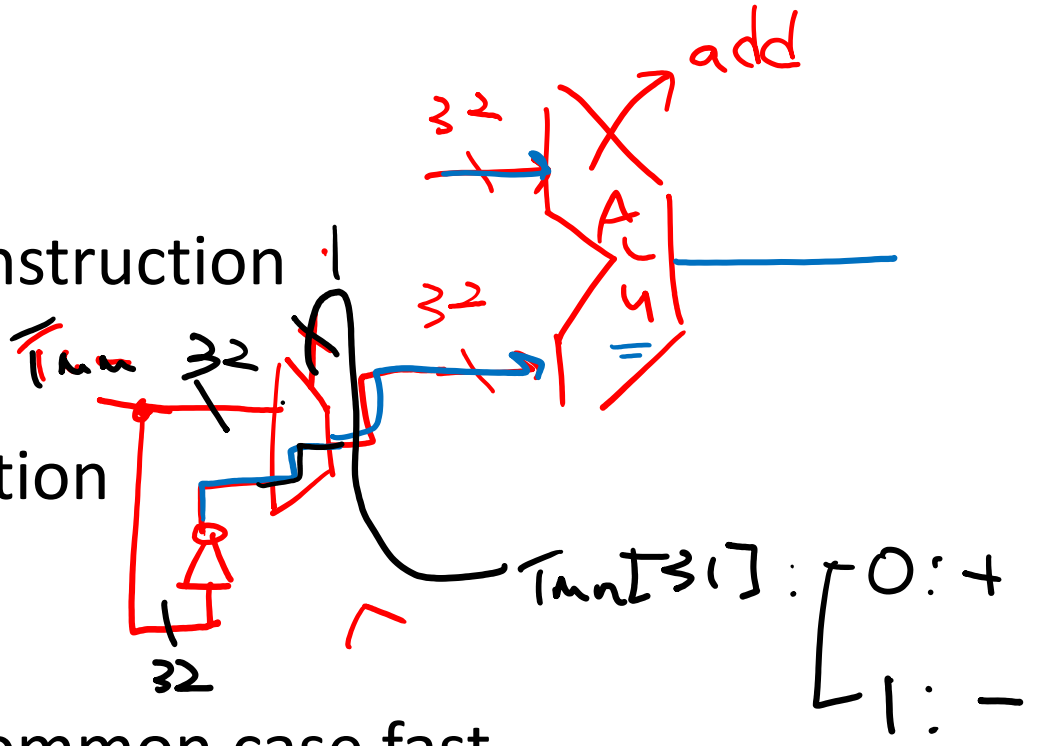

The Constant Zero

- MIPS register 0 ($zero) is the constant 0
  - Cannot be overwritten
- Useful for common operations
  - E.g., move between registers

```
add $t2, $s1, $zero
```

Unsigned Binary Integers

- Given an n-bit number

$$x = x_{n-1}2^{n-1} + x_{n-2}2^{n-2} + \cdots + x_1 2^1 + x_0 2^0$$

- Range: 0 to $+2^n - 1$
- Example
  - $0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 0000\ 1011_2$
    $= 0 + \ldots + 1\times2^3 + 0\times2^2 + 1\times2^1 + 1\times2^0$
    $= 0 + \ldots + 8 + 0 + 2 + 1 = 11_{10}$
- Using 32 bits
  - 0 to +4,294,967,295

2s Complement Signed Integers

- Given an n-bit number

$$x = -x_{n-1}2^{n-1} + x_{n-2}2^{n-2} + \cdots + x_1 2^1 + x_0 2^0$$

- Range: -2^{n-1} to $+2^{n-1} - 1$
- Example
  - $1111\ 1111\ 1111\ 1111\ 1111\ 1111\ 1111\ 1100_2$
    $= -1\times2^{31} + 1\times2^{30} + \ldots + 1\times2^2 + 0\times2^1 + 0\times2^0$
    $= -2{,}147{,}483{,}648 + 2{,}147{,}483{,}644 = -4_{10}$
- Using 32 bits
  - –2,147,483,648 to +2,147,483,647

2^s Complement Signed Integers

- Bit 31 is sign bit
  - 1 for negative numbers
  - 0 for non-negative numbers
- $-(-2^{n-1})$ can't be represented
- Non-negative numbers have the same unsigned and 2s-complement representation
- Some specific numbers
  - 0: 0000 0000 … 0000
  - –1: 1111 1111 … 1111
  - Most-negative: 1000 0000 … 0000
  - Most-positive: 0111 1111 … 1111

Signed Negation

- Complement and add 1
  - Complement means 1 → 0, 0 → 1

$$x + \bar{x} = 1111...111_2 = -1$$

$$\bar{x} + 1 = -x$$

- Example: negate +2
  - +2 = 0000 0000 … 0010_2
  - –2 = 1111 1111 … 1101_2 + 1
    = 1111 1111 … 1110_2

Sign Extension

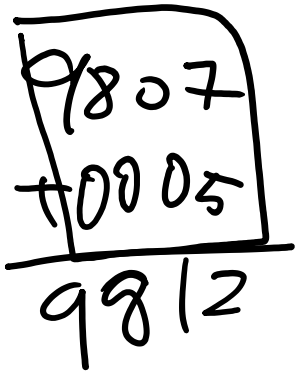

- Representing a number using more bits
  - Preserve the numeric value
- In MIPS instruction set
  - `addi`: extend immediate value
  - `lb`, `lh`: extend loaded byte/halfword
  - `beq`, `bne`: extend the displacement
- Replicate the sign bit to the left
  - c.f. unsigned values: extend with 0s
- Examples: 8-bit to 16-bit
  - +2: 0000 0010 => 0000 0000 0000 0010
  - –2: 1111 1110 => 1111 1111 1111 1110

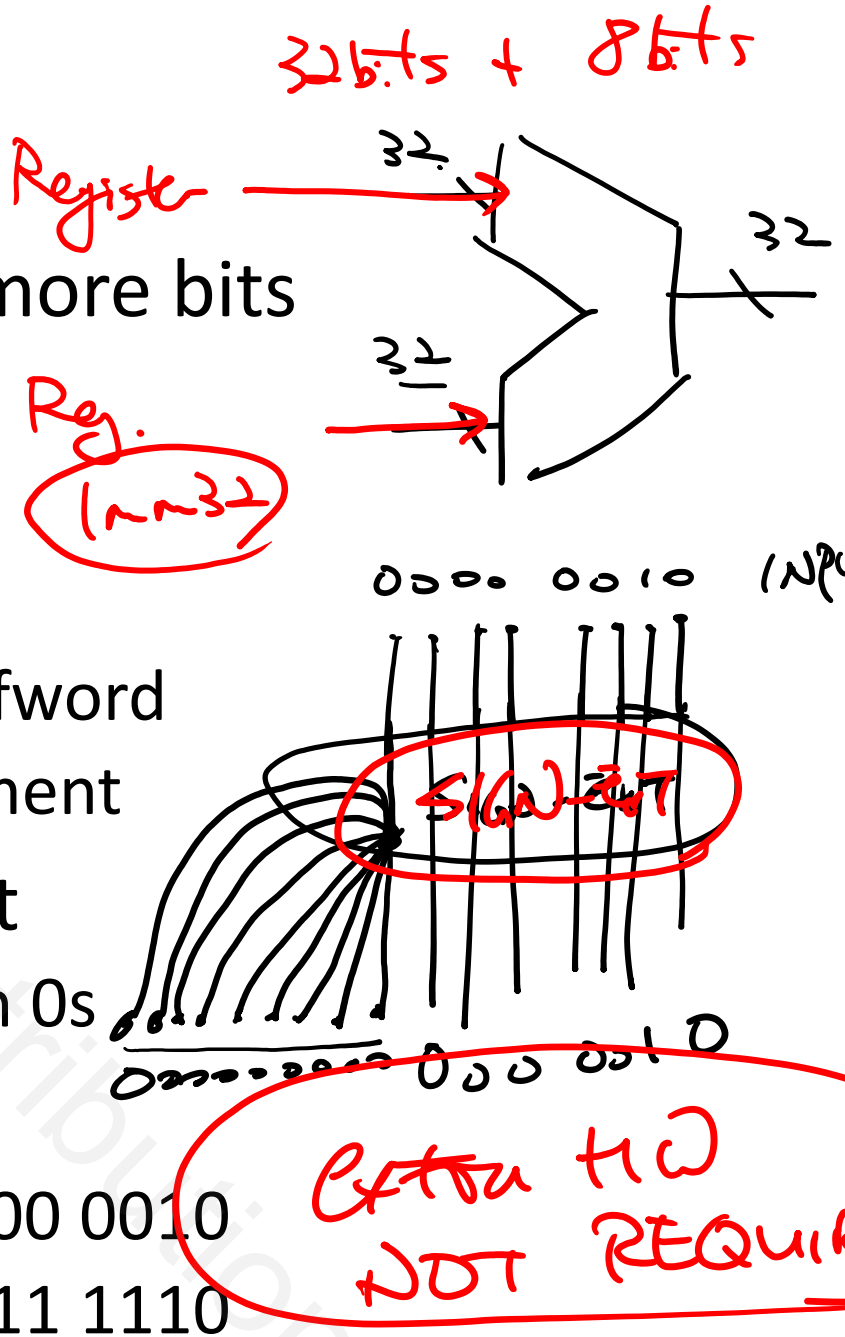

Representing Instructions

- Instructions are encoded in binary
  - Called machine code
- MIPS instructions
  - Encoded as 32-bit instruction words
  - Small number of formats encoding operation code (opcode), register numbers, …
  - Regularity!
- Register numbers
  - $t0 – $t7 are reg's 8 – 15
  - $t8 – $t9 are reg's 24 – 25
  - $s0 – $s7 are reg's 16 – 23

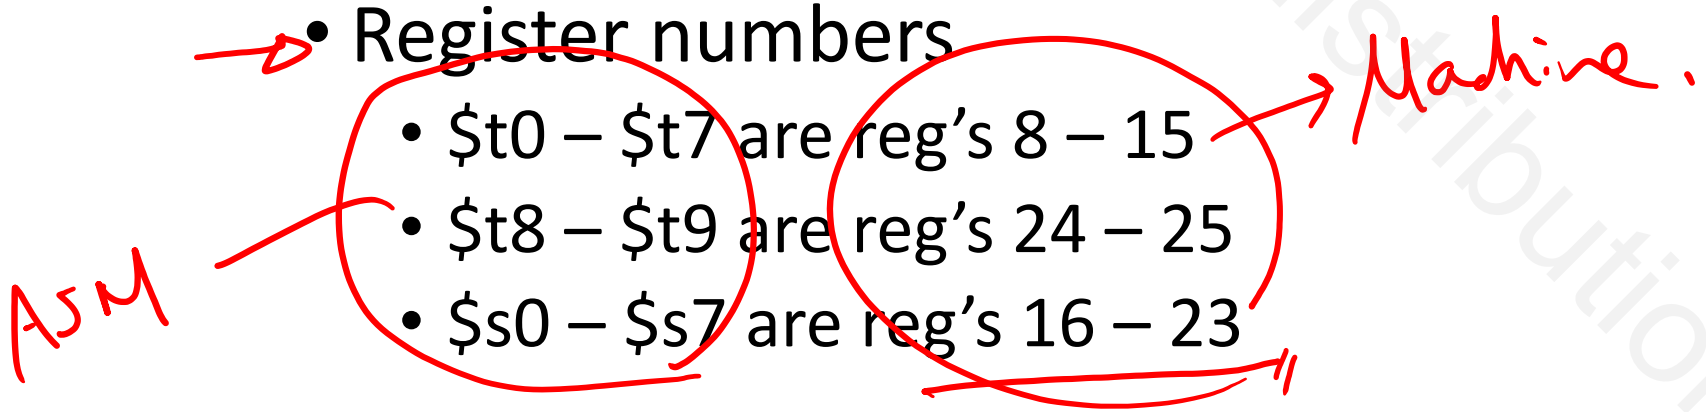

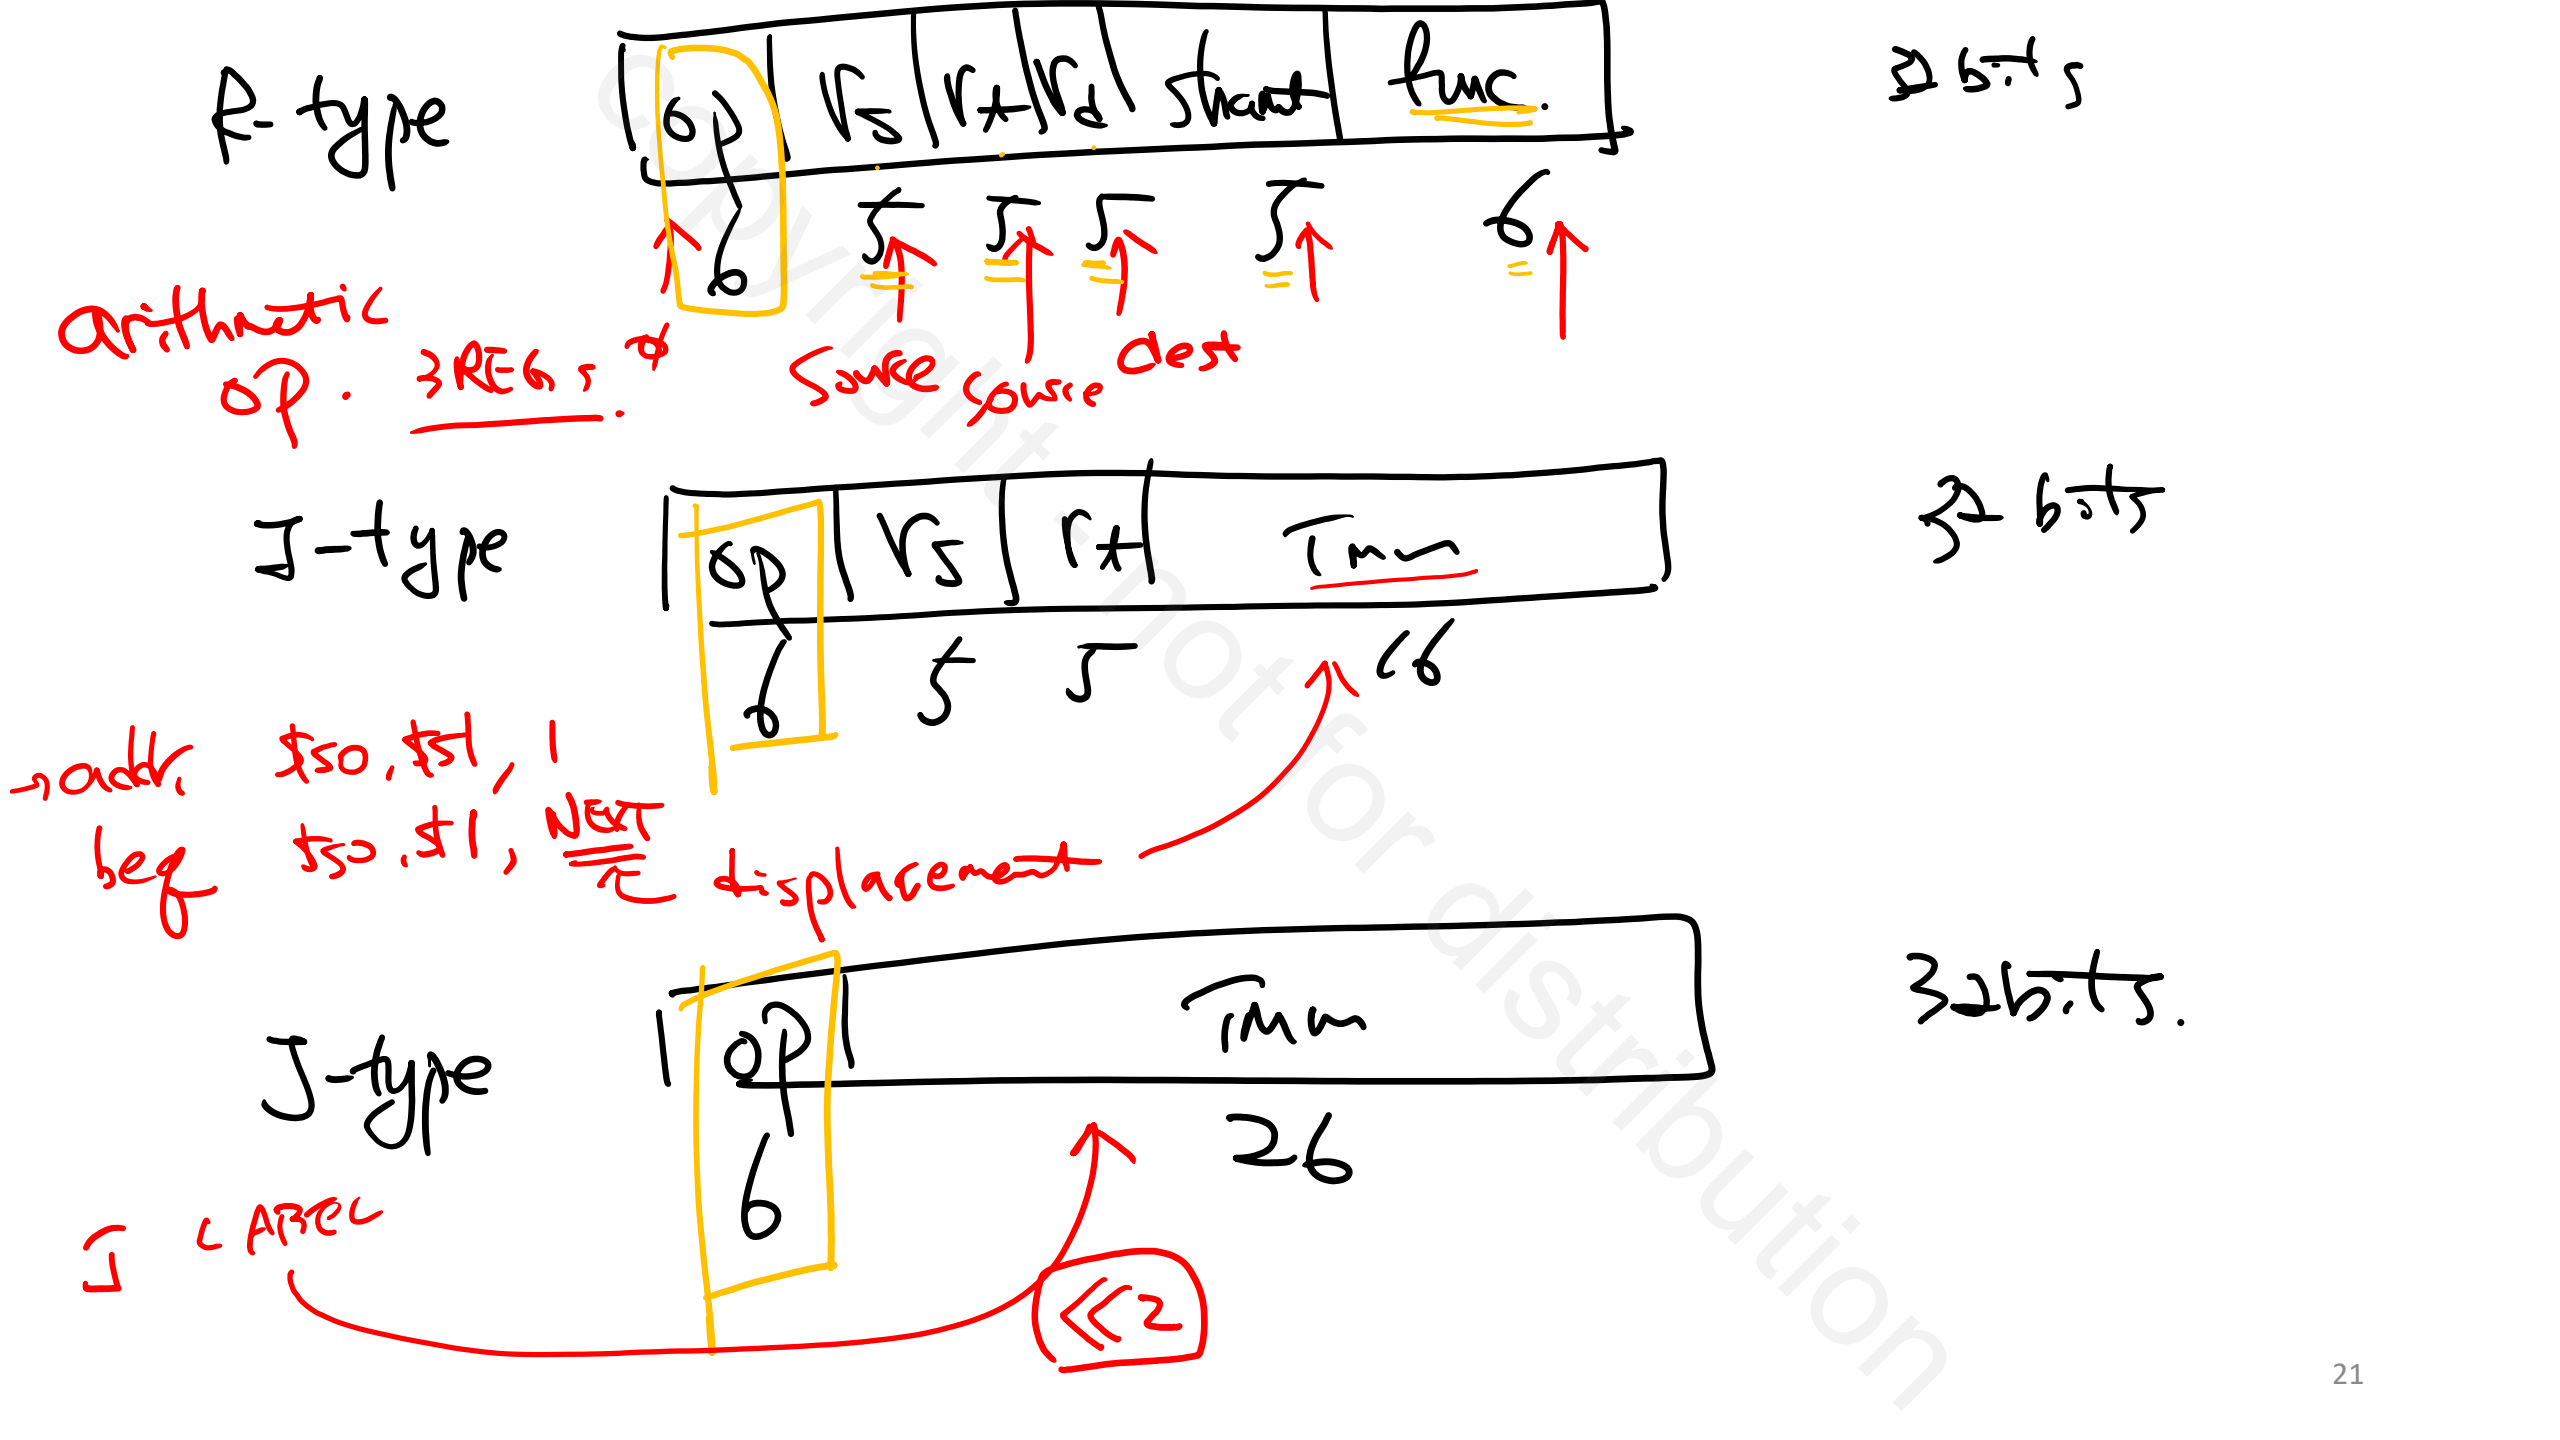

MIPS R-Format Instructions

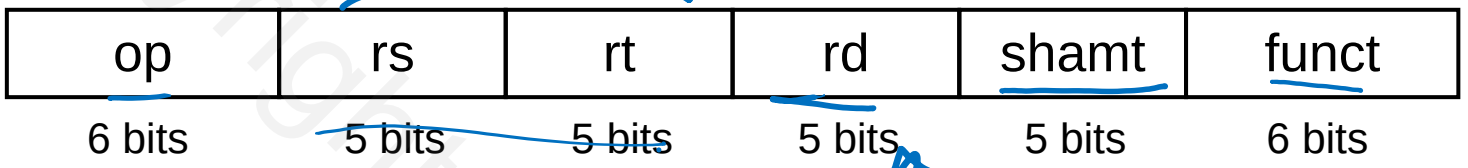

- Instruction fields
  - op: operation code (opcode)
  - rs: first source register number
  - rt: second source register number
  - rd: destination register number
  - shamt: shift amount (00000 for now)
  - funct: function code (extends opcode)

MIPS R-Format Example

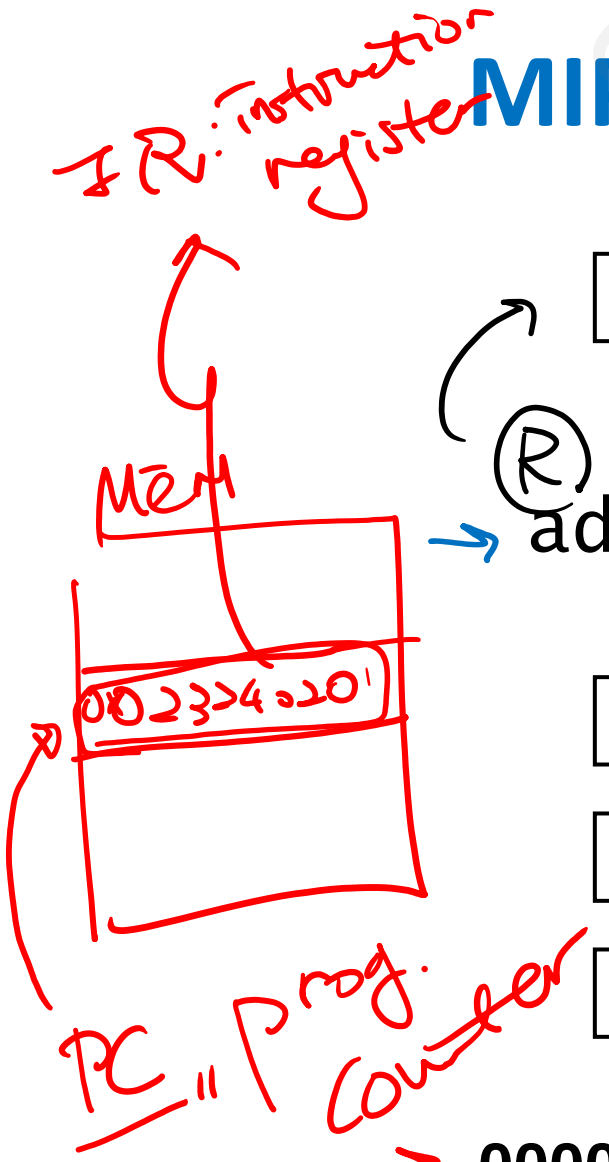

op	rs	rt	rd	shamt	funct
6 bits	5 bits	5 bits	5 bits	5 bits	6 bits

(R) rd rs rt

```
add $t0, $s1, $s2
```

special	$s1	$s2	$t0	0	add
0	17	18	8	0	32
000000	10001	10010	01000	00000	100000

$$00000010001100100100000001000000_2 = 02324020_{16}$$

Hexadecimal

- Base 16
  - Compact representation of bit strings
  - 4 bits per hex digit

0	0000	**4**	0100	**8**	1000	**C**	1100
1	0001	**5**	0101	**9**	1001	**D**	1101
2	0010	**6**	0110	**A**	1010	**E**	1110
3	0011	**7**	0111	**B**	1011	**F**	1111

- Example: ECA8 6420
  - 1110 1100 1010 1000 0110 0100 0010 0000

MIPS I-Format Instructions

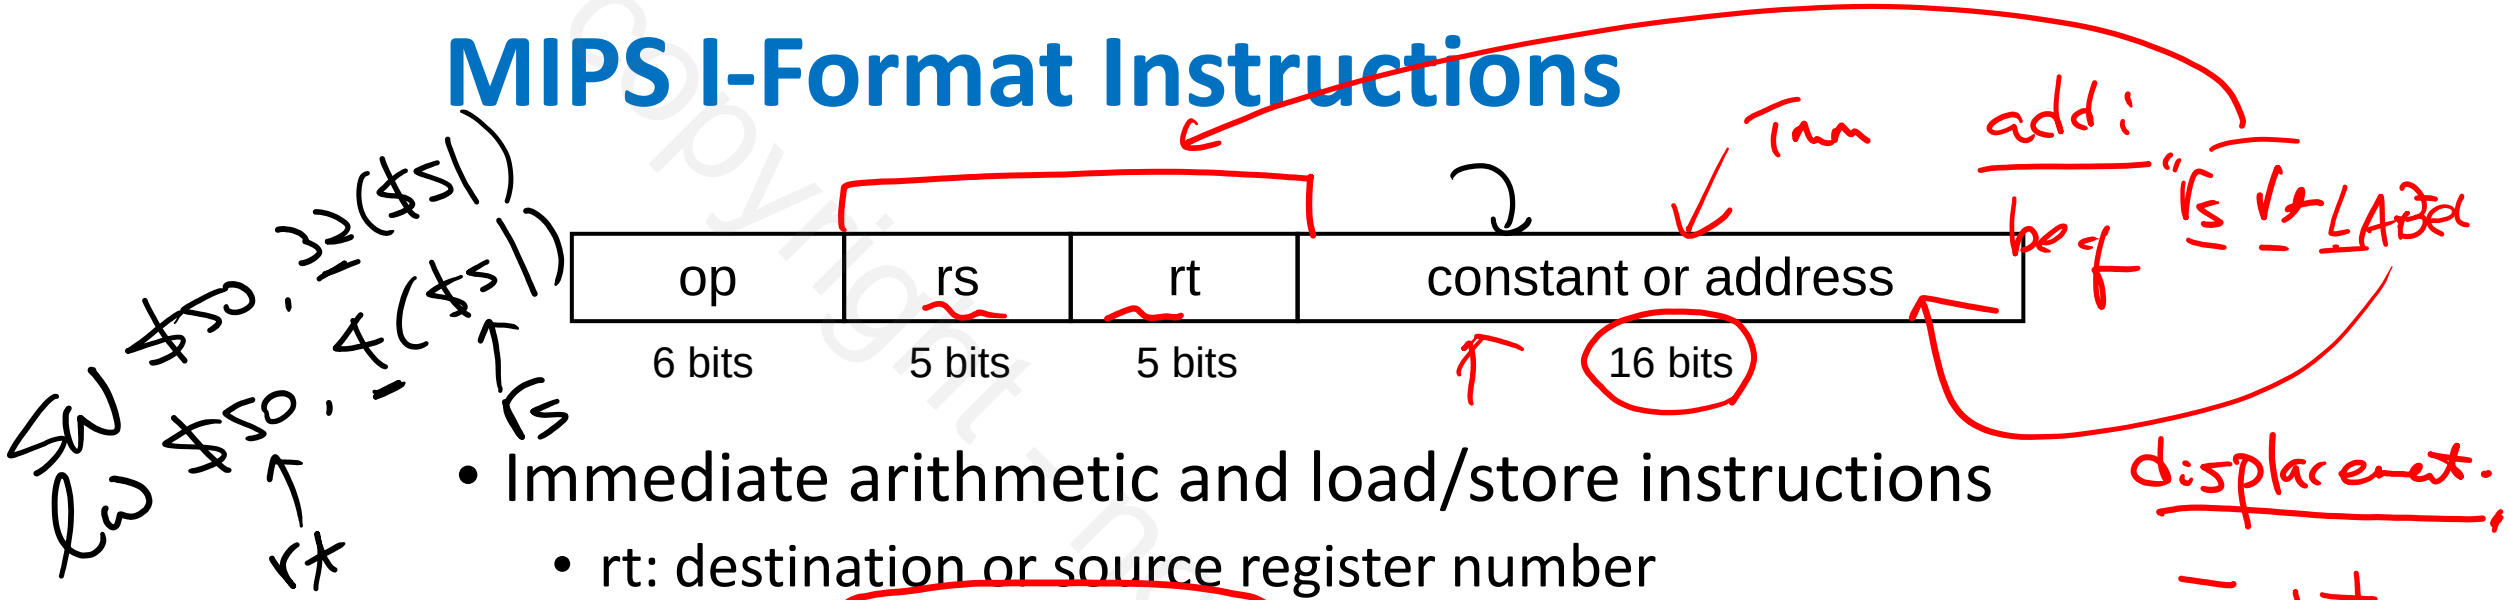

- Immediate arithmetic and load/store instructions
  - rt: destination or source register number
  - Constant: -2^{15} to $+2^{15} - 1$
  - Address: offset added to base address in rs
- *Design Principle 4:* Good design demands good compromises
  - Different formats complicate decoding, but allow 32-bit instructions uniformly
  - Keep formats as similar as possible

Stored Program Computers

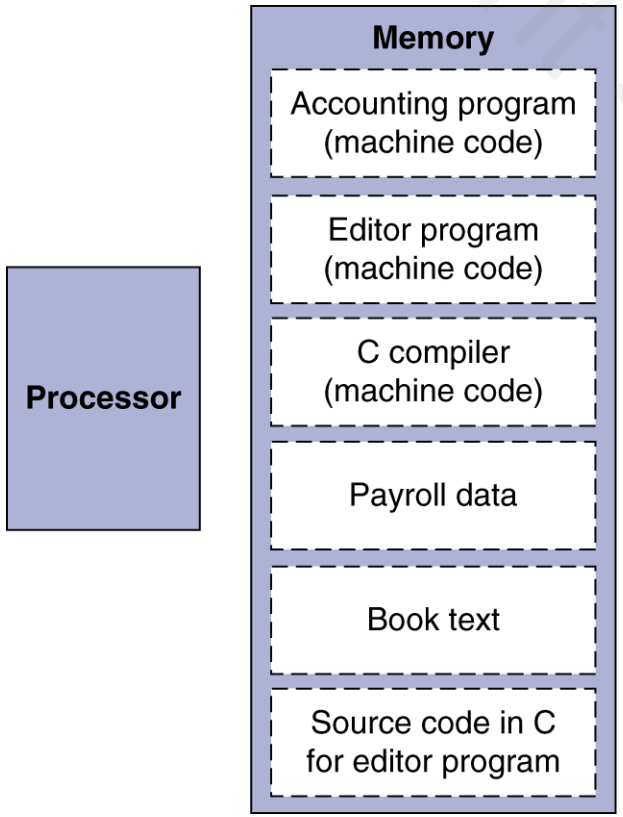

- Instructions represented in binary, just like data
- Instructions and data stored in memory
- Programs can operate on programs
  - e.g., compilers, linkers, …
- Binary compatibility allows compiled programs to work on different computers
  - Standardized ISAs

Logical Operations

- Instructions for bitwise manipulation

Operation	C	Java	MIPS
Shift left	<<	<<	`sll`
Shift right	>>	>>>	`srl`
Bitwise AND	&	&	`and, andi`
Bitwise OR	|	|	`or, ori`
Bitwise NOT	~	~	`nor`

- Useful for extracting and inserting groups of bits in a word

Shift Operations

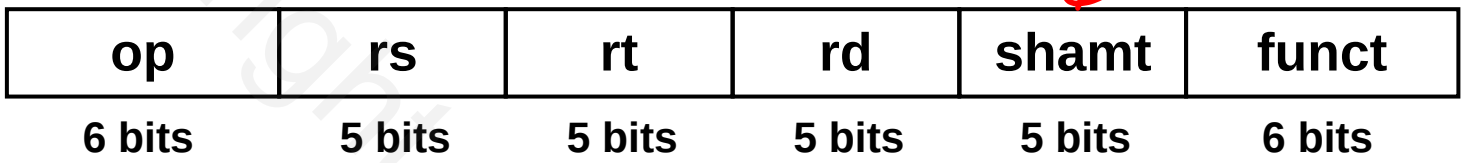

- shamt: how many positions to shift
- Shift left logical
  - Shift left and fill with 0 bits
  - `sll` by *i* bits multiplies by 2^i
- Shift right logical
  - Shift right and fill with 0 bits
  - `srl` by *i* bits divides by 2^i (unsigned only)

AND Operations

- Useful to mask bits in a word
  - Select some bits, clear others to 0
  - **Check on the status of a bit (1) or to force mask off (0)**

```
and $t0, $t1, $t2
```

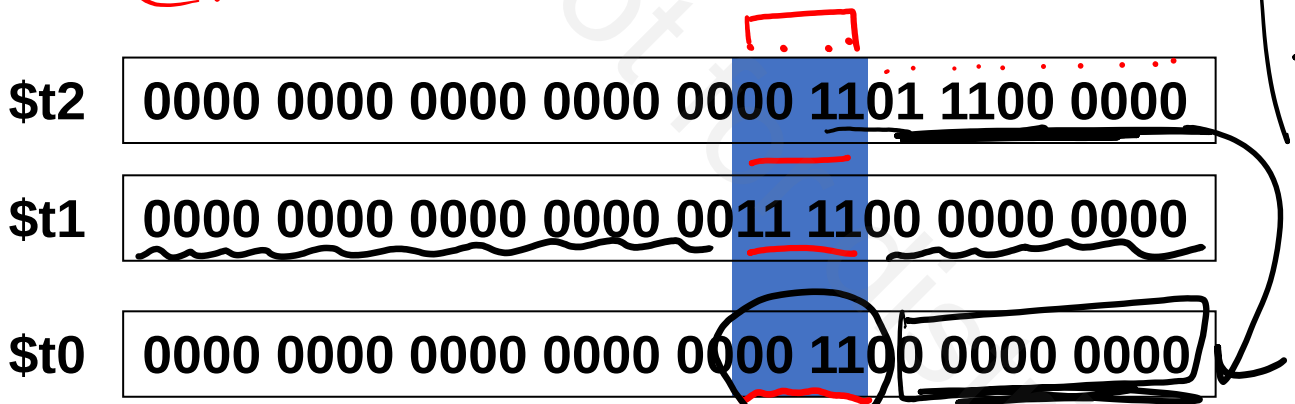

OR Operations

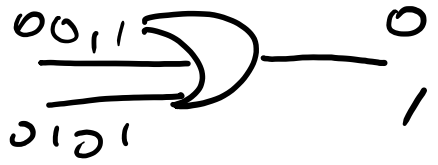

- Useful to include bits in a word
  - Set some bits to 1, leave others unchanged
  - **To leave a bit unchanged (0) or to turn bits ON (1)**

```
or $t0, $t1, $t2
```

↳ MASK ON

$t2	**0000 0000 0000 0000 0000 1101 1100 0000**
$t1	**0000 0000 0000 0000 0011 1100 0000 0000**
$t0	**0000 0000 0000 0000 0011 1101 1100 0000**

NOT Operations

- Useful to invert bits in a word
  - Change 0 to 1, and 1 to 0
- MIPS has NOR 3-operand instruction
  - a NOR b == NOT (a OR b)

```
nor $t0, $t1, $zero
```

Register 0: always read as zero

$t1	**0000 0000 0000 0000 0011 1100 0000 0000**
$t0	**1111 1111 1111 1111 1100 0011 1111 1111**

Conditional Operations

- Branch to a labeled instruction if a condition is true
  - Otherwise, continue sequentially
- `beq rs, rt, L1`
  - if (rs == rt) branch to instruction labeled L1;
- `bne rs, rt, L1`
  - if (rs != rt) branch to instruction labeled L1;
- `j L1`
  - unconditional jump to instruction labeled L1

Compiling If Statements

- C code:

```
if (i==j) f = g+h;
else f = g-h;
```

  - f, g, … in $s0, $s1, …

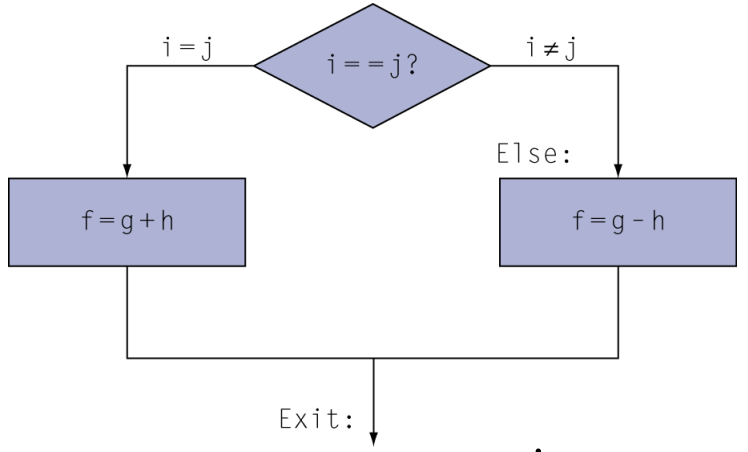

- Compiled MIPS code:

```
      bne $s3, $s4, Else
      add $s0, $s1, $s2
      j   Exit
Else: sub $s0, $s1, $s2
Exit: …
```

Assembler calculates addresses

bne

beq

Compiling Loop Statements

- C code:

```
while (save[i] == k) i += 1;
```

  - i in $s3, k in $s5, address of save in $s6

- Compiled MIPS code:

```
Loop: sll  $t1, $s3, 2
      add  $t1, $t1, $s6
      lw   $t0, 0($t1)
      bne  $t0, $s5, Exit
      addi $s3, $s3, 1
      j    Loop
Exit: …
```

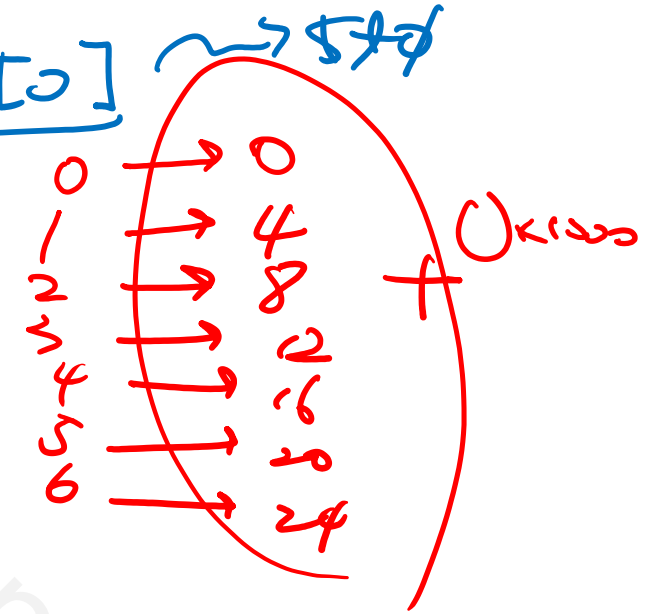

Basic Blocks

- A basic block is a sequence of instructions with
  - No embedded branches (except at end)
  - No branch targets (except at beginning)

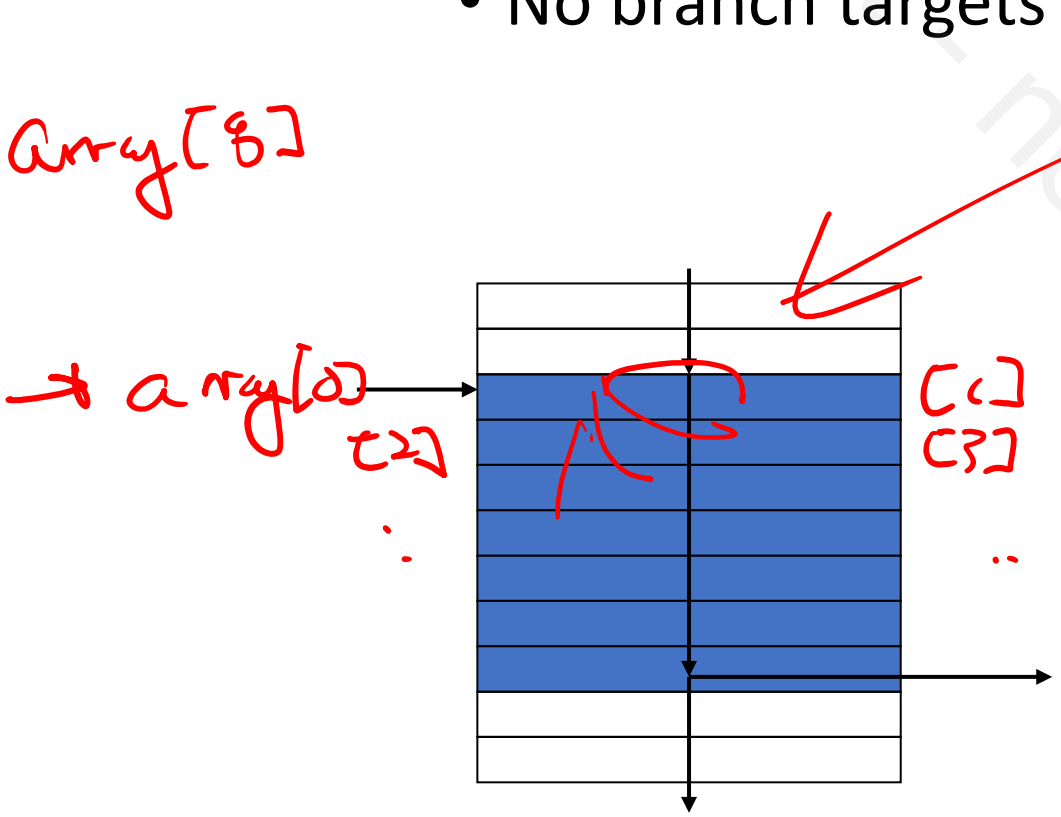

- A compiler identifies basic blocks for optimization
- An advanced processor can accelerate execution of basic blocks

More Conditional Operations

- Set result to 1 if a condition is true
  - Otherwise, set to 0
- `slt rd, rs, rt`
  - if (rs < rt) rd = 1; else rd = 0;
- `slti rt, rs, constant`
  - if (rs < constant) rt = 1; else rt = 0;
- Use in combination with beq, bne

```
slt $t0, $s1, $s2  # if ($s1 < $s2)
bne $t0, $zero, L  #   branch to L
```

Branch Instruction Design

- Why not **`blt`**, **`bge`**, etc?
- Hardware for <, ≥, … slower than =, ≠
  - Combining with branch involves more work per instruction, requiring a slower clock
  - All instructions penalized!
- **`beq`** and **`bne`** are the common case
- This is a good design compromise

Signed vs. Unsigned

- Signed comparison: `slt`, `slti`
- Unsigned comparison: `sltu`, `sltui`
- Example
  - $s0 = 1111 1111 1111 1111 1111 1111 1111 1111
  - $s1 = 0000 0000 0000 0000 0000 0000 0000 0001
  - `slt  $t0, $s0, $s1  # signed`
    - –1 < +1 ⇒ $t0 = 1
  - `sltu $t0, $s0, $s1  # unsigned`
    - +4,294,967,295 > +1 ⇒ $t0 = 0