

PowerPact Auxiliary Shutdown

Auxiliary Shutdown Switch

All generators are provided with an external means to shut down the generator which complies with the 2017 NEC code requirement. The primary generator shutdown sequence is described in the previous topic.

See [Figure 7-3](#). An auxiliary shutdown switch is located on the exterior of the generator back panel. This switch shuts down the generator and disables restarts.

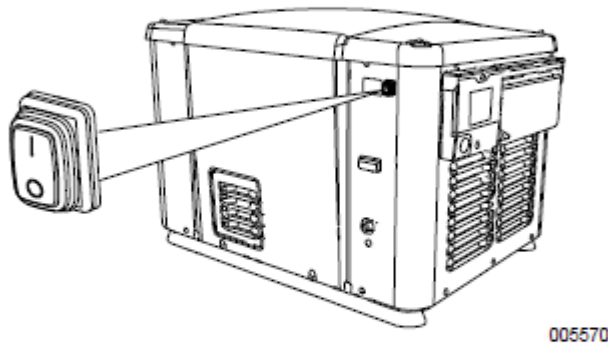


Figure 7-3. Auxiliary Shutdown Switch

NOTE: Whenever possible, perform the primary shutdown procedure before disabling the generator with the auxiliary shutdown switch.

If the auxiliary shutdown switch is open (O), the generator will not start. The controller displays a High Temperature alarm and the High Temperature LED on the controller flashes until the switch is closed (I). Once the switch is closed (I), the generator will return to either AUTO mode or OFF mode.