

ROBOT 0 · UNITREE GO2



RealSense D435i
RGB-D camera

ROBOT 1 · WHEELED CHASSIS



Odin1
RGB-D camera + LiDAR + IMU

Shared Cross-Robot Calibration

Both robots observe one shared circle-grid board from different positions to register their local frames into one shared frame.

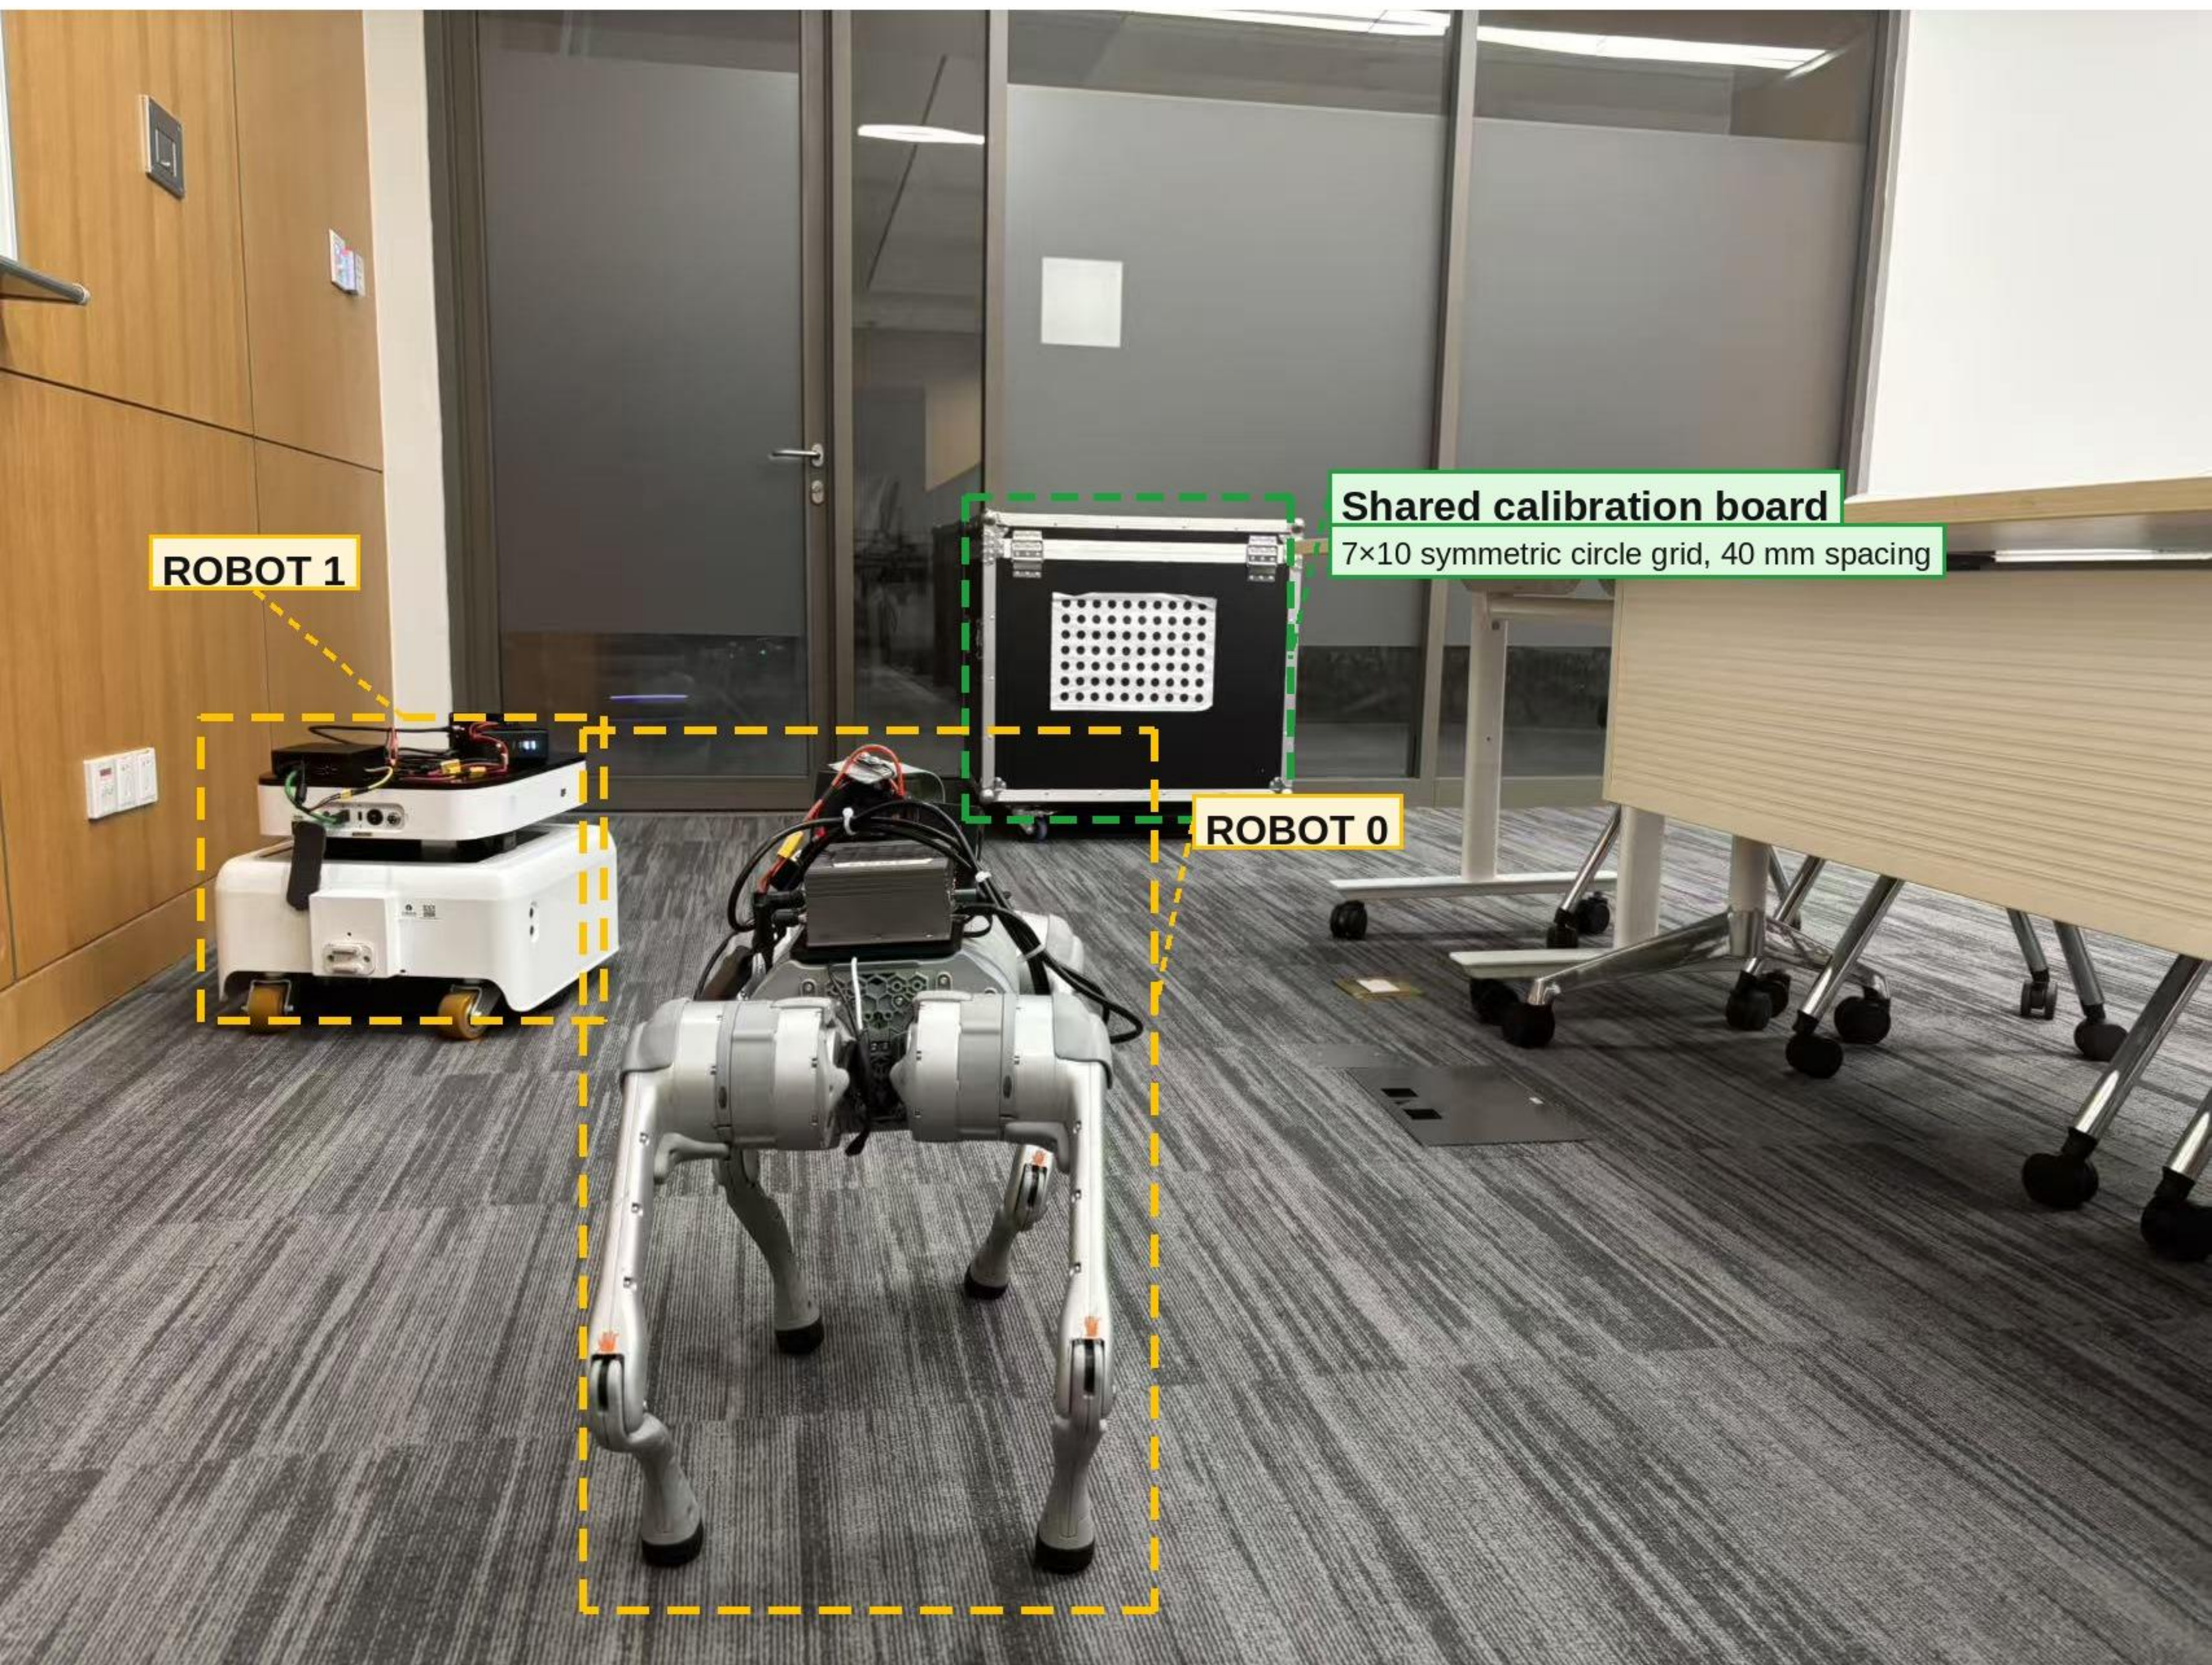


Fig. Cross-robot shared-frame calibration. With both robots stationary, each robot's own camera captures the shared board and solves its pose by PnP; the two per-camera poses compose into a fixed transform between the robots' camera frames. The board is then moved at least 10 cm or rotated at least 5° and re-observed as an independent holdout — the calibration is only accepted if it also explains this second, independently moved observation.