MUE42VNI-SHB | Observed Fan Wiring

Summary of connections reported from comparison with another installed fan of the same model. This is not a manufacturer-certified wiring schematic.

Direction switch (six pins)

Terminal / lead	Reported connection
Pins 1 and 6	Blue wire from fan harness (previously reported).
Pin 2	Black capacitor lead and speed-switch terminal L.
Pins 3 and 4	White wire from fan harness (previously reported; not independently reconfirmed).
Pin 5	Gray wire from fan harness, white neutral from installation, and white lead to light bulb (observed on

Chain speed switch (marked 3089 / E87438)

Terminal / lead	Reported connection
L	Black capacitor lead and direction-switch pin 2.
1	Bottom orange lead of capacitor.
2	Black incoming supply line.
3	Middle orange lead of capacitor.

Capacitor (CBB6-1)

Terminal / lead	Reported connection
Black / common	Direction-switch pin 2 and speed-switch L.
Red	Brown wire from fan harness.
Middle orange	Speed-switch terminal 3.
Bottom orange	Speed-switch terminal 1.


Capacitor label: black-to-red 3 µF / 300 V AC; black-to-each-orange 4.5 µF / 250 V AC; 50/60 Hz, tolerance J (typically ±5%).

Important: The earlier AI-created diagram has visual connection errors and must not be used as an installation guide. The image is included on the following page solely as the requested reference illustration. A humming motor, unknown reverse-switch contacts, and an unverified replacement speed switch require qualified electrical verification before power is restored.

This image and text was generated by AI, do not trust the generated outcome.
Please reach out to aranbaru@pm.me for queries on this.

Previously generated diagram (reference only)

CAUTION: The image below does not accurately depict every connection listed on page 1. Follow the written record only as a description of reported observations, not as repair instructions.

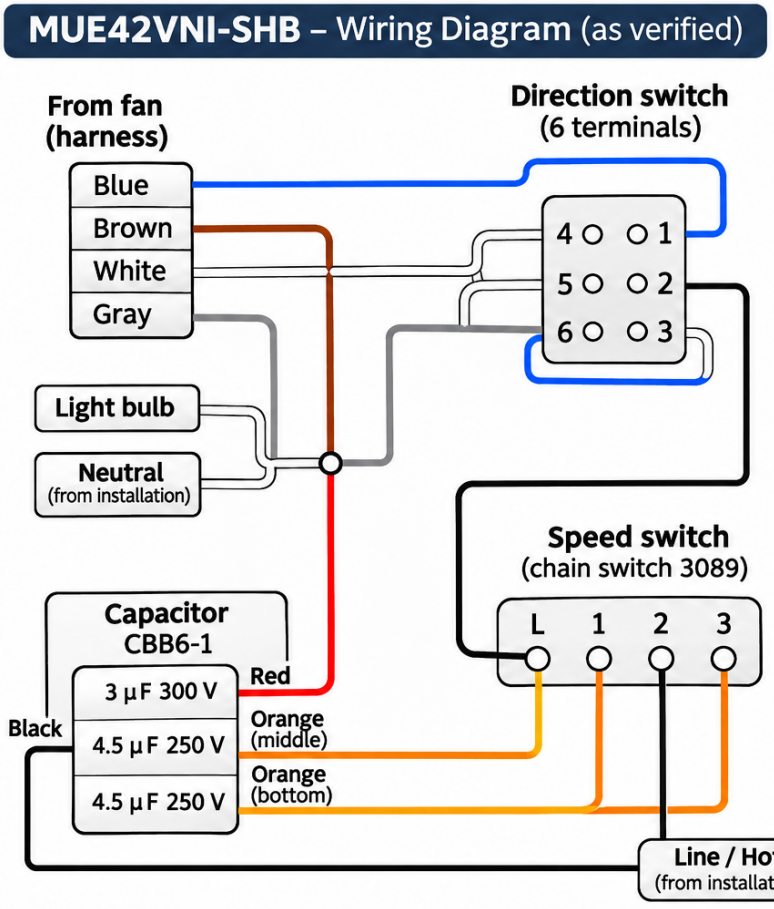

Connections (verified)

Direction switch (reversing, 6 terminals)

- **1 and 6** → Blue (from fan harness)
- **2** → Black from capacitor and to speed switch L
- **3 and 4** → White (from fan harness)
- **5** → Gray (from fan harness) + Neutral (white from installation) + White to light bulb

Speed switch (chain, 3089)

- **L** → Black from capacitor and from direction switch pin 2
- **1** → Orange (bottom) from capacitor
- **2** → Black (Line / Hot from installation)
- **3** → Orange (middle) from capacitor

Capacitor (CBB6-1)

- **Black** → To direction switch pin 2 and speed switch L
- **Red** (3 µF 300 V) → To Brown (from fan harness)
- **Orange** (4.5 µF 250 V, middle) → To speed switch 3
- **Orange** (4.5 µF 250 V, bottom) → To speed switch 1

Notes

- Gray (from fan harness), installation Neutral (white), and the light bulb white are joined at direction switch pin 5.
- Terminals 3 and 4 are connected together to the White (fan harness).
- Terminals 1 and 6 are connected together to the Blue (fan harness).

This image and text was generated by AI, do not trust the generated outcome.
Please reach out to aranbaru@pm.me for queries on this.