


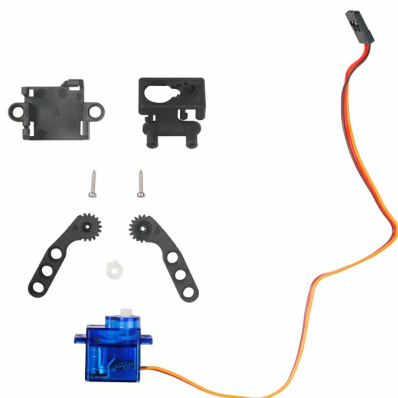


RoverC-Pro

SKU:K036-B





Description

RoverC-Pro is a programmable Mecanum wheel omnidirectional mobile robot base. It is compatible with M5StickC/M5StickC PLUS and can be used by simply inserting the M5StickC/M5StickC PLUS. The main control chip is STM32F030C6T6, consisting of four N20 worm gear motors driven by the motor driver L9110S. The PRO version provides a gripping mechanism controlled by a servo for holding objects. The base offers two servo interfaces. Additionally, there are two Grove-compatible I2C interfaces for expanding other modules. The base is compatible with LEGO holes, allowing structural expansion. On the back, there is a replaceable rechargeable 16340 (700mAh) battery. The base battery can be charged via M5StickC/M5StickC Plus. There is a power switch and indicator light at the rear of the base.

Features

- I2C address 0x38
- Remote controllable
- Equipped with a gripping structure
- Programmable
- Omnidirectional flexible movement
- Four-channel motor driver
- LEGO compatible
- Additional Grove interface for expansion
- Equipped with 16340 (700mAh)

Includes


- 1 x RoverC-Pro
- 1 x Gripper Kit

Applications

- Mini reconnaissance vehicle
- Small mobile robot
- Smart toys

Specifications

Specification	Parameter
MCU	STM32F030C8T6
Protocol	I2C:0x38
Product Size	120.0 x 75.0 x 58.0mm
Product Weight	169.3g
Package Size	115.0 x 85.0 x 65.0mm
Gross Weight	245.0g

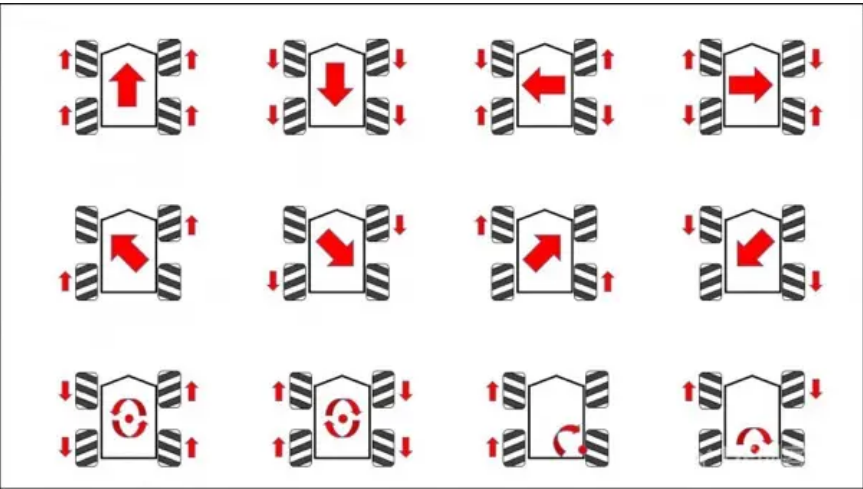

PinMap

M5StickC	G26	G0	5V	GND
RoverC HAT	SCL	SDA	5V	GND
I2C①	SCL	SDA	5V	GND
I2C②	SCL	SDA	5V	GND

Structure

◦ [RoverC-Pro Structure Files](#)

Softwares

Arduino

1: This example uses RoverC and JoyC to achieve wireless control through UDP communication. Please choose the corresponding example program below according to the device you are using.

- [RoverC-Pro & JoyC Remote Control - with M5StickC](#)
- [RoverC-Pro & JoyC Remote Control - with M5StickC-Plus](#)
- Note: After powering on, RoverC will display the hotspot name "M5AP+2-byte mac address", and JoyC will scan for the mac address name of RoverC. Long press the Home button on the M5StickC on JoyC for 3 seconds to start scanning the car's hotspot, and it will pair successfully. After successful pairing, the connection icon will be highlighted in the upper left corner of the screen, and the joystick values will be displayed on the screen. The left joystick controls forward and backward movement, left and right for lateral movement, and the right joystick controls turning.

2: This example is a standalone control program for RoverC, directly controlled by the main controller. Please choose the corresponding example program below according to the device you are using.

- [RoverC-Pro Example- with M5StickC](#)
- [RoverC-Pro Example- with M5StickC-Plus](#)

UiFlow1

- [RoverC-Pro UiFlow1 Docs](#)

Protocol

- Communication Type: I2C
- I2C Communication Address: **0x38**
- [RoverC-Pro I2C Protocol](#)

Easyloader

Easyloader	Download Link	Remarks
RoverC-Pro Easyloader	download	/

Video

[RoverC.Pro.mp4](#)

Product Comparison

Product Comparison



RoverC PRO



RoverC

Servo Gripper	x1	/
Servo Expansion Interface	x2	/
Battery	Removable	Non-removable