

0.5mm and 1mm Pitch FPC/FFC Connectors

FH12 Series





■Features

1. Rotating one-touch ZIF mechanism

The one-touch rotating ZIF mechanism is easier to operate and works with a light force.

2. Clear tactile click

A clear tactile click is delivered upon the successful completion of the mating process

3. Supports high density mounting

The FH12's one-touch ZIF system requires less space than a slide locking connector and can be mounted in the center of the PCB.

4. Top & Bottom Contact and Vertical Mount type

There are three connection types available: top contact, bottom contact and a Vertical mount.


5. 1mm pitch product


In addition to the 0.5mm pitch connector, we also offer a 1mm pitch connector.


6. Reinforced actuator

The FH12S version in 30, 40, 45, 50, and 53 pin counts are offered with a reinforced actuator that provides an extra measure of security against actuator breakage.

Rotating one-touch ZIF mechanism







■Product Specifications

	Current rating : 0.5A DC(Note 1)	Operating Temperature Range : -40 to +85°C (Note 2)	Storage Temperature Range : −10 to +50°C (Note 3)	
Rating	Voltage rating : 50V AC	Operating Humidity Range : Relative humidity, 90% max.	Storage Humidity Range : Relative humidity, 90% max.	
		(Not dewed)	(Not dewed)	

Adaptive FPC/FFC contact specifi	ications	t=0.3±0.05 Gold plated
riduptivo i i O/i i O donituot opodin	odiono	t-0.0±0.00 dola piatoa

Item	Specification	Conditions		
Insulation resistance	500MΩ minimum	100V DC		
2. Withstanding voltage	No flashover or insulation breakdown.	150V AC/1 minute		
3. Contact resistance	50mΩ maximum	1mA		
4. Durability (Insertion/withdrawal)	Contact resistance : $50m\Omega$ maximum No damage, cracks, or parts dislocation.	20 cycles		
5. Vibration	No electrical discontinuity of $1\mu s$ or more Contact resistance : $50m\Omega$ maximum. No damage, cracks, or parts dislocation.	Frequency: 10 to 55Hz, single amplitude of 0.75mm, for 10 cycles in 3 axial directions		
6. Shock	No electrical discontinuity of $1\mu s$ or more Contact resistance : $50m\Omega$ maximum. No damage, cracks, or parts dislocation.	Acceleration of 981m/s², 6ms duaration, sine half-wave waveform, 3 cycles in each of the 3 axis		
7. Humidity(Steady state)	Contact resistance : $50m\Omega$ maximum. Insulation resistance : $50M\Omega$ minimum. No damage, cracks, or parts dislocation.	96 hours at 40°C and humidity of 90% to 95%		
8. Temperature Cycle	Contact resistance : $50m\Omega$ maximum. Insulation resistance : $50M\Omega$ minimum. No damage, cracks, or parts dislocation.	Temperature : $-40^{\circ}C \rightarrow 15$ to $35^{\circ}C \rightarrow 85^{\circ}C \rightarrow 15$ to $35^{\circ}C$, Time: $30 \rightarrow 2$ to $3 \rightarrow 30 \rightarrow 2$ to 3 (minutes) 5 cycles		
9.Resistance to Soldering heat	No deformation of components affecting performance.	Reflow : At the recommended temperature profile Manual soldering : 350±10°C for 5 seconds		

Note 1: When passing the current through all of the contacts, use 70% of the current rating.

Note 2: Includes temperature rise caused by current flow.

Note 3 : The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers nonconducting condition of installed connectors in storage, shipment or during transportation.

■Materials / Finish

Part	Material	Finish	Remarks
Insulator	Polyamide, LCP(60 pos.)	Color : Beige	UL94V-0
insulator	PPS	Color : Dark brown	UL94V-U
Contact	Phosphor bronze	Gold plated	
Metal Fittings	Brass	Tin plated	

■Product Number Structure

Refer to the chart below when determining the product specifications from the product number. Please select from the product numbers listed in this catalog when placing orders.


Series Name : FH	6 Contact alignment : Single
2 Series No. : 12	Eccentric direction :
3 Blank : standard type	Blank : standard type
A : Top contact type	A : Eccentric type
S : Type with strengthed flip-lock actuator	3 Contacts Pitch: 0.5mm, 1mm
4 Standard type: Number of contacts	Contact type
Eccentric type: Number of contacts in 0.5mm housing	SH : SMT horizontal mounting type
5 Standard type: Blank	SVA : SMT vertical mounting type
Eccentric type: Number of contacts	Plating specification
	(54) : Selective gold plated
	(55) : Gold plated
	(1)(98): Gold plated 500 pieces/reel


■Series Configuration


Pitch	Bottom Contact Type	Top Contact Type	Vertical mounting Type
0.5mm	FH12- ** S-0.5SH Number of contacts 6, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 33, 34, 35, 36, 40, 45, 50, 53 Type with Strengthened Lock Lever FH12S- ** S-0.5SH P.5 Number of contacts 30, 40, 45, 50, 53	FH12A- ** S-0.5SH P.6 Number of contacts 10, 12, 15, 16, 18, 20, 22, 24, 26, 28, 29, 30, 32, 33, 34, 36, 40, 42, 45, 50	FPC/FFC conductive surface(bottom side) FH12- ** S-0.5SVA P.7 Number of contacts 6, 10, 12, 13, 15, 16, 17, 18, 20, 22, 24, 26, 30, 32, 33, 34, 36, 40, 45, 49, 50, 60
1mm	Standard FH12- ** S-1SH P.8 Eccentric FH12- ** (**) SA-1SH Standard Number of contacts 5, 6, 7, 8, 9, 11, 12,16,17,22,26 Eccentric Number of contacts 4, 6, 8, 10, 11, 14, 19, 24		FPC/FFC conductive surface(bottom side) FH12- ** S-1SVA P.9 Number of contacts 6, 7, 8, 16, 20, 22, 24

■0.5mm Pitch Bottom Contact Type










- Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
- Packaged on tape and reel only. Check packaging specification.
- : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
- Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

 Note S: If there is no problem with the connector height, we recommend the type with the strengthened Fliplock actuator (FH12S-*S-0.5SH). Standard type connector height: 2mm Connector height of type with strengthened Flip-lock actuator: 2.4mm

	Part No.	HRS No.	No. of Contacts	Α	В	С	D
	FH12-6S-0.5SH(**)	586-0582-5 * *	6	2.5	6.1	7.1	3.57
	FH12-8S-0.5SH(**)	586-0744-5 **	8	3.5	7.1	8.1	4.57
	FH12-10S-0.5SH(**)	586-0522-3 **	10	4.5	8.1	9.1	5.57
	FH12-11S-0.5SH(**)	586-0600-5 * *	11	5.0	8.6	9.6	6.07
	FH12-12S-0.5SH(**)	586-0704-0 * *	12	5.5	9.1	10.1	6.57
	FH12-13S-0.5SH(**)	586-0549-0 * *	13	6.0	9.6	10.6	7.07
	FH12-14S-0.5SH(**)	586-0533-0 **	14	6.5	10.1	11.1	7.57
	FH12-15S-0.5SH(**)	586-0523-6 **	15	7.0	10.6	11.6	8.07
	FH12-16S-0.5SH(**)	586-0531-4 **	16	7.5	11.1	12.1	8.57
	FH12-17S-0.5SH(**)	586-0606-1 **	17	8.0	11.6	12.6	9.07
	FH12-18S-0.5SH(**)	586-0530-1 **	18	8.5	12.1	13.1	9.57
	FH12-19S-0.5SH(**)	586-0534-2 **	19	9.0	12.6	13.6	10.07
	FH12-20S-0.5SH(**)	586-0524-9 * *	20	9.5	13.1	14.1	10.57
	FH12-22S-0.5SH(**)	586-0532-7 **	22	10.5	14.1	15.1	11.57
	FH12-24S-0.5SH(**)	586-0521-0 **	24	11.5	15.1	16.1	12.57
	FH12-25S-0.5SH(**)	586-0692-3 **	25	12.0	15.6	16.6	13.07
	FH12-26S-0.5SH(**)	586-0576-2 **	26	12.5	16.1	17.1	13.57
	FH12-28S-0.5SH(**)	586-0612-4 **	28	13.5	17.1	18.1	14.57
Note 5	FH12-30S-0.5SH(**)	586-0525-1 **	30	14.5	18.1	19.1	15.57
	FH12-32S-0.5SH(**)	586-0681-7 **	32	15.5	19.1	20.1	16.57
	FH12-33S-0.5SH(**)	586-0520-8 **	33	16.0	19.6	20.6	17.07
	FH12-34S-0.5SH(**)	586-0617-8 **	34	16.5	20.1	21.1	17.57
	FH12-35S-0.5SH(**)	586-0740-4 **	35	17.0	20.6	21.6	18.07
	FH12-36S-0.5SH(**)	586-0526-4 **	36	17.5	21.1	22.1	18.57
Note 5	FH12-40S-0.5SH(**)	586-0527-7 **	40	19.5	23.1	24.1	20.57
Note 5	FH12-45S-0.5SH(**)	586-0528-0 **	45	22.0	25.6	26.6	23.07
Note 5	FH12-50S-0.5SH(**)	586-0529-2 **	50	24.5	28.1	29.1	25.57
Note 5	FH12-53S-0.5SH(**)	586-0595-7 **	53	26.0	29.6	30.6	27.07
	Note 1 : Embossed tape	reel packaging (2,0	00 pcs/reel, 500 pc	cs/reel). O	rder by nu	mber of re	eels.

■0.5mm Pitch Bottom Contact Type with Strengthened Flip-lock Actuator

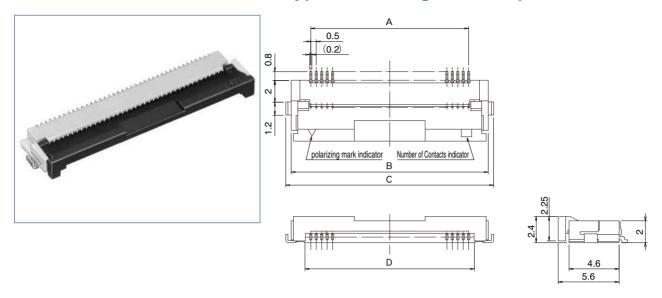

Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.

Note 2: Packaged on tape and reel only. Check packaging specification.


Note 3: Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.

Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

Part No.	HRS No.	No. of Contacts	Α	В	С	D
FH12S-30S-0.5SH(**)	586-0667-6 **	30	14.5	18.1	19.1	15.57
FH12S-40S-0.5SH(**)	586-0640-0 **	40	19.5	23.1	24.1	20.57
FH12S-45S-0.5SH(**)	586-0665-0 **	45	22.0	25.6	26.6	23.07
FH12S-50S-0.5SH(**)	586-0642-5 **	50	24.5	28.1	29.1	25.57
FH12S-53S-0.5SH(**)	586-0691-0 * *	53	26.0	29.6	30.6	27.07

Note 1: Embossed tape reel packaging (2,000 pcs/reel, 500 pcs/reel). Order by number of reels.

■0.5mm Pitch Top Contact Type

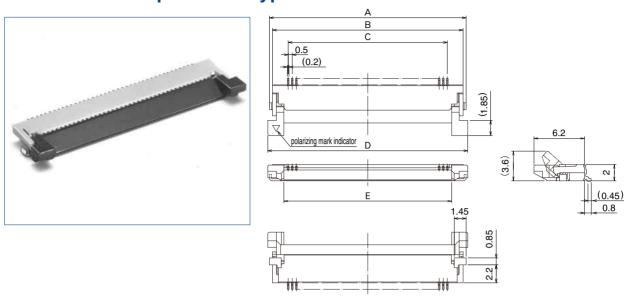

Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.

Note 2: Packaged on tape and reel only. Check packaging specification.


Note 3: Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.

Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

Part No.	HRS No.	No. of Contacts	Α	В	С	D	Е
FH12A-10S-0.5SH(**)	586-0550-9 **	10	9.1	8.35	4.5	9.5	5.57
FH12A-12S-0.5SH(**)	586-0696-4 **	12	10.1	9.35	5.5	10.5	6.57
FH12A-15S-0.5SH(**)	586-0551-1 **	15	11.6	10.85	7.0	12.0	8.07
FH12A-16S-0.5SH(**)	586-0552-4 **	16	12.1	11.35	7.5	12.5	8.57
FH12A-18S-0.5SH(**)	586-0553-7 **	18	13.1	12.35	8.5	13.5	9.57
FH12A-20S-0.5SH(**)	586-0554-0 **	20	14.1	13.35	9.5	14.5	10.57
FH12A-22S-0.5SH(**)	586-0686-0 **	22	15.1	14.35	10.5	15.5	11.57
FH12A-24S-0.5SH(**)	586-0555-2 **	24	16.1	15.35	11.5	16.5	12.57
FH12A-26S-0.5SH(**)	586-0663-5 **	26	17.1	16.35	12.5	17.5	13.57
FH12A-28S-0.5SH(**)	586-0725-0 **	28	18.1	17.35	13.5	18.5	14.57
FH12A-29S-0.5SH(**)	586-0585-3 **	29	18.6	17.85	14.0	19.0	15.07
FH12A-30S-0.5SH(**)	586-0556-5 **	30	19.1	18.35	14.5	19.5	15.57
FH12A-32S-0.5SH(**)	586-0687-3 **	32	20.1	19.35	15.5	20.5	16.57
FH12A-33S-0.5SH(**)	586-0570-6 **	33	20.6	19.85	16.0	21.0	17.07
FH12A-34S-0.5SH(**)	586-0670-0 **	34	21.1	20.35	16.5	21.5	17.57
FH12A-36S-0.5SH(**)	586-0662-2 **	36	22.1	21.35	17.5	22.5	18.57
FH12A-40S-0.5SH(**)	586-0557-8 **	40	24.1	23.35	19.5	24.5	20.57
FH12A-42S-0.5SH(**)	586-0698-0 **	42	25.1	24.35	20.5	25.5	21.57
FH12A-45S-0.5SH(**)	586-0558-0 **	45	26.6	25.85	22.0	27.0	23.07
FH12A-50S-0.5SH(**)	586-0559-3 **	50	29.1	28.35	24.5	29.5	25.57

Note 1: Embossed tape reel packaging (2,000 pcs/reel). Order by number of reels.

■0.5mm Pitch Vertical mounting Type

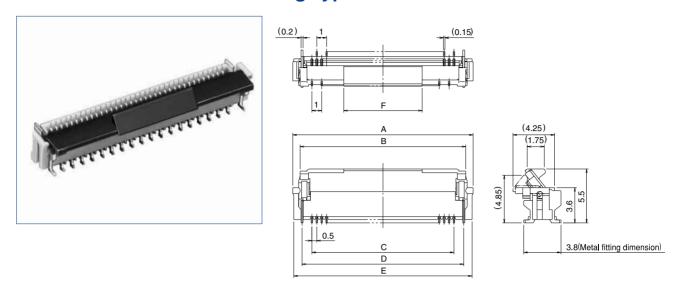

Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.

Note 2: Packaged on tape and reel only. Check packaging specification.


Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.


Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

Part No.	HRS No.	No. of Contacts	Α	В	С	D	Е	F
FH12-6S-0.5SVA (54)	586-0756-4 54	6	6.4	4.9	2.5	4.5	6.2	4
FH12-10S-0.5SVA (54)	586-0806-0 54	10	8.4	6.9	4.5	6.5	8.2	4
FH12-12S-0.5SVA (54)	586-0757-7 54	12	9.4	7.9	5.5	7.5	9.2	4
FH12-13S-0.5SVA (54)	586-0807-3 54	13	9.9	8.4	6.0	8.0	9.7	4
FH12-15S-0.5SVA (54)	586-0808-6 54	15	10.9	9.4	7.0	9.0	10.7	4
FH12-16S-0.5SVA (54)	586-0809-9 54	16	11.4	9.9	7.5	9.5	11.2	4
FH12-17S-0.5SVA (54)	586-0810-8 54	17	11.9	10.4	8.0	10.0	11.7	4
FH12-18S-0.5SVA (54)	586-0811-0 54	18	12.4	10.9	8.5	10.5	12.2	4
FH12-20S-0.5SVA (54)	586-0812-3 54	20	13.4	11.9	9.5	11.5	13.2	4
FH12-22S-0.5SVA (54)	586-0813-6 54	22	14.4	12.9	10.5	12.5	14.2	8
FH12-24S-0.5SVA (54)	586-0814-9 54	24	15.4	13.9	11.5	13.5	15.2	8
FH12-26S-0.5SVA (54)	586-0815-1 54	26	16.4	14.9	12.5	14.5	16.2	8
FH12-30S-0.5SVA (54)	586-0750-8 54	30	18.4	16.9	14.5	16.5	18.2	8
FH12-32S-0.5SVA (54)	586-0816-4 54	32	19.4	17.9	15.5	17.5	19.2	8
FH12-33S-0.5SVA (54)	586-0818-0 54	33	19.9	18.4	16.0	18.0	19.7	8
FH12-34S-0.5SVA (54)	586-0817-7 54	34	20.4	18.9	16.5	18.5	20.2	8
FH12-36S-0.5SVA (54)	586-0819-2 54	36	21.4	19.9	17.5	19.5	21.2	8
FH12-40S-0.5SVA (54)	586-0804-5 54	40	23.4	21.9	19.5	21.5	23.2	8
FH12-45S-0.5SVA (54)	586-0820-1 54	45	25.9	24.4	22.0	24.0	25.7	8
FH12-49S-0.5SVA (54)	586-0821-4 54	49	27.9	26.4	24.0	26.0	27.7	8
FH12-50S-0.5SVA (54)	586-0805-8 54	50	28.4	26.9	24.5	26.5	28.2	8
FH12-60S-0.5SVA (54)	586-0749-9 54	60	33.4	31.9	29.5	31.5	33.2	8

Note 1: Embossed tape reel packaging (1,000 pcs/reel, 500 pcs/reel). Order by number of reels.

■1mm Pitch Type Bottom Contact Type



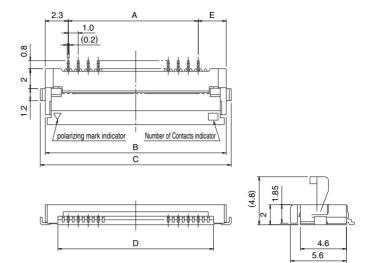

Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.

Note 2: Packaged on tape and reel only. Check packaging specification.

Note 3: Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.


Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

	Part No.	HRS No.	No. of Contacts	А	В	С	D	Е
	FH12-5S-1SH(**)	586-0591-6 **	5	4	8.6	9.6	6.07	2.3
	FH12-6S-1SH(**)	586-0607-4 **	6	5	9.6	10.6	7.07	2.3
	FH12-7S-1SH(**)	586-0535-5 **	7	6	10.6	11.6	8.07	2.3
Ф	FH12-8S-1SH(**)	586-0579-0 **	8	7	11.6	12.6	9.07	2.3
typ	FH12-9S-1SH(**)	586-0540-5 **	9	8	12.6	13.6	10.07	2.3
Standard type	FH12-11S-1SH(**)	586-0668-9 **	11	10	14.6	15.6	12.07	2.3
itano	FH12-12S-1SH(**)	586-0741-7 **	12	11	15.6	16.6	13.07	2.3
0)	FH12-16S-1SH(**)	586-0536-8 **	16	15	19.6	20.6	17.07	2.3
	FH12-17S-1SH(**)	586-0739-5 **	17	16	20.6	21.6	18.07	2.3
	FH12-22S-1SH(**)	586-0547-4 **	22	21	25.6	26.6	23.07	2.3
	FH12-26S-1SH(**)	586-0592-9 **	26	25	29.6	30.6	27.07	2.3
	FH12-10(4)SA-1SH(**)	586-0537-0 **	4	3	8.1	9.1	5.57	2.8
	FH12-14(6)SA-1SH(**)	586-0538-3 **	6	5	10.1	11.1	7.57	2.8
be l	FH12-18(8)SA-1SH(**)	586-0539-6 **	8	7	12.1	13.1	9.57	2.8
Eccentric type	FH12-22(10)SA-1SH(**)	586-0541-8 **	10	9	14.1	15.1	11.57	2.8
ent	FH12-24(11)SA-1SH(**)	586-0542-0 **	11	10	15.1	16.1	12.57	2.8
ЕСС	FH12-30(14)SA-1SH(**)	586-0543-3 **	14	13	18.1	19.1	15.57	2.8
	FH12-40(19)SA-1SH(**)	586-0546-1 **	19	18	23.1	24.1	20.57	2.8
	FH12-50(24)SA-1SH(**)	586-0548-7 **	24	23	28.1	29.1	25.57	2.8

Note 1 : Embossed tape reel packaging (2,000 pcs/reel, 500 pcs/reel). Order by number of reels.

■1mm Pitch Vertical Mounting Type



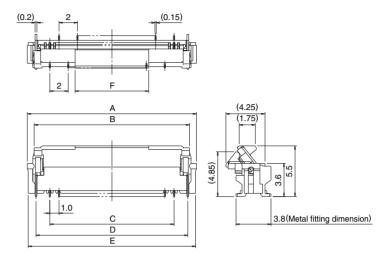

Note 1: The coplanarity of each terminal lead within specified dimension is 0.1mm Max.

Note 2: Packaged on tape and reel only. Check packaging specification.

Note 3: Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.

Note 4: After reflow, the terminal plating may change color, however this does not represent a quality issue.

Part No.	HRS No.	No. of Contacts	Α	В	С	D	Е	F
FH12- 6S-1SVA (54)	586-0822-0 54	6	9.9	8.4	5	8	9.7	4
FH12- 7S-1SVA (54)	586-0823-0 54	7	10.9	9.4	6	9	10.7	4
FH12- 8S-1SVA (54)	586-0824-0 54	8	11.9	10.4	7	10	11.7	4
FH12-16S-1SVA (54)	586-0825-0 54	16	19.9	18.4	15	18	19.7	8
FH12-20S-1SVA (54)	586-0826-0 54	20	23.9	22.4	19	22	23.7	8
FH12-22S-1SVA (54)	586-0827-0 54	22	25.9	24.4	21	24	25.7	8
FH12-24S-1SVA (54)	586-0828-0 54	24	27.9	26.4	23	26	27.7	8

Note 1 : Embossed tape reel packaging (1,000 pcs/reel, 500 pcs/reel). Order by number of reels.

♠ Recommended FPC/FFC dimensions and Land/Metal Mask dimensions.

В

Unit: mm

•0.5mm Pitch Product

FPC/FFC dimensions 0.35±0.03(FPC) 0.3±0.05 0.3±0.03(FFC) 0.5 ± 0.1 0.5mm Pitch *Set the stiffener thickness to 0.188 (7.5mil) min. **Bottom** Unit: mm **Contact** Dimension Dimension В **Type** Α Number of Contacts 2.5 3.5 12.0 13.0 6 25 8 3.5 4.5 26 4.5 28 10 5.5 11 5.0 6.0 29 0.5mm 6.5 30 12 5.5 Pitch 7.0 32 13 6.0


Recommended metal mask thickness : 0.15mm Unit : mn							t : mm
Dimension Number of Contacts	Α	В	С	Dimension Number of Contacts	А	В	С
6	2.5	8.1	4.5	25	12.0	17.6	14.0
8	3.5	9.1	5.5	26	12.5	18.1	14.5
10	4.5	10.1	6.5	28	13.5	19.1	15.5
11	5.0	10.6	7.0	29	14.0	19.6	16.0
12	5.5	11.1	7.5	30	14.5	20.1	16.5
13	6.0	11.6	8.0	32	15.5	21.1	17.5
14	6.5	12.1	8.5	33	16.0	21.6	18.0
15	7.0	12.6	9.0	34	16.5	22.1	18.5
16	7.5	13.1	9.5	35	17.0	22.6	19.0
17	8.0	13.6	10.0	36	17.5	23.1	19.5
18	8.5	14.1	10.5	40	19.5	25.1	21.5
19	9.0	14.6	11.0	42	20.5	26.1	22.5
20	9.5	15.1	11.5	45	22.0	27.6	24.0
22	10.5	16.1	12.5	50	24.5	30.1	26.5
24	11.5	17.1	13.5	53	26.0	31.6	28.0


Land / Metal Mask dimensions

C±0.1

0.3±0.03(Land)

0.25+0.03(Metal mask)






0.5mm Pitch **Vertical Mountin**

g Type

*Set the stiffener thickness to 0.188 (7.5mil) min.

Dimension Number of Contacts	Α	В	Dimension Number of Contacts	Α	В
6	2.5	3.5	26	12.5	13.5
10	4.5	5.5	30	14.5	15.5
12	5.5	6.5	32	15.5	16.5
13	6.0	7.0	33	16.0	17.0
15	7.0	8.0	34	16.5	17.5
16	7.5	8.5	36	17.5	18.5
17	8.0	9.0	40	19.5	20.5
18	8.5	9.5	45	22.0	23.0
20	9.5	10.5	49	24.0	25.0
22	10.5	11.5	50	24.5	25.5
24	11.5	12.5	60	29.5	30.5




Recommended metal mask thickness: 0.15mm

U	Jnit	:	mm
U	mit	•	ШП

Dimension Number of Contacts	Α	В	Dimension Number of Contacts	Α	В
10	6.5	4.5	26	14.5	12.5
12	7.5	5.5	30	16.5	14.5
13	8.0	6.0	32	17.5	15.5
15	9.0	7.0	33	18.0	16.0
16	9.5	7.5	34	18.5	16.5
17	10.0	8.0	36	19.5	17.5
18	10.5	8.5	40	21.5	19.5
20	11.5	9.5	45	24.0	22.0
22	12.5	10.5	49	26.0	24.0
24	13.5	11.5	50	26.5	24.5
			60	31.5	29.5

♠ Recommended FPC/FFC dimensions and Land/Metal Mask dimensions


●1mm Pitch Product

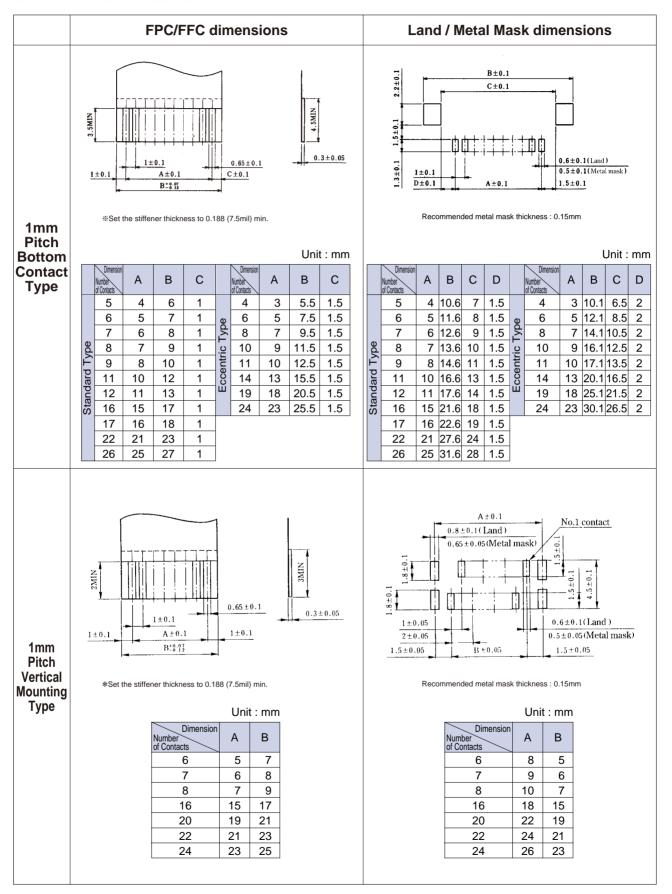


● Packaging Specification


Embossed Carrier Tape Dimensions


Horizontal Type (Common to Bottom/Top Contact, 0.5mm/1mm Pitch)





Reel Dimensions (Common to All Types)



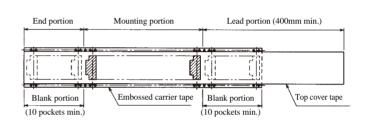

●0.5mm Pitch Bottom/Top Contact Type

Dimension Number of Contacts Α В С Ε 16 7.5 17.4 21.4 6 8 16 7.5 17.4 21.4 10 16 7.5 17.4 21.4 11 16 7.5 17.4 21.4 12 24 11.5 25.4 29.4 13 24 11.5 25.4 29.4 14 24 11.5 25.4 29.4 15 24 11.5 25.4 29.4 16 24 25.4 29.4 11.5 17 24 11.5 25.4 29.4 18 24 11.5 25.4 29.4 19 24 11.5 25.4 29.4 20 24 11.5 25.4 29.4 22 24 25.4 29.4 11.5 24 11.5 25.4 29.4

				ι	Jnit : mm
Dimension Number of Contacts	Α	В	С	D	Е
25	24		11.5	25.4	29.4
26	24		11.5	25.4	29.4
28	32	28.4	14.2	33.4	37.4
29	32	28.4	14.2	33.4	37.4
30	32	28.4	14.2	33.4	37.4
32	32	28.4	14.2	33.4	37.4
33	32	28.4	14.2	33.4	37.4
34	32	28.4	14.2	33.4	37.4
35	44	40.4	20.2	45.4	49.4
36	44	40.4	20.2	45.4	49.4
40	44	40.4	20.2	45.4	49.4
42	44	40.4	20.2	45.4	49.4
45	44	40.4	20.2	45.4	49.4
50	44	40.4	20.2	45.4	49.4
53	44	40.4	20.2	45.4	49.4


● 1mm Pitch Bottom Contact Type

	Number of Contacts	Α	В	С	D	Е
	5	16		7.5	17.4	21.4
	6	24		11.5	25.4	29.4
	7	24		11.5	25.4	29.4
Type	8	24		11.5	25.4	29.4
	9	24		11.5	25.4	29.4
ard	11	24		11.5	25.4	29.4
Standard	12	24		11.5	25.4	29.4
Sts	16	32	28.4	14.2	33.4	37.4
	17	44	40.4	20.2	45.4	49.4
	22	44	40.4	20.2	45.4	49.4
	26	44	40.4	20.2	45.4	49.4


					·	Jnit : mm
	Dimension Number of Contacts	А	В	O	D	Е
	4	16		7.5	17.4	21.4
به	6	24		11.5	25.4	29.4
Type	8	24		11.5	25.4	29.4
		24		11.5	25.4	29.4
Eccentric	11	24		11.5	25.4	29.4
ဗြ	14	32	28.4	14.2	33.4	37.4
ш	19	44	40.4	20.2	45.4	49.4
	24	44	40.4	20.2	45.4	49.4

Vertical Mounting Type (Common to 0.5mm/1mm Pitch)


Tape width 24mm max.




Tape width 32mm min.



Reel Dimensions (Common to All Types)





●0.5mm Pitch Vertical mounting Type

Dimension Number of Contacts	А	В	С	D	Е
6	16		7.5	17.4	21.4
10	16		7.5	17.4	21.4
12	16		7.5	17.4	21.4
13	24		11.5	25.4	29.4
15	24		11.5	25.4	29.4
16	24		11.5	25.4	29.4
17	24		11.5	25.4	29.4
18	24		11.5	25.4	29.4
20	24		11.5	25.4	29.4
22	24		11.5	25.4	29.4
24	24		11.5	25.4	29.4


Dimension Number of Contacts	А	В	С	D	E
26	24		11.5	25.4	29.4
30	32	28.4	14.2	33.4	37.4
32	32	28.4	14.2	33.4	37.4
33	32	28.4	14.2	33.4	37.4
34	44	40.4	20.2	45.4	49.4
36	44	40.4	20.2	45.4	49.4
40	44	40.4	20.2	45.4	49.4
45	44	40.4	20.2	45.4	49.4
49	44	40.4	20.2	45.4	49.4
50	44	40.4	20.2	45.4	49.4
60	56	52.4	26.2	57.4	61.4

●1mm Pitch Vertical mounting Type Unit: mm

Dimension Number of Contacts	Α	В	С	D	Е
6	24		11.5	25.4	29.4
7	24		11.5	25.4	29.4
8	24		11.5	25.4	29.4
16	32	28.4	14.2	33.4	37.4
20	44	40.4	20.2	45.4	49.4
22	44	40.4	20.2	45.4	49.4
24	44	40.4	20.2	45.4	49.4

◆FH12 Series FPC/FFC Construction (Recommended Specifications)

1. FFC Flexible Flat Cable

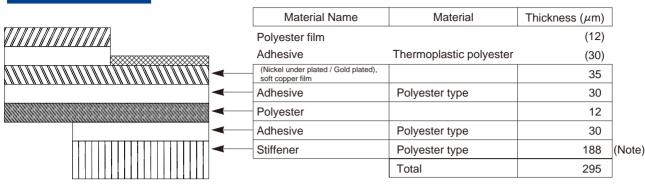


*Real tolerance of thickness dimension is on the order of $\pm 20 \mu m$ (275 to 315 μm)

Note: Use of a thicker FFC results in a stiffer lock action and the lock is more easily released.

A factor that contributes to thicker FFC is the use of $250\mu m$ stiffener which is thicker than the standard (188 μm) product. This results in a total thickness of $357\mu m$.

When using FFC, control of FFC thickness becomes easy if you indicate to us the thickness of the stiffener.


2. FPC Flexible Printed Circuit

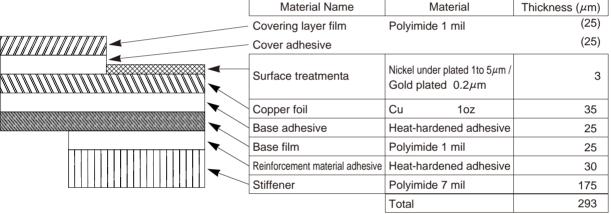

3. Precautions

- 1. This specification is a recommendation for the construction of the FH12 Series FPC and FFC (t=0.3±0.05).
- 2. For details about the construction, please contact the FPC/FFC manufacturers.

■Recommended Temperature Profile



HRS test conditions

Land dimensions

Solder method : Reflow, IR/hot air

Environment : Room air

Solder composition : Paste, 96.5%Sn/3%Ag/0.5%Cu (Senju Metal Industry, Co., Ltd.'s

Part Number: M705-221CM5-32-

10.5)

Test board : Glass epoxy 40mm×80mm×1.6mm thick

: Top and bottom contact type 0.3mm×1.3mm

Vertical mounting type

0.6mm×1.5mm

Metal mask : Top and bottom contact type

0.25mm×1.3mm×0.15mm thick

Vertical mounting type

0.5mm $\times 1.5$ mm $\times 0.15$ mm thick

This temperature profile is based on the above conditions. In individual applications the actual temperature may vary, depending on solder paste type, volume/thickness and board size/thickness. Consult your solder paste and equipment manufacturer for specific recommendations.


● Connector Operating Instructions, precautions and recommendations

●Bottom Contact Type (common for 0.5mm/1mm Pitch)


1. FPC/FFC Termination procedure. Connector installed on the board.

1) Lift up the actuator. Use thumb or index finger.

Operation




2) Fully insert the FPC/FFC parallel to mounting surface, with the exposed conductive traces facing down.




1) Avoid grasping the actuator with two fingers or lifting the actuator with fingernail.

Precautions




2) Do not use a thin tool such as the tip of a screwdriver to release the lock lever. Doing so will cause deformation of the contacts.




3) Do not apply force in the direction of arrows A, B, or C while the lock lever is open.

Doing so will cause the lock lever to become disen gaged, or will damage the hook portion of the connector body.



4) When inserting the FPC/FFC, do not forcefully rub against the surface beneath the connector insertion slot. Doing so will result in the FPC/FFC forcefully striking the contacts and this will cause contact deformation, peeling of the FPC/FFC conductors, and other irregularities.




5) Insert the FPC/FFC at the proper position of the connector insertion slot, and insert perpendicularly with respect to the connector. Improper insertion will cause continuity problems, disengagement of the lock lever, and damage to the hook portion.



●Bottom Contact Type (common for 0.5mm/1mm Pitch)


Operation

3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1.




Precautions


6) Partial insertion of the FPC/FFC, offset insertion, and diagonal insertion will result in an unfavorable engagement of the lock lever in which the lock lever is raised. To correct this, first remove the FPC/FFC and then reinsert it. Forcing the lock will damage the connector.



7) When locking, handle the FPC/FFC so that a load is not applied to the FPC/FFC as would occur by pulling the FPC/FFC, or lifting it, etc. When a load is applied in the opposite direction to the rotational movement of the lock, an excessive load will be applied and this will cause connector damage.




8) At the time of lock operation, application of force such as that indicated by the arrows in the diagrams below will cause the lock lever to disengage. When the lock lever has become disengaged, please exchange the entire connector.



2. FPC/FFC Removal

- 1) Lift up the actuator.
- 2) Carefully remove the FPC/FFC.




●Top Contact Type


Operation

1. FPC/FFC Termination procedure. Connector installed on the board.


1) Lift up the actuator. Use thumb or index finger.



Fully insert the FPC/FFC parallel to mounting surface, with the exposed conductive traces facing UP.




3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1 above.




2. FPC/FFC Removal

- 1) Lift up the actuator.
- 2) Carefully remove the FPC/FFC.




Precautions


 Avoid further lifting of the actuator once the lock has been released. Doing so will cause the lock lever to separate from the rotational shaft, and the lock lever will become disengaged or the hook portion of the connector body will be damaged.



2) Avoid further pressing of the lock portion from the locked condition when the FPC/FFC has not yet been inserted. Doing so will cause the lock lever to become disengaged from the rotational shaft, and the hook portion of the connector body will be damaged.



 Do not insert the FPC/FFC diagonally. Do i ng so will result in the corners of the FPC/FFC catching on the contacts and will cause deformation of the contacts.



4) When closing down the actuator apply equal pressure to both sides of the actuator.




●Vertical Mounting type (common for 0.5mm/1mm pitch)


Operation

1. FPC/FFC Termination procedure. Connector installed on the board.


1) Verify that the actuator is positioned upright. If the actuator has rotated to the side, carefully rotate it upright. Actuator upright



2) Insert the FPC/FFC vertically in the connector slot assuring that the conductive traces of the FPC/FFC are facing away from the actuator.

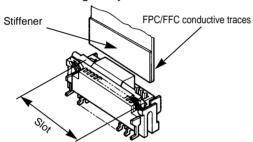


3) Press down the actuator in the direction shown.



2. FPC/FFC Removal

Rotate the actuator upward and withdraw the FPC/FFC.




Precautions

1) Avoid forcing the actuator up or down without the FPC/FFČ inserted.






2) Do not attempt to open or over rotate an already released actuator (refer to the diagram below). These actions may damage the actuator.




3) Do not insert the FPC/FFC diagonally. Doing so will result in the corners of the FPC/FFC catching on the contacts and will cause deformation of the contacts.



4) Do not press down vertically on the actuator when the FPC/FFC already inserted, it needs to be rotated to engage the lock. Refer to the diagram below.

Doing so may cause actuator failure.



MEMO:

USA:

HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE

2300 Warrenville Road, Suite 150, Downers Grove, IL 60515 Phone: +1-630-282-6700 http://www.hirose.com/us/

THE NETHERLANDS: HIROSE ELECTRIC EUROPE B.V.

Hogehillweg #8 1101 CC Amsterdam Z-0

Phone: +31-20-6557460 Fax: +31-20-6557469 http://www.hirose.com/eu/

GERMANY:

HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE

Bayernstr. 3, Haus C 30855 Langenhagen, Germany

Phone: +49-511 97 82 61 30 Fax: +49-511 97 82 61 35 http://www.hirose.com/eu/

CHINA:

HIROSE ELECTRIC (SHANGHAI) CO., LTD.

1601, Henderson Metropolitan, NO.300, East Nanjing Road, Huangpu District, Shanghai, China 200001

Phone: +86-21-6391-3355 Fax: +86-21-6391-3335 http://www.hirose.com/cn/

HONG KONG:

HIROSE ELECTRIC HONGKONG TRADING CO., LTD.

Room 1001, West Wing, Tsim Sha Tsui Centre, 66 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong

Phone: +852-2803-5338 Fax: +852-2591-6560 http://www.hirose.com/hk/

SINGAPORE:

HIROSE ELECTRIC SINGAPORE PTE. LTD.

10 Anson Road #26-16, International Plaza 079903, Singapore

Phone: +65-6324-6113 Fax: +65-6324-6123 http://www.hirose.com/sg/

MALAYSIA:

PENANG REPRESENTATIVE OFFICE

1-21-01, Suntech @ Penang Cybercity (1164), Lintang Mayang Pasir 3,11950, Bayan Baru, Penang, Malaysia.

Phone: +604-619-2564 Fax: +604-619-2574 http://www.hirose.com/sg/

USA:

HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE

2841 Junction Ave, Suite 200 San Jose, CA, 95134 Phone: +1-408-253-9640 Fax: +1-408-253-9641 http://www.hirose.com/us/

GERMANY:

HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH

Schoenbergstr. 20, 73760 ostfildern Phone: +49-711-456002-1 Fax: +49-711-456002-299 http://www.hirose.com/eu/

FRANCE:

HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE

Regus La Garenne Colombes, Place de La Belgique, 71 Boulevard National La Garenne Colombes, 92250, France

Phone: +33 (0) 1 7082 3170 Fax: +33 (1) 7082 3101 http://www.hirose.com/eu/

HIROSE ELECTRIC (SHANGHAI) CO.,LTD. BEIJING BRANCH

A1001, Ocean International Center, Building 56# East 4th Ring Middle Road, ChaoYang District, Beijing, 100025

Phone: +86-10-5165-9332 Fax: +86-10-5908-1381 http://www.hirose.com/cn/

TAIWAN:

HIROSE ELECTRIC TAIWAN CO., LTD.

103 8F, No.87, Zhengzhou Rd., Taipei

Phone: +886-2-2555-7377 Fax: +886-2-2555-7350 http://www.hirose.com/tw/

INDIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD. DELHI LIAISON OFFICE

Office NO.552, Regus-Green Boulevard, Level5, Tower C, Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India

Phone: +91-12-660-8018 Fax: +91-120-4804949 http://www.hirose.com/sg/

THAILAND:

BANGKOK OFFICE (REPRESENTATIVE OFFICE)

Unit 4703, 47th FL., 1 Empire Tower, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 Thailand

Phone: +66-2-686-1255 Fax: +66-2-686-3433 http://www.hirose.com/sg/

USA:

HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)

17197 N. Laurel Park Drive, Suite 253,

Livonia, MI 48152 Phone: +1-734-542-9963 Fax: +1-734-542-9964 http://www.hirose.com/us/

GERMANY:

HIROSE ELECTRIC EUROPE B.V. NUREMBERG OFFICE

Neumeyerstrasse 22-26, 90411 Nurnberg

Phone: +49-911 32 68 89 63 Fax: +49-911 32 68 89 69 http://www.hirose.com/eu/

UNITED KINGDOM:

HIROSE ELECTRIC EUROPE BV (UK BRANCH)

4 Newton Court, Kelvin Drive, Knowlhill,

Milton Keynes, MK5 8NH Phone: +44-1908 202050 Fax: +44-1908 202058 http://www.hirose.com/eu/

HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.

Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre, 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008

Phone: +86-755-8207-0851 Fax: +86-755-8207-0873 http://www.hirose.com/cn/

KOREA:

HIROSE KOREA CO.,LTD.

250, Huimanggongwon-ro, Siheung-si, Gyeonggi-do, Korea, 15083 Phone: +82-31-496-7000 or 7124 Fax: +82-31-496-7100

http://www.hirose.co.kr/

INDIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE

Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma Gandhi (MG) Road, Bangalore 560 001, Karnataka, India

Phone: +91-80-4120 1907 Fax: +91-80-4120 9908 http://www.hirose.com/sg/



HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540.JAPAN TEL: +81-45-620-3526 Fax: +81-45-591-3726

http://www.hirose.com

http://www.hirose-connectors.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

FH12-10S-0.5SH(55) FH12-10S-0.5SV(55) FH12-12S-0.5SH(55) FH12-12S-0.5SV(55) FH12-15S-0.5SH(55) FH12-15S-0.5SV(55) FH12-16S-0.5SV(55) FH12-16S-1SH(55) FH12-18S-0.5SH(55) FH12-20S-0.5SH(55) FH12-20S-0.5SV(55) FH12-22S-0.5SH(55) FH12-22S-0.5SV(55) FH12-22S-1SH(55) FH12-24S-0.5SH(55) FH12-24S-0.5SV(55) FH12-26S-0.5SH(55) FH12-26S-0.5SV(55) FH12-26S-1SH(55) FH12-28S-0.5SH(55) FH12-30S-0.5SH(55) FH12-30S-0.5SV(55) FH12-32S-0.5SH(55) FH12-33S-0.5SH(55) FH12-33S-0.5SV(55) FH12-34S-0.5SH(55) FH12-36S-0.5SH(55) FH12-36S-0.5SV(55) FH12-40S-0.5SH(55) FH12-40S-0.5SV(55) FH12-45S-0.5SH(55) FH12-45S-0.5SV(55) FH12-50S-0.5SH(55) FH12-50S-0.5SV(55) FH12-5S-1SH(55) FH12-6S-0.5SH(55) FH12-6S-1SH(55) FH12-7S-1SH(55) FH12-8S-1SH(55) FH12-9S-1SH(55) FH12A-10S-0.5SH(55) FH12A-12S-0.5SH(55) FH12A-18S-0.5SH(55) FH12A-20S-0.5SH(55) FH12A-24S-0.5SH(55) FH12A-30S-0.5SH(55) FH12A-32S-0.5SH(55) FH12A-33S-0.5SH(55) FH12A-36S-0.5SH(55) FH12A-40S-0.5SH(55) FH12A-50S-0.5SH(55) FH12S-40S-0.5SH(55) FH12-11S-0.5SH(55) FH12A-16S-0.5SH(55) FH12-8S-1SV(55) FH12-16S-1SV(55) FH12-11S-1SH(55) FH12-16S-0.5SH(55) FH12-60S-0.5SV(55) FH12-18S-0.5SV(55) FH12-24S-1SV(55) FH12-14S-0.5SH(55) FH12S-45S-0.5SH(55) FH12-32S-0.5SV(55) FH12S-50S-0.5SH(55) FH12-6S-1SV(55) FH12-20S-1SV(55) FH12S-30S-0.5SH(55) FH12F-14S-0.5SH(55) FH12F-28S-0.5SH(55) FH12A-26S-0.5SH(55) FH12F-36S-0.5SH(55) FH12-13S-0.5SH(55) FH12F-20S-0.5SH(55) FH12F-32S-0.5SH(55) FH12-17S-0.5SV(55) FH12-49S-0.5SV(55) FH12A-15S-0.5SH(55) FH12F-40S-0.5SH(55) FH12S-53S-0.5SH(55) FH12F-30S-0.5SH(55) FH12F-16S-0.5SH(55) FH12F-6S-0.5SH(55) FH12-17S-0.5SH(55) FH12F-24S-0.5SH(55) FH12A-34S-0.5SH(55) FH12-53S-0.5SH(55) FH12F-22S-0.5SH(55) FH12-19S-0.5SH(55) FH12F-34S-0.5SH(55) FH12F-12S-0.5SH(55) FH12A-22S-0.5SH(55) FH12F-13S-0.5SH(55) FH12A-42S-0.5SH(55) FH12F-15S-0.5SH(55) FH12-13S-0.5SV(55) FH12A-29S-0.5SH(55) FH12F-10S-0.5SH(55) FH12F-26S-0.5SH(55) FH12-22S-1SV(55)