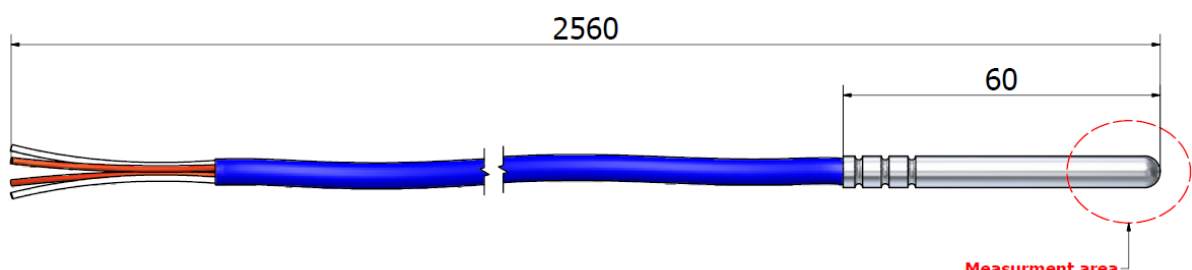


Data sheet

PS

RS Stock No. 407-1387

ENGLISH

									
PT100 THERMIC ELEMENT WITH CABLE AND TIP Ø 6									
RANGE : <ul style="list-style-type: none"> -20°C / +200°C 									
USE : <ul style="list-style-type: none"> Universal, long time dumping 									
KEY POINT : <ul style="list-style-type: none"> Flexible 									
SPECIFICATIONS : <ul style="list-style-type: none"> PT100Ω thermic element A Class – 1x4 wires Tip in SS316L Cable 4 conductors, section 0.22mm Isolated Silicon/Copper braid/Silicon Leak tightness by 3 ring finger crimping 									
DIMENSIONS: <ul style="list-style-type: none"> Tip length = 60mm Tip diameter = 6mm Total length (tip + cable) = 2560mm 									
METROLOGICAL DATA : <ul style="list-style-type: none"> As per IEC 751 <u>Standard tolerance PT100 A class</u> : ±0.15 + 0.002. [t°C] 									
<p>Other type:</p> <table border="1"> <tr> <td>Length</td><td>2560mm</td></tr> <tr> <td>Wiring</td><td></td></tr> <tr> <td>Mounting 1x3wires</td><td>457-3704</td></tr> <tr> <td>Mounting 1x4wires</td><td>407-1387</td></tr> </table>		Length	2560mm	Wiring		Mounting 1x3wires	457-3704	Mounting 1x4wires	407-1387
Length	2560mm								
Wiring									
Mounting 1x3wires	457-3704								
Mounting 1x4wires	407-1387								