



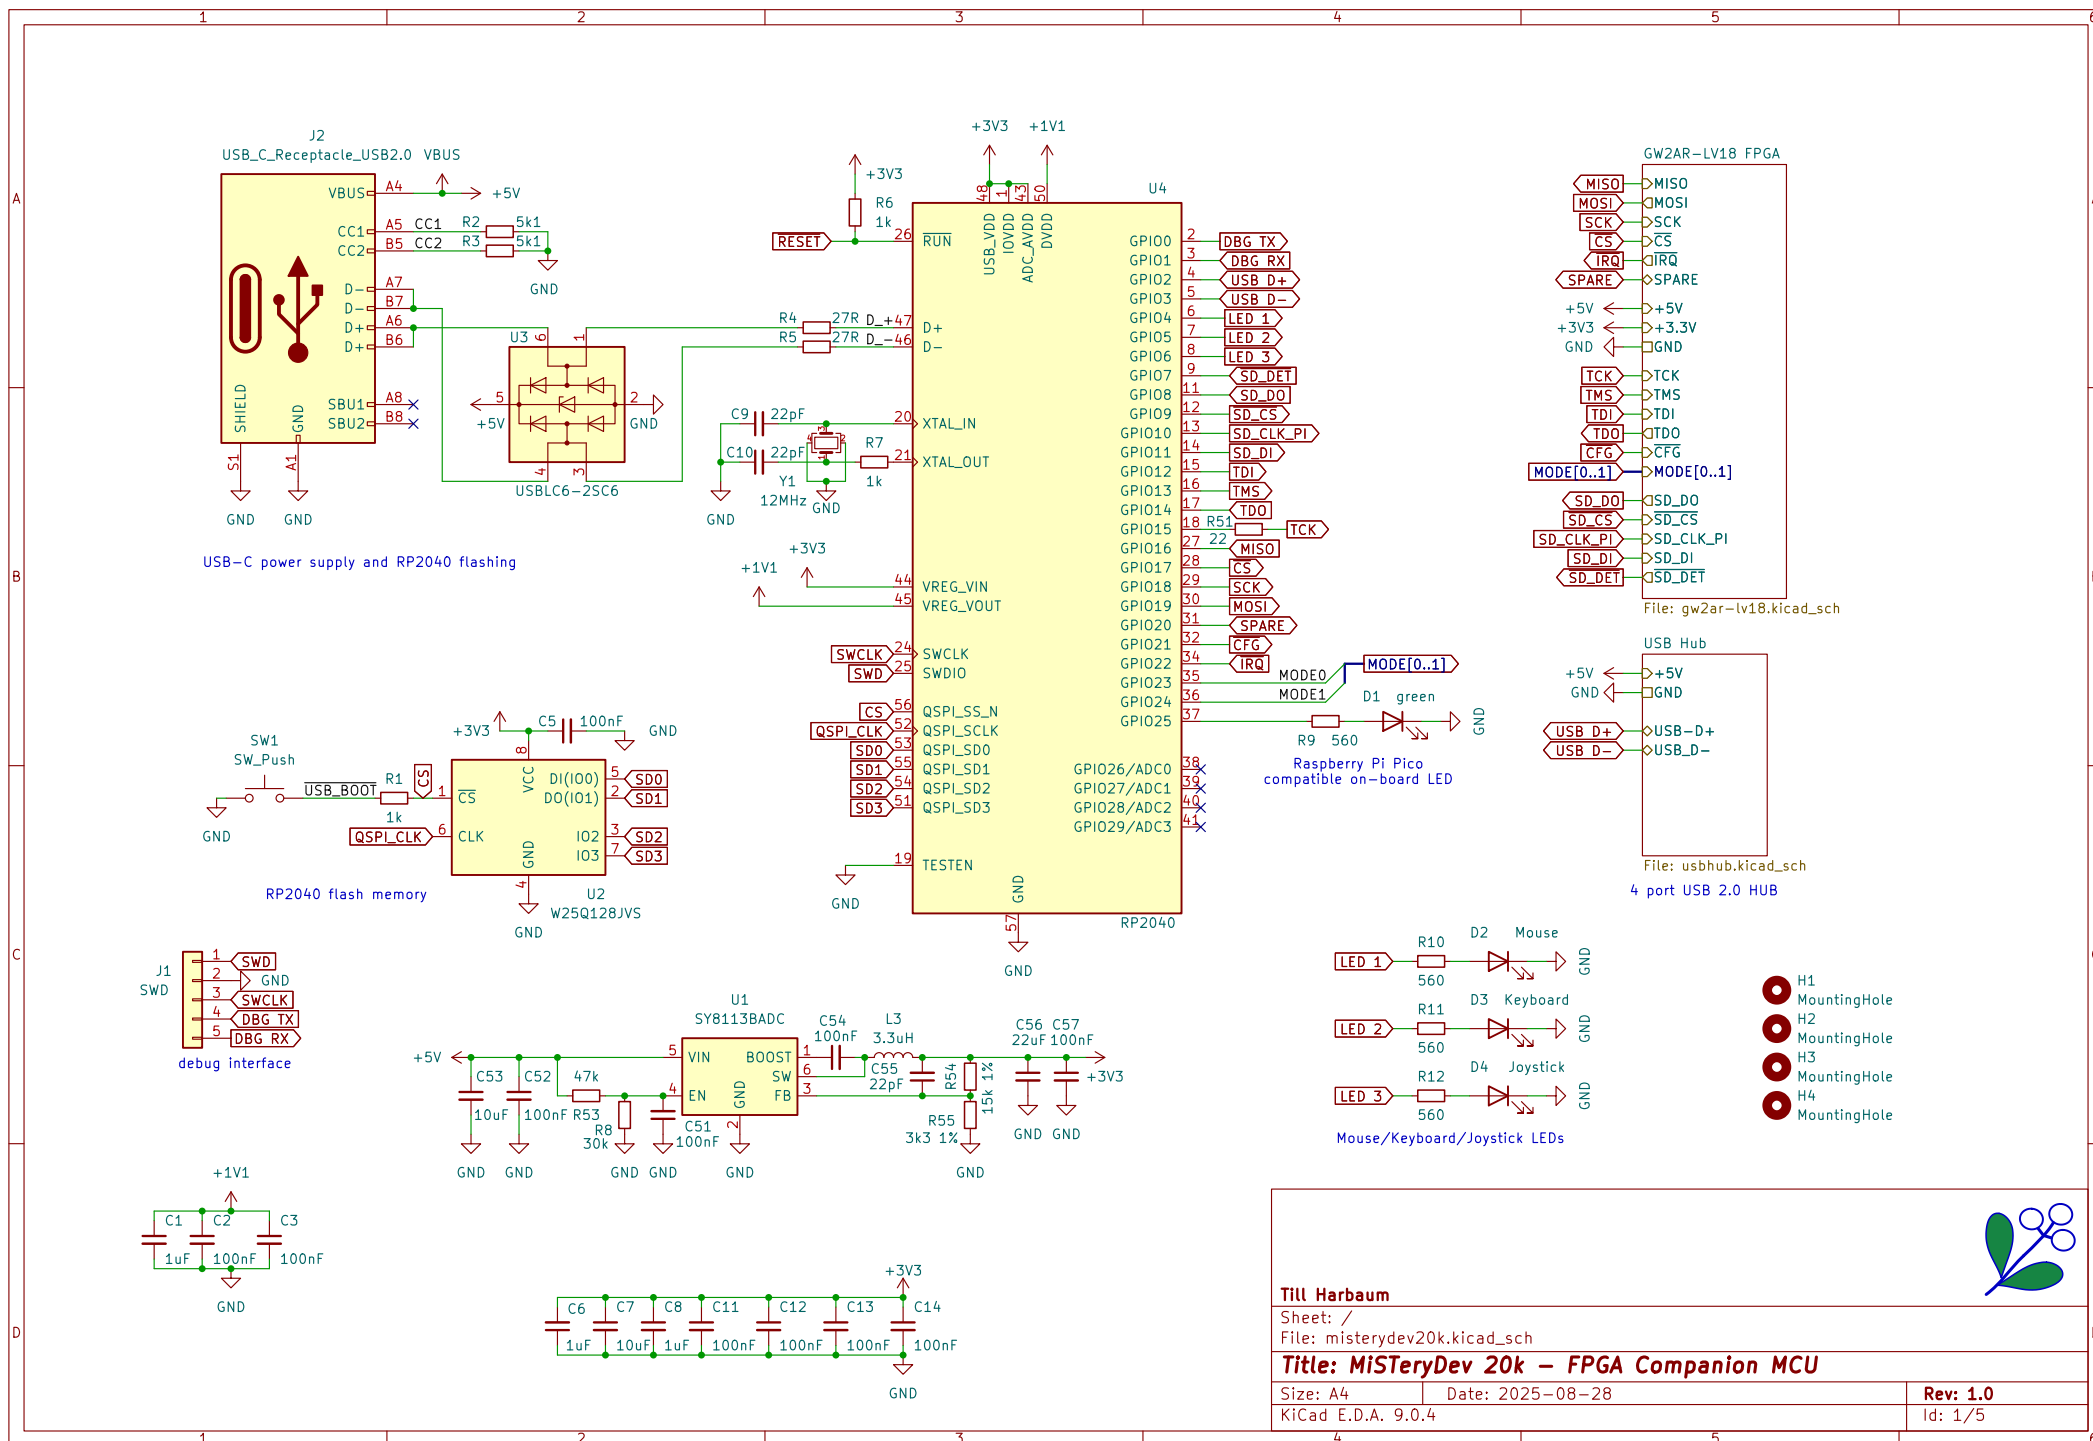
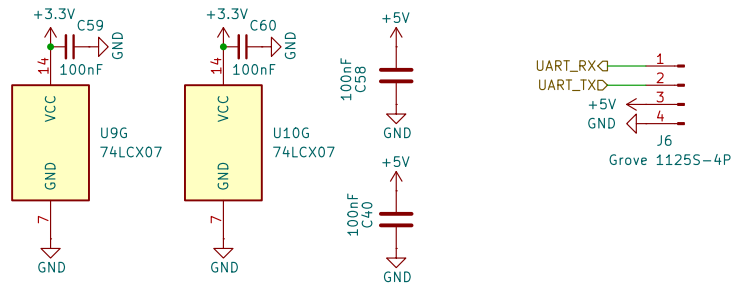
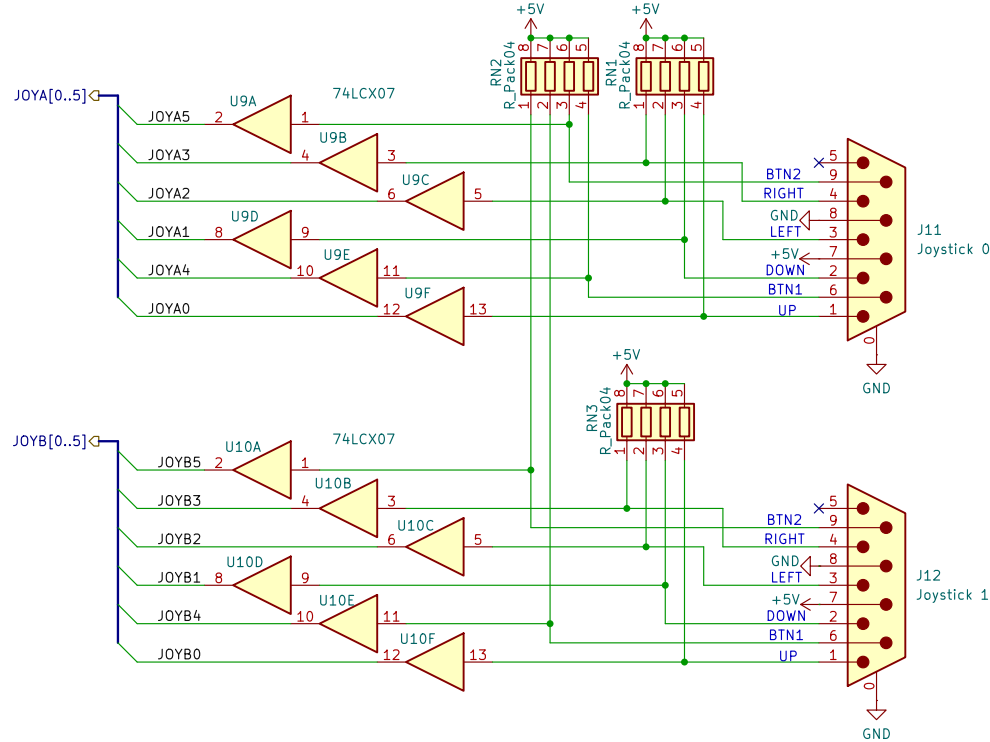


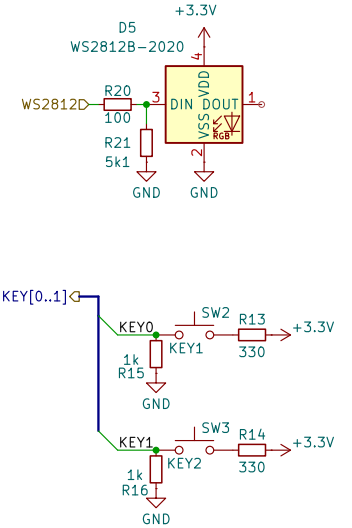

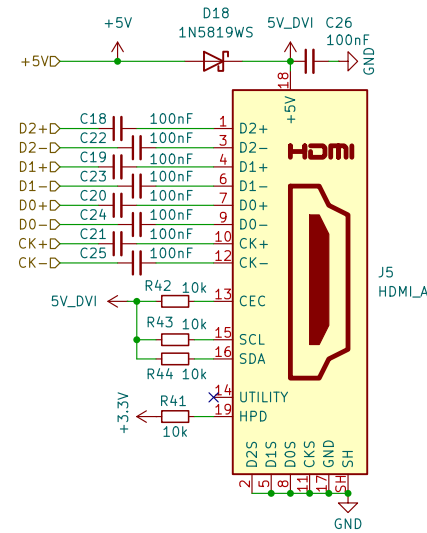

Id: 2/5

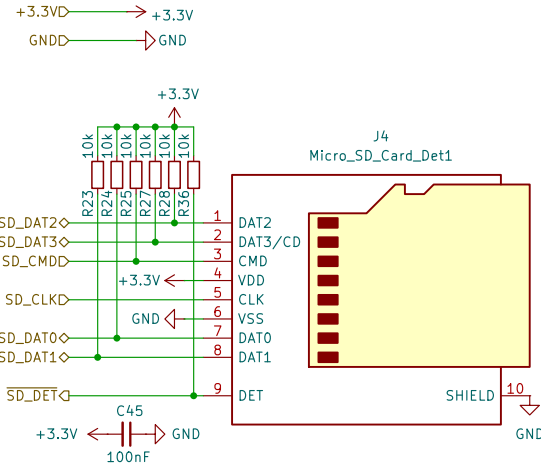

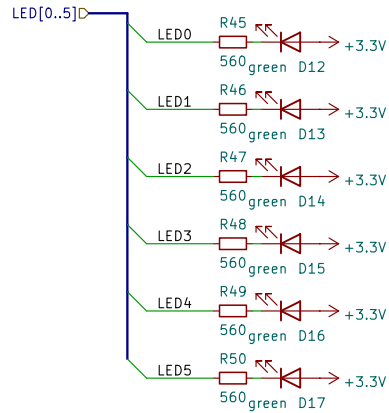

Pin	Function	TN20K	NanoMig
1	Vcore	—	—
2	Vss	—	—
3	Vccc	—	—
4	IOL7A	SYS_CLK	CLOCK
5	IOR25B	SYS_TMS	—
6	IOR26A	SYS_TCK	—
7	IOR26B	SYS_TDI	—
8	IOR25A	SYS_TDO	—
9	IOR31B	RECFG	—
10	IOL29A	5351_CKP	—
11	IOL29B	5351_CKN	—
12	Vccx	—	—
13	IOL45A	HSPI_SCLK	BL616_SCLK
14	Vccpll	—	—
15	IOL47A	LED0 *	LED0
16	IOL47B	LED1 *	LED1
17	IOL49A	LED2 *	LED2
18	IOL49B	LED3 *	LED3
19	IOL51A	LED4 *	LED4
20	IOL51B	LED5 *	LED5
21	Vss	—	—
22	Vcore	—	—
23	Vcc	—	—
24	Vss	—	—
25	IOB6A	LCD_HS *	IO 2
26	IOB6B	LCD_VS *	IO 3
27	IOB8A	LCD_B7 *	IO 0
28	IOB8B	LCD_B6 *	IO 1
29	IOB14A	LCD_B5 *	IO 4
30	IOB14B	LCD_B4 *	IO 5
31	IOB18A	LCD_B3 *	SPARE 3
32	IOB18B	LCD_G7	—
33	IOB24A	DVI_CKP	DVI_CKP
34	IOB24B	DVI_CKN	DVI_CKN
35	IOB30A	DVI_D0P	DVI_D0P
36	IOB30B	DVI_D0N	DVI_D0N
37	IOB34A	DVI_D1P	DVI_D1P
38	IOB34B	DVI_D1N	DVI_D1N
39	IOB40A	DVI_D2P	DVI_D2P
40	IOB40B	DVI_D2N	DVI_D2N
41	IOB43A	LCD_R4 *	MOS 0
42	IOB42B	LCD_R3 *	MOS 1
43	Vss	—	—
44	Vcc	—	—

Pin	Function	TN20K	NanoMig
45	Vcore	—	—
46	Vss	—	—
47	EXTR	—	—
48	IOR49B	LCD_DE *	MOS 5
49	IOR49A	LCD_BL *	SPARE 4
50	Vccpll	—	—
51	IOR45A	PA_EN *	MOS 4
52	IOR39A	EDID_DAT *	—
53	IOR38B	EDID_CLK *	—
54	IOR38A	I2S_DIN *	MOS 3
55	IOR36B	I2S_LRCK *	SPARE 5
56	IOR36A	I2S_BCLK *	MOS 2
57	IOR35A	MSPI_WP	MSPI_WP
58	Vcc	—	—
59	IOR34B	MSPI_CLK	MSPI_CLK
60	IOR34A	MSPI_CS	MSPI_CS
61	IOR33B	MSPI_DI	MSPI_DI
62	IOR33A	MSPI_DO	MSPI_DO
63	IOR29A	MSPI_HOLD	MSPI_HOLD
64	Vccx	—	—
65	Vss	—	—
66	Vcore	—	—
67	Vcc	—	—
68	Vss	—	—
69	IOT50A	SYS_TX	—
70	IOT44B	SYS_RX	—
71	IOT44A	HSPI_DIN0 *	MIDI_OUT
72	IOT40B	HSPI_DIN1 *	MIDI_IN
73	IOT40A	HSPI_DIN2 *	SPARE 0
74	IOT34B	HSPI_DIN3 *	SPARE 1
75	IOT34A	HDPI_DIR *	BL616_DIR
76	IOT30B	HDPI_DAT *	BL616_DAT
77	IOT30A	LCD_CLK *	SPARE 2
78	Vcc	—	—
79	IOT27B	WS2812 *	WS2812
80	IOT27A	SDIO_D2 *	SDIO_D2
81	IOT17B	SDIO_D3	SDIO_D3
82	IOT17A	SDIO_CMD	SDIO_CMD
83	IOT6B	SDIO_CLK	SDIO_CLK
84	IOT6A	SDIO_D0	SDIO_D0
85	IOT4B	SDIO_D1 *	SDIO_D1
86	IOT4A	HSPI_CSN	BL616_CS
87	IOR20B	KEY 2 *	BTN_RESET
88	IOR30A	KEY 1	BTN_USER

* pin exposed on headers

FPGA pin usage

Sheet: /GW2AR-LV18 FPGA/FPGA Pin Usage/
File: gw2ar-lv18_pins.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.4

Id: 5/5