

Change the port baud rate

With a USB cable with converter, at the same time pay attention to the sending and receiving light and flash a few times:

To send and receive light flash only **1** at the same time, corresponding baud rate of serial port for **2000000**

Transceiver indicator light flash **2** at the same time, corresponding baud rate of serial port for **1228800**


Transceiver indicator light flash **3** at the same time, the corresponding baud rate of serial port for **115200**

Transceiver indicator light flashes **4** at the same time, the corresponding baud rate of serial port for **38400**


Transceiver indicator light flashes **5** at the same time, corresponding baud rate of serial port for **19200**

Transceiver indicator light flash **6** at the same time, the corresponding baud rate of serial port for **9600**


1. Open the software, select the corresponding COM port and baud rate, click the open button (such as electricity on converter plug in USB cable to send and receive light and flash 1, we should choose 2000000 baud rate)

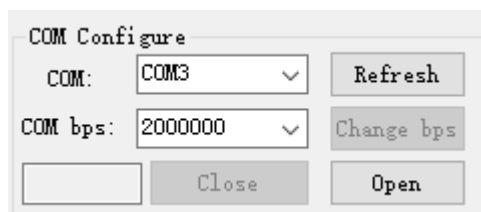

2. Click the **Open** button

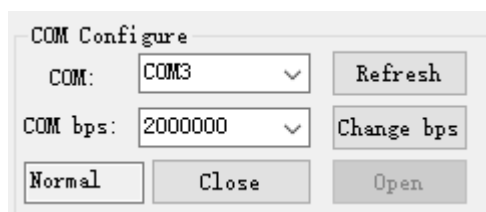


3. Click **Change bps** button

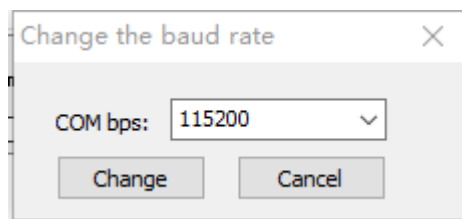


At this time will jump out of a dialog box, inside the baud rate combo box we choose we are going to set the baud rate, click **Change** button; If you don't want to change, click on the **Cancel** button.

4. For example, we should change baud rate to 9600

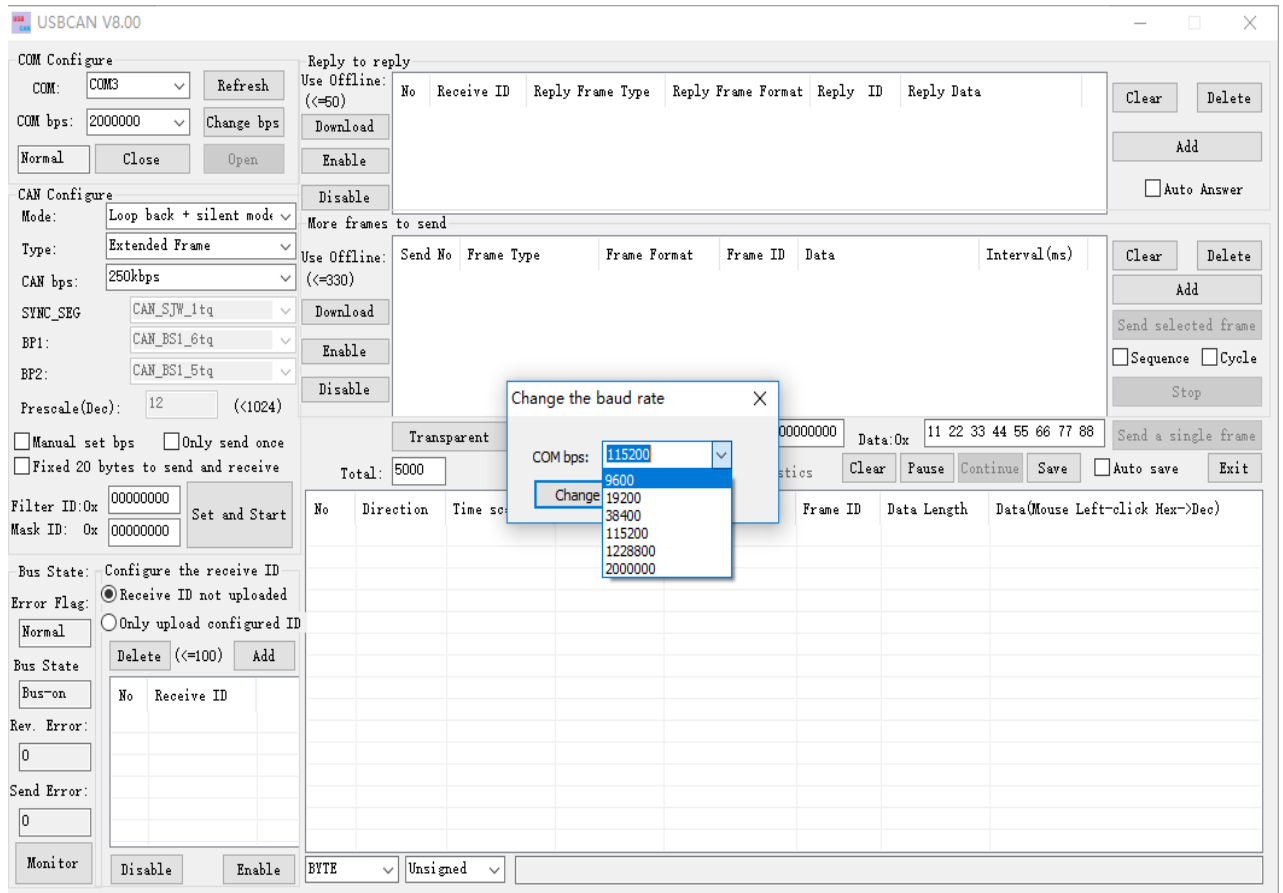


In 9600 baud rate combo box.

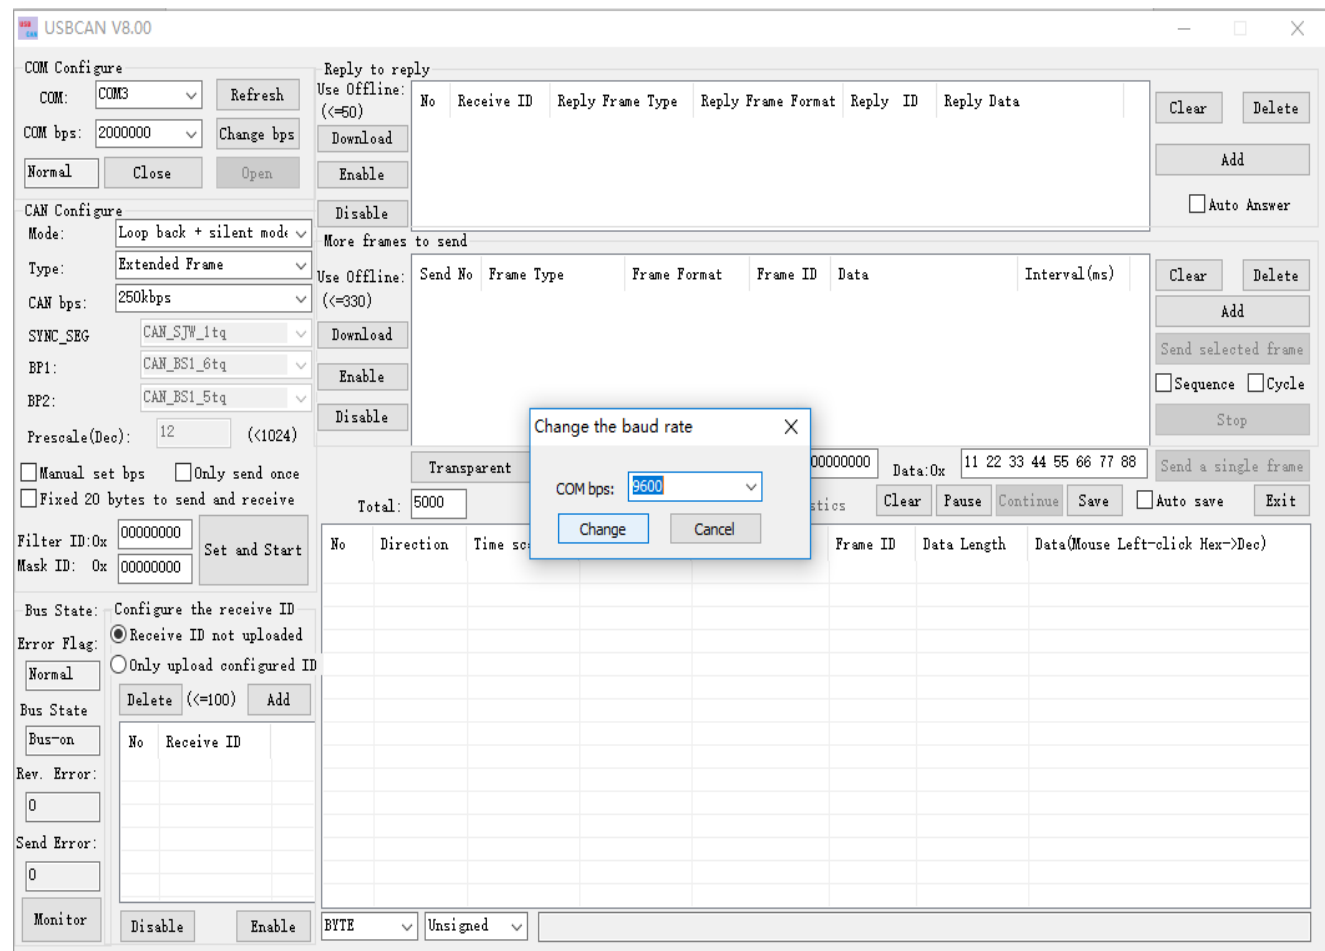

Click the **Change** button, observe converter transceiver lights flashing at the same time, corresponding to 9600 baud rate converter under the transceiver will flash at the same time 6 lights.

Due to the port baud rate has been changed, need to close the port after, after the option to change the baud rate of open again

5. Click the **Close** button

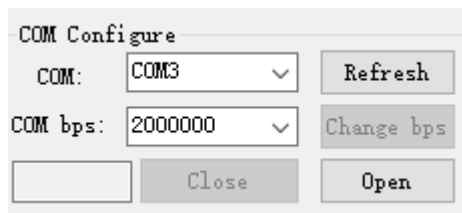


COM Configure

COM: COM3 Refresh

COM bps: 2000000 Change bps

Close Open

6. Will choose to change the baud rate after baud rate

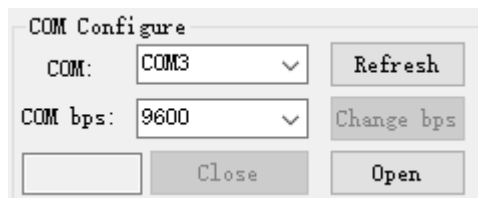


COM Configure

COM: COM3 Refresh

COM bps: 9600 Change bps

Close Open

7. Click the **Open** button again

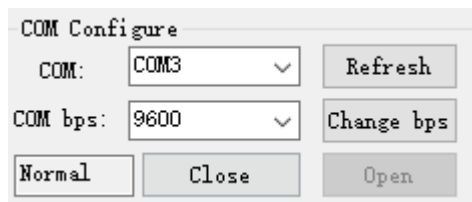

COM Configure

COM: COM3 Refresh

COM bps: 9600 Change bps

Normal Close Open