



NPWD
SCHEDULE OF RATES 2021
HOUSING
Volume- I



NPWD
SCHEDULE OF RATES 2021
HOUSING
Volume- I

FOREWORD

The Nagaland Public Works Department has updated the Schedule of Rates (SoR) for Road and Building works in two separate volumes for the convenience of all. Due to fluctuations in the costs of materials for the construction of roads, bridges and building works, every effort has been made to analyze the present rates.

The revised Schedule of Rates have been worked out using the computer program based on the STANDARD DATA BOOK FOR ANALYSIS OF RATES (Second Revision) published by IRC on behalf of the Govt. of India, Ministry of Shipping, Road Transport & Highways, New Delhi and the CPWD Analysis of Rates for Building Works 2019. Both the analysis books have been revised and updated by the competent authorities taking into consideration the technological up-gradation, increased level of mechanization, etc especially in the roads sector.

In accordance with the analysis taken into consideration by the MoRTH, keeping in view the size of the project and type of machineries being used for various works in the road and bridge sector, rate analysis have been worked out under three categories of projects classified as Small projects (Civil cost less than Rs. 200 Cr), Medium Projects (Civil cost greater than Rs. 200 Cr and less than Rs. 500 Cr) and Large Project (Civil cost greater than Rs. 500 Cr). Further, the output efficiency of machineries and labour has been considered depending upon the type of terrain like plain, rolling and hilly.

The basic rates of Materials/ Items have been considered and analysed for all the District Headquarters considering the present price in and around the nearest market / availability. The wages for skilled and unskilled laborers are based on the average market rate in Nagaland. The rates arrived is inclusive of the GST of 12% and Labour Cess of 1%.

Since the previous Schedule of Rates, for a more practical application, multiplication factor of Administrative blocks with respect to its District Headquarter has been introduced. These factors have been introduced for certain major items of work which are not locally available. These Items have been indicated as 'MF' in front of the item description. This was computed taking into account the remoteness and accessibility of the place from marketing centers of building materials, difficulties and costs involved in transportation of materials and the adverse road conditions.

In addition to the SoR, this book also contains other useful engineering and construction data, Plinth Area Rates which has been appended herewith.

All possible precaution have been taken in the publication of this SoR. However, if any is observed, it may kindly be brought to the notice of the undersigned. Any other suggestions for the improvement of the schedule will be thankfully acknowledged.

For items not covered by the Schedule of Rates 2021, the analysis of rate of those items should be prepared as per the market rate and approved by the respective Chief Engineers before being included in the estimates.

The Schedule of Rates 2021 will be effective for all works with effect from 01.11.2021

Kohima, Nagaland



(Er. K. THEUNUO)

Engineer-in-Chief
Nagaland Public Works Department
Nagaland, Kohima

PREFACE

The rates in the schedule will apply to any category of work that may arise in construction and maintenance of the buildings undertaken by Nagaland Public Works Department (NPWD) throughout the state of Nagaland.

The Multiplication factor has been indicated below in ANNEXURE-I. This will be applicable for preparing the estimates of works to be executed in the respective administrative blocks. During the preparation of the estimates, the multiplication factor should be considered for the applicable items as indicated in the SoR. This will be calculated taking the rate of the district as the base rate. The rate as applicable in the Administrative block where the work is to be carried out will be arrived at by multiplying the base rate with the respective multiplication factor.

This factor is applicable for estimate purpose only and not for the purpose of tendering and billing.

The Engineer-in-Chief, NPWD is the final deciding authority for the interpretation and implication of various provision made in the schedule of items, analysis of rates and specification. His decision shall be final conclusive and binding on all concern.

Kohima, Nagaland



(Er. K. THEUNUO)
Engineer-in-Chief
Nagaland Public Works Department
Nagaland, Kohima

I N D E X

	Description of Works	Page
CHAPTER- 2	EARTHWORK	1
CHAPTER- 3	MORTARS	7
CHAPTER- 4	CONCRETE WORK	8
CHAPTER- 5	REINFORCED CEMENT CONCRETE	13
CHAPTER- 6	BRICK WORK	25
CHAPTER- 7	STONE WORK	30
CHAPTER- 8	CLADDING WORK	34
CHAPTER- 9	WOOD & PVC WORK	42
CHAPTER- 10	STEEL WORKS	79
CHAPTER- 11	FLOORING	84
CHAPTER- 12	ROOFING	96
CHAPTER- 13	FINISHING	113
CHAPTER- 14	REPAIRS TO BUILDINGS	125
CHAPTER- 15	DISMANTLING & DEMOLISHING	136
CHAPTER- 16	ROAD WORKS	143
CHAPTER- 17	SANITARY INSTALLATIONS	144
CHAPTER- 18	WATER SUPPLY	159
CHAPTER- 19	DRAINAGE	183
CHAPTER- 20	PILE WORK	193
CHAPTER- 21	ALUMINIUM WORK	197
CHAPTER- 22	WATER PROOFING	202
CHAPTER- 23	RAIN WATER HARVESTING	210
CHAPTER- 24	CONSERVATION OF HERITAGE BUILDINGS	214
CHAPTER- 25	STRUCTURAL GLAZING	216
CHAPTER- 26	NEW TECHNOLOGIES & MATERIALS	222

TABLE OF CONTENTS
HOUSING (BUILDING WORKS)

CHAPTER	DESCRIPTION	PAGE NO.
2.0	Earthwork	1
3.0	Mortars	7
4.0	Concrete Work	8
	Cement Concrete (Cast in-Situ)	8
	Cement Concrete (Pre Cast)	9
	Damp Proof Course	10
	Miscellaneous	10
5.0	Reinforced Cement Concrete	13
	Pre Cast RCC	15
	Encasing Rolled Steel Section	16
	Steel Reinforcement	16
6.0	Brickwork	25
7.0	Stone work	30
8.0	Cladding Works	34
9.0	Wood & PVC Work	42
10.0	Steel Works	79
11.0	Flooring	84
	Stone Flooring	88
12.0	Roofing	96
	Zinc Aluminium Alloy Galvanized Coloured Profile steel (Dyna,Durashine,Bluescope etc.)	111
	Polycarbonate Roof	112
13.0	Finishing	113
14.0	Repairs to buildings	125
15.0	Dismantling and Demolishing	136
16.0	Road Works	143

17.0	Sanitary Installations	144
18.0	Water Supply	159
19.0	Drainage	183
20.0	Pile Work	193
21.0	Aluminium Work	197
22.0	Water Proofing	202
23.0	Rain Water Harvesting	210
24.0	Conservation of Heritage Buildings	214
25.0	Structural Glazing	216
26.0	New Technologies and Materials	222

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		2.0 EARTHWORK													
A 2.1		Earth work in surface excavation not exceeding 30 cm in depth but exceeding 1.5 m in width as well as 10 sqm on plan including disposal of excavated earth upto 50 m and lift upto 1.5 m, disposed soil to be levelled and neatly dressed:													
A 2.1.1		All Kinds of Soil	100 Sqm	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70	7465.70
A 2.2		Earth work in rough excavation, banking excavated earth in layers not exceeding 20 cm in depth, breaking clods watering, rolling each layer with 1/2 tonne roller or wooden or steel rammers, and rolling every 3rd and top-most layer with power roller of minimum 8 tonnes and dressing up in embankments for roads, flood banks, marginal banks and guide banks or filling up ground depressions, lead upto 50 m and lift upto 1.5 m.													
A 2.2.1		All Kinds of soil	Cum	604.90	604.90	604.90	604.90	604.90	604.90	604.90	604.90	604.90	604.90	6.20	6.20
A 2.3		Banking excavated earth in layers not exceeding 20 cm. in depth, breaking clods, watering, rolling each layer with 1/2 tonne roller, or wooden or steel rammers, and rolling every 3rd and top-most layer with power roller of minimum 8 tonnes and dressing up, in embankments for roads, flood banks, marginal banks, and guide banks etc.. lead upto 50 m and lift upto 1.5 m.													
A 2.3.1		All kinds of soil	Cum	382.70	382.60	382.70	382.80	382.90	382.80	382.70	382.90	382.70	382.80	383.00	382.90
A 2.4		Deduct for not rolling with power roller of minimum 8 tonnes for banking excavated earth in layers not exceeding 20 cm in depth.	Cum	6.40	6.40	6.40	6.50	6.50	6.50	6.40	6.60	6.40	6.50	6.60	6.60
A 2.5		Deduct for not watering the excavated earth for banking.	Cum	26.80	26.80	26.80	26.80	26.80	26.80	26.80	26.80	26.80	26.80	26.80	26.80
A 2.6		Earth work in excavation by mechanical means (Hydraulic excavator/Manual means over areas (exceeding 30 cm in depth, 1.5m in width as well as 10 Sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-Charge.													
A 2.6.1		All Kinds of soil	Cum	220.90	220.90	220.90	220.90	220.90	220.90	220.90	220.90	220.90	220.90	220.90	220.90
		Details of cost for 10 cum													
A 2.7		Earth work in excavation by mechanical means (Hydraulic excavator/Manual means over areas (exceeding 30 cm in depth, 1.5m in width as well as 10 Sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-Charge.													
A 2.7.1		Ordinary Rock	Cum	398.90	398.70	398.90	399.20	399.60	399.50	399.00	399.60	399.00	399.30	400.00	399.80
A 2.7.2		Hard Rock (Requiring Blasting)	Cum	731.00	728.30	731.00	733.70	738.60	737.50	731.70	739.00	732.10	735.60	742.90	740.60
A 2.7.3		Hard Rock (Blasting prohibited)	Cum	761.50	761.20	761.50	761.90	762.50	762.40	761.60	762.60	761.70	762.10	763.00	762.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 2.8		Earth work in excavation by mechanical means (Hydraulic excavator/Manual means in foundation trenches or drains (not exceeding 1.5m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift upto 1.5m including getting out the excavated soil and disposal of surplus excavated soil as directed within a lead of 50m.													
A 2.8.1		All Kinds of soil	Cum	278.20	278.20	278.20	278.20	278.20	278.20	278.20	278.20	278.20	278.20	278.20	278.20
A 2.9		Earth work in excavation by mechanical means (Hydraulic excavator/Manual means in foundation trenches or drains (not exceeding 1.5m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift upto 1.5m including getting out the excavated soil and disposal of surplus excavated soil as directed within a lead of 50m.													
A 2.9.1		Ordinary Rock	Cum	475.50	475.20	475.50	475.80	476.40	476.20	475.60	476.40	475.70	476.00	476.80	476.60
A 2.9.2		Hard Rock (Requiring Blasting)	Cum	835.80	831.50	835.80	840.10	848.00	846.20	837.00	848.70	837.60	843.10	854.80	851.10
A 2.9.3		Hard Rock (Blasting prohibited)	Cum	1101.30	1101.00	1101.30	1101.70	1102.40	1102.30	1101.50	1102.50	1101.50	1102.00	1103.10	1102.70
A 2.10		Excavating trenches of required width for pipes, cables, etc including excavation for sockets, and dressing of sides, ramming of bottoms, depth upto 1.5 m including getting out the excavated soil, and then returning the soil as required, in layers not exceeding 20 cm depth including consolidating each deposited layer by ramming, watering, etc. and disposing of surplus excavated soil as directed, within a lead of 50 m:													
A 2.10.1		All Kinds of Soil													
A 2.10.1.1		Pipes,cables etc, not exceeding 80mm dia.	Metre	215.20	215.20	215.20	215.20	215.20	215.20	215.20	215.20	215.20	215.20	215.20	215.20
A 2.10.1.2		Pipes, cables etc. exceeding 80 mm dia. but not exceeding 300 mm dia.	Metre	351.50	351.50	351.50	351.50	351.50	351.50	351.50	351.50	351.50	351.50	351.50	351.50
A 2.10.1.3		Pipes, cables etc. exceeding 300 mm dia but not exceeding 600mm	Metre	548.80	548.80	548.80	548.80	548.80	548.80	548.80	548.80	548.80	548.80	548.80	548.80
A 2.11		Extra for excavating trenches for pipes, cables etc. in all kinds of soil for depth exceeding 1.5 m, but not exceeding 3 m. (Rate is over corresponding basic item for depth upto 1.5 metre.)	Metre	126.70	126.70	126.70	126.70	126.70	126.70	126.70	126.70	126.70	126.70	126.70	126.70
A 2.12		Extra for excavating trenches for pipes, cables, etc, in all kinds of soil for depth exceeding 3 m in depth, but not exceeding 4.5 m. (Rate is over corresponding basic item for depth upto 1.5 metre.)	Metre	316.00	316.00	316.00	316.00	316.00	316.00	316.00	316.00	316.00	316.00	316.00	316.00
A 2.13		Excavating trenches of required width for pipes, cables, etc, including excavation for sockets, depth upto 1.5 m including getting out the excavated materials, returning the soil as required in layers not exceeding 20 cm in depth including consolidating each deposited layers by ramming, watering etc. stacking serviceable material for measurement and dosposal of unserviceable material as directed, within a lead of 50m:													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 2.13.1		Ordinary Rock													
A 2.13.1.1		Pipes, cables etc. not exceeding 80 mm dia.	Metre	315.10	315.00	315.10	315.30	315.60	315.50	315.20	315.60	315.20	315.40	315.80	315.70
A 2.13.1.2		Pipes, cables etc. exceeding 80 mm dia but not exceeding 300 mm dia.	Metre	780.30	780.00	780.30	780.70	781.40	781.20	780.40	781.40	780.60	780.90	781.90	781.60
A 2.13.1.3		Pipes, cables exceeding 300 mm dia but not exceeding 600mm dia	Metre	897.90	897.50	897.90	898.40	899.20	898.90	898.10	899.20	898.20	898.60	899.70	899.40
A 2.13.2		Hard rock (requiring blasting)	Metre												
A 2.13.2.1		Pipes, cables etc. not exceeding 80 mm dia	Metre	487.10	485.00	487.10	489.10	492.80	492.00	487.60	493.10	487.90	490.50	496.00	494.30
A 2.13.2.2		Pipes, cables etc. exceeding 80 mm dia but not exceeding 300 mm dia.	Metre	1206.00	1201.00	1206.00	1211.10	1220.30	1218.20	1207.40	1221.10	1208.10	1214.60	1228.30	1223.90
A 2.13.2.3		Pipes, cables exceeding 300 mm dia but not exceeding 600mm dia	Metre	1387.80	1382.00	1387.80	1393.50	1404.20	1401.80	1389.40	1405.10	1390.20	1397.60	1413.30	1408.40
A 2.13.3		Hard rock (blasting prohibited)	Metre												
A 2.13.3.1		Pipes, cables etc. not exceeding 80mm dia.	Metre	612.50	485.00	487.10	489.10	492.80	492.00	487.60	493.10	487.90	490.50	496.00	494.30
A 2.13.3.2		Pipes, cables etc. exceeding 80 mm dia but not exceeding 300 mm dia.	Metre	1516.70	1201.00	1206.00	1211.10	1220.30	1218.20	1207.40	1221.10	1208.10	1214.60	1228.30	1223.90
A 2.13.3.3		Pipes, cables exceeding 300 mm dia but not exceeding 600mm dia	Metre	1745.30	1382.00	1387.80	1393.50	1404.20	1401.80	1389.40	1405.10	1390.20	1397.60	1413.30	1408.40
A 2.14		Extra for excavating trenches for pipes, cables, etc. in ordinary/ hard rock exceeding 1.5 m in depth but not exceeding 3 m. (Rate	Metre	102.70	102.80	102.70	102.60	102.40	102.50	102.60	102.40	102.60	102.50	102.30	102.40
A 2.15		Extra for excavating trenches for pipes, cables, etc. in ordinary/ hard rock exceeding 3m in depth but not exceeding 4.5 m. (Rate	Metre	254.20	254.50	254.20	253.90	253.40	253.50	254.10	253.30	254.10	253.70	252.90	253.20
A 2.16		Close timbering in trenches including strutting, shoring and packing cavities (wherever required) complete. (Measurements to be taken of the face area timbered):													
A 2.16.1		Depth not exceeding 1.5 m.	Sqm	117.50	116.40	116.50	116.70	116.90	116.90	116.50	117.00	116.60	116.80	117.20	117.00
A 2.16.2		Depth exceeding 1.5 m but not exceeding 3 m	Sqm	126.90	126.70	126.90	127.20	127.60	127.50	127.00	127.60	127.00	127.30	128.00	127.80
A 2.16.3		Depth exceeding 3m but not exceeding 4.5m	Sqm	148.40	148.10	148.40	148.80	149.40	149.30	148.50	149.50	148.60	149.00	150.00	149.70
A 2.17		Close timbering in case of shafts, wells, cesspits, manholes and the like including strutting, shoring and packing cavities (wherever required) etc. complete. (Measurements to be taken of the face area timbered)													
A 2.17.1		Depth not exceeding 1.5 m.	Sqm	125.00	124.60	125.00	125.30	126.00	125.80	125.10	126.00	125.10	125.60	126.60	126.30
A 2.17.2		Depth exceeding 1.5 m but not exceeding 3 m	Sqm	145.50	145.00	145.50	145.90	146.80	146.60	145.60	146.80	145.70	146.30	147.50	147.10
A 2.17.3		Depth exceeding 3 m but not exceeding 4.5 m	Sqm	167.20	166.60	167.20	167.70	168.70	168.50	167.30	168.80	167.40	168.10	169.50	169.10
A 2.18		Close timbering over areas including strutting, shoring and packing, cavities (wherever required) etc. complete. (Measurements to be taken of the face area timbered)													
A 2.18.1		Depth not exceeding 1.5 m.	Sqm	105.40	105.10	105.40	105.70	106.30	106.20	105.50	106.30	105.50	105.90	106.80	106.50
A 2.18.2		Depth exceeding 1.5 m but not exceeding 3 m	Sqm	116.80	116.40	116.80	117.10	117.70	117.50	116.80	117.70	116.90	117.30	118.20	117.90
A 2.18.3		Depth exceeding 3 m but not exceeding 4.5 m	Sqm	128.90	128.50	128.90	129.30	130.00	129.80	129.00	130.00	129.10	129.50	130.60	130.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 2.19		Extra for planking, strutting and packing materials for cavities (in close timbering) if required to be left permanently in position (Face area of timber permanently left to be measured)	Sqm	1475.00	1472.80	1475.00	1477.10	1481.10	1480.10	1475.60	1481.40	1475.90	1478.60	1484.40	1482.60
A 2.20		Open timbering in trenches including strutting and shoring complete (Measurements to be taken of the face area timbered)													
A 2.20.1		Depth not exceeding 1.5 m.	Sqm	60.80	60.60	60.80	61.00	61.40	61.30	60.90	61.40	60.90	61.10	61.70	61.50
A 2.20.2		Depth exceeding 1.5 m but not exceeding 3 m	Sqm	66.90	66.60	66.90	67.10	67.50	67.40	66.90	67.60	67.00	67.30	67.90	67.70
A 2.20.3		Depth exceeding 3m but not exceeding 4.5m	Sqm	76.80	76.60	76.80	77.10	77.60	77.50	76.90	77.60	77.00	77.30	78.00	77.80
A 2.21		Open timbering in case of shafts, wells, cesspits, manholes and the like including strutting and shoring complete (measurements to be taken of the face area timbered):													
A 2.21.1		Depth not exceeding 1.5 m.	Sqm	54.80	54.40	54.80	55.10	55.70	55.50	54.90	55.70	54.90	55.30	56.20	55.90
A 2.21.2		Depth exceeding 1.5 m but not exceeding 3 m		64.30	64.00	64.30	64.70	65.30	65.20	64.40	65.40	64.50	64.90	65.90	65.60
A 2.21.3		Depth exceeding 3 m but not exceeding 4.5 m		77.00	76.60	77.00	77.30	78.00	77.90	77.10	78.10	77.10	77.60	78.60	78.30
A 2.22		Open timbering over areas including strutting, shoring etc. complete (Measurements to be taken of the face area timbered)													
A 2.22.1		Depth not exceeding 1.5 m.	Sqm	37.80	37.40	37.80	38.30	39.10	38.90	38.00	39.20	38.00	38.60	39.80	39.50
A 2.22.2		Depth exceeding 1.5 m but not exceeding 3 m		44.50	44.00	44.50	45.00	46.00	45.70	44.60	46.00	44.70	45.40	46.80	46.30
A 2.22.3		Depth exceeding 3 m but not exceeding 4.5 m		55.10	54.50	55.10	55.70	56.80	56.50	55.30	56.80	55.30	56.10	57.70	57.20
A 2.23		Extra for planking and strutting in open timbering if required to be left permanently in position (face area of the timber permanently left to be measured).	Sqm	763.20	761.00	763.20	765.30	769.30	768.40	763.80	769.60	764.10	766.80	772.60	770.80
A 2.24		Extra rate for quantities of works, executed.													
A 2.24.1		In or under water and/or liquid mud, including pumping out water as required.	Metre depth												
A 2.24.2		In Foul position, including pumping out water as required	Metre depth												
		NOTE for Item No 2.24 : The extra percentagerate is applicable in respect of each item but limited to quantities of work executed in these difficult conditions.The unit 'Meter depth"to be considered for payment shall be the depth measured from the sub soil water level upto the center of gravity of the quantity executed in difficult conditions.The depth shall be reckoned correct to 0.10m, 0.05m or more shall be taken as 0.10 m and less than 0.05m ignored													
A 2.25		Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth: consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m	Cum	177.30	177.30	177.30	177.30	177.30	177.30	177.30	177.30	177.30	177.30	177.30	177.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 2.25(a)		Excavating, supplying and filling of local earth (including royalty) by mechanical transport upto a lead of 5Km also including ramming and watering of earth in layers not exceeding 20 cm in trenches, plinth, sides of foundation etc. complete.	Cum	8337.30	8333.00	8337.30	8341.60	8349.60	8347.70	8338.50	8350.20	8339.10	8344.60	8356.30	8352.60
A 2.26		Extra for every additonal lift of 1.5 m or part thereof in excavation/banking excavated or stacked materials.													
A 2.26.1		All Kinds of soil	Cum	72.90	72.90	72.90	72.90	72.90	72.90	72.90	72.90	72.90	72.90	72.90	72.90
A 2.26.2		Ordinary or Hard Rock	Cum	130.80	130.80	130.80	130.80	130.80	130.80	130.80	130.80	130.80	130.80	130.80	130.80
A 2.27		Supplying and filling in plinth with sand under floors, including, watering, ramming consolidating and dressing complete.	Cum	215.80	202.60	215.80	229.00	253.50	247.90	219.60	255.40	221.50	238.40	274.20	262.90
A 2.28		Surface dressing of the ground including removing vegetation and in-equalities not exceeding 15 cm deep and disposal of rubbish, lead upto 50 m and lift upto 1.5m													
A 2.28.1		All Kinds of soil	Sqm	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
A 2.29		Ploughing the existing ground to a depth of 15 cm to 25 cm and watering the same:													
A 2.29.1		All Kinds of soil	Sqm	19.90	19.90	19.90	19.90	19.90	19.90	19.90	19.90	19.90	19.90	19.90	19.90
A 2.30		Excavating holes more than 0.10 cum & upto 0.5 cum including getting out the excavated soil, then returning the soil as required in layers not exceeding 20 cm in depth, including consolidating each deposited layer by ramming, watering etc, disposing of surplus excavated soil-, as directed within a lead of 50 m and lift upto 1.5 m:													
A 2.30.1		All Kinds of soil	Each	193.50	193.00	193.50	194.00	194.90	194.70	193.70	195.00	193.70	194.40	195.70	195.30
A 2.30.2		Ordinary rock	Each	318.10	317.90	318.10	318.30	318.70	318.60	318.20	318.70	318.20	318.40	319.00	318.80
A 2.30.3		Hard Rock (Requiring Blasting)	Each	566.50	563.20	566.50	569.90	576.10	574.70	567.50	576.60	568.00	572.30	581.40	578.50
A 2.30.4		Hard Rock (Blasting Prohibited)	Each	744.20	743.50	744.20	744.90	746.30	746.00	744.40	746.40	744.50	745.50	747.50	746.80
A 2.31		Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth upto 30 cm measured at a height of 1 m above ground level and removal of rubbish upto a distance of 50 m outside the periphery of the area cleared.	Sqm	10.10	10.10	10.10	10.10	10.10	10.10	10.10	10.10	10.10	10.10	10.10	10.10
A 2.32		Clearing grass and removal of the rubbish upto a distance of 50 m outside the periphery of the area cleared	Sqm	5.20	5.20	5.20	5.20	5.20	5.20	5.20	5.20	5.20	5.20	5.20	5.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 2.33		Felling trees of the girth (measured at a height of 1 m above ground level) including cutting of trunks and branches removing the roots and stacking of serviceable material and disposal of unserviceable material:													
A 2.33.1		Beyond 30 cm girth upto and including 60 cm girth	Each	307.00	306.60	307.00	307.40	308.10	308.00	307.10	308.20	307.20	307.70	308.80	308.40
A 2.33.2		Beyond 60 cm girth upto and including 120 cm girth	Each	1360.70	1360.30	1360.70	1361.00	1361.80	1361.60	1360.80	1361.80	1360.80	1361.30	1362.40	1362.10
A 2.33.3		Beyond 120 cm girth upto and including 240 cm girth	Each	6327.70	6327.40	6327.70	6328.10	6328.90	6328.70	6327.90	6328.90	6327.90	6328.40	6329.50	6329.10
A 2.33.4		Above 240 cm girth	Each	12649.50	12649.10	12649.50	12649.90	12650.60	12650.50	12649.60	12650.70	12649.70	12650.20	12651.20	12650.90
A 2.34		Supplying chemical emulsion in sealed containers including delivery as specified.													
A 2.34.1		Chlorpyriphos/Lindane emulsifiable concentrate of 20%	Litre	246.90	230.80	246.90	263.10	293.10	286.20	251.60	295.40	253.90	274.60	318.50	304.60
A 2.35		Diluting and injecting chemical emulsion for POST-CONSTRUCTIONAL anti-termite treatment (excluding the cost of chemical emulsion)													
A 2.35.1		Along external wall where the apron is not provided using chemical imulsion @ 7.5 litres / sqm of the vertical surface of the substructure to a depth of 300 mm including excavation channel along the wall & rodding etc. complete:													
A 2.35.1.1		With Chlorpyriphos/Lindane E.C. 20% with 1% concentration	Metre	20.50	20.40	20.50	20.50	20.60	20.60	20.50	20.60	20.50	20.50	20.60	20.60
A 2.35.2		Along the external wall below concrete or masonry apron using chemical emulsion @2.25 litres per linear metre including grilling and plugging holes etc													
A 2.35.2.1		With Chlorpyriphos/Lindane E.C. 20% with 1% concentration	Metre	24.70	24.60	24.70	24.70	24.80	24.80	24.70	24.80	24.70	24.70	24.90	24.80
A 2.35.3		Treatment of soil under existing floors using.chemical emulsion @ one litre per hole, 300 mm apart including drilling 12 mm diameter holes and plugging with cement mortar 1 :2 (1 cement : 2 Coarse sand) to match the existing floor.													
A 2.35.3.1		With Chlorpyriphos/Lindane E.C. 20% with 1% concentration	Sqm	178.40	178.40	178.40	178.40	178.40	178.40	178.40	178.40	178.40	178.40	178.40	178.40
A 2.35.4		Treatment of existing masonry using chemical emulsion@ one litre per hole at 300mm interval including drilling holes at 45 degree and plugging them with cement mortar 1:2(1 cement : 2 coarse sand) to the full depth of the hole.													
A 2.35.4.1		With Chlorpyriphos/Lindane E.C. 20% with 1% concentration.	Metre	22.70	22.60	22.70	22.70	22.80	22.80	22.70	22.80	22.70	22.70	22.80	22.80
A 2.35.5		Treatment at points of contact of wood work by chemical emulsion Chlorpyriphos./Lindane (in oil or kerosene based solution) @ 0.5 litres per hole by drilling 6 mm dia holes at downward angle of 45 degree at 150mm centre to centre and sealing the same.	Metre	294.60	277.10	294.60	312.00	344.40	336.90	299.60	346.90	302.10	324.50	371.80	356.80
A 2.36		Extra levelling & neatly dressing of disposed soil completely as directed by Engineer-in-Charge	Cum	10.20	10.20	10.20	10.20	10.20	10.20	10.20	10.20	10.20	10.20	10.20	10.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		3.0 MORTARS	The Rates mentioned below are exclusive of Centages and have been used for reference purpose for other items of work only												
A3.1	MF	Cement Mortar 1:1 (1 Cement : 1 fine sand)	Cum	9407.30	8585.60	9407.30	11691.10	13606.00	13164.10	10076.30	14338.80	10955.50	11695.70	18300.20	16099.00
A3.2	MF	Cement Mortar 1:2 (1 Cement : 2 fine sand)	Cum	7273.50	6452.10	7273.50	9412.00	11254.00	10828.90	7858.90	11958.70	8704.40	9416.60	15768.70	13651.60
A3.3	MF	Cement Mortar 1:3 (1 Cement : 3 fine sand)	Cum	6208.80	5386.90	6208.80	8276.30	10083.30	9666.30	6752.80	10774.60	7582.20	8280.90	14511.90	12435.20
A3.4	MF	Cement Mortar 1:4 (1 Cement : 4 fine sand)	Cum	5231.50	4461.50	5231.50	7126.00	8797.90	8412.00	5717.00	9437.10	6483.90	7130.70	12893.60	10972.90
A3.5	MF	Cement Mortar 1:5 (1 Cement : 5 fine sand)	Cum	4705.20	3963.30	4705.20	6506.70	8105.70	7736.70	5159.20	8717.00	5892.60	6511.30	12022.30	10185.60
A3.6	MF	Cement Mortar 1:6 (1 Cement : 6 fine sand)	Cum	4254.10	3536.20	4254.10	5975.80	7512.40	7157.80	4681.10	8099.70	5385.70	5980.40	11275.40	9510.70
A3.7	MF	Cement Mortar 1:2 (1 Cement : 2 Coarse sand)	Cum	8784.10	7962.70	8784.10	10922.60	12764.60	12339.50	9369.50	13469.30	10215.00	10927.20	17279.30	15162.20
A3.8	MF	Cement Mortar 1:3 (1 Cement : 3 Coarse sand)	Cum	7910.20	7088.30	7910.20	9977.70	11784.70	11367.70	8454.20	12476.00	9283.60	9982.30	16213.30	14136.60
A3.9	MF	Cement Mortar 1:4 (1 Cement : 4 Coarse sand)	Cum	6932.90	6162.90	6932.90	8827.40	10499.30	10113.50	7418.40	11138.60	8185.40	8832.10	14595.00	12674.40
A3.10	MF	Cement Mortar 1:5 (1 Cement : 5 Coarse sand)	Cum	6406.60	5664.70	6406.60	8208.10	9807.10	9438.10	6860.60	10418.40	7594.00	8212.70	13723.70	11887.00
A3.11	MF	Cement Mortar 1:6 (1 Cement : 6 Coarse sand)	Cum	5955.50	5237.60	5955.50	7677.20	9213.80	8859.20	6382.50	9801.10	7087.10	7681.80	12976.80	11212.10
A3.12	MF	Cement Mortar 1:2 (1 Cement : 2 Stone dust)	Cum	7200.60	6922.10	7200.60	8241.00	8960.30	8794.30	7638.00	9233.30	7965.30	8245.70	10711.40	9889.80
A3.13	MF	Cement Mortar 1:2(1 Cement : 2 marble Dust)	Cum	4816.60	4560.80	4816.60	5425.90	6013.90	5878.20	5017.30	6180.80	5214.50	5500.10	7149.90	6604.90
A3.14	MF	Cement Mortar 1:5 (1 Cement : 5 Marble Dust)	Cum	4290.40	4062.50	4290.40	4806.50	5321.80	5202.90	4459.50	5460.60	4623.20	4880.70	6278.50	5817.50
A3.15	MF	Cement Mortar 1:2 (1White Cement : 2 Marble Dust)	Cum	19422.20	18176.00	19422.20	20668.40	22982.90	22448.80	19778.30	23160.90	19956.30	21558.60	24941.30	23873.10
A3.16	MF	Cement Mortar 1:3 (1White Cement : 3 Marble Dust)	Cum	15056.60	14096.00	15056.60	16017.20	17801.30	17389.60	15331.10	17938.50	15468.30	16703.40	19310.90	18487.50
A3.17	MF	Cement Mortar 1:5 (1 Cement : 5 Marble Dust)	Cum	4290.40	4062.50	4290.40	4806.50	5321.80	5202.90	4459.50	5460.60	4623.20	4880.70	6278.50	5817.50
A3.18		Mud Mortar	Cum	1958.60	1859.30	1958.60	2057.90	2242.20	2199.70	1986.90	2256.40	2001.10	2128.80	2398.20	2313.10
A3.19		Mortar in lime, surkhi (50% red and 50% light yellow) and marbel dust 1:1.5:0.5	Cum	2726.80	1239.30	1282.00	1324.60	1403.80	1385.60	1294.20	1409.90	1300.30	1355.10	1470.90	1434.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		4.0 CONCRETE WORK													
		CEMENT CONCRETE (CAST-IN-SITU)													
A 4.1		Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering -All work upto Plinth Level													
A 4.1.2	MF	1:1.5:3 (1 Cement: 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	10562.10	10020.10	10562.10	12166.90	13401.20	13116.30	11125.10	13874.20	11692.60	12169.10	16430.20	15010.00
A 4.1.3	MF	1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	Cum	9968.90	9454.40	9968.90	11473.20	12627.80	12361.30	10498.80	13070.10	11029.50	11475.40	15460.70	14132.40
A 4.1.4	MF	1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 40 mm nominal size)	Cum	9552.40	9037.90	9552.40	11304.20	12458.80	12192.30	10329.80	12901.10	10860.50	11306.40	15291.70	13963.40
A 4.1.5	MF	1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	9224.80	8744.80	9224.80	10603.30	11658.00	11414.60	9713.30	12061.90	10198.00	10605.40	14245.40	13032.20
A 4.1.6	MF	1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	Cum	8704.20	8224.20	8704.20	10392.00	11446.70	11203.30	9502.10	11850.70	9986.80	10394.10	14034.10	12820.90
A 4.1.8	MF	1:4:8 (1 Cement : 4 coarse sand (zone III): 8 graded stone aggregate 40 mm nominal size)	Cum	8201.30	7748.00	8201.30	9800.10	10785.20	10557.90	8969.10	11162.50	9421.60	9802.20	13201.40	12068.50
A 4.1.10	MF	1:5:10 (1 cement : 5 coarse sand(zone III) : 10 graded stone aggregate 40 mm nominal size)	Cum	7798.90	7367.10	7798.90	9326.60	10256.10	10041.60	8542.60	10611.90	8969.50	9328.70	12535.20	11466.50
A 4.1.11	MF	1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size)	Cum	6784.00	6353.20	6784.00	8310.70	9238.40	9024.30	7527.50	9594.00	7954.20	8312.10	11516.00	10448.10
A 4.1.12	MF	1:2:3.5:9 (1 ordinary portland cement : 2 fly ash: 3.5 coarse sand (zone III): 9 graded stone aggregate 40 mm nominal size)	Cum	7756.60	7379.50	7756.60	9183.00	10010.70	9819.70	8485.40	10327.20	8865.10	9185.40	12038.30	11087.50
A 4.1.13	MF	1 : 2.5 : 4 : 11 (1 ordinary portland cement : 2.5 fly ash: 4 coarse sand (zone III): 11 graded stone aggregate 40 mm nominal size)	Cum	7219.10	6886.30	7219.10	8522.40	9247.00	9079.80	7912.10	9523.90	8244.20	8524.80	11020.90	10189.00
A 4.2		Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets etc. upto a floor five level, excluding the cost of centering, shuttering and finishing.													
A 4.2.2	MF	1:1.5:3 (1 Cement: 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	10669.50	10102.80	10669.50	12578.10	13858.20	13562.80	11518.70	14334.70	12089.70	12597.90	16926.00	15484.60
A 4.2.3	MF	1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	Cum	10019.50	9480.30	10019.50	11876.60	13077.00	12800.00	10884.70	13522.90	11418.90	11896.40	15948.60	14599.20
A 4.2.5	MF	1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Cum	9258.30	8753.70	9258.30	11004.40	12104.90	11850.90	10096.90	12512.40	10585.10	11024.10	14731.00	13496.70
A 4.2.8	MF	1:5:10 (1 Cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size)	Cum	8221.70	7765.00	8221.70	9774.10	10749.70	10524.60	8972.40	11109.00	9402.90	9793.90	13067.80	11977.90
A 4.3		Centering and shuttering including strutting, propping etc. and removal of form work for:													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 4.3.1		Foundations, footings, bases of Columns	Sqm	263.40	255.90	263.40	270.90	284.90	281.70	265.60	286.00	266.70	276.30	296.70	290.20
A 4.3.2		Retaining walls, return walls, walls (any thickness) including attached pilasters, buttresses, plinth and string courses fillets, kerbs and steps etc.	Sqm	551.40	543.90	551.40	559.00	573.00	569.70	553.60	574.10	554.70	564.40	584.80	578.40
A 4.3.3		Columns, piers, abutments, pillars, posts and struts.	Sqm	662.20	650.00	662.20	674.40	697.00	691.80	665.70	698.80	667.40	683.10	716.20	705.70
A 4.4		Providing and laying cement concrete in kerbs, steps and the like at or near ground level excluding the cost of centring, shuttering and finishing													
A 4.4.1	MF	1:1.5:3 (1 cement : 2 coarse sand : 3 grade stone aggregate 20 mm nominal size)	Cum	10562.10	10020.10	10562.10	12166.90	13401.20	13116.30	11125.10	13874.20	11692.60	12169.10	16430.20	15010.00
		CEMENT CONCRETE (PRECAST)													
A 4.5		Providing and fixing upto floor five level precast cement concrete string or lacing courses, copings, bed plates, anchor blocks, plain window sills, shelves, louvers, steps, stair cases, etc. including hoisting and setting in position with cement mortar 1:3 (1 cement: 3 coarse sand), cost of required centring, shuttering and finishing smooth with 6 mm thick cement plaster 1:3 (1 cement: 3 fine sand) on exposed surfaces complete.													
A 4.5.1	MF	1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20mm nominal size)	Cum	11925.00	11325.90	11925.00	13638.70	14987.60	14676.20	12515.00	15494.70	13122.80	13653.40	18246.10	16716.20
A 4.6		Providing and fixing at or near ground level precast cement concrete in kerbs, edgings etc. as per approved pattern and setting in position with cement mortar 1:3(1 cement: 3 coarse sand) including the cost of required centring, shuttering and finishing smooth with 6 mm thick cement plaster 1:3 (1 cement: 3 fine sand) on exposed surfaces complete.													
A 4.6.1	MF	1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20mm nominal size)	Cum	10858.80	10287.20	10858.80	12532.00	13827.80	13528.70	11438.30	14324.40	12034.10	12534.30	17007.90	15516.80
A 4.7		Providing and fixing upto floor five level precast cement concrete solid block including hoisting and setting in position with cement mortar 1:3 (1cement : 3 coarse sand), cost of required centring, shuttering and finishing smooth with 6 mm thick cement plaster 1:3 (1 cement: 3 fine sand) on exposed surfaces complete.													
A 4.7.1	MF	1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20mm nominal size)	Cum	16989.70	16324.60	16989.70	18898.00	20399.30	20052.80	17631.00	20974.60	18321.20	18900.80	24083.10	22355.80
A 4.8		Providing and fixing upto floor five level precast cement concrete Hollow block including hoisting and setting in position with cement mortar 1:3 (1cement : 3 coarse sand), cost of required centring, shuttering and finishing Complete													
A 4.8.1	MF	1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20mm nominal size)	Cum	18393.00	17983.80	18393.00	19361.60	20243.20	20039.70	18716.40	20515.10	19039.30	19445.60	22060.40	21194.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 4.9		Precasting and placing in position 125mm dia Bollards 600mm high of required shape including providing M.S. Pipe Sleeve 50mm dia 300mm long in the Bollard and M.S. Pipes 40mm dia and 450mm long with 150x150x6mm M.S. plate welded at bottom and embedded 150 in cement concrete 1:3:6 (1cement: 3 coarse sand: 6 graded stone aggregate 20mm nominal size) including necessary excavation of size 250x250x450mm deep for the same in bitumen/concrete pavement at specified spacing	Each	862.40	837.20	862.40	928.60	982.90	970.40	884.90	1002.60	908.30	930.40	1109.50	1049.80
		DAMP PROOF COURSE													
A 4.10	MF	Providing and laying damp-proof course 40mm thick with cement concrete 1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 12.5mm nominal size).	Sqm	875.40	854.80	875.40	960.10	1006.30	995.70	921.10	1024.00	942.30	960.20	1119.70	1066.50
A 4.11	MF	Providing and laying damp-proof course 50mm thick with cement concrete 1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size).	Sqm	572.50	546.50	572.50	648.00	706.20	692.80	599.00	728.40	625.60	648.30	848.30	781.70
A 4.12		Extra for providing and mixing water proofing material in cement concrete work in doses by weight of cement as per manufacturers specification:	per bag	57.60	53.90	57.60	61.40	68.40	66.80	58.70	68.90	59.20	64.10	74.30	71.10
A 4.13	MF	Applying a coat of residual petroleum bitumen of Grade VG - 10 of approved quality using 1.7kg per square metre on damp proof course after cleaning the surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil	Sqm	157.50	155.00	157.50	160.70	165.00	164.00	157.80	166.20	159.20	161.30	173.10	169.20
		MISCELLANEOUS													
A 4.14		Extra for concrete work in superstructure above floor V level for each four floors or part thereof	Cum	903.10	903.10	903.10	903.10	903.10	903.10	903.10	903.10	903.10	903.10	903.10	903.10
A 4.15		Extra for laying concrete in or under water and/or liquid mud including cost of pumping or bailing out water and removing slush etc. Complete	per cum per m	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00
A 4.16		Extra for laying concrete in or under foul positions	Cum	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60
A 4.17		Making Plinth protection 50mm thick of cement concrete 1:3:6 (1 cement:3coarse sand:6 graded stone aggregate 20mm nominal size) over 75mm thick bed of dry brick ballast 40 mm nominal size, well rammed and consolidated and grouted with fine sand, including necessary excavation , levelling and dressing and finishing the top smooth.	Sqm	715.40	681.50	715.40	799.50	871.50	854.90	743.60	895.90	772.70	803.70	1031.30	955.70
A 4.18		Extra for addition of synthetic Polyester triangular fibre of length 12mm effective diameter 10-40 microns and specific gravity of 1.34-1.40 in cement concrete/RCC/Flooring?Water retaining structures by using 125 gms of synthetic polyster triangular fibre for 50 kg cement used as per directions of Engineer in charge.	per bag	75.10	70.20	75.10	80.00	89.20	87.00	76.50	89.90	77.20	83.50	96.90	92.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 4.19		Providing and laying in position ready mixed plain cement concrete , using Fly-Ash and cement content as per approved design mix and manufactured in fully automatic batching plant and transported to site of work in transit mixer for all leads, having continuous agitated mixture manufactured as per mix design of specified grade for plain cement concrete work, including pumping of RMC from transit mixture to site of laying and curing excluding the cost of centering, shuttering and finishing,including cost of curing , admixtures in recommended propotions as per IS:9103 to accelerated/retard setting of concrete, improve workability without impairing strength and durability as direction of the Engineer in Charge.													
		NOTE: (1)Excess/Less cement used than specified in this Item is payable/recoverable seperately (2)Fly ash conforming to Grade-I of IS:3812(Part-I) only be used as part replacement of OPC as per IS:456. Uniform blending with cement is to be ensured in accordance with Clauses 5.2 & 5.2.1 of IS:456-2000 in the items of BMC & RMC.													
A 4.19.1		All work upto Plinth Level:													
A 4.19.1.1		M15 grade plain cement concrete	Cum	15523.00	15104.00	15523.00	17078.30	18011.50	17796.20	16295.20	18366.10	16720.40	17083.80	20285.70	19218.80
A 4.19.1.2		M10 Grade plain cement concrete	Cum	15784.20	15376.30	15784.20	17303.50	18208.20	17999.40	16544.20	18552.00	16956.60	17308.70	20413.30	19242.30
A 4.19.2		All work above Plinth & upto Floor-V Level:													
A 4.19.2.1		M15 grade plain cement concrete	Cum	15785.20	15366.20	15785.20	17340.50	18273.80	18058.40	16557.40	18628.30	16982.70	17346.00	20548.00	19344.50
A 4.19.2.2		M10 grade plain cement concrete	Cum	15578.10	15170.20	15578.10	17097.40	18002.10	17793.40	16338.20	18345.90	16750.50	17102.70	20207.20	19036.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 4.20		Providing and laying in position ready mixed plain cement concrete , with cement content as per approved design mix and manufactured in fully automatic batching plant and transported to site of work in transit mixer for all leads, having continuous agitated mixture manufactured as per mix design of specified grade for plain cement concrete work, including pumping of RMC from transit mixture to site of laying and curing excluding the cost of centering, shuttering and finishing,including cost of curing , admixtures in recommended propotions as per IS:9103 to accelerated/retard setting of concrete, improve workability without impairing strength and durability as per direction of the Engineeer in Charge.													
		NOTE: (1) Excess/Less cement used than specified in this Item is payable/recoverable seperately.													
A 4.20.1		All work upto Plinth Level:													
A 4.20.1.1		M15 grade plain cement concrete	Cum	16438.50	15943.20	16438.50	18166.40	19257.40	19005.60	17249.70	19672.70	17747.90	18171.70	21920.40	20534.80
A 4.20.1.2		M10 grade plain cement concrete	Cum	16231.40	15747.20	16231.40	17923.30	18985.70	18740.60	17030.40	19390.30	17515.70	17928.40	21579.70	20226.50
A 4.20.2		All work above Plinth & upto Floor-V Level:													
A 4.20.2.1		M15 grade plain cement concrete	Cum	16232.40	15737.20	16232.40	17960.40	19051.30	18799.60	17043.60	19466.70	17541.80	17965.70	21714.40	20328.70
A 4.20.2.2		M10 grade plain cement concrete	Cum	16025.30	15541.20	16025.30	17717.30	18779.70	18534.50	16824.40	19184.30	17309.70	17722.30	21373.70	20020.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
5.0 REINFORCED CEMENT CONCRETE															
A 5.1		Providing and laying in position specified grade of reinforced cement concrete excluding the cost of centring, shuttering, finishing and reinforcement - All work upto plinth level													
A 5.1.2	MF	1:1.5:3 (1 Cement: 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	10974.90	10432.80	10974.90	12579.60	13813.90	13529.10	11537.80	14286.90	12105.30	12581.80	16843.00	15422.80
A 5.1.3	MF	1:2:4 (1 Cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	Cum	10381.70	9867.10	10381.70	11885.90	13040.50	12774.10	10911.60	13482.80	11442.30	11888.10	15873.40	14545.10
A 5.2		Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts, etc. upto floor five level excluding cost of centring, shuttering, finishing and reinforcement.													
A 5.2.2	MF	1:1.5:3 (1 Cement: 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	12320.40	11768.50	12320.40	13935.00	15187.70	14898.60	12886.20	15662.10	13455.10	13944.30	18232.20	16803.50
A 5.3	MF	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands. plain window sills, staircases and spiral stair cases upto floor five level excluding the cost of centring, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20 mm nominal size).	Cum	12681.40	12139.40	12681.40	14286.20	15520.50	15235.60	13244.40	15993.40	13811.90	14288.40	18549.50	17129.30
A 5.4	MF	Providing and laying upto floor five level reinforced cement concrete in kerbs, steps and the like excluding the cost of centring, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20 mm nominal size).	Cum	15553.70	14828.50	15553.70	17700.80	19352.20	18971.00	16306.90	19985.00	17066.20	17703.70	23404.80	21504.70
A 5.5	MF	Reinforced cement concrete work in arches, archribs, domes, vaults, shells, folded plate and roofs having slope more than 15° upto floor five level excluding the cost of centring, shuttering, finishing and reinforcement with 1 : 1.5 : 3 (1 cement : 1.5 coarse sand ; 3 graded stone aggregate 20 mm nominal size)	Cum	13145.70	12603.50	13145.70	14750.60	15985.20	15700.20	13708.70	16458.10	14276.20	14752.90	19014.40	17594.10
A 5.6	MF	Reinforced cement concrete work in chimneys, shafts, upto floor 5 level, excluding the cost of centring, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement; 1.5 coarse sand; 3 graded stone aggregate 20mm nominal size)	Cum	12476.90	11925.00	12476.90	14091.50	15344.20	15055.10	13042.70	15818.60	13611.60	14100.80	18388.70	16960.00
A 5.7	MF	Reinforced cement concrete work in well-steining, excluding the cost of centring, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement; 1.5 coarse sand; 3 graded stone aggregate 20mm nominal size)	Cum	10610.30	10068.30	10610.30	12215.10	13449.40	13164.50	11173.30	13922.40	11740.80	12217.30	16478.40	15058.20
A 5.8	MF	Reinforced cement concrete work in vertical and horizontal fins individually or forming box louvers, fascias and eaves boards above plinth level upto floor 5 level, excluding the cost of centring, shuttering, finishing and reinforcement with 1 : 1.5 : 3 (1 cement	Cum	290.30	276.70	290.30	330.20	361.10	354.00	304.30	372.80	318.30	330.40	436.30	401.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.9		Centering and shuttering including strutting, propping etc. and removal of form for:													
A 5.9.1		Foundations, footings, bases of columns etc. for mass concrete.	Sqm	263.40	255.90	263.40	270.90	284.90	281.70	265.60	286.00	266.70	276.30	296.70	290.20
A 5.9.2		Walls (any thickness) including attached pilasters, butteresses, plinth and string courses etc.	Sqm	551.60	544.10	551.60	559.20	573.20	570.00	553.80	574.30	554.80	564.60	585.10	578.60
A 5.9.3		Suspended floors, roofs, landings, balconies and access platform.	Sqm	618.10	612.90	618.10	624.10	633.90	631.60	619.80	635.00	621.00	627.40	644.00	638.70
A 5.9.4		Shelves (Cast in Situ)	Sqm	618.10	612.90	618.10	624.10	633.90	631.60	619.80	635.00	621.00	627.40	644.00	638.70
A 5.9.5		Lintles, Beams, Plinth beams, Girders, Bressumers & Cantilevers	Sqm	499.80	494.50	499.80	506.00	516.00	513.70	501.60	517.20	502.90	509.40	526.60	521.10
A 5.9.6		Columns, Pillars, Piers, Abutments, Posts & Struts	Sqm	662.20	650.00	662.20	674.40	697.00	691.80	665.70	698.80	667.40	683.10	716.20	705.70
A 5.9.7		Stairs (Excluding Landings) except spiral stair cases	Sqm	552.10	550.90	552.10	553.20	555.50	555.00	552.40	555.60	552.60	554.10	557.30	556.30
A 5.9.8		Spiral staircases (including landing)	Sqm	569.30	561.00	569.30	577.80	593.20	589.60	571.70	594.50	573.00	583.60	606.70	599.40
A 5.9.9		Arches, Domes, Vaults upto 6 meter span	Sqm	1553.10	1544.30	1553.10	1561.90	1578.20	1574.40	1555.60	1579.40	1556.80	1568.10	1592.00	1584.50
A 5.9.10		Extra for Arches, Domes, Vaults exceeding 6 meter span	Sqm	5834.20	5814.40	5834.20	5853.90	5890.60	5882.10	5839.80	5893.30	5842.50	5867.90	5921.60	5904.70
A 5.9.11		Chimneys and Shafts	Sqm	551.60	544.10	551.60	559.20	573.20	570.00	553.80	574.30	554.80	564.60	585.10	578.60
A 5.9.12		Well Steining	Sqm	257.90	256.50	257.90	259.30	261.90	261.30	258.30	262.10	258.50	260.30	264.10	262.90
A 5.9.13		Vertical and Horizontal Fins individually or forming box louvers bent, facias and eaves boards	Sqm	897.80	894.80	897.80	900.80	906.40	905.10	898.70	906.80	899.10	903.00	911.10	908.50
A 5.9.15		Small lintels not exceeding 1.5m clear span, moulding as in cornices, window sills, string courses, bands, copings, bed plates, anchor blocks and the like,	Sqm	263.40	255.90	263.40	270.90	284.90	281.70	265.60	286.00	266.70	276.30	296.70	290.20
A 5.9.16		Edges of Slabs and Breaks in Floors and Walls	Sqm												
A 5.9.16.1		Under 20 cm wide	Sqm	153.60	153.50	153.60	153.70	153.90	153.80	153.60	153.90	153.70	153.80	154.00	154.00
A 5.9.16.2		Above 20 cm wide	Sqm	655.10	654.80	655.10	655.50	656.10	656.00	655.20	656.20	655.30	655.70	656.70	656.40
A 5.9.17		Cornices and Mouldings	Sqm	673.40	670.10	673.40	676.70	682.90	681.40	674.30	683.30	674.80	679.10	688.10	685.20
A 5.9.18		Small surfaces such as cantilever ends, brackets and ends of steps, caps and bases to pilasters and columns and the like	Sqm	680.00	678.40	680.00	681.60	684.60	683.90	680.50	684.90	680.70	682.80	687.20	685.80
A 5.9.19		Weather shade, Chajjas, Corbles etc., including edges	Sqm	684.50	681.10	684.50	687.80	694.00	692.60	685.40	694.50	685.90	690.20	699.30	696.40
A 5.9.20		Suspended floors, roofs, landings, balconies and access platform with water proof ply 12mm thick	Sqm	718.50	705.90	718.50	731.60	755.10	749.70	722.30	757.10	724.40	740.40	776.10	764.80
A 5.9.21		Lintels, Beams, Plinth beams, Girders, Bressumers & Cantilevers with water proof ply 12mm thick	Sqm	600.10	587.60	600.10	613.10	636.30	631.00	603.80	638.40	605.90	621.70	657.30	646.00
A 5.10		Providing and fixing tie bolt, spring coil and plastic cone in wall shuttering complete as per the direction of engineer-in-charge													
A 5.10.1	MF	12 mm dia & 100 mm length	Set	171.50	160.30	171.50	182.70	203.50	198.70	174.70	205.20	176.30	190.70	221.20	211.60
A 5.10.2	MF	12 mm dia. & 150 mm length	Set	188.00	175.70	188.00	200.30	223.10	217.80	191.50	224.80	193.20	209.00	242.40	231.90
A 5.10.3	MF	20 mm dia.& 150 mm length	Set	202.80	189.50	202.80	216.00	240.70	235.00	206.60	242.60	208.50	225.50	261.50	250.20
A 5.10.4	MF	20 mm dia.& 225 mm length	Set	219.20	204.90	219.20	233.60	260.20	254.10	223.30	262.30	225.40	243.80	282.80	270.50
A 5.11		Extra for additional height in centring, shuttering where ever required with adequate bracing, propping etc. including cost of de-shuttering and decentring at all levels, over a height of 3.5 m, for every additional height of 1 metre or part thereof (Plan area to be measured).													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.11.1		Suspended floors, roofs, landing, beams and balconies (Plan area to be measured).	Set	251.40	249.50	251.40	253.20	256.70	255.90	251.90	256.90	252.10	254.50	259.60	258.00
		PRE CAST R.C.C													
A 5.12	MF	Providing, hoisting and fixing above plinth level upto floor five level precast reinforced cement concrete work in string courses, bands, copings, bed plates, anchor blocks plain window sills and the like including the cost of required centring, shuttering, but excluding cost of reinforcement with 1:1.5:3 (1 cement: 1.5coarse sand: 3 graded stone aggregate 20mm nominal size).	Cum	12215.30	11616.20	12215.30	13929.00	15277.90	14966.50	12805.30	15785.00	13413.10	13943.70	18536.40	17006.50
A 5.13	MF	Providing, hoisting and fixing upto floor five level precast reinforced cement concrete in small lintels not exceeding 1.5m clear span upto floor five level including the cost of required centring, shuttering but excluding the cost of reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand: 3 graded stone aggregate 20mm nominal size).	Cum	13865.00	13215.00	13865.00	15856.90	17292.60	16961.60	14738.60	17781.30	15321.90	15936.70	20491.50	18977.90
A 5.14	MF	Providing, hoisting and fixing upto floor five level precast reinforced cement concrete in mouldings as in cornices, windows sills etc. including setting in cement mortar 1:3 (1 cement : 3 coarse sand) cost of required centring, shuttering but excluding the cost of reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	17124.00	16460.80	17124.00	18849.90	20310.10	19973.50	17722.30	20800.80	18307.40	18939.20	23529.70	22004.80
A 5.15	MF	Providing, hoisting and fixing above plinth level upto floor five level precast reinforced cement concrete in lintels ,beams and bressumers including setting in cement mortar 1:3 (1 cement: 3 coarse sand), cost of required centring, shuttering but excluding the cost of reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20mm nominal size)	Cum	14556.60	13884.30	14556.60	16291.80	17768.60	17428.00	15157.30	18260.50	15743.60	16387.40	21002.60	19470.10
A 5.16	MF	Providing, hoisting and fixing above plinth level upto floor five level precast reinforced cement concrete in Shelves including setting in cement mortar 1:3 (1 cement: 3 coarse sand), cost of required centring, shutteringand finishing with neat cement punning on exposed surfaces but excluding the cost of reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20mm nominal size)	Cum	24308.50	23226.60	24308.50	26959.30	29325.50	28778.70	25218.10	30062.70	26092.20	27173.90	34240.90	31898.80
A 5.17	MF	Providing, hoisting and fixing above plinth level upto floor five level precast reinforced cement concrete in vertical & horizontal fins individually or forming box louvers setting in cement mortar 1:2 (1 cement . 2 coarse sand) including the cost of required centring, shuttering but excluding the cost of reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	13095.30	12489.10	13095.30	14764.30	16118.10	15805.80	13676.90	16600.40	14253.60	14812.50	19248.10	17772.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.18		Providing, precast cement concrete Jali 1:2:4 (1 cement:2 coarse sand: 4 stone aggregate 6mm nominal size) reinforced with 1.6 mm dia mild steel wire including centring and shuttering, roughening cleaning, fixing and finishing in cement mortar 1:3 (1 cement : 3 fine sand) etc. complete excluding plastering of the jambs, sills and soffits.													
A 5.18.1	MF	50 mm thick	Sqm	1467.20	1422.30	1467.20	1512.10	1595.40	1576.20	1480.00	1601.80	1486.40	1544.10	1665.90	1627.40
A 5.18.2	MF	40 mm thick	Sqm	1317.50	1277.60	1317.50	1357.40	1431.40	1414.30	1328.90	1437.10	1334.60	1385.90	1494.10	1459.90
A 5.18.3	MF	25 mm thick	Sqm	1164.40	1132.70	1164.40	1196.10	1255.00	1241.40	1173.40	1259.50	1178.00	1218.70	1304.80	1277.60
		ENCASING ROLLED STEEL SECTION													
A 5.19	MF	Encasing rolled steel sections, in beams and columns, with cement concrete 1:1.5:3 (1 cement : 1.5 coarse sand :3 stone aggregate 20 mm nominal size) including centring and shuttering complete but excluding cost of reinforcement.	Cum	15841.20	15237.10	15841.20	17516.70	18867.90	18556.10	16424.70	19354.00	17006.30	17559.60	22016.30	20533.70
A 5.20	MF	Encasing rolled steel section in grillages with cement concrete 1:1.5:3 (1 cement : 1.5 coarse sand :3 stone aggregate 12.5 mm nominal size) including centring and shuttering but excluding cost of expanded metal and hangers.	Cum	11423.60	10875.60	11423.60	13035.50	14281.20	13993.70	11988.70	14755.60	12557.70	13041.60	17322.40	15895.90
A 5.21	MF	Extra for providing and fixing expanded metal mesh of size 20x60mm and strands 3 25 mm wide 1.6 mm thick weighing 3.64 kg. per sqm. for encasing of rolled steel sections in beams, columns and grillages excluding cost of hangers.	Sqm	526.90	495.00	526.90	558.90	618.20	604.50	536.10	622.80	540.60	581.70	668.50	641.10
		STEEL REINFORCEMENT													
A 5.22		Reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete .													
A 5.22.1		Mild steel and medium tensile steel bars	Kg	96.70	95.90	96.70	98.70	100.40	100.00	97.30	101.00	98.00	98.80	104.30	102.50
A 5.22.2		Hard drawn steel wire	Kg	98.40	92.90	98.40	103.80	113.90	111.50	99.90	114.60	100.70	107.70	122.40	117.70
A 5.22.3		Cold twisted bars	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70
A 5.22.4		Hot rolled deformed bars (Tor)	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70
A 5.22.5		Hard drawn steel wire fabric	Kg	108.00	101.60	108.00	114.30	126.20	123.40	109.80	127.10	110.70	118.90	136.10	130.70
A 5.22.6		Thermo mechanically treated bars of Grade Fe 500D or more	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70
A 5.22A		Steel reinforcement for RCC work including straightening, cutting, bending, placing in position and binding all complete above plinth level													
A 5.22A.1		Mild steel and medium tensile steel bars	Kg	96.70	95.90	96.70	98.70	100.40	100.00	97.30	101.00	98.00	98.80	104.30	102.50
A 5.22A.2		Hard drawn steel wire	Kg	99.20	93.80	99.20	104.70	114.90	112.60	100.80	115.70	101.60	108.70	123.50	118.80
A 5.22A.3		Cold twisted bars	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70
A 5.22A.4		Hot Rolled deformed bars	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70
A 5.22A.5		Hard drawn steel wire fabric	Kg	108.00	101.60	108.00	114.30	126.20	123.40	109.80	127.10	110.70	118.90	136.10	130.70
A 5.22A.6		Thermo mechanically treated bars of Grade Fe500D or more	Kg	91.00	90.10	91.00	92.90	94.70	94.30	91.50	95.30	92.30	93.00	98.60	96.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.22B		Steel reinforcement for RCC work ready to use "cut & bend" rebars of approved make from factories/workshop to construction site including placing in position and binding all complete upto plinth level													
A 5.22B.1		Thermo mechanically treated bars of Grade Fe500D or more	Kg	86.40	85.30	86.40	88.60	90.90	90.40	87.10	91.50	87.80	89.00	95.20	93.10
A 5.22C		Steel reinforcement for RCC work ready to use "cut & bend" rebars of approved make from factories/workshop to construction site including placing in position and binding all complete above plinth level													
A 5.22C.1		Thermo mechanically treated bars of Grade Fe500D or more	Kg	86.40	85.30	86.40	88.60	90.90	90.40	87.10	91.50	87.80	89.00	95.20	93.10
A 5.23		Smooth finishing of the exposed surface of RCC work with 6mm thick cement mortar 1:3 (1 cement : 3 fine sand)	Sqm	215.70	207.30	215.70	236.20	254.60	250.30	221.10	261.30	229.20	236.60	298.10	277.60
A 5.24		Extra for rendering smooth the top of suspended floors, landings, & stair cases (treads and risers) with cement mortar 1:2 (1 cement; 2 coarse sand) including a floating coat of neat cement and protecting the surface with a layer of 7.5cm of earth laid over 50mm of fine sand in case of suspended floor and bricks laid in mud mortar in case of landing and steps including subsequent removal and cleaning of the same.	Sqm	157.70	140.80	157.70	197.00	233.00	224.70	167.50	246.20	183.30	197.80	318.40	278.20
A 5.25		Providing and fixing in position copper plate as per design for expansion joints	Kg	890.20	833.30	890.20	947.00	1052.70	1028.30	906.40	1060.80	914.50	987.70	1142.10	1093.30
A 5.26		Providing and filling in position, blown bitumen in expansion joints	Cum	71858.30	67694.40	71858.30	76022.20	83755.20	81970.70	73048.00	84350.10	73642.80	78996.50	90298.60	86729.50
A 5.27		Providing and filling in position bitumen mix filler of proportion 80 kg of hot bitumen, 1 kg of cement and 0.25 cum of coarse sand for expansion joints	Cum	31188.10	30257.40	31188.10	32996.90	34793.60	34377.10	31516.70	35457.00	32312.70	33031.70	39069.40	37058.40
A 5.28		Providing and fixing in position 12 mm thick bitumen impregnated fibre board conforming to IS-1838, including cost of primer, sealing compound Grade-A in expansion joints	Cum	66.20	62.10	66.20	70.30	77.90	76.20	67.40	78.50	68.00	73.30	84.40	80.90
A 5.29		Providing and fixing sheet covering over expansion joints with iron screws as per design													
A 5.29.1		Non-Asbestos fibre cement board 6 mm thick as per IS-14862													
A5.29.1.1		150 mm wide	Metre	192.10	185.60	192.10	198.50	210.40	207.70	193.90	211.40	194.80	203.10	220.60	215.00
A 5.29.1.2		200 mm wide	Metre	258.10	249.50	258.10	266.70	282.70	279.00	260.60	284.00	261.80	272.90	296.30	288.90
A 5.29.2		Aluminium fluted strips 3.15 mm thick	Metre												
A 5.29.2.1		150 mm wide	Metre	561.40	530.80	561.40	591.90	648.70	635.60	570.10	653.10	574.50	613.80	696.70	670.50
A 5.29.2.2		200 mm wide	Metre	745.40	704.80	745.40	786.00	861.40	844.00	757.00	867.20	762.80	815.00	925.20	890.40
A 5.29.3		Cement bonded wood particle board 6 mm thick as per IS-14276													
A 5.29.3.1		150 mm wide	Metre	188.20	182.00	188.20	194.40	205.90	203.20	189.90	206.70	190.80	198.80	215.60	210.30
A 5.29.3.2		200 mm wide	Metre												
A 5.30		Add for Plaster drip course/groove in plastered surface or moulding to RCC projections	Metre	52.00	51.80	52.00	52.20	52.60	52.50	52.10	52.60	52.10	52.30	52.90	52.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A .31		Extra for laying RCC in or under water and/or liquid mud, including cost of pumping or bailing out water and removing slush etc. complete. NOTE: For Item No.5.31 - The quantity will be calculated by multiplying the depth measured from the sub soil water level upto the center of gravity of the RCC under sub soil water with a quantity of RCC in Cubic meter executed under sub soil water. The depth of center of gravity shall be reckoned correct to 0.1 meter, 0.05 meter or more shall be taken as 0.1 meter and less than 0.05 meter ignored. No extra payment shall be made for placing reinforcement or centering and shuttering under sub soil water conditions.	Cum	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60
A 5.32		Extra for laying RCC in or under foul positions	Cum	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60
A 5.33		Providing and laying in position machine batched and machine mixed design mix M25 grade cement concrete for RCC work, using cement content as per approved design mix, including pumping of concrete to site of laying but excluding the cost of centering, shuttering, finishing and reinforcement including admixtures in recommended proportions as per IS-9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer in charge. (NOTE: Cement content considered in this item is @ 330 kg/cum. Excess or less cement used as per design mix is payable or recoverable seperately)													
A 5.33.1	MF	All works upto Plinth level	Cum	16947.00	16436.20	16947.00	18433.20	19581.50	19316.50	17469.50	20017.90	17992.90	18439.80	22380.40	21067.30
A 5.33.2	MF	All works above Plinth level upto floor 5 level	Cum	18078.90	17568.10	18078.90	19565.10	20713.40	20448.40	18601.40	21149.80	19124.80	19571.70	23512.30	22199.20
A 5.34		Extra for providing richer mixes at all floor levels. NOTE: Excess/Less cement over the specified cement content used payable/recoverable seperately.													
A 5.34.1	MF	Providing M-30 grade concrete instead of M-25 grade BMC/RMC. (NOTE: Cement content considered in M-30 is @ 340Kg/cum)	Cum	103.50	98.00	103.50	121.50	135.80	132.50	109.60	141.20	116.10	121.70	170.40	154.10
A 5.34.2	MF	Providing M-30 grade concrete instead of M-25 grade BMC/RMC. (NOTE: Cement content considered in M-35 is @ 350Kg/cum)	Cum	2334.80	2184.50	2334.80	2510.00	2797.00	2730.80	2386.70	2827.70	2419.50	2609.70	3084.90	2933.10
A 5.34.3	MF	Providing M-30 grade concrete instead of M-25 grade BMC/RMC. (NOTE: Cement content considered in M-40 is @ 360Kg/cum)	Cum	310.60	294.00	310.60	364.60	407.40	397.60	328.90	423.60	348.20	365.00	511.10	462.40
A 5.35		Add for using extra cement in the items of design mix over and above the specified cement content therein.	Quintal	1005.90	952.30	1005.90	1183.80	1323.00	1290.80	1066.10	1376.50	1130.30	1183.80	1665.50	1504.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.36	MF	Providing and placing in position precast reinforced cement concrete waffle units, square or rectangular, as per design and shape for floors and roofs in 1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 10 mm nominal size), including flush or deep ruled pointing at joints in Cement mortar 1:2 (1 Cement : 2 Fine sand), making necessary holes of required sizes for carrying through service lines etc., providing steel hooks for lifting etc, form work in precasting, handling, hoisting, centering and erection complete for all floor levels but, excluding the cost of reinforcement.	Cum	27119.80	26252.60	27111.30	29070.70	30905.60	30482.90	27777.10	31441.20	28411.40	29284.60	34521.20	32679.70
A 5.37		Providing and laying in position ready mixed M25 grade concrete for RCC work, using cement content as per approved design mix, manufactured in fully automatic batching plant and transported to site of work in transit mixer for all leads, having continuous aggitated mixture, manufactured as per Mix Design of specified Grade for RCC work, including pumping of RMC from transit mixer to site of laying, excluding the cost of centering, shuttering, finishing and reinforcement including cost of admixtures in recommended proportions as per IS-9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer in charge. (NOTE: Cement content considered in this item is @ 330 kg/cum. Excess or less cement used as per design mix is payable or recoverable seperately)													
A 5.37.1		All works upto Plinth level	Cum	17415.20	16904.50	17415.20	18901.50	20049.80	19784.80	17937.80	20486.20	18461.20	18908.10	22848.70	21399.10
A 5.37.2		All works above Plinth level upto floor V level	Cum	18547.10	18036.40	18547.10	20033.40	21181.70	20916.70	19069.70	21618.10	19593.10	20040.00	23980.60	22531.00
A 5.38		Extra for RCC/BMC/RMC work above floor V level for each 4 floors or part thereof.	Cum	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.40		Providing and laying in position ready mixed M25 grade concrete for RCC work, using fly ash and cement content as per approved design mix, manufactured in fully automatic batching plant and transported to site of work in transit mixer for all leads, having continuous aggitated mixture, manufactured as per Mix Design of specified Grade for RCC work, including pumping of RMC from transit mixer to site of laying, excluding the cost of centering, shuttering, finishing and reinforcement including cost of admixtures in recommended proportions as per IS-9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer in charge. (NOTE: (i) Cement content considered in this item is @ 330 kg/cum. Excess or less cement used as per design mix is payable or recoverable seperately (ii) Fly Ash conforming to Grade-I of IS-3812 (Part-1) only be used as part replacement of OPC as per IS-456. Uniform blending with cement to be ensured in accordance with Clauses 5.2 and 5.2.1 of IS:456-2000 in the items of BMC and RMC)													
A 5.40.1		All works upto Plinth level	Cum	16923.20	16454.30	16923.20	18640.40	19702.10	19457.10	17750.10	20105.10	18233.40	18647.10	22287.30	20937.90
A 5.40.2		All works above Plinth level and upto floor-V level	Cum	18055.10	17586.20	18055.10	19772.30	20834.00	20589.00	18882.00	21237.00	19365.30	19779.00	23419.20	22069.80
A 5.41		Supplying and applying pre tested and approved water based concrete curing compound to concrete or masonry surface, all as per manufacturers specification and direction of Engineer-in-charge.													
A 5.41.1		Non pigmented wet curing compound	Sqm	50.20	49.30	50.20	51.10	52.70	52.40	50.50	52.90	50.60	51.70	54.10	53.40
A 5.42		Providing and fixing parallel threaded couplers conforming to IS Code on "Reinforcement Couplers for Mechanical Splices of Bars for Concrete Reinforcement - Specification", to reinforcement bars including threading, enlargement at connection by forging, protecting the prepared reinforcement bars and related operations as required to complete the works as per direction of Engineer in charge.													
A 5.42.1		Coupler for 16 mm diameter reinforcement bar	Each	120.30	112.40	120.30	128.20	142.80	139.40	122.60	143.90	123.70	133.80	155.20	148.40
A 5.42.2		Coupler for 20 mm diameter reinforcement bar	Each	166.50	155.60	166.50	177.40	197.60	193.00	169.60	199.20	171.20	185.20	214.80	205.40
A 5.42.3		Coupler for 25 mm diameter reinforcement bar	Each	240.50	224.80	240.50	256.30	285.50	278.70	245.00	287.70	247.30	267.50	310.20	296.70
A 5.42.4		Coupler for 28 mm diameter reinforcement bar	Each	281.20	262.80	281.20	299.60	333.80	325.90	286.50	336.40	289.10	312.80	362.70	346.90
A 5.42.5		Coupler for 32 mm diameter reinforcement bar	Each	339.30	317.10	339.30	361.50	402.70	393.20	345.70	405.90	348.80	377.40	437.60	418.60
A 5.43		Providing and fixing in position Stainless steel Grade-304 plate 1.0 mm thick as per design for expansion joints.													
A 5.43.1		200 mm wide	Metre	831.00	783.10	831.00	878.90	967.90	947.40	844.70	974.80	851.50	913.20	1043.20	1002.10
A 5.43.2		300 mm wide	Metre	1193.20	1121.60	1193.20	1264.80	1397.80	1367.10	1213.70	1408.00	1223.90	1316.00	1510.30	1449.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.44		Providing and fixing of expansion joint system related with floor location as per drawings and direction of Engineer in Charge. The joint system will be of extruded Aluminium based members self aligning/self centering arrangement and support plates etc. as per ASTM B221-02. The system shall be such that it provides floor to floor/floor to wall expansion control system for various vertical locations in load application areas that accomodates multi directional seismic movement without stress to its components. System shall consist of metal profiles with a universal aluminium base member designed to accomodate various project conditions and finished floor treatments. The cover plate shall be designed of width & thickness required to satisfy project movements and loading requirements and secured to base members by utilising manufacturer's pre engineered self centering arrangement that freely rotates or moves in all directions. the self centering arrangement shall exhibit circular sphere ends that lock and slide inside the corresponding aluminium extrusion cavity to allow freedom of movement and flexure in all directions including vertical displacements. Provision of moisture barrier membrane in the joint system to have water tight joint is mandatory requirement all as per the manufacturer's design and as approved by Engineer-in-charge. (Material shall confirm to ASTM 6063).													
A 5.44.1		Floor joint of 100 mm gap	Metre	6384.00	5981.40	6384.00	6786.50	7534.10	7361.60	6499.00	7591.60	6556.50	7074.00	8166.70	7821.60
A 5.44.2		Floor joint of 150 mm gap	Metre	7927.00	7424.00	7927.00	8431.00	9366.00	9150.00	8071.00	9438.00	8143.00	8791.00	10157.00	9726.00
A 5.44.3		Floor joint of 200 mm gap	Metre	10294.00	9635.70	10294.00	10952.30	12175.00	11892.80	10482.10	12269.00	10576.10	11422.60	13209.50	12645.20
A 5.45		Providing and fixing of expansion joint system related with wall joint (internal or external) location as per drawings and direction of Engineer in Charge. The joint system will be of extruded Aluminium based members self aligning/self centering arrangement and support plates etc. as per ASTM B221-02. The material shall be such that it provides expansion joint system suitable for vertical wall to wall/ wall to corner application, both new and existing constructions in office buildings and complexes with no slipping down tendency amongst the components of the joint system. The joint system shall utilise light weight Aluminium profiles exhibiting minimal exposed aluminium surfaces mechanically snap locking the multicellular to facilitate movement. (Material shall confirm to ASTM 6063).													
A 5.45.1		Wall joint of 100 mm gap	Metre	5231.50	4904.40	5231.50	5558.70	6166.20	6026.00	5325.00	6213.00	5371.70	5792.40	6680.30	6399.90
A 5.45.2		Wall joint of 150 mm gap	Metre	5951.80	5577.50	5951.80	6326.10	7021.10	6860.70	6058.70	7074.60	6112.20	6593.40	7609.30	7288.50
A 5.45.3		Wall joint of 200 mm gap	Metre	7001.30	6558.40	7001.30	7444.30	8266.90	8077.00	7127.90	8330.10	7191.20	7760.60	8962.90	8583.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.46		Providing and fixing of expansion joint system of approved make & manufactures for various roof locations as per approved drawings and direction of Engineer in Charge. The joints shall be of extruded Aluminium based members with self aligning & self centering arrangement and support plates etc. as per ASTM B221-02. The system shall be such that it provides water tight roof to roof/ roof to corner joint cover expansion control system that is capable of accomodating multi directional seismic movement without stress to its components. System shall consist of metal profiles that incorporates a universal aluminium base member designed to accomodate various project conditions and roof treatments. The cover plate shall be designed of width & thickness required to satisfy movements and loading requirements and secured to base members by utilising manufacturer's pre engineered self centering arrangement that freely rotates or moves in all directions. The self centering arrangement shall exhibit circular sphere ends that lock and slide inside the corresponding aluminium extrusion cavity to allow freedom of movement and flexure in all directions including vertical displacements. The joint system shall resist damage or deterioration from the impact of falling ice, exposure to UV, air borne contaminants and occassional foot traffic from maintenance personnel. Provision of moisture barrier membrane in the joint system to have water tight joint is mandatory requirement. (Material shall confirm to ASTM 6063).													
A 5.46.1		Roof joint of 100 mm gap	Metre	5890.10	5519.80	5890.10	6260.30	6947.90	6789.20	5995.80	7000.80	6048.70	6524.70	7529.70	7212.30
A 5.46.2		Roof joint of 150 mm gap	Metre	6610.30	6193.00	6610.30	7027.70	7802.80	7623.90	6729.60	7862.40	6789.20	7325.80	8458.60	8100.90
A 5.46.3		Roof joint of 200 mm gap	Metre	7989.10	7481.60	7989.10	8496.70	9439.30	9221.80	8134.20	9511.80	8206.70	8859.20	10236.90	9801.80
A5.47		Providing and fixing in position factory made precast RCC M-40 fixing with hold fast embedded in 1:3:6 concrete block for door and windows frames having excellent smooth finish as per IS: 6523 with reinforcement of 3 Nos, 6 mm dia main bars tied with 3mm M.S stirrups placed @ 200 mm C/C and 6 numbers high strength polymer blocks of required size for fixing hinges including providing 6 no specially designed M.S galvanised sleeves for accomodating 6 mm dia fully threaded bolts for fixing hold fast on vertical members, providing suitable arrangement for recieving sliding doors bolts and tower bolt etc. All complete, as per the ditrection of engineer-in-charge. The frame shall be measured in running metre correct to two places of decimal.													
A5.47.1		Door frame 125 mm x 60 mm	Metre	3707.40	3553.20	3653.00	3837.30	4038.80	3992.30	3711.60	4086.60	3767.20	3874.60	4378.10	4292.90
A5.47.2		Door frame 100 mm x 60 mm	Metre	3399.00	3252.00	3344.00	3513.00	3699.00	3656.00	3398.00	3743.00	3448.00	3548.00	4009.00	3938.00
A5.47.3		Door frame 85 mm x 60 mm	Metre	3240.70	3097.10	3186.20	3346.40	3525.50	3484.20	3236.70	3566.60	3284.40	3381.30	3819.80	3756.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A5.48		Providing and laying RCC for construction of piers, abutments, portal frames, pier caps and bearing pedestals and seismic arresters over pier/abutment caps at all locations with specified grade using ordinary portland cement (conforming to strength requirement of IS:8112) including the cost of steel centering & shuttering etc. complete, including testing of materials etc for casting pier and pier cap in one or two stage, necessary tools, plants, machinery and all related operations as required to complete the work as per drawings & specifications with all leads, lifts and depths true to level and position but excluding the cost of providing reinforcement. Reinforcement shall be measured and paid seperately. NOTE: Cement content considered in this item is 480 Kg/cum. Excess or less cement used as per design mix is payable or recoverable seperately.													
A5.48.1		Reinforced Cement Concrete M-50	Cum	13192.90	12509.40	13192.90	15220.10	16785.70	16424.40	13902.40	17383.20	14619.20	15225.90	20615.00	18819.00
A5.48.2		Reinforced Cement Concrete M-60	Cum	14667.00	13860.00	14667.00	16805.60	18602.00	18187.50	15392.40	19221.70	16132.50	16894.60	22650.10	20737.50
A5.48.3		Extra for using M50 or M60 grade self compacting cement concrete	Cum	1000.70	961.20	1000.70	1052.20	1124.00	1107.40	1031.30	1125.10	1031.20	1085.40	1161.30	1138.30
A5.48.3X		M60 grade self compacting reinforced cement concrete	Cum	15667.70	14821.20	15667.70	17857.80	19726.00	19294.90	16423.70	20346.80	17163.70	17980.00	23811.40	21875.80
A5.48X		Annexure for Item 5.48.1, Providing M50 Grade reinforced cement concrete data for 120 cum	Each	1052738.30	998194.30	1052738.30	1214499.70	1339423.10	1310594.60	1109349.60	1387101.00	1166544.60	1214961.70	1644986.50	1501675.70
A5.48Y		Annexure for Item 5.48.2, for using M60 Grade self compacting reinforced cement concrete data for 120 cum	Each	1170363.70	1105965.20	1170363.70	1341016.70	1484359.50	1451280.40	1228247.80	1533810.60	1287305.10	1348117.70	1807379.40	1654765.50
A5.48Z		Annexure for Item 5.48.3, extra for using M60 Grade self compacting reinforced cement concrete data for 120 cum	Each	1250212.30	1182664.40	1250212.30	1424977.50	1574051.10	1539649.50	1310539.00	1623586.70	1369591.70	1434728.10	1900049.20	1745592.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 5.49		Constructing cast-in-situ RCC diaphragm wall by providing and laying machine batched, machine mixed, self compacting, ready mix reinforced cement concrete, tramie controlled, of M30 grade using minimum 400 Kg cement per cum of concrete including providing and mixing required admixtures in recommended proportions as per IS:9103, as approved by the Engineer-in-charge, for achieving 150-200 mm slump,for diaphragm wall having thickness as per approved structural design not exceeding 600 mm, in pannels of required depth and lengths as per approved drawings, includingconstructing necessary guide walls as required and as specified including boring in all kinds of soils and rocks including working in or under water and/or liquid mud, in foul conditions and pumping or bailing out of water and removing slush,including disposal of earth/rock/slush etc for all leads and all lifts, including preparing, providing and recirculating bentonite slurry in the trench as and when required for all depths,including agitating bentonite slurry during trenching etc. providing and fixing stopends or forms tubes, upto the required depths of diaphragm wall including extracting the same after casting, including chipping off the bentonite adulterated concrete or unsound concrete upto the cutoff level for obtaining the sound concrete , dressing undulations on the exposed face of diaphragm wall after excavating by chipping/ chiseling etc. including filling the depressio/cavities with sound concrete etc. complete and as directed by the Engineer-in-charge, including providing recess for bearing plates and fixing insert boxes for inclined rock anchors etc. complete as per the specifications and approved design and as directed by the Engineer-in-charge, but excluding the cost of reinforcement and inserts.(rates includes cost of all inputs of labour,material and T&P, cost of handling, lifting and placing in position the reinforcement cage in the trench, including the additional cost of welding the reinforcement bars etc. involved in hte work and all other incidental expenditure for completing the work as directed by the Engineer-in-Charge), However, the actual area of the diaphragm wal, correct to 2 decimal places, from designed bottom level to the designed cut off level (including portion anchored in the rock upto the designed bottom level) only shall be measured for payment. Excess/less cement used for the designed mix including the extra cement required for under water concreting is payable/recoverable separately.	Cum	25392.30	31899.20	32958.80	35676.10	37982.50	37451.30	33899.20	38756.40	34816.20	35822.50	43050.70	40648.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
6.0 BRICKWORK															
A 6.1		Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in													
A 6.1.1	MF	Cement mortar 1:4 (1 cement : 4 fine sand)	Cum	10918.70	9603.10	10918.70	13882.80	16591.20	15966.20	11593.50	17631.30	12841.50	13884.80	23249.60	20128.10
A 6.1.2	MF	Cement mortar 1:6 (1 cement : 6 fine sand)	Cum	10591.80	9293.60	10591.80	13498.10	16161.20	15546.60	11247.00	17183.90	12474.20	13500.00	22708.30	19639.00
A 6.2		Brick work with common burnt clay modular bricks of class designation 7.5 in foundation and plinth in	Cum												
A 6.2.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	6553.20	6116.10	6553.20	7321.20	8204.10	8000.30	6756.20	8422.30	7012.00	7472.90	9740.20	8994.60
A 6.2.2	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	6265.50	5843.80	6265.50	6982.70	7825.70	7631.10	6451.30	8028.60	6688.70	7134.30	9263.90	8564.20
A 6.3		Brick work with common burnt clay machine moulded perforated bricks of class designation 12.5 conforming to IS:2222 in superstructure above plinth level upto floor V level in cement mortsr 1:6 (1 cement : 6 coarse sand) bricks of class designation 7.5 in foundation and plinth in													
A 6.3.1	MF	With F.P.S (Non-Modular) bricks	Cum	8612.40	8116.80	8612.40	9443.80	10432.20	10204.10	8828.30	10665.10	9100.40	9627.80	12092.30	11283.10
A 6.3.2	MF	With Modular bricks	Cum	8412.10	7923.90	8412.10	9195.70	10162.20	9939.20	8616.90	10374.60	8863.80	9394.90	11704.90	10948.20
A 6.4		Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in super structure above plinth level upto floor-V level in all shapes and sizes in :													
A 6.4.1	MF	Cement mortar 1:4 (1 cement : 4 fine sand)	Cum	12122.90	10802.40	12122.90	15091.80	17809.10	17182.00	12799.00	18849.90	14047.80	15097.20	24475.10	21349.50
A 6.4.2	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	11796.00	10492.90	11796.00	14707.10	17379.10	16762.50	12452.60	18402.50	13680.40	14712.50	23933.80	20860.40
A 6.5		Extra for brick work/ ACC block masonry/ Tile brick masonry in superstructure above floor-V level, for each Four floors or part thereof by mechanical means:	Cum	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90	1337.90
A 6.6		Extra for forming cavity 5 cm to 11.5 cm wide in cavity walls with necessary weep and vent holes including use of cores and cost of providing and fixing bitumastic coated M.S ties 300 mm long of 25x3 mm section at not less than 3 ties per sqm as per approved design:	Sqm	170.80	1674.90	1682.80	1696.40	1711.80	1708.20	1686.70	1715.50	1691.10	1699.20	1737.90	1725.20
A 6.7		Providing half brick masonry with common burnt clay FPS (non modular) bricks of class designation 7.5 in cement mortar 1:3 (1 cement : 3 coarse sand) in super structure for closing cavity 5 to 7.5 cm wide in cavity wall complete with 10 cm / 11.4 cm wide bitumen felt type 3 grade 1	Metre	394.80	352.90	394.80	488.70	575.10	555.20	416.40	607.80	455.60	489.40	784.70	686.40
A 6.8		Brick work 7 cm thick with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in cement mortar 1:3 (1 cement : 3 coarse sand) in super structure above plinth level & upto floor-V level	Sqm	1037.90	938.40	1037.90	1261.70	1466.40	1419.20	1088.80	1545.00	1183.00	1261.90	1969.30	1733.60
A 6.9	MF	Brick work in plain arches in super structure above plinth level and upto floor-V level including centering and shuttering complete for span upto 6 meters with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in cement mortar 1:3 (1 cement : 3 coarse sand):	Cum	16332.10	14975.20	16332.10	19377.90	22175.70	21529.90	17033.20	23236.40	18305.40	19396.70	28982.80	25788.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 6.10	MF	Brick work in gauged arches in super structure above plinth level and upto floor-V level in cement mortar 1:3 (1 cement : 3 coarse sand) including centering and shuttering complete, for span upto 6 meters with common burnt clay F.P.S. (non modular) bricks of class designation 7.5	Cum	19282.10	17831.00	19282.10	22535.40	25524.50	24834.60	20028.80	26658.90	21389.40	22554.20	32802.70	29387.90
A 6.11		Extra for additional cost of centering for arches exceeding 6 meter span including all shuttering, bolting, wedging and removal (area of the soffit to be measured)	Sqm	461.60	467.10	461.60	456.10	445.80	448.20	460.00	445.10	459.30	452.20	437.20	441.90
A 6.12		Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundations and plinth in:													
A 6.12.1	MF	Cement mortar 1:3(1 cement : 3 coarse sand)	Sqm	1320.50	1168.50	1320.50	1664.70	1978.60	1906.20	1399.50	2099.10	1544.00	1665.10	2749.70	2388.20
A 6.12.2	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	1283.90	1133.80	1283.90	1621.60	1930.50	1859.20	1360.70	2048.90	1502.90	1622.00	2689.10	2333.40
A 6.13		Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level upto floor V level													
A 6.13.1	MF	Cement mortar 1:3 (1 cement : 3 coarse sand)	Sqm	1451.30	1299.30	1451.30	1795.60	2109.50	2037.00	1530.40	2229.90	1674.90	1795.90	2880.60	2519.10
A 6.13.2	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	1414.70	1264.60	1414.70	1752.50	2061.30	1990.00	1491.60	2179.80	1633.80	1752.80	2820.00	2464.30
A 6.14		Extra for Half brick masonry in superstructure above floor V level for every 4 floors or part thereof by mechanical means	Sqm	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40	22.40
A 6.15		Extra for providing and placing in position 2 Nos 6 mm dia M.S bars at every third course of half brick masonry	Sqm	100.70	99.70	100.70	103.00	105.00	104.50	101.40	105.70	102.30	103.00	109.80	107.50
A 6.16		Tile brick masonry with common burnt clay FPS (non modular) Tile bricks of Class designation 10 in foundation and plinth in :													
A 6.16.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	11760.20	10970.60	11760.20	13151.70	14747.60	14379.30	12127.90	15143.70	12592.30	13423.90	17532.90	16181.40
A 6.16.2	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	11237.10	10475.40	11237.10	12536.10	14059.60	13708.10	11573.50	14427.90	12004.50	12808.30	16666.80	15398.80
A 6.17	MF	Tile brick masonry with common burnt clay machine moulded Tile bricks of Class designation 12.5 conforming to IS:2690 (Part 1) in foundation and plinth in cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	11748.80	10953.60	11748.80	13081.30	14667.00	14301.00	12094.80	15040.00	12530.60	13377.30	17326.80	16030.00
A 6.18	MF	Tile brick masonry with common burnt clay FPS (non modular) Tile bricks of Class designation 10 in super structure above plinth level upto floor V level in cement mortar 1:6 (1 cement : 6 coarse sand) :	Cum	12533.20	11764.10	12533.20	13839.40	15376.50	15021.80	12871.60	15745.80	13303.70	14116.80	17995.10	16720.80
A 6.20	MF	Tile brick masonry with common burnt clay FPS (non modular) Tile bricks of Class designation 10 in super structure above plinth level upto floor V level in cement mortar 1:4 (1 cement : 4 coarse sand) including centering and shuttering complete	Cum	16698.30	15936.10	16698.30	17987.10	19515.80	19162.90	17040.40	19872.40	17456.80	18276.00	22064.70	20821.20
A 6.21	MF	Tile brick masonry with common burnt clay FPS (non modular) Tile bricks of Class designation 10 in gauged arch work in super structure above plinth level upto floor V level in cement mortar 1:4 (1 cement : 4 coarse sand) including centering and shuttering complete	Cum	19313.30	18544.30	19313.30	20608.90	22150.20	21794.40	19657.30	22507.80	20074.70	20902.60	24709.80	23460.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 6.22	MF	Tile brick masonry work 5 cm thick with common burnt clay FPS (non modular) Tile bricks of Class designation 10 in cement mortar 1:3 (1 cement : 3 coarse sand) in super structure above plinth and upto floor V level	Sqm	817.10	782.20	817.10	877.10	947.60	931.30	833.30	964.10	852.60	890.30	1065.50	1008.00
A 6.23	MF	Honey comb brick work 10/11.4 cm thick with common burnt clay bricks of Class designation 7.5 in super structure above plinth and upto floor V level with cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	904.50	809.00	904.50	1113.80	1309.60	1264.40	952.50	1382.10	1039.30	1117.40	1776.60	1557.10
A 6.24		Extra for laying brick work in or under water and/or liquid mud including cost of pumping or bailing out water and removing slush etc. complete. NOTE- the quantity will be calculated by multiplying the depth measured from sub-soil water level upto the center of gravity of brick work under sub-soil water with the quantity of brick work in cum. executed under the sub-soil water. the depth of center of gravity shall be reckoned correct to 0.1m, 0.05m or more shall be taken as 0.1m and less 0.05m	Cum	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60	2784.60
A 6.25		Extra for laying brick work in or under foul position	Cum	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60
A 6.26		Brick work with common burnt clay selected F.P.S (non modular) bricks of Class designation 7.5 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.26.1	MF	From ground level upto plinth level	Cum	10739.70	9438.60	10739.70	13649.00	16317.50	15701.70	11395.80	17340.70	12623.40	13653.00	22869.30	19797.50
A 6.26.2	MF	Above plinth level upto floor V level	Cum	12004.10	10698.20	12004.10	14918.20	17595.70	16977.80	12661.60	18619.50	13889.80	14925.70	24155.00	21079.10
A 6.27		Brick work with common burnt clay modular bricks of class designation 7.5 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.27.1	MF	From ground level upto plinth level	Cum	6310.40	5885.80	6310.40	7030.50	7879.00	7683.20	6497.10	8082.40	6734.90	7184.30	9321.90	8619.60
A 6.27.2	MF	Above plinth level upto floor V level	Cum	7287.80	6858.40	7287.80	8012.80	8870.20	8672.30	7475.80	9074.20	7714.40	8169.90	10320.60	145228.90
A 6.28		Brick work with common burnt clay machine moulded modular bricks of Class designation 12.5 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.28.1	MF	From ground level upto plinth level	Cum	7112.20	6635.10	7112.20	7884.80	8830.70	8612.40	7313.80	9041.50	7559.20	8076.00	10355.90	9608.70
A 6.28.2	MF	Above plinth level upto floor V level	Cum	8256.20	7774.30	8256.20	9033.50	9988.40	9768.00	8459.20	10199.90	8705.20	9228.20	11521.30	10769.90
A6.29		Brick work with common burnt clay machine moulded FPS (non - modular) bricks of Class designation 12.5 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.29.1	MF	From ground level upto plinth level	Cum	7697.20	7187.50	7697.20	8542.60	9557.20	9323.10	7917.00	9792.10	8191.20	8736.70	11239.50	10418.10
A 6.29.2	MF	Above plinth level upto floor V level	Cum	8849.20	8334.70	8849.20	9699.40	10723.00	10486.80	9070.40	10958.60	9345.30	9897.00	12412.80	11587.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 6.30		Brick work with common burnt clay machine moulded perforated FPS (non - modular) bricks of Class designation 12.5 conforming to IS : 2222 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.30.1	MF	From ground level upto plinth level	Cum	7453.20	6959.50	7453.20	8282.70	9267.60	9040.30	7668.50	9500.30	7940.40	8465.40	10924.80	10117.10
A 6.30.2	MF	Above plinth level upto floor V level	Cum	8657.40	8158.80	8657.40	9491.70	10485.50	10256.20	8874.00	10718.90	9146.60	9677.80	12150.30	11338.50
A 6.31		Brick work with common burnt clay machine moulded perforated modular bricks of Class designation 12.5 conforming to IS : 2222 in exposed brick work including making horizontal and vertical grooves 10mm wide, 12mm deep, complete in cement mortar 1:6 (1 cement : 6 coarse sand)													
A 6.31.1	MF	From ground level upto plinth level	Cum	7272.50	6785.00	7272.50	8055.60	9021.00	8798.20	7477.20	9233.30	7724.00	8254.30	10562.80	9806.50
A 6.31.2	MF	From ground level upto plinth level	Cum	8476.70	7984.30	8476.70	9264.60	10238.90	10014.10	8682.70	10451.90	8930.30	9466.70	11788.30	11027.90
A 6.32		Brick work with clay flyash F.P.S. (non modular) bricks of class designation 7.5 in super structure above plinth level upto floor V level in:													
A 6.32.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	8407.50	7892.00	8407.50	9299.10	10337.30	10097.70	8643.60	10587.90	8936.90	9484.90	12112.50	11249.00
A 6.32.2	MF	Cement mortar 1 : 6 (1 cement : 6 coarse sand)	Cum	8649.70	8151.60	8649.70	9483.50	10476.40	10247.30	8866.20	10709.70	9138.70	9669.20	12140.40	11329.00
A 6.34		Brick work with non modular flyash brick conforming to IS : 12894, class designation 10 average compressive strength in super structure above plinth level upto floor V level in:													
A 6.34.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	7785.40	7327.80	7785.40	8574.00	9495.00	9282.50	7994.30	9716.20	8253.00	8740.30	11063.50	10300.20
A 6.34.2	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	7998.50	7556.30	7998.50	8736.20	9617.40	9414.10	8190.20	9823.30	8430.60	8902.60	11088.00	10370.60
A 6.35		Brick work with modular calcium silicate bricks machine moulded conforming to IS : 4139, class designation 10 average compressive strength in super structure above plinth level upto floor V level in:													
A 6.35.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	8667.40	8152.10	8667.40	9513.60	10541.80	10304.50	8892.70	10771.20	9159.70	9721.20	12200.90	11388.20
A 6.35.2	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	8880.50	8380.50	8880.50	9675.90	10664.20	10436.10	9088.60	10878.30	9337.20	9883.40	12225.40	11458.60
A 6.36		Brick work with modular extruded burnt fly ash clay sewer bricks (conforminng to IS : 4885) in cement mortar 1 : 4 (1 cement : 4 coarse sand) in foundation and plinth :													
A 6.36.1	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Cum	7174.80	6664.40	7174.80	8016.30	9035.50	8800.30	7398.80	9264.20	7665.10	8220.40	10687.10	9878.50
A 6.37	MF	Brick work with modular extruded burnt fly ash clay sewer bricks (conforminng to IS : 4885) in arches in foundation and plinth in cement mortar 1 : 3 (1 cement : 3 fine sand) :	Cum	11893.90	11315.40	11893.90	12889.10	14057.30	13787.60	12162.60	14331.70	12483.20	13107.30	16015.60	15060.90
A 6.38	MF	Providing and laying autoclaved aerated cement blocks masonry with 100 mm thick ACC blocks in super structure above plinth level upto floor V level in cement mortar 1 : 4 (1 cement : 4 coarse sand). The rate includes providing and placing in position 2 Nos 6 mm dia M.S bars at every third course of masonry work:	Cum	9222.40	8776.70	9222.40	9909.60	10788.70	10585.80	9407.90	10965.00	9611.20	10112.30	12103.20	11453.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 6.40		Providing and laying Gypsum panel partitions 100 mm thick with water proof Gypsum panels of size 666x500x100 mm made of calcite phosphor Gypsum fixed with tongue and groove, jointed with bonding plaster as per manufacturer's specifications in superstructure above plinth level upto floor V level. Gypsum blocks will have a minimum compressive strength of 9.3 Kg/cm ²	Sqm	1004.60	945.90	1004.60	1063.30	1172.40	1147.20	1021.40	1180.80	1029.80	1105.30	1264.70	1214.30
A 6.41		Extra for Gypsum panel Partition in superstructure above floor V level for every four floors or part thereof :	Sqm	104.20	104.20	104.20	104.20	104.20	104.20	104.20	104.20	104.20	104.20	104.20	104.20
A 6.44		Brick edging 7 cm wide 11.4 cm deep to plinth protection with common burnt clay FPS (non modular) bricks of class designation 7.5 including grouting with cement mortar 1:4 (1 cement : 4 fine sand)	Metre	86.40	76.10	86.40	109.20	130.20	125.30	91.50	138.20	101.10	109.20	181.60	157.50
A 6.45		Half brick masonry with non modular fly ash bricks of class designation 10 conforming to IS : 12894, in superstructure above plinth level and upto floo V level													
A 6.45.1	MF	Cement mortar 1:3 (1 cement : 3 coarse sand)	Sqm	586.40	555.30	586.40	664.10	732.40	716.60	606.80	758.30	637.90	664.50	898.70	820.60
A 6.45.2	MF	Cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	613.50	584.30	613.50	684.80	747.90	733.40	631.80	771.90	660.50	685.10	901.80	829.60
A 6.47		Providing and laying autoclaved aerated cement blocks masonry with 150 mm/230mm/300mm thick ACC blocks in super structure above plinth level upto floor V level with RCC band at sill level and lintel level with approved block laying polymer modified adhesive mortar all complete as per direction of Engineer-in-Charge. (The payment of RCC band and reinforcement shall be made for seperately)	Cum	7161.60	6832.60	7161.60	7490.70	8101.90	7960.80	7255.70	8148.90	7302.70	7725.80	8619.00	8336.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
7.0 STONE WORK															
A 7.1		Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement: 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) at plinth level with :													
A 7.1.1	MF	Cement mortar 1:6 (1 cement: 6 coarse sand)	Cum	6822.60	6494.80	6822.60	7785.10	8483.60	8322.40	7205.70	8744.50	7518.40	7794.80	10162.00	9373.60
A 7.2		Random rubble masonry with hard stone in super structure above plinth level and upto floor V level, including levelling up with cement concrete 1:6:12 (1 cement: 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) at window sills, ceiling level and the like :													
A 7.2.1	MF	Cement mortar 1:6 (1 cement: 6 coarse sand)	Cum	7342.90	7010.20	7342.90	8310.30	9017.90	8854.60	7727.40	9279.40	8040.80	8323.50	10704.00	9911.40
A 7.4		Extra for random rubble masonry with hard stone in													
A 7.4.1		Square or rectangular pillars	Cum	628.20	628.20	628.20	628.20	628.20	628.20	628.20	628.20	628.20	628.20	628.20	628.20
A 7.4.2		Circular Pillars	Cum	1819.20	1819.20	1819.20	1874.70	1874.70	1874.70	1874.70	1874.70	1874.70	1874.70	1874.70	1874.70
A 7.5		Extra for random rubble masonry with hard stone curved on plan for a mean radius not exceeding 6 m	Cum	697.40	697.40	697.40	716.60	716.60	716.60	716.60	716.60	716.60	716.60	716.60	716.60
A 7.6		Coursed rubble masonry (first sort) with hard stone in foundation and plinth with:													
A 7.6.1	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	7747.30	7456.30	7747.30	8673.10	9295.30	9151.70	8151.30	9531.40	8434.60	8677.00	10810.20	10099.40
A 7.7		Coursed rubble masonry (second sort) with hard stone in foundation and plinth with:													
A 7.7.1	MF	Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	7280.60	6989.60	7280.60	8185.30	8807.50	8663.90	7663.60	9043.60	7946.80	8189.20	10322.50	9611.60
A 7.8		Coursed rubble masonry (first or second sort) with hard stone in super structure above plinth level and upto floor five level:													
A 7.8.1	MF	Masonry work (first sort), in Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	8926.70	8630.50	8926.70	9857.70	10489.50	10343.70	9332.20	10726.40	9616.20	9865.40	12012.70	11297.40
A 7.8.2	MF	Masonry work (second sort), in Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	8460.00	8163.70	8460.00	9369.90	10001.80	9856.00	8844.50	10238.70	9128.40	9377.60	11524.90	10809.60
A 7.10		Extra for coursed random rubble masonry with hard stone (first or second sort) in													
A 7.10.1		Square or rectangular pillars	Cum	700.40	700.40	700.40	700.40	700.40	700.40	700.40	700.40	700.40	700.40	700.40	700.40
A 7.10.2		Circular Pillars	Cum	2068.30	2068.30	2068.30	2129.60	2129.60	2129.60	2129.60	2129.60	2129.60	2129.60	2129.60	2129.60
A 7.11		Extra for coursed random rubble masonry with hard stone (first or second sort) curved on plan for a mean radius not exceeding 6 meter	Cum	761.70	761.70	761.70	782.80	782.80	782.80	782.80	782.80	782.80	782.80	782.80	782.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 7.12		Stone work in plain ashlar in super structure upto floor V level in cement mortar 1:6 (1 cement : 6 coarse sand) including pointing with cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade :													
A 7.12.1		One face dressed													
A 7.12.1.1		Red sand stone	Cum	45984.00	44619.90	45984.00	47348.00	49881.30	49296.70	46373.70	50076.20	46568.60	48322.40	52024.80	50855.60
A 7.12.1.2		White sand stone	Cum	73573.20	70404.20	73573.20	76742.20	82627.40	81269.30	74478.60	83080.10	74931.30	79005.70	87607.20	84891.00
A 7.12.2		Both face dressed													
A 7.12.2.1		Red sand stone	Cum	60527.30	59163.30	60527.30	61891.40	64424.70	63840.10	60917.10	64619.60	61111.90	62865.70	66568.20	65399.00
A 7.12.2.2		White sand stone	Cum	88116.60	84947.60	88116.60	91285.60	97170.80	95812.70	89022.00	97623.50	89474.70	93549.10	102150.60	99434.30
A 7.13		Stone work in plain ashlar in super structure upto floor V level in cement mortar 1:3 (1 cement : 3 coarse sand) including centering, shuttering and pointing with cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade													
A 7.13.1		One face dressed													
A 7.13.1.1		Red sand stone	Cum	53089.50	51260.60	53089.50	54918.40	58315.00	57531.20	53612.10	58576.30	53873.40	56224.80	61189.00	59621.40
A 7.13.1.2		White sand stone	Cum	80678.80	77044.90	80678.80	84312.60	91061.10	89503.80	81717.00	91580.20	82236.10	86908.20	96771.40	93656.70
A 7.13.2		Both face dressed													
A 7.13.2.1		Red sand stone	Cum	67632.90	65804.00	67632.90	69461.80	72858.40	72074.60	68155.50	73119.70	68416.70	70768.20	75732.40	74164.80
A 7.13.2.2		White sand stone	Cum	95222.10	91588.30	95222.10	98856.00	105604.50	104047.10	96260.40	106123.60	96779.50	101451.60	111314.80	108200.10
A 7.14		Stone work in plain ashlar in domes, in super structure upto floor V level in cement mortar 1:3 (1 cement : 3 coarse sand) including centering, shuttering and pointing with cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade :													
A 7.14.1		One face dressed													
A 7.14.1.1		Red sand stone	Cum	83100.70	80849.00	83100.70	85352.50	89534.40	88569.30	83744.10	89856.00	84065.80	86960.90	93072.80	91142.80
A 7.14.1.2		White sand stone	Cum	110690.00	106633.30	110690.00	114746.60	122280.50	120541.90	111849.00	122860.00	112428.50	117644.30	128655.20	125178.10
A 7.14.2		Both face dressed													
A 7.14.2.1		Red sand stone	Cum	121191.80	118940.00	121191.80	123443.60	127625.40	126660.40	121835.20	127947.10	122156.90	125052.00	131163.90	129233.80
A 7.14.2.2		White sand stone	Cum	148781.10	144724.40	148781.10	152837.70	160371.50	158633.00	149940.10	160951.10	150519.60	155735.30	166746.30	163269.20
A 7.15		Stone work ashlar punched (ordinary) in superstructure upto floor V level in cement mortar 1:6 (1 cement : 6 coarse sand) including pointing with cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade :													
A 7.15.1		One face dressed													
A 7.15.1.1		Red sand stone	Cum	43655.90	42291.90	43655.90	45020.00	47553.30	46968.70	44045.70	47748.20	44240.50	45994.40	49696.80	48527.60
A 7.15.1.2		White sand stone	Cum	71245.20	68076.20	71245.20	74414.20	80299.40	78941.30	72150.60	80752.10	72603.30	76677.70	85279.20	82562.90
A 7.15.2		Both face dressed													
A 7.15.2.1		Red sand stone	Cum	55871.30	54507.20	55871.30	57235.40	59768.70	59184.10	56261.10	59963.50	56455.90	58209.70	61912.20	60743.00
A 7.15.2.2		White sand stone	Cum	83460.60	80291.60	83460.60	86629.50	92514.80	91156.60	84366.00	92967.50	84818.70	88893.10	97494.60	94778.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 7.16		Extra for stone work, random rubble/ coursed rubble masonry/ashlar masonry above floor V level for every four floors or part thereof:	Cum	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10	1204.10
A 7.17		Extra for plain ashlar or ashlar punched in													
A 7.17.1		Square or Rectangular pillars	Cum	2953.50	2760.30	2953.50	3146.70	3505.60	3422.80	3008.70	3533.20	3036.30	3284.80	3809.20	3643.60
A 7.18		Extra for stone work; plain ashlar or ashlar punched curved on plan with amean radius not exceeding 6 meters	Cum	2054.60	1920.20	2054.60	2189.00	2438.70	2381.10	2093.00	2457.90	2112.20	2285.00	2649.90	2534.70
A 7.19		Extra for additional cost of centering for arches exceeding 6m span including all strutting, bolting, wedging etc. and removal (area of soffit to be measured)	Sqm	461.60	467.10	461.60	456.10	445.80	448.20	460.00	445.10	459.30	452.20	437.20	441.90
A 7.20		Stone work ashlar sunk or moulded or sunk and moulded upto floor V level in cement mortar 1:6 (1 cement : 6 coarse sand) including pointing with white cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade :													
A 7.20.1		Red sand stone	Cum	64933.90	63396.20	64933.90	66471.60	69327.30	68668.30	65373.30	69547.00	65592.90	67570.00	71743.70	70425.70
A 7.20.2		white sand stone	Cum	92523.20	89180.60	92523.20	95865.80	102073.40	100640.90	93478.20	102550.90	93955.70	98253.30	107326.10	104461.00
A 7.21		Extra for stone work; ashlar sunk or moulded or sunk and moulded or carved in :													
A 7.21.1		triangular or square or rectangular pillars	Cum	3852.40	3600.40	3852.40	4104.40	4572.50	4464.50	3924.40	4608.50	3960.40	4284.50	4968.50	4752.50
A 7.21.2		Circular or polygonal pillars	Cum	10915.20	10201.10	10915.20	11629.30	12955.40	12649.40	11119.20	13057.40	11221.20	12139.30	14077.50	13465.50
A7.22		Extra for stone work ashlar sunk or moulded in cornices	Cum	852.90	852.90	852.90	852.90	852.90	852.90	852.90	852.90	852.90	852.90	852.90	852.90
A 7.24		Extra for stone work (veneer work) curved on plan with a mean radius not exceeding 6m	Cum	2953.50	2760.30	2953.50	3146.70	3505.60	3422.80	3008.70	3533.20	3036.30	3284.80	3809.20	3643.60
A 7.26		Providing and fixing stone dowels 10x5x2.50 cm cut to double wedge shape as per design in cement mortar 1:2 (1 cement : 2 coarse sand), including making the necessary chases	Each	59.30	55.10	59.30	65.20	73.50	71.60	60.90	74.90	62.50	67.50	84.40	78.90
A 7.28		Providing and fixing sloping chajja of stone 40mm thick and upto 80 cm wide beyond the wall as measured along the slope in cement mortar 1:4 (1 cement: 4 coarse sand) with 12mm diameter anchoring steel bar, 45cm long, fixed in each stone and supported on and including with bricks cove in cement mortar 1:4 (1 cement: 4 coarse sand), including pointing in cement mortar 1:2 (1 white cement: 2 stone dust) with an admixture of pigment matching the stone shade:													
A 7.28.1		Red sand stone													
A 7.28.1.1		With common burnt clay F.P.S (non- modular) bricks of class designation 7.5	Sqm	2134.70	2063.00	2134.70	2231.80	2369.50	2337.70	2161.30	2391.80	2186.60	2270.10	2547.70	2457.70
A 7.28.2		White sand stone													
A 7.28.2.1		With common burnt clay F.P.S (non- modular) bricks of class designation 7.5	Sqm	2134.70	2063.00	2134.70	2231.80	2369.50	2337.70	2161.30	2391.80	2186.60	2270.10	2547.70	2457.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 7.29		Providing and fixing horizontal chajja of stone 40mm thick and upto 80 cm projection in cement mortar 1:4 (1 cement: 4 coarse sand), including pointing in white cement mortar 1:2 (1 white cement: 2 stone dust) with an admixture of pigment matching the stone shade:													
A 7.29.1		Red sand stone	Sqm	1278.00	1240.60	1278.00	1315.40	1384.90	1368.80	1288.70	1390.20	1294.00	1342.10	1443.60	1411.60
A 7.29.2		White sand stone	Sqm	1278.00	1240.60	1278.00	1315.40	1384.90	1368.80	1288.70	1390.20	1294.00	1342.10	1443.60	1411.60
A 7.30		30 mm red sand stone sun-shade (chisel-dressed) supported on red sand stone brackets, fixed in walls with cement mortar 1:4 (1 cement : 4 coarse sand), including finishing complete	Sqm	1512.90	1471.80	1512.90	1554.00	1630.20	1612.60	1524.60	1636.10	1530.50	1583.30	1694.80	1659.60
A 7.31		Providing and fixing red sand stone brackets 55x22.5x45 cm sunk and moulded including providing and fixing with 4 Nos gun metal cramp 25x6 mm, 30 cm long	Each	4858.90	4759.00	4858.90	4958.80	5144.30	5101.50	4887.40	5158.60	4901.70	5030.10	5301.30	5215.60
A 7.32		Stone work, plain in copings, cornices, string courses and plinth courses, upto 75 mm thick in cement mortar 1:6 (1 Cement : 6 Coarse sand), including pointing with white cement mortar 1:2 (1 white cement : 2 stone dust), with an admixture of pigment matching the stone shade.													
A 7.32.1		Red sand stone	Cum	78692.40	76697.20	78692.40	80687.40	84392.70	83537.60	79262.40	84677.80	79547.40	82112.60	87527.80	85817.70
A 7.32.2		White sand stone	Cum	115605.00	111195.00	115605.00	120015.00	128204.90	126315.00	116865.00	128834.90	117494.90	123164.90	135134.90	131355.00
A 7.33		Providing and fixing stone jali 40mm thick throughout in cement mortar 1: 3 (1 cement : 3 coarse sand), including pointing with white cement mortar 1:2 (1 white cement : 2 stone dust), with an admixture of pigment matching the stone shade, jali slab without any chamfers etc													
A 7.33.1		Red sand stone	Sqm	9797.60	9756.50	9797.60	9838.70	9915.00	9897.30	9809.30	9920.80	9815.20	9868.00	9979.50	9944.30
A 7.33.2		White sand stone	Sqm	9797.60	9756.50	9797.60	9838.70	9915.00	9897.30	9809.30	9920.80	9815.20	9868.00	9979.50	9944.30
A 7.34		Extra for laying Stone work in or under water and/or liquid mud including cost of pumping or bailing out water and removing slush etc. complete.NOTE- the quantity will be calculated by multiplying the depth measured from sub-soil water level upto the center of gravity of stone work under sub-soil water with the quantity of stone work in cum. executed under the sub-soil water. The depth of center of gravity shall be reckoned correct to 0.1m, 0.05m or more shall be taken as 0.1m and less 0.05m ignored.	Cum	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00	663.00
A 7.35		Extra for laying Stone work in or under foul position	Cum	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60	275.60
A 7.38		Stone tile work for wall lining upto 10 m height with special adhesive over 12mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand), including pointing in white cement with an admixture of pigment to match the stone shades.													
A 7.38.1		8mm thick (mirror polished and machine cut edge)													
A 7.38.1.1		Granite stone of any colour and shade	Sqm	2697.90	2593.60	2697.90	2829.70	3029.90	2983.70	2735.00	3057.10	2765.10	2892.00	3261.10	3142.20
A 7.38.1.2		Raj Nagar plain white marble/ Udaipur green marble/ Zebra black marble	Sqm	2360.40	2278.20	2360.40	2470.10	2629.30	2592.60	2391.20	2653.30	2418.10	2516.60	2825.80	2725.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
8.0. CLADDING WORKS															
A 8.1		Marble work gang saw cut (Polished and machine cut) of thickness 18 mm for wall lining (veener work), backing filled with with grout of average 12 mm thick in mortar 1:3 (1 cement : 3 coarse sand), including pointing with white cement mortar 1:2 (1 white cement : 2 marble dust) with an admixture of pigment to match the marble shade (To be secured to the backing by means of cramps, which shall be paid seperately)													
A 8.1.1		Raj Nagar Plain white marble/Udaipur green marble/Zebra black marble.													
A 8.1.1.1		Area of slab upto 0.50 sqm	Sqm	4260.20	3905.60	4260.20	4388.50	4583.40	4538.40	4295.80	4610.20	4325.60	4448.70	4810.30	4693.80
A 8.1.1.2		Area of slab over 0.50 sqm	Sqm	4473.50	4358.50	4473.50	4612.40	4831.40	4780.80	4512.30	4858.80	4542.40	4683.30	5072.50	4947.50
A 8.2		Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and pre polished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels.													
A 8.2.1		Raj Nagar Plain white marble/Udaipur green marble/Zebra black marble.													
A 8.2.1.1		Area of slab upto 0.50 sqm	Sqm	2961.20	2847.60	2896.20	2980.80	3078.70	3056.10	2918.50	3102.60	2946.60	2997.90	3247.60	659501.30
A 8.2.1.2		Area of slab above 0.50 sqm	Sqm	2814.80	2688.20	2814.80	2977.50	3220.30	3164.20	2859.50	3255.30	2898.70	3050.30	3511.80	3362.80
A 8.2.2		Granite of any colour and shade													
A 8.2.2.1		Area of slab upto 0.50 sqm	Sqm	4733.00	4503.60	4733.00	4998.60	5432.60	5332.40	4807.10	5482.30	4861.00	5145.00	5885.80	5648.60
A 8.2.2.2		Area of slab over 0.50 sqm	Sqm	4605.20	4361.50	4605.20	4885.00	5345.30	5239.10	4683.30	5397.10	4739.20	5041.50	5820.90	5571.50
A 8.3		Providing edge moulding to 18 mm thick marble stone counters, vanities etc. including machine polishing to edge to give high gloss finish etc. complete as per design approved by Engineer-in-													
A 8.3.1		Marble work	Metre	206.30	204.60	206.30	208.00	211.10	210.40	206.80	211.30	207.00	209.20	213.70	212.30
A 8.3.2		Granite work	Metre	349.60	347.10	349.60	352.10	356.80	355.70	350.30	357.20	350.70	353.90	360.80	358.60
A 8.4		Extra for fixing marble/Granite stone, over and above corresponding basic item, in facia and drops of width upto 150mm with epoxy rasin based adhesive, including cleaning etc.	Metre	424.30	415.20	424.30	438.30	456.20	452.00	428.00	459.80	432.20	442.30	483.20	469.90
A 8.5		Extra for providing opening of required size and shape for wash basin/kitchen sink in kitchen platform, vanity counter and similar location in marble/granite/stone work, including necessary holes for pillar taps etc. including moulding, rubbing and polishing of cut edges etc. complete	Each	665.80	662.50	665.80	669.10	675.20	673.80	666.80	675.70	667.20	671.50	680.40	677.60
A 8.6		Mirror polishing on marble works/granite work/stone work wherever required to give high gloss finish complete	Sqm	312.40	311.00	312.40	313.80	316.40	315.80	312.80	316.60	313.00	314.80	318.60	317.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.7		Providing and fixing cramps of required size & shape in RCC/CC/Brick masonry backing with cement mortar 1:2 (1 cement : 2 coarse sand), including drilling necessary holes in stones and embedding the cramp in the hole (fatener to be paid seperately)													
A 8.7.1		Gun metal cramps	Kg	763.00	712.70	763.00	814.90	908.60	887.00	777.80	916.60	785.90	850.00	991.70	946.90
A 8.7.2		Stainless steel cramps.	Kg	743.20	694.20	743.20	794.10	885.50	864.40	757.70	893.30	765.70	828.20	967.00	923.00
A 8.8		Providing and fixing expansion hole fasteners on CC/RCC/Brick masonry surface backing including drilling necessary holes and the cost of bolt etc. complete													
A 8.8.1		Wedge expansion type													
A 8.8.1.1		Fastener with threaded dia 6 mm	Each	35.70	34.20	35.70	37.20	40.00	39.30	36.10	40.20	36.30	38.20	42.30	41.00
A 8.8.1.2		Fastener with threaded dia 10 mm	Each	36.10	34.60	36.10	37.60	40.40	39.80	36.50	40.60	36.70	38.70	42.80	41.50
A 8.8.1.3		Fastener with threaded dia 12 mm	Each	62.80	59.50	62.80	66.10	72.20	70.80	63.70	72.60	64.20	68.40	77.30	74.50
A 8.9		Stone tile (polished) work for wall lining over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and cement slurry @3.3 kg/sqm including pointing in white cement complete.													
A 8.9.1		8 mm thick													
A 8.9.1.1		Raj Nagar plain white marble/Udaipur green marble/zebra black marble	Sqm	2534.20	2463.80	2534.20	2632.10	2769.40	2737.70	2561.60	2791.70	2586.90	2670.20	2947.40	2857.50
A 8.9.1.2		Granite of any colour and shape	Sqm	3040.40	2936.90	3040.40	3171.40	3370.30	3324.40	3077.30	3397.40	3107.30	3233.20	3600.30	3482.10
A 8.10		Providing and fixing stone slab with table rubbed, edges rounded and polished, of size 75x50 cm deep and 1.8 cm thick, fixed in urinal partitions by cutting a chase of approximate width with chase cutter and embedding the stone in the chase with epoxy grout or with cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregete 6 mm nominal size)as per direction of Engineer-in-charge and finished smooth.													
A 8.10.1		White Agaria Marble Stone	Sqm	3958.40	3699.40	3958.40	4217.40	4698.30	4587.30	4032.40	4735.30	4069.40	4402.30	5105.20	4883.30
A 8.10.2		Granite stone of approved shade	Sqm	3958.40	3699.40	3958.40	4217.40	4698.30	4587.30	4032.40	4735.30	4069.40	4402.30	5105.20	4883.30
A 8.11		Providing and fixing machine cut, mirror/eggshell polished, Marble stone work for wall lining (veener work) including dado, skirting, risers of steps etc., in required design and pattern wherever required, stones of different finished surface texture, on 12 mm (average) thick cement mortar 1:3 (1 cement : 3 coarse sand) laid and jointed with with white cement slurry @ 3.3 kg/sqm including pointing with white cement slurry admixed with pigment of matching shade, including rubbing, curing, polishing etc. all complete as per Architectural drawings, and as directed by the engineer-in-charge.													
A 8.11.1		18 mm thick Italian marble stone slab, Perlato, Rosso Verona, Fire red or Dark Emperadore etc.	Sqm	9681.80	9225.40	9681.80	10165.00	11018.70	10821.60	9818.90	11096.10	9899.30	10478.50	11803.10	11382.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.14		Stone work (Machine cut edges) for wall lining etc. (veener work) upto 10 meter height, backing filled with a grout of average 12 mm thick cement mortar 1:3 (1 cement : 3 coarse sand), including pointing in white cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade. (To be secured to the backing by means of cramps and pins which shall be paid seperately)													
A 8.14.1		Red sand stone - Exposed face fine dressed with rough backing													
A 8.14.1.1		70 mm thick	Sqm	4303.50	4189.90	4303.50	4447.10	4664.70	4614.50	4343.40	4694.80	4376.80	4514.20	4918.70	4788.30
A 8.14.1.2		60 mm thick	Sqm	4130.10	4027.90	4130.10	4262.30	4458.90	4413.60	4166.80	4487.40	4198.50	4321.30	4695.10	4574.50
A 8.14.1.3		50 mm thick	Sqm	3957.10	3866.20	3957.10	4078.10	4253.60	4213.10	3990.60	4280.40	4020.70	4129.00	4472.00	4361.10
A 8.14.1.4		40 mm thick	Sqm	3782.90	3703.40	3782.90	3892.40	4046.80	4011.10	3813.00	4072.00	3841.50	3935.10	4247.30	4146.10
A 8.14.1.5		30 mm thick	Sqm	3609.80	3541.60	3609.80	3707.90	3841.30	3810.50	3636.70	3864.90	3663.60	3742.60	4024.00	3932.50
A 8.14.2		Red sand stone - Exposed face machine cut and table rubbed with rough backing.													
A 8.14.2.1		70 mm thick	Sqm	5769.30	5655.80	5769.30	5912.90	6130.60	6080.30	5809.20	6160.60	5842.60	5980.00	6384.60	6254.20
A 8.14.2.2		60 mm thick	Sqm	5596.00	5493.70	5596.00	5728.20	5924.80	5879.40	5632.60	5953.20	5664.40	5787.20	6161.00	6040.30
A 8.14.2.3		50 mm thick	Sqm	5423.00	5332.10	5423.00	5543.90	5719.50	5679.00	5456.40	5746.30	5486.50	5594.80	5937.90	5826.90
A 8.14.2.4		40 mm thick	Sqm	5249.10	5169.60	5249.10	5358.60	5513.10	5477.40	5279.30	5538.30	5307.80	5401.40	5713.60	5612.40
A 8.14.2.5		30 mm thick	Sqm	5075.60	5007.40	5075.60	5173.80	5307.20	5276.40	5102.50	5330.70	5129.40	5208.50	5489.80	5398.40
A 8.14.3		White sand stone - Exposed face fine dressed with rough backing.													
A 8.14.3.1		70 mm thick	Sqm	6238.50	5998.30	6238.50	6508.70	6961.40	6856.90	6314.60	7009.50	6366.00	6666.20	7414.30	7175.50
A 8.14.3.2		60 mm thick	Sqm	5789.60	5578.80	5789.60	6030.40	6428.60	6336.70	5857.30	6472.60	5904.60	6167.00	6835.40	6621.70
A 8.14.3.3		50 mm thick	Sqm	5340.80	5159.30	5340.80	5552.20	5895.90	5816.60	5400.00	5935.60	5443.10	5667.70	6256.50	6068.00
A 8.14.2.4		40 mm thick	Sqm	4888.50	4736.70	4888.50	5070.30	5359.10	5292.50	4939.30	5394.60	4978.20	5164.80	5673.20	5510.00
A 8.14.3.5		30 mm thick	Sqm	4439.30	4316.80	4439.30	4591.70	4825.90	4771.90	4481.70	4857.20	4516.40	4665.20	5093.90	4955.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.14.4		White Sand Stone - Exposed face machine cut and table rubbed with rough backing.													
A 8.14.4.1		70 mm thick	Sqm	7704.30	7464.20	7704.30	7974.50	8427.30	8322.80	7780.40	8475.40	7831.90	8132.00	8880.20	8641.30
A 8.14.4.2		60 mm thick	Sqm	7255.50	7044.70	7255.50	7496.30	7894.50	7802.60	7323.10	7938.40	7370.40	7632.80	8301.30	8087.60
A 8.14.4.3		50 mm thick	Sqm	6806.60	6625.20	6806.60	7018.00	7361.70	7282.40	6865.90	7401.40	6908.90	7133.60	7722.40	7533.80
A 8.14.4.4		40 mm thick	Sqm	6354.40	6202.50	6354.40	6536.20	6824.90	6758.30	6405.20	6860.40	6444.00	6630.60	7139.10	6975.90
A 8.14.4.5		30 mm thick	Sqm	5905.10	5782.70	5905.10	6057.60	6291.80	6237.70	5947.60	6323.10	5982.20	6131.00	6559.70	6421.70
A 8.14.5		Gang saw cut stone													
A 8.14.5.1		30 mm thick White sand stone	Sqm	2591.80	2494.40	2591.80	2719.30	2907.10	2863.80	2627.10	2934.90	2658.20	2774.90	3135.90	3019.30
A 8.14.5.2		30 mm thick Red sand stone	Sqm	2358.50	2276.30	2358.50	2470.70	2630.10	2593.30	2389.40	2655.70	2418.30	2515.40	2834.90	2731.40
A 8.15		Providing and Fixing stainless steel cramps of required size and shape for anchoring stone wall lining to the backing or securing adjacent stones in stone wall lining in cement mortar 1:2 (1 cement : 2 coarse sand) including making the necessary chases in stone and holes in walls wherever required.	Kg	743.20	694.20	743.20	794.10	885.50	864.40	757.70	893.30	765.70	828.20	967.00	923.00
A 8.16		Providing and Fixing copper pins 7.5 cm long, 6 mm diameter for securing adjacent stones in stone wall lining in cement mortar 1:2 (1 cement : 2 coarse sand) including making the necessary chases.	Each	47.50	44.00	47.50	52.70	59.50	57.90	48.90	60.80	50.40	54.40	69.20	64.40
A 8.17		Wall lining butch work upto 10 meters height with Bholpur stone 40 mm thick rough facing on the exposed surface with stone strips of minimum length 300 mm and required width, including embedding every tenth layer and bottom most layer in masonry or concrete after making necessary chases of size 75x75 mm and providing layer of 75 mm thick strips i/c 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) i/c ruled pointing in cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment to match the shade of stone complete as per direction of Engineer-in-charge.	Sqm	2546.30	2438.40	2546.30	2719.90	2933.70	2884.40	2598.20	2976.40	2647.40	2769.30	3252.90	3095.10
A 8.18		Stone work (Machine cut edges veener work) for wall lining upto 10 meter height, backing filled with a grout of 12 mm thick cement mortar 1:3 (1 cement : 3 coarse sand), and jointed with Cement mortar 1:2 (1 cement : 2 stone dust) including rubbing and polishing complete. (To be secured to the backing and the sides by means of cramps and pins which shall be paid seperately)													
A 8.18.1		Kota stone slabs exposed face dressed and rubbed													
A 8.18.1.1		25 mm thick	Sqm	27665.40	26104.50	26668.40	27472.20	28573.60	28319.40	26889.00	28764.70	27106.80	27762.80	30064.10	29316.40
A 8.19		Extra for stone work for wall lining on exterior walls of height more than 10m from ground level for every additional height of 3 m or part there of	Sqm	136.50	131.20	136.50	141.70	151.50	149.30	138.00	152.30	138.70	145.50	159.80	155.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.20		Providing and Fixing dry cladding upto 10 meter heights with 300 mm thick gang saw cut stone with (machine cut edges) of uniform colour and size upto 1mx1m, fixed to structural steel frame work and/or with the help of cramps, pins etc. and sealing the joints with approved weather sealant as per Architectural drawing and direction of Engineer-in-charge. (The steel frame work, stainless steel cramps and pins etc. shall be paid for seperately).													
A 8.20.1		Red sand stone - 30 mm thick gang saw cut stone	Sqm	2247.60	2165.20	2247.60	2329.90	2482.80	2447.50	2271.10	2494.60	2282.90	2388.70	2612.20	2541.60
A 8.20.2		White sand stone - 30 mm thick gang saw cut stone	Sqm	2480.90	2383.30	2480.90	2578.50	2759.80	2718.00	2508.80	2773.80	2522.80	2648.30	2913.20	2829.50
A 8.21		Providing and fixing structural steel frame (for dry cladding with 30 mm thick gang saw cut with machine cut edges sand stone) on walls on all heights using M.S. square/ rectangular tube in the required pattern as per architectural drawing, including cost of cutting, bending, welding, etc. the framework shall be fixed to the wall with the help of M.S. brackets/ lugs of angle iron/ flats etc. which shall be welded to the frame and embeded in brick wall with cement concrete block 1:2:4 (1 cement :2 coarse sand : 4 graded stone aggregate 20 mm nominal size) of size 300x230x300 mm, including cost of necessary centering and shuttering and with approved expansion hold fasteners on CC/RCC surface, including drilling necessary holes. approved cramps/ pins etc shall be welded to the frame work to support stone cladding, the steel work will be given a priming coat of zinc primer as approved by Engineer- in-charge and painted with two or more coats of epoxy paint (shop drawings shall be submitted by the contractor to the Engineer-in-charge for approval before execution). the framework shall be fixed in true horizontal & vertical lines/ planes. (Only structural steel framework shall be measured for the purpose of payment, stainless steel cramps shall be paid for seperately and nothing extra shall be paid.)	kg	236.90	229.20	236.90	249.50	264.70	261.20	240.90	267.70	244.40	253.10	287.20	276.10
A 8.22		providing and fixing adjustable stainless steel cramps of approved quality, required shape and size, adjustable with stainless steel nuts, bolts and washer (total weight not less than 260 gms), for dry stone cladding fixed on frame work at suitable location, including making necessary recessess in stone slab, drilling required holes etc. complete as per direction of the Engineer-in-charge.	Each	333.50	321.90	333.50	345.20	366.90	361.90	336.90	368.50	338.50	353.50	385.20	375.20
A 8.23		providing 50x50x50 mm 2nd class teak wood plugs including cutting brick work and fixing in cement mortar 1:3 (1 cement: 3 fine sand) and making good the walls etc.	Each	22.80	22.80	22.80	22.90	22.90	22.90	22.80	22.90	22.80	22.90	23.00	23.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.24		Providing and Fixing expandable fastners of specified size with necessary plastic sleeves and galvanised M.S. screws including drilling holes in masonary work/ CC/ R.C.C. and making good etc. complete.													
A 8.24.1		25 mm long	Each	23.30	21.80	23.30	24.80	27.70	27.00	23.70	27.90	24.00	25.90	30.10	28.80
A 8.24.2		32 mm long	Each	25.00	23.40	25.00	26.70	29.70	29.00	25.50	29.90	25.70	27.80	32.30	30.90
A 8.24.3		40 mm long	Each	30.00	28.00	30.00	31.90	35.60	34.70	30.50	35.80	30.80	33.30	38.60	37.00
A 8.24.4		50 mm long	Each	31.60	29.50	31.60	33.70	37.50	36.60	32.20	37.80	32.50	35.20	40.80	39.00
A 8.25		Providing and Fixing 2nd class teak wood plain lining tongued and grooved, including wooden plugs complete with necessary screws and priming coat on unexposed surface.													
A 8.25.1		40 mm thick	Sqm	3370.70	3297.20	3370.70	3444.20	3580.80	3549.20	3391.80	3591.30	3402.20	3496.70	3696.20	3633.30
A 8.25.2		25 mm thick	Sqm	2245.80	2198.90	2245.80	2292.60	2379.70	2359.50	2259.20	2386.40	2265.80	2326.10	2453.20	2413.10
A 8.25.3		20 mm thick	Sqm	1802.30	1764.30	1802.30	1840.20	1910.80	1894.50	1813.20	1916.20	1818.60	1867.30	1970.40	1937.90
A 8.25.4		12 mm thick	Sqm	1202.40	1178.60	1202.40	1226.00	1270.20	1260.00	1209.20	1273.60	1212.50	1243.00	1307.40	1287.20
A 8.26		Providing and Fixing in wall lining flat pressed three layer (medium density) particle board or graded wood pre-laminated one side decorative lamination and other side balancing lamination Grade-I, Type-II, IS : 1283 marked, including priming coat on unexposed arrangement and screws etc. complete:													
A 8.26.1		12 mm thick	Sqm	1456.30	1375.60	1456.30	1536.90	1686.70	1652.00	1479.40	1698.20	1490.80	1594.50	1813.30	1744.20
A 8.26.2		18 mm thick	Sqm	1655.50	1561.80	1655.50	1749.10	1923.10	1882.90	1682.30	1936.50	1695.60	1816.00	2070.20	1990.00
A 8.26.3		25 mm thick	Sqm	2108.30	1984.90	2108.30	2231.50	2460.50	2407.60	2143.50	2478.10	2161.00	2319.50	2654.10	2548.50
A 8.27		Providing and Fixing specified wood frame work consisting of battens 50x25 mm fixed with rawl plug and drilling necessary holes for rawl plug etc. including priming coat complete.													
A 8.27.1		Kiln seasoned and chemically treated hollock wook	Cum	189.80	179.90	189.80	199.60	218.00	213.70	192.60	219.40	194.00	206.70	233.50	225.00
A 8.28		Providing and fixing plywood 4 mm thick, one side decorative veneer conforming to IS : 1328 (type-I), for plain lining/ cladding with necessary screws, including priming coat on unexposed surface with:													
A 8.28.1		Decorative veneer facings of approved manufacture	Sqm	1393.30	1349.40	1393.30	1437.00	1518.30	1499.50	1405.80	1524.60	1412.00	1468.20	1587.00	1549.60
A 8.29		Providing and fixing 4 mm thick coir veneer board, ISI marked IS: 14842, plain lining with necessary screws, priming coat on unexposed surfaced etc, complete.	Sqm	1334.00	1294.00	1334.00	1373.80	1448.00	1430.80	1345.40	1453.70	1351.00	1402.30	1510.60	1476.50
A 8. 30		Providing and fixing skirting with Pre-laminated (one side decorative and other side balancing lamination) flat pressed 3 layer or graded particle board (medium density) Grade-I, Type-II, IS: 12823 marked, with necessary fixing arrangements and screws, including drilling necessary holes for rawl plugs etc and priming coat on unexposed surface complete:													
A 8.30.1		18 mm thick	Sqm	2221.30	2090.60	2221.30	2351.90	2594.60	2538.50	2258.70	2613.30	2277.30	2445.20	2799.80	2687.90
A 8.30.2		25 mm thick	Sqm	2674.10	2513.80	2674.10	2834.30	3131.90	3063.20	2719.90	3154.90	2742.70	2948.70	3383.70	3246.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 8.31		Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1: 3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @3.3 kg/ sqm, including pointing in white cement mixed with pigment of matching shade complete.	Sqm	1145.50	1090.40	1145.50	1228.00	1336.80	1311.70	1168.50	1357.00	1191.60	1255.20	1490.70	1414.00
A 8.32		Designing, fabricating, testing, installing and fixing in position Curtain Wall with Aluminium Composite Panel Cladding, with open grooves for linear as well as curvilinear portions of the building, for all heights and all levels etc. including : (a) Structural analysis & design and preparation of shop drawings for pressure equalisation or rain screen principle as required, proper drainage of water to make it watertight including checking of all the structural and functional design. (b) Providing, fabricating and supplying and fixing panels of aluminium composite panel cladding in pan shape in metallic colour of approved shades made out of 4 mm thick aluminium composite panel material consisting of 3 mm thick FR grade mineral core sandwiched between two Aluminium sheets (each 0.5 mm thick). The aluminium composite panel cladding sheet shall be coil coated, with Kynar 500 based PVDF/ Lumiflon based fluoropolymer resin coating of approved colour and shade on face # 1 and polymer (Service) coating on face # 2 as specified using stainless steel screws, nuts, bolts, washers, cleats, weather silicone sealant, backer rods etc. (c) The fastening brackets of Aluminium alloy 6005 T5/ MS with Hot Dip Galvanised with serrations and serrated washers to arrest the wind load movement, fastener, SS 316 Pins and anchore bolts of approved make in SS 316, Nylon separators to prevent bi-metallic context all complete required to perform as per specification and drawing. The item includes coat of all material & labour component, the cost of all mock ups at site, cost of all samples of the individual components for testing in an approved	Sqm	5303.20	4956.30	5303.20	5650.20	6294.50	6145.80	5402.30	6344.00	5451.90	5898.00	6839.70	6542.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		laboratory, field tests on the assembled working curtain wall with aluminium composite panel cladding, cleaning and protection of the curtain wall with aluminium composite panel cladding till the handing over of the building for occupation. Base frame work for ACP cladding is payable under the relevant aluminium items. The Contractor shall provide curtain wall with aluminium composite panel cladding, having all the performance characteristics all complete, as per the Architectural drawings, as per item description, as specified, as per the approved shop drawinds and as directed by the Engineer-in-Charge. However, for the purpose of payment, only the actual area on the external													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
----------	----	-------------	------	--------	---------	-------	-------	------	-----------	------------	----------	-----	----------	---------	--------

9.0 WOOD & PVC WORK

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.1		Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia and length (hold fast lugs or dash fastener shall be paid for seperately).													
A 9.1.1		Second clas Teak wood	Cum	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60	63124.60
A 9.1.2		Sal wood	Cum	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30	52458.30
A 9.1.3		Kiln seasoned and chemically treated Hollock wood	Cum	80172.50	76054.50	80172.50	84290.50	91938.30	90173.40	81349.10	92526.60	81937.40	87232.00	98409.40	94879.70
A 9.2		Providing laminated veneer lumber conforming IS: 14616 and TAD-15: 2001 (Part B), in factory made frames of doors, windows, clerestory windows and other frames, wrought framed and fixing in position with hold fast lugs or with dash fasteners of required dia and length (hold fast lugs or dash fastener shall be paid for seperately).	Cum	134653.40	126695.30	134653.40	142611.50	157390.90	153980.30	136927.10	158527.80	138064.00	148295.90	169896.50	163075.30
A 9.3		Providing wood work in frames of false ceiling, partitions etc. sawn and fixed in position with necessary stainless steel screws etc.	Cum												
A 9.3.1		Sal wood	Cum	43749.30	43675.90	43749.30	43822.70	43958.90	43927.50	43770.30	43969.40	43780.70	43875.10	44074.20	44011.40
A 9.3.2		Kiln seasoned and chemically treated Hollock wood	Cum	72228.70	68085.10	72228.70	76372.20	84067.40	82291.60	73412.60	84659.40	74004.50	79331.90	90578.70	87027.10
A 9.4		Extra for additional labour for circular works, such as in frames of fan light	Cum												
A 9.4.1		Second class Teak wood	Cum	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50	6312.50
A 9.4.2		Sal wood	Cum	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00	5112.00
A 9.4.3		Kiln seasoned and chemically treated Hollock wood	Cum	8017.50	7605.70	8017.50	8429.30	9194.20	9017.70	8135.20	9253.00	8194.00	8723.50	9841.30	9488.30
A 9.5		Providing and fixing panelled or panelled and glazed shutters for doors, windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-Charge. (Note: - Butt hinges and necessary screws shall be paid seperately)													
A 9.5.1		Second class Teak wood													
A 9.5.1.1		35mm thick shutters	Sqm	1973.30	1969.80	1973.30	1976.90	1983.60	1982.00	1974.40	1984.10	1974.90	1979.50	1989.20	1986.10
A 9.5.1.2		30mm thick shutters	Sqm	1832.40	1828.80	1832.40	1836.00	1842.60	1841.10	1833.40	1843.20	1834.00	1838.60	1848.30	1845.20
A 9.5.2		Kiln seasoned and chemically treated Hollock wood													
A 9.5.2.1		35mm thick shutters	Sqm	2505.70	2400.10	2505.70	2611.20	2807.30	2762.10	2535.80	2822.40	2550.90	2686.70	2973.20	2882.70
A 9.5.2.2		30mm thick shutters	Cum	2293.60	2201.90	2293.60	2385.30	2555.60	2516.30	2319.80	2568.70	2332.90	2450.80	2699.70	2621.10
A 9.5.3		Kiln seasoned selected planks of sheesham wood													
A 9.5.3.1		35mm thick shutters	Sqm	1923.50	1918.00	1923.50	1929.00	1939.20	1936.80	1925.10	1940.00	1925.90	1932.90	1947.80	1943.10
A 9.5.3.2		30mm thick shutters	Sqm	1789.40	1784.20	1789.40	1794.70	1804.40	1802.10	1790.90	1805.10	1791.70	1798.40	1812.60	1808.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.6		Providing and fixing 35 mm thick factory made laminated veneer lumber door shutter conforming to IS: 14616 and TADS 15:2001 (Part B) fixing with butt hinges of required size with necessary screws, all complete as per directions of Engineer-in-charge and panelling with panels of : (Note: - Butt hinges and necessary screws shall be paid seperately)													
A 9.6.1		12mm thick plain grade - 1, medium density flat pressed three layer particle board FPT - I or graded wood particle board FPT - I, IS : 3087 marked, bonded with BWP type synthetic resin adhesive as per IS : 848:	Sqm	3043.90	2866.10	3043.90	3221.60	3551.70	3475.50	3094.70	3577.10	3120.00	3348.50	3831.00	3678.60
A 9.6.2		12 mm thick prelaminated with particle board (decorative lamination on both sides) grade - 1, medium density flat pressed, three layer particle board FPT - I or graded wood particle board FPT - I IS : 3087 marked bonded with BWP type synthetic resin adhesive as per IS : 848 and prelaminated conforming to IS : 12823, Grade 1, Type II marked:	Sqm	3208.50	3020.00	3208.50	3397.00	3747.10	3666.30	3262.40	3774.00	3289.30	3531.60	4043.30	3881.70
A 9.6.3		12 mm thick one side prelaminated particle board (decorative lamination on one side and other sides balancing lamination) grade - 1 medium density, flat pressed, three layer particle board FPT - I or graded wood particle board FPT-1 IS : 3087 bonded with BWP type synthtic resin adhesive as per IS : 848 and prelamination conforming to IS: 12823 Grade 1, Type II marked:	Sqm	3521.30	3312.30	3521.30	3730.30	4118.30	4028.80	3581.00	4148.20	3610.90	3879.50	4446.70	4267.60
A 9.7		Providing and fixing panelling or panelling and glazing in panelled or panelled and glazed shutters for doors, windows and celerestory windows (Area of openning for panel inserts excluding portion inside grooves or rebate to be measured). Panelling for panelled or pannelled and glazed shutters 25mm to 40mm thick:													
A 9.7.1		Second class Teak wood	Sqm	1680.80	1679.30	1680.80	1682.20	1684.90	1684.30	1681.20	1685.10	1681.40	1683.30	1687.20	1685.90
A 9.7.2		Kiln seasoned and chemically treated hollock wood	Sqm	2154.70	2066.70	2154.70	2242.80	2406.30	2368.60	2179.90	2418.90	2192.50	2305.70	2544.70	2469.20
A 9.7.3		Plywood 5 ply, 9mm thick													
A 9.7.3.1		Decorative plywood both side decorative veneer (Type-I) conforming to IS:1328 BWR Type	Sqm	2527.10	2414.70	2527.10	2639.50	2848.30	2800.10	2559.20	2864.30	2575.30	2719.80	3024.90	2928.60
A 9.7.3.2		Decorative plywood one side decorative veneer and commercial veneer on other face (Type-I) conforming to IS:1328 BWR Type	Sqm	2567.00	2452.00	2567.00	2682.00	2895.70	2846.40	2599.90	2912.10	2616.30	2764.20	3076.40	2977.80
A 9.7.4		Plywood 7 ply, 9mm thick													
A 9.7.4.1		Decorative plywood one side decorative veneer and commercial veneer on other face (Type-I) conforming to IS:1328 BWR Type	Sqm	2726.70	2601.20	2726.70	2852.10	3085.10	3031.40	2762.50	3103.10	2780.40	2941.80	3282.30	3174.80
A 9.7.5		Particle board 12mm thick													
A 9.7.5.1		Plain particle board flat pressed, 3 layer or graded wood particle board medium density Grade I, IS:3087 marked	Sqm	1405.60	1366.60	1405.60	1444.70	1517.20	1500.40	1416.80	1522.70	1422.30	1472.50	1578.50	1545.00
A 9.7.5.2		Veneer Flat pressed 3 layer or graded wood particle board with commercial veneering on both sides conforming to IS: 3097, grade I	Sqm	1828.70	1762.00	1828.70	1895.40	2019.30	1990.70	1847.70	2028.80	1857.30	1943.00	2124.10	2066.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.7.5.3		Pre-laminated particle board with decorative lamination on one side and balancing on other side, Grade I, Type II IS:12823 marked	Sqm	1908.50	1836.60	1908.50	1980.40	2114.00	2083.20	1929.00	2124.30	1939.30	2031.80	2227.10	2165.40
A 9.7.5.4		Pre-laminated particle board with decorative lamination on both side, Grade I, Type II IS:12823 marked	Sqm	1978.30	1901.80	1978.30	2054.80	2196.90	2164.10	2000.20	2207.90	2011.10	2109.50	2317.20	2251.60
A 9.7.6		Coir veneer Board (conforming to IS:14842)													
A 9.7.6.1		12mm thick	Sqm	2167.90	2079.00	2167.90	2256.80	2421.90	2383.80	2193.30	2434.70	2206.00	2320.30	2561.70	2485.50
A 9.7.7		Float glass panes													
A 9.7.7.1		4mm thick glass pane (weight not less than 10Kg/sqm).	Sqm	1738.30	1690.80	1738.30	1785.80	1874.00	1853.60	1751.90	1880.70	1758.70	1819.70	1948.60	1907.90
A 9.7.7.2		5.0mm thick glass pane (weight not less than 12.50Kg/sqm).	Sqm	2137.40	2063.80	2137.40	2211.00	2347.70	2316.10	2158.40	2358.20	2169.00	2263.60	2463.30	2400.20
A 9.7.8		Fly proof stainless steel grade 304 wire gauge with 0.5mm dia. Wire and 1.4mm wide aperture with matching wood beading	Sqm	1513.60	1459.90	1513.60	1567.20	1666.90	1643.90	1528.90	1674.60	1536.60	1605.60	1751.20	1705.20
A 9.9		Providing and fixing glazed shutters for doors, windows and clerestory windows using 4mm thick float glass panes, including ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws.													
A 9.9.1		Second class teak wood													
A 9.9.1.1		35mm thick	Sqm	2567.70	2540.20	2567.70	2595.20	2646.20	2634.40	2575.50	2650.10	2579.50	2614.80	2689.30	2665.80
A 9.9.1.2		30mm thick	Sqm	2406.60	2379.20	2406.60	2434.10	2485.10	2473.30	2414.50	2489.00	2418.40	2453.70	2528.30	2504.70
A 9.9.2		Kiln seasoned and chemically treated hollock wood													
A 9.9.2.1		35mm thick	Sqm	3171.20	3027.90	3171.20	3314.50	3580.70	3519.30	3212.10	3601.20	3232.60	3416.90	3806.00	3683.10
A 9.9.2.2		30mm thick	Sqm	2928.80	2801.30	2928.80	3056.30	3293.00	3238.40	2965.20	3311.20	2983.40	3147.30	3493.40	3384.10
A 9.9.3		Kiln seasoned selected planks of sheesham wood													
A 9.9.3.1		35mm thick	Sqm	2511.00	2481.40	2511.00	2540.70	2595.70	2583.00	2519.50	2599.90	2523.70	2561.80	2642.30	2616.90
A 9.9.3.2		30mm thick	Sqm	2357.80	2328.50	2357.80	2387.10	2441.60	2429.00	2366.20	2445.80	2370.40	2408.10	2487.70	2462.60
A 9. 10		Providing and fixing factory made laminated veneer lumber glazed shutter conforming to IS: 14616 and TADS 15:2001 (Part B), using 4mm thick float glass panes for doors, windows and clerestory windows fixing with butt hinges of required size with necessary screws, all as per directions of Engineer-in-charge (Note:- Butt hinges and necessary screws shall be paid seperately)													
A 9.10.1		30 mm thick shutters	Sqm	3043.90	2866.10	3043.90	3221.60	3551.70	3475.50	3094.70	3577.10	3120.00	3348.50	3831.00	3678.60
A 9.11		Extra for providing heavy sheet float glass panes instead of ordinary float glass in glazed doors, windows and clerestory window shutters. (Area of opening for glass panes excluding portion inside rebate shall be measured)													
A 9.11.1		5.5mm thick instead of 4mm thick	Sqm	329.00	308.00	329.00	351.00	391.00	382.00	335.00	394.00	338.00	366.00	425.00	406.00
A 9.12		Extra for providing frosted glass panes 4mm thick instead of ordinary float glass panes 4mm thick in doors, windows and clerestory window shutters. (Area of opening for glass panes excluding portion inside rebate shall be measured)	Sqm	263.40	246.20	263.40	280.60	312.60	305.30	268.30	315.10	270.80	293.00	339.70	325.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.13		Deduct for providing pin headed glass panes instead of ordinary float glass panes weighing 4 mm thick in doors, windows and clerestory windows, shutters (Area of opening for glass panes excluding portion inside rebate shall be measured).	Sqm	-8.00	-8.00	-8.00	-9.00	-10.00	-10.00	-8.00	-10.00	-8.00	-9.00	-11.00	-10.00
A 9.14		Extra for providing ISI marked Stainless Steel butt hinges instead of M.S. steel pressed butt hinges bright finished of required size with necessary screws. (Shutter area to be measured).	Sqm	155.60	145.50	155.60	165.80	184.70	180.40	158.50	186.20	160.00	173.10	200.70	192.00
A 9.15		Deduct for not providing hinges in doors, windows or clerestory window shutters with :													
A 9.15.1		Stainless Steel butt hinges with Stainless Steel screws:													
A 9.15.1.1		For 2nd class teak wood and other class of wood shutters	Sqm	223.50	208.90	223.50	238.10	265.20	259.00	227.70	267.30	229.70	248.50	288.20	275.70
A 9.15.2		ISI marked M.S. pressed butt hinges bright finished of required size.													
A 9.15.2.1		For 2nd class teak wood and other class of wood shutters	Sqm	67.80	63.40	67.80	72.30	80.50	78.60	69.10	81.10	69.70	75.40	87.50	83.70
A 9.16		Providing and fixing 25 mm thick shutters for cup board etc.:													
A 9.16.1		Panelled or panelled and glazed shutters:													
A 9.16.1.1		Secondary class teak wood including ISI marked anodised aluminium butt hinges with necessary screws	Sqm	2611.10	2579.50	2611.10	2642.80	2701.50	2688.00	2620.20	2706.10	2624.70	2665.40	2751.30	2724.10
A 9.16.1.2		Secondary class teak wood including ISI marked nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2786.30	2743.20	2786.30	2829.40	2909.40	2890.90	2798.60	2915.60	2804.70	2860.20	2977.20	2940.20
A 9.16.2		Glazed shutters :													
A 9.16.2.1		Secondary class teak wood including ISI marked anodised aluminium butt hinges with necessary screws	Sqm	2300.70	2270.90	2300.70	2330.40	2385.70	2373.00	2309.20	2390.00	2313.40	2351.70	2432.50	2407.00
A 9.16.2.2		Secondary class teak wood including ISI marked nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2348.10	2315.20	2348.10	2380.90	2441.90	2427.90	2357.50	2446.60	2362.10	2404.40	2493.60	2465.40
A 9.17		Providing and fixing flat pressed 3 layer particle board medium density exterior grade (Grade I) or graded wood particle board IS : 3087 marked, to frame, backing or studding with screws etc. complete (Frames, backing or studding to be paid seperately):													
A 9.17.1		12 mm thick	Sqm	699.70	666.30	699.70	733.10	795.20	780.80	709.30	799.90	714.00	757.00	847.60	819.00
A 9.17.2		18 mm thick	Sqm	1031.60	976.50	1031.60	1086.70	1189.10	1165.50	1047.40	1197.00	1055.30	1126.10	1275.70	1228.50
A 9.18		Providing and fixing pre-laminated flat pressed 3 layer (medium density) particle board or graded wood particle board IS : 3087 marked, with one side decorative and other side balancing lamination Grade I, Type II exterior grade IS - 12823 marked, in shelves with screws and fittings wherever required, edges to be painted with polyurethane primer (fittings to be paid seperately).													
A 9.18.1		18 mm thick	Sqm	1331.00	1257.50	1331.00	1404.50	1541.00	1509.50	1352.00	1551.50	1362.50	1457.00	1656.50	1593.50
A 9.18.2		25 mm thick	Sqm	1806.00	1701.40	1806.00	1910.50	2104.80	2060.00	1835.80	2119.70	1850.80	1985.20	2269.10	2179.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 20		Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (part I) decorative type, core of block board construction with frame of 1st class hard wood and well matched teak 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters.													
A 9.20.1		35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	3506.30	3299.90	3506.30	3712.70	4096.10	4007.60	3565.30	4125.60	3594.80	3860.20	4420.40	4243.50
A 9.20.2		30 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	3177.10	2992.20	3177.10	3361.90	3705.30	3626.00	3229.90	3731.70	3256.30	3494.00	3995.80	3837.30
A 9.20.3		25 mm thick (for cupboard) including ISI marked nickel plated bright finished M.S. piano hinges IS : 3818 marked with necessary screws.	Sqm	2818.20	2656.80	2818.20	2979.60	3279.30	3210.10	2864.30	3302.30	2887.30	3094.80	3532.90	3394.60
A 9.21		Providing and fixing ISI marked flush door shutters conforming to IS : 2202(part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters.													
A 9.21.1		35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2106.90	1992.10	2106.90	2221.80	2435.10	2385.90	2139.80	2451.50	2156.20	2303.90	2615.60	2517.20
A 9.21.2		30 mm thick including ISI marked Stainless Steel butt hinges with necessary screws.	Sqm	2024.60	1915.20	2024.60	2134.10	2337.40	2290.50	2055.90	2353.10	2071.50	2212.30	2509.50	2415.60
A 9.21.3		25 mm thick (for cupboard) including ISI marked nickel plated bright finished M.S. piano hinges with necessary screws Stainless Steel butt hinges with necessary screws.	Sqm	1978.50	1872.10	1978.50	2085.00	2282.70	2237.10	2009.00	2297.90	2024.20	2161.00	2450.00	2358.70
A 9.22		Extra for providing and fixing flush doors with decorative veneering instead of non decorative ISI marked flush door shutters conforming to IS: 2202 (part I)teak veneering on one side instead of commercial veneering													
A 9.22.1		On one side only	Sqm	543.30	507.70	543.30	578.80	644.80	629.60	553.40	649.90	558.50	604.20	700.70	670.20
A 9.23		Extra for providing lipping with 2nd class teak wood battens 25 mm minimum depth on all edges of flush door shutters (over all area of door shutter to be measured).	Sqm	493.90	461.60	493.90	526.20	586.20	572.40	503.10	590.80	507.70	549.30	637.00	609.30
A 9.24		Extra for providing vision panel not exceeding 0.1 sqm in all type of flush doors (Cost of glass excluded) (overall area of door shutter to be measured):													
A 9.24.1		Rectangular or Square	Sqm	214.00	200.00	214.00	228.00	254.00	248.00	218.00	256.00	220.00	238.00	276.00	264.00
A 9.24.2		Circular	Sqm	222.30	207.70	222.30	236.80	263.80	257.60	226.40	265.90	228.50	247.20	286.60	274.20
A 9.25		Extra if louvers (not exceeding 0.2 sqm) are provided in flush door shutters (overall area of door shutters to be measured)													
A 9.25.1		Decorative type door.	Sqm	436.30	407.70	436.30	464.80	517.80	505.60	444.40	521.90	448.50	485.20	562.70	538.20
A 9.26		Extra for cutting rebate in flush door shutters (Total area of the shutter to be measured).	Sqm	115.20	107.70	115.20	122.80	136.80	133.60	117.40	137.90	118.50	128.20	148.60	142.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.27		Providing and fixing wire gauge shutters using galvanized M.S. wire gauge of average width of aperture 1.4mm in both directions with wire of dia. 0 63 mm, for doors, windows and clerestory windows with hinges and necessary screws :													
A 9.27.1		35mm thick shutters													
A 9.27.1.1		With ISI marked M.S. pressed butt hinges bright finished of required size													
A 9.27.1.1.1		Second class teak wood	Sqm	2659.10	2633.70	2659.10	2684.50	2731.60	2720.80	2666.40	2735.30	2670.00	2702.60	2771.50	2749.80
A 9.27.1.1.2		Kiln seasoned and chemically treated hollock wood	Sqm	3195.30	3067.20	3195.30	3323.50	3561.50	3506.60	3231.90	3579.80	3250.30	3415.00	3762.90	3653.00
A 9.27.1.1.3		Kiln seasoned selected class of Sheesham wood	Sqm	2608.90	2581.60	2608.90	2636.20	2686.90	2675.20	2616.70	2690.80	2620.60	2655.70	2729.80	2706.40
A 9.27.1.2		With ISI marked stainless steel butt hinges of required size													
A 9.27.1.2.1		Second class teak wood	Sqm	2814.80	2779.20	2814.80	2850.30	2916.40	2901.10	2824.90	2921.50	2830.00	2875.70	2972.30	2941.80
A 9.27.1.2.2		Kiln seasoned and chemically treated hollock wood	Sqm	3351.00	3212.60	3351.00	3489.30	3746.20	3686.90	3390.50	3766.00	3410.30	3588.10	3963.60	3845.00
A 9.27.1.2.3		Kiln seasoned selected class of sheesham wood	Sqm	2764.50	2727.10	2764.50	2802.00	2871.70	2855.60	2775.30	2877.00	2780.60	2828.80	2930.60	2898.40
A 9.27.2		30mm thick shutter													
A 9.27.2.1		With ISI marked M.S. pressed butt hinges finished of required size													
A 9.27.2.1.1		Second class teak wood.	Sqm	2413.50	2388.10	2413.50	2438.90	2486.00	2475.20	2420.80	2489.70	2424.40	2457.00	2525.90	2504.20
A 9.27.2.1.2		Kiln seasoned and chemically treated hollock wood	Sqm	2874.70	2761.20	2874.70	2988.20	3199.00	3150.40	2907.10	3215.20	2923.30	3069.30	3377.40	3280.10
A 9.27.2.1.3		Kiln seasoned selected class of sheesham wood	Sqm	2370.50	2343.50	2370.50	2397.60	2447.80	2436.20	2378.30	2451.60	2382.10	2416.90	2490.20	2467.10
A 9.27.2.2		With ISI marked stainless steel butt hinges of required size													
A 9.27.2.2.1		Second class teak wood	Sqm	2569.20	2533.60	2569.20	2604.70	2670.80	2655.50	2579.30	2675.90	2584.40	2630.10	2726.70	2696.20
A 9.27.2.2.2		Kiln seasoned and chemically treated hollock wood	Sqm	3030.10	2906.50	3030.10	3153.80	3383.50	3330.50	3065.50	3401.20	3083.10	3242.20	3577.80	3471.80
A 9.27.2.2.3		Kiln seasoned selected class of sheesham wood	Sqm	2526.20	2489.00	2526.20	2563.40	2632.50	2616.60	2536.80	2637.80	2542.10	2590.00	2691.00	2659.10
A 9.31		Providing and fixing wire guage laminated veneer lumber shutters conforming to IS: 14616, as per TADS 15: 2001 (Part B) using galvanised wire guage with average width of aperture 1.4mm in both directions with wire of dia 0.63mm as per IS: 1568, for doors, windows and clerestory windows fixing with butt hinges of required size of necessary screws, as per direction of Engineer-in-Charge: (Note: - Butt hinges and necessary screws shall be paid separately)													
A 9.31.1		35mm thick shutters	Sqm	3043.90	2866.10	3043.90	3221.60	3551.70	3475.50	3094.70	3577.10	3120.00	3348.50	3831.00	3678.60
A 9.31.2		30mm thick shutters	Sqm	2731.00	2574.00	2731.00	2888.00	3180.00	3113.00	2776.00	3203.00	2798.00	3001.00	3428.00	3293.00
A 9.40		Providing and fixing wooden moulded beading to door and window frames with iron screws, plugs and priming coat on unexposed surface etc. complete:													
A 9.40.1		2nd class teak wood													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.40.1.1		50 x 12 mm	Metre	139.10	138.50	139.10	139.70	140.70	140.50	139.30	140.80	139.30	140.10	141.60	141.10
A 9.40.1.2		50 x 20 mm	Metre	159.10	158.50	159.10	159.70	160.80	160.50	159.30	160.80	159.30	160.10	161.70	161.20
A 9.40.2		Kiln seasoned and chemically treated hollock wood													
A 9.40.2.1		50 x 12 mm	Metre	152.80	149.40	152.80	156.10	162.30	160.90	153.70	162.80	154.20	158.50	167.50	164.70
A 9.40.2.2		50 x 20 mm	Metre	181.90	176.70	181.90	187.10	196.80	194.50	183.40	197.50	184.10	190.80	204.90	200.50
A 9.41		Providing and fixing plain jaffri of 35x10 mm laths placed 35 mm apart (frames to be paid separetely), including fixing 50x12 mm beading complete with :													
A 9.41.1		Second class teak wood	Sqm	1546.60	1543.30	1546.60	1550.00	1556.10	1554.70	1547.60	1556.60	1548.10	1552.30	1561.30	1558.50
A 9.42		Providing and fixing 18 mm thick, 150 mm wide pelmet of flat pressed 3 layer or graded wood particle board medium density grade I, IS : 3087 marked, including top cover of 6 mm commercial ply wood conforming to IS: 303 BWR grade, nickel plated M.S. pipe 20 mm dia (heavy type) curtain rod with nickle plated brackets, including fixing with 25x3 mm M.S. Flat 10 cm long fixed to pelmet with hollock wood cleats of size 100 mmx40mmx40mm on both inner side of pelmet and rawl plug 75 mm long etc., all complete.	Metre	549.60	525.30	549.60	573.90	619.00	608.60	556.50	622.50	560.00	591.30	657.20	636.40
A 9.43		Providing and fixing 18 mm thick, 150 mm wide pelmet of coir veneer board ISI marked IS : 14842, including top cover of 6 mm coir veneer board, nickle plated M.S. Pipe 20 mm dia. (heavy type) curtain rod with nickle plated brackets, including fixing with 25x3 mm M.S. Flat 10 cm long fixed to pelmet with hollock wood cleats of size 100mmx40mmx40mm on both inner side of pelmet and rawl plug 75 mm long etc., all complete.	Metre	705.40	670.90	705.40	739.90	804.00	789.20	715.30	809.00	720.20	764.60	858.30	828.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.44		Extra for using veneered particle board conforming to IS 3097 Grade I, in item of pelmet 18 mm thick 150 mm wide.													
A 9.44.1		Non decorative veneer on both sides	Metre	40.80	38.20	40.80	43.50	48.50	47.30	41.60	48.80	42.00	45.40	52.70	50.40
A 9.44.2		Particle board with decorative veneering on both sides.	Metre	131.70	123.10	131.70	140.30	156.30	152.60	134.20	157.60	135.40	146.50	169.90	162.50
A 9.45		Providing and fixing teak wood lipping of size 25x3 mm in pelmet	Metre	58.20	56.70	58.20	59.70	62.50	61.80	58.60	62.70	58.80	60.80	64.80	63.60
A 9.46		Providing and fixing chromium plated brass curtain rod having wall thickness of 1.25 mm with two chromium plated brass brackets fixed with C.P. brass screws and PVC sleeves etc., wherever necessary complete :													
A 9.46.1		12 mm dia	Metre	328.60	307.10	328.60	350.10	390.00	380.80	334.70	393.10	337.80	365.40	423.80	405.40
A 9.46.2		20 mm dia	Metre	452.10	422.50	452.10	481.60	536.60	523.90	460.50	540.80	464.70	502.80	583.00	557.70
A 9.46.3		25 mm dia	Metre	583.80	545.60	583.80	622.00	692.90	676.50	594.70	698.30	600.10	649.20	752.90	720.20
A 9.47		Providing and fixing nickel plated M.S. pipe curtain rods with nickel plated brackets :													
A 9.47.1		20 mm dia (heavy type)	Metre	189.00	176.60	189.00	201.30	224.30	219.00	192.50	226.10	194.30	210.20	243.70	233.10
A 9.47.2		25 mm dia (heavy type)	Metre	197.20	184.30	197.20	210.10	234.10	228.50	200.90	235.90	202.70	219.30	254.40	243.30
A 9.48		Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.													
A 9.48.1		Fixed to steel windows by welding	Kg	175.70	173.30	174.70	177.20	179.90	179.30	175.40	180.60	176.30	177.60	184.80	182.50
A 9.48.2		Fixed to openings / wooden frames with rawl plugs screws etc.	Kg	198.10	194.20	197.10	201.10	206.50	205.20	198.20	207.40	199.30	202.50	213.70	210.10
A 9.49		Providing and fixing expanded metal 20x60mm strands 3.25mm wide and 1.6mm thick for windows etc. including 62x19mm beading of IInd class teak wood and priming coat with approved steel primer all complete.	Sqm	1049.60	1011.90	1049.60	1087.30	1157.40	1141.30	1060.40	1162.90	1065.80	1114.30	1216.70	1184.40
A 9. 50		Providing and fixing hard drawn steel wire fabric 75x25 mm mesh of weight not less than 7.75 Kg per sqm to window frames etc. including 62x19 mm beading of second class teak wood and priming coat with approved steel primer all complete.	Sqm	1305.30	1250.90	1305.30	1359.80	1460.90	1437.60	1320.90	1468.80	1328.70	1398.70	1546.50	1499.90
A 9.51		Providing and fixing fly proof galvanised M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia. 0.63 mm all complete.													
A 9.51.1		With 2nd Class teak wood beading 62x19 mm	Sqm	933.10	900.80	933.10	965.40	1025.40	1011.60	942.30	1030.00	946.90	988.50	1076.20	1048.50
A 9.51.2		With 12 mm mild steel U beading.	Sqm	842.70	801.30	842.70	875.70	944.80	920.40	849.10	941.70	850.20	902.30	994.90	192928.90
A 9.52		Deduct for fixing 75x25 mm hard drawn steel wire fabric of weight not less than 7.75 Kg per sqm in panelled and glazed door and window shutter instead of glass sheet 4 mm thick.	Sqm	214.00	200.00	214.00	228.00	254.00	248.00	218.00	256.00	220.00	238.00	276.00	264.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.53		Providing 40x5 mm flat iron hold fast 40 cm long including fixing to frame with 10 mm diameter bolts, nuts and wooden plugs and embeddings in cement concrete block 30x10x15 cm 1:3:6 mix (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	Each	174.50	168.40	171.40	181.30	187.80	186.30	175.90	190.30	178.80	181.40	203.40	196.10
A 9.54		Providing beams including hoisting, fixing in position and applying wood preservative for the unexposed surfaces, etc. complete with:													
A 9.54.1		Sal wood	Cum	42690.90	42658.40	42690.90	42723.80	42784.50	42770.70	42700.40	42789.40	42705.00	42747.10	42836.00	42807.80
A 9.54.2		Hollock wood	Sqm	68280.80	64431.10	68280.80	72130.90	79280.70	77631.00	69381.00	79830.90	69930.90	74880.80	85330.70	82030.60
A 9.55		Providing and fixing ISI marked M.S. pressed butt hinges bright finished with necessary screws etc. complete :													
A 9.55.1		125x65x2.12 mm	Each	48.80	46.70	48.80	50.90	54.80	53.90	49.40	55.10	49.70	52.40	58.10	56.30
A 9.55.2		100x58x1.90 mm	Each	37.70	36.40	37.70	39.10	41.70	41.10	38.10	41.90	38.30	40.10	43.80	42.70
A 9.55.3		75x47x1.70mm	Each	30.30	29.40	30.30	31.20	32.90	32.50	30.60	33.00	30.70	31.90	34.30	33.50
A 9.55.4		50x37x1.50mm	Each	16.50	15.80	16.50	17.10	18.30	18.10	16.70	18.40	16.70	17.60	19.40	18.80
A 9.56		Providing and fixing ISI marked, IS : 1341, M.S. heavy weight butt hinges with necessary screws etc., complete :													
A 9.56.1		125x90x4mm	Each	61.10	58.20	61.10	64.00	69.40	68.20	61.90	69.80	62.40	66.10	74.00	71.50
A 9.56.2		100x75x3.50mm	Each	50.90	48.70	50.90	53.10	57.30	56.30	51.50	57.60	51.90	54.70	60.80	58.90
A 9.56.3		75x60x3.10mm	Each	36.70	35.40	36.70	38.10	40.50	39.90	37.10	40.70	37.30	39.00	42.60	41.40
A 9.56.4		50x40x2.50mm	Each	21.60	20.60	21.60	22.60	24.40	24.00	21.90	24.50	22.00	23.30	26.00	25.10
A 9.57		Providing and fixing ISI marked oxidised M.S. pressed butt hinges with necessary screws etc. complete.													
A 9.57.1		125x65x2.12 mm	Each	48.10	46.00	48.10	50.10	53.90	53.10	48.70	54.20	49.00	51.60	57.20	55.40
A 9.57.2		100x58x1.90 mm	Each	38.80	37.40	38.80	40.30	43.00	42.30	39.20	43.20	39.40	41.30	45.20	44.00
A 9.57.3		75x47x1.70 mm	Each	31.90	30.90	31.90	32.90	34.70	34.30	32.20	34.90	32.30	33.60	36.30	35.40
A 9.57.4		50x37x1.50mm	Each	17.30	16.50	17.30	18.00	19.30	19.00	17.50	19.40	17.60	18.50	20.40	19.80
A 9.58		Providing and fixing ISI marked oxidised M.S. pressed Parliamentary hinges with necessary screws etc. complete :													
A 9.58.1		150x125x27x2.80mm	Each	82.80	78.70	82.80	87.00	94.60	92.90	84.00	95.20	84.60	89.90	101.10	97.60
A 9.58.2		125x125x27x2.80 mm	Each	78.70	74.80	78.70	82.60	89.70	88.10	79.80	90.30	80.40	85.30	95.80	92.50
A 9.58.3		100x125x27x2.80 mm	Each	65.90	62.80	65.90	68.90	74.50	73.20	66.70	74.90	67.20	71.00	79.20	76.70
A 9.58.4		75x100x20x2.24 mm	Each	51.90	49.80	51.90	54.00	58.00	57.10	52.50	58.30	52.80	55.60	61.30	59.50
A 9.59		Providing and fixing ISI marked oxidised M.S. single acting spring hinges with necessary screws etc. complete :													
A 9.59.1		150 mm	Each	281.40	265.80	281.40	296.90	325.70	319.00	285.80	327.90	288.00	308.00	350.10	336.80
A 9.59.2		125 mm	Each	248.40	235.10	248.40	261.80	286.60	280.90	252.20	288.50	254.20	271.30	307.60	296.20
A 9.59.3		100 mm	Each	205.50	194.90	205.50	216.00	235.60	231.10	208.50	237.20	210.00	223.60	252.20	243.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 60		Providing and fixing oxidised M.S. double acting spring hinges with necessary screws etc. complete.													
A 9.60.1		150 mm	Each	312.60	295.10	312.60	330.20	362.80	355.30	317.70	365.30	320.20	342.70	390.40	375.40
A 9.60.2		125 mm	Each	276.40	261.20	276.40	291.60	319.80	313.30	280.80	322.00	282.90	302.50	343.70	330.70
A 9.60.3		100 mm	Each	246.60	233.30	246.60	259.80	284.40	278.70	250.40	286.30	252.30	269.30	305.20	293.90
A 9.61		Providing M.S. Piano hinges ISI marked IS : 3818 finished with nickle plating and fixing with necessary screws etc., complete.													
A 9.61.1		Overall width 35 mm	Metre	254.80	249.00	254.80	260.60	271.30	268.80	256.50	272.10	257.30	264.70	280.40	275.40
A 9.61.2		Overall width 50 mm	Metre	248.20	242.90	248.20	253.60	263.50	261.20	249.80	264.30	250.50	257.40	271.90	267.30
A 9.61.3		Overall width 65 mm	Metre	268.00	261.40	268.00	274.60	286.90	284.10	269.90	287.90	270.80	279.40	297.40	291.70
A 9.62		Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete :													
A 9.62.1		300x16 mm	Each	215.60	202.80	215.60	228.40	252.10	246.70	219.20	254.00	221.10	237.50	272.20	261.30
A 9.62.2		200x16 mm	Each	199.20	187.50	199.20	210.90	232.70	227.60	202.50	234.30	204.20	219.30	251.10	241.00
A 9.63		Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete :													
A 9.63.1		250x10mm	Each	80.30	75.60	80.30	85.00	93.80	91.80	81.70	94.50	82.30	88.40	101.20	97.20
A 9.63.2		200x10 mm	Each	70.50	66.40	70.50	74.50	82.10	80.40	71.60	82.70	72.20	77.50	88.50	85.00
A 9.63.3		150x10 mm	Each	60.60	57.20	60.60	64.10	70.40	69.00	61.60	70.90	62.10	66.50	75.80	72.90
A 9.63.4		100x10 mm	Each	44.20	41.70	44.20	46.70	51.20	50.20	44.90	51.60	45.20	48.40	55.10	53.00
A 9.64		Providing and fixing ISI marked 85x42mm oxidised M.S. pull bolt lock conforming to IS : 7534 with necessary screws bolts, nut and washers etc.complete.	Each	118.80	112.40	118.80	125.30	137.30	134.50	120.70	138.20	121.60	129.90	147.50	141.90
A 9.65		Providing and fixing ISI marked oxidised M.S. door latches conforming to IS:5930 with screws etc. complete :													
A 9.65.1		300x20x6 mm	Each	95.60	90.00	95.60	101.30	111.70	109.30	97.20	112.50	98.00	105.30	120.60	115.70
A 9.65.2		250x20x6 mm	Each	79.20	74.60	79.20	83.70	92.20	90.20	80.50	92.80	81.10	87.00	99.30	95.40
A 9.66		Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete :													
A 9.66.1		125 mm	Each	40.10	37.80	40.10	42.40	46.70	45.70	40.80	47.00	41.10	44.10	50.30	48.40
A 9.66.2		100 mm	Each	31.90	30.10	31.90	33.70	36.90	36.20	32.40	37.20	32.60	34.90	39.70	38.20
A 9.66.3		75 mm	Each	26.90	25.50	26.90	28.40	31.10	30.50	27.40	31.30	27.60	29.40	33.40	32.10
A 9.67		Providing and fixing oxidised M.S. hasp and staple (Safety type) conforming to IS : 363 with necessary screws etc. complete :													
A 9.67.1		150 mm	Each	32.20	30.50	32.20	33.90	37.10	36.30	32.70	37.30	33.00	35.10	39.70	38.30
A 9.67.2		115 mm	Each	28.40	26.90	28.40	29.80	32.50	31.80	28.80	32.70	29.00	30.80	34.70	33.50
A 9.67.3		90 mm	Each	23.60	22.50	23.60	24.70	26.80	26.30	23.90	26.90	24.10	25.50	28.50	27.60
A 9.68		Providing and fixing oxidised M.S. casement stays (straight peg type) with necessary screws etc. complete.													
A 9.68.1		300 mm weighing not less than 200 gms	Each	68.90	64.90	68.90	72.90	80.20	78.50	70.00	80.80	70.60	75.70	86.50	83.10
A 9.68.2		250 mm weighing not less than 150 gms	Each	59.80	56.40	59.80	63.20	69.50	68.00	60.80	69.90	61.20	65.60	74.80	71.90
A 9.68.3		200 mm weighing not less than 120 gms	Each	51.60	48.70	51.60	54.40	59.70	58.50	52.40	60.10	52.80	56.40	64.20	61.70
A 9.69		Providing and fixing oxidised M.S. Safety chain with necessary fixtures for doors, (Weighing not less than 450 gms)	Each	105.40	99.10	105.40	111.80	123.60	120.90	107.20	124.50	108.20	116.30	133.60	128.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 70		Providing and fixing IS : 12817 marked stainless steel butt hinges with stainless steel screws etc. complete :													
A 9.70.1		125x64x1.90mm	Each	95.80	90.70	95.80	101.00	110.60	108.40	97.30	111.40	98.10	104.70	118.80	114.30
A 9.70.2		100x58x1.90 mm	Each	83.70	79.30	83.70	88.00	96.20	94.30	84.90	96.80	85.50	91.20	103.10	99.30
A 9.70.3		75x47x1.80 mm	Each	61.80	58.80	61.80	64.70	70.20	68.90	62.60	70.60	63.00	66.80	74.80	72.30
A 9.70.4		50x37x1.50 mm	Each	36.90	34.90	36.90	38.90	42.60	41.70	37.40	42.90	37.70	40.30	45.70	44.00
A 9.71		Providing and fixing ISI : 12817 marked Stainless Steel butt hinges (heavy weight) with Stainless Steel screws etc. complete :													
A 9.71.1		125x64x2.50 mm	Each	109.80	103.70	109.80	115.90	127.30	124.60	111.60	128.10	112.50	120.30	136.80	131.60
A 9.71.2		100x60x2.50 mm	Each	87.00	82.40	87.00	91.60	100.10	98.10	88.30	100.80	88.90	94.80	107.30	103.40
A 9.71.3		75x50x2.50 mm	Each	69.20	65.70	69.20	72.60	79.00	77.50	70.20	79.50	70.60	75.10	84.40	81.40
A 9.72		Providing and fixing bright finished brass butt hinges with necessary screws etc. complete :													
A 9.72.1		125x85x5.5 mm (heavy type)	Each	270.90	254.40	270.90	287.30	317.90	310.90	275.60	320.30	277.90	299.10	343.80	329.70
A 9.72.2		125x70x4 mm (ordinary type)	Each	182.90	172.20	182.90	193.70	213.60	209.00	186.00	215.10	187.50	201.30	230.40	221.20
A 9.72.3		100x85x5.5 mm (heavy type)	Each	205.70	193.50	205.70	217.90	240.50	235.30	209.10	242.30	210.90	226.60	259.70	249.20
A 9.72.4		100x70x4 mm (ordinary type)	Each	144.40	136.20	144.40	152.60	167.80	164.30	146.80	169.00	147.90	158.50	180.70	173.70
A 9.72.5		75x65x4 mm (heavy type)	Each	170.90	161.00	170.90	180.90	199.30	195.00	173.80	200.70	175.20	187.90	214.90	206.40
A 9.72.6		75x40x2.5 mm (ordinary type)	Each	95.50	90.50	95.50	100.50	109.80	107.70	97.00	110.50	97.70	104.10	117.70	113.40
A 9.72.7		50x40x2.5mm (ordinary type)	Each	39.30	37.20	39.30	41.30	45.20	44.30	39.90	45.50	40.20	42.80	48.50	46.70
A 9.73		Providing and fixing bright finished brass parliamentary hinges with necessary screws etc. complete :													
A 9.73.1		150x125x27x5 mm	Each	473.60	444.00	473.60	503.20	558.10	545.40	482.10	562.40	486.30	524.30	604.60	579.30
A 9.73.2		125x125x27x5 mm	Each	422.60	396.40	422.60	448.80	497.50	486.30	430.10	501.30	433.80	467.60	538.80	516.30
A 9.73.3		100x125x27x5 mm	Each	388.00	364.00	388.00	412.00	456.50	446.20	394.90	459.90	398.30	429.10	494.20	473.60
A 9.73.4		75x100x20x3.2 mm	Each	343.20	322.20	343.20	364.30	403.40	394.30	349.20	406.40	352.30	379.30	436.40	418.40
A 9.74		Providing and fixing bright finished brass tower bolts (barrel type) with necessary screws etc. complete :													
A 9.74.1		250x10 mm	Each	455.50	426.30	455.50	484.70	538.90	526.40	463.90	543.10	468.00	505.60	584.80	559.80
A 9.74.2		200x10 mm	Each	365.30	342.00	365.30	388.60	431.80	421.90	372.00	435.20	375.30	405.20	468.40	448.50
A 9.74.3		150x10 mm	Each	281.30	263.50	281.30	299.10	332.20	324.60	286.40	334.70	289.00	311.80	360.10	344.90
A 9.74.4		100x10 mm	Each	192.80	180.80	192.80	204.80	227.00	221.90	196.20	228.80	197.90	213.30	245.90	235.60
A 9.75		Providing and fixing bright finished brass door latch with necessary screws etc. complete :													
A 9.75.1		300x16x5 mm	Each	330.60	309.70	330.60	351.50	390.30	381.40	336.60	393.30	339.60	366.40	423.20	405.30
A 9.75.2		250x16x5 mm	Each	314.20	294.30	314.20	334.00	370.80	362.30	319.80	373.60	322.70	348.10	401.90	384.90
A 9.76		Providing and fixing brigh finished brass 100 mm mortice latch and lock with 6 levers and a pair of lever handles of approved quality with necessary screws etc. complete.	Each	829.70	785.90	829.70	873.60	955.10	936.30	842.30	961.30	848.50	904.90	1024.00	986.40
A 9.77		Providing and fixing bright finished brass 100 mm mortice latch with one dead bolt and a pair of lever handles of approved quality with necessary screws etc. complete.	Each	681.60	647.40	681.60	715.70	779.20	764.60	691.30	784.10	696.20	740.10	832.90	803.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.78		Providing and fixing bright finished brass night latch of approved quality including necessary screws etc. complete.	Each	2112.00	2045.50	2112.00	2178.50	2302.00	2273.50	2131.00	2311.50	2140.50	2226.00	2406.40	2349.50
A 9.79		Providing and fixing special quality bright finished brass cupboard or ward robe locks with four levers of approved quality including necessary screws etc. complete.													
A 9.79.1		40 mm	Each	261.70	255.00	261.70	268.50	280.90	278.00	263.70	281.90	264.60	273.20	291.50	285.70
A 9.79.2		50 mm	Each	311.10	301.20	311.10	321.10	339.50	335.30	314.00	341.00	315.40	328.20	355.20	346.60
A 9.79.3		65 mm	Each	319.40	308.90	319.40	329.80	349.30	344.80	322.40	350.80	323.90	337.30	365.80	356.80
A 9.79.4		75 mm	Each	344.10	332.00	344.10	356.20	378.60	373.40	347.50	380.30	349.20	364.80	397.60	387.30
A 9. 80		Providing and fixing 50 mm bright finished brass cup board or wardrobe knob of approved quality with necessary screws.	Each	72.40	68.50	72.40	76.30	83.50	81.80	73.50	84.00	74.00	79.00	89.60	86.20
A 9.81		Providing and fixing bright finished brass handles with screws etc. complete :													
A 9.81.1		125 mm	Each	249.30	233.30	249.30	265.20	294.80	288.00	253.80	297.10	256.10	276.60	319.90	306.20
A 9.81.2		100 mm	Each	231.20	216.40	231.20	245.90	273.30	267.00	235.40	275.40	237.50	256.50	296.50	283.90
A 9.81.3		75 mm	Each	181.80	170.30	181.80	193.30	214.70	209.80	185.10	216.30	186.70	201.50	232.80	222.90
A 9.82		Providing and fixing bright finished brass hanging type floor door stopper with necessary screws, etc. complete.	Each	129.60	121.30	129.60	137.90	153.30	149.70	131.90	154.50	133.10	143.80	166.30	159.20
A 9.83		Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI : 3564, embossed on the body,door weight upto 35 Kg and door width upto 700 mm), with necessary accessories and screws etc. complete.	Each	1202.10	1128.70	1202.10	1275.50	1411.80	1380.30	1223.10	1422.30	1233.50	1327.90	1527.10	1464.20
A 9.84		Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer(having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 36 Kg to 80 Kg and door width from 701 mm to 1000 mm), with double speed adjustment with necessary accessories and screws etc. complete.	Each	1016.10	954.80	1016.10	1077.30	1191.00	1164.70	1033.50	1199.70	1042.30	1121.00	1287.20	1234.70
A 9.85		Providing and fixing bright finished brass casement window fastener with necessary screws etc. complete.	Each	90.00	84.80	90.00	95.30	105.10	102.90	91.50	105.90	92.30	99.10	113.40	108.90
A 9.86		Providing and fixing bright finished brass casement stays (straight peg type) with necessary screws etc. complete :													
A 9.86.1		300 mm weighing not less than 330 gms	Each	226.00	211.80	226.00	240.20	266.50	260.40	230.10	268.50	232.10	250.30	288.80	276.60
A 9.86.2		250 mm weighing not less than 280 gms	Each	180.60	169.40	180.60	191.80	212.60	207.80	183.80	214.20	185.40	199.80	230.20	220.60
A 9.86.3		200 mm weighing not less than 240 gms	Each	172.40	161.70	172.40	183.00	202.80	198.20	175.40	204.30	176.90	190.60	219.60	210.40
A 9.87		Providing and fixing bright finished brass hasp and staple (safety type) with necessary screws etc. complete :													
A 9.87.1		150 mm	Each	142.50	133.70	142.50	151.30	167.70	163.90	145.00	169.00	146.30	157.60	181.60	174.00
A 9.87.2		115 mm	Each	128.70	120.80	128.70	136.70	151.40	148.00	131.00	152.50	132.10	142.30	163.90	157.10
A 9.87.3		90 mm	Each	113.10	106.20	113.10	120.00	132.80	129.90	115.10	133.80	116.10	124.90	143.70	137.80
A 9.88		Providing and fixing chromium plated brass 100 mm mortice latch and lock with 6 levers and a pair of lever handles of approved quality with necessary screws etc. complete.	Each	945.00	893.60	945.00	996.40	1091.80	1069.80	959.70	1099.20	967.00	1033.10	1172.60	1128.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.89		Providing and fixing chromium plated brass night latch of approved quality including necessary screws etc. complete.	Each	994.40	939.70	994.40	1049.00	1150.50	1127.10	1010.00	1158.30	1017.80	1088.00	1236.30	1189.50
A 9.90		Providing and fixing special quality chromium plated brass cupboard locks with six levers of approved quality including necessary screws etc. complete.													
A 9.90.1		Size 40 mm	Each	270.00	262.70	270.00	277.20	290.70	287.60	272.10	291.70	273.10	282.40	302.10	295.90
A 9.90.2		Size 50 mm	Each	286.40	278.10	286.40	294.80	310.20	306.70	288.80	311.40	290.00	300.70	323.30	316.20
A 9.90.3		Size 65 mm	Each	327.60	316.60	327.60	338.60	359.10	354.40	330.70	360.60	332.30	346.50	376.40	366.90
A 9.90.4		Size 75 mm	Each	540.00	525.50	540.00	554.50	581.40	575.20	544.10	583.40	546.20	564.80	604.10	591.70
A 9.91		Providing and fixing chromium plated brass 50 mm cupboard or wardrobe knobs with nuts complete.	Each	144.80	136.20	144.80	153.40	169.40	165.70	147.30	170.70	148.50	159.60	183.00	175.60
A 9.92		Providing and fixing chromium plated brass handles with necessary screws etc. Complete:													
A 9.92.1		125 mm	Each	275.60	258.00	275.60	293.30	326.10	318.50	280.70	328.60	283.20	305.90	353.80	338.70
A 9.92.2		100 mm	Each	242.70	227.20	242.70	258.20	287.00	280.40	247.10	289.20	249.30	269.30	311.40	298.10
A 9.92.3		75 mm	Each	218.00	204.10	218.00	231.90	257.70	251.70	222.00	259.70	224.00	241.80	279.50	267.60
A 9.93		Providing and fixing chromium plated brass casement window fastener with necessary screws etc. complete.	Each	169.40	158.90	169.40	179.90	199.30	194.80	172.40	200.80	173.90	187.30	215.80	206.80
A 9.94		Providing and fixing chromium plated brass casement stays (straight peg type) with necessary screws etc. Complete :													
A 9.94.1		300 mm weighing not less than 330 gms	Each	251.70	235.90	251.70	267.60	297.00	290.20	256.20	299.30	258.50	278.90	321.90	308.30
A 9.94.2		250 mm weighing not less than 280 gms	Each	218.80	205.10	218.80	232.50	257.90	252.10	222.70	259.90	224.70	242.30	279.50	267.70
A 9.94.3		200 mm weighing not less than 240 gms	Each	185.90	174.30	185.90	197.40	218.80	213.90	189.20	220.50	190.80	205.60	237.00	227.10
A 9.95		Providing and fixing ISI marked aluminium butt hinges anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade with necessary screws etc. complete:													
A 9.95.1		125x75x4 mm	Each	160.10	150.90	160.10	169.40	186.60	182.60	162.80	187.90	164.10	176.00	201.10	193.20
A 9.95.2		125x63x4 mm	Each	132.60	125.20	132.60	140.10	153.90	150.70	134.80	155.00	135.80	145.40	165.70	159.30
A 9.95.3		100x75x4 mm	Each	121.40	114.70	121.40	128.20	140.70	137.80	123.30	141.60	124.30	133.00	151.20	145.50
A 9.95.4		100x63x4 mm	Each	110.10	104.10	110.10	116.10	127.20	124.60	111.80	128.00	112.60	120.30	136.60	131.50
A 9.95.5		100x63x3.2 mm	Each	101.20	95.80	101.20	106.60	116.60	114.30	102.70	117.40	103.50	110.40	125.10	120.50
A 9.95.6		75x63x4 mm	Each	87.50	83.00	87.50	92.00	100.40	98.50	88.80	101.10	89.40	95.20	107.50	103.60
A 9.95.7		75x63x3.2 mm	Each	79.40	75.50	79.40	83.40	90.80	89.10	80.60	91.40	81.20	86.30	97.10	93.70
A 9.95.8		75x45x3.2 mm	Each	74.50	70.80	74.50	78.20	85.00	83.40	75.60	85.50	76.10	80.80	90.70	87.60
A 9.96		Providing and fixing aluminium sliding door bolts, ISI marked anodised (anodic coating not less than grade AC 10 as per IS : 1868), transparent or dyed to required colour or shade, with nuts and screws etc. complete :													
A 9.96.1		300x16 mm	Each	300.70	284.10	300.70	317.30	348.10	341.00	305.40	350.50	307.80	329.20	374.20	360.00
A 9.96.2		250x16 mm	Each	269.40	254.90	269.40	284.00	311.00	304.80	273.60	313.10	275.70	294.40	333.90	321.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.97		Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc- complete :													
A 9.97.1		300 x 10 mm	Each	138.80	130.50	138.80	147.10	162.60	159.00	141.20	163.70	142.40	153.10	175.60	168.50
A 9.97.2		250 x 10 mm	Each	122.50	115.30	122.50	129.80	143.20	140.10	124.60	144.30	125.60	134.90	154.60	148.40
A 9.97.3		200 x 10 mm	Each	106.40	100.20	106.40	112.60	124.10	121.40	108.10	124.90	109.00	117.00	133.80	128.50
A 9.97.4		150 x 10 mm	Each	89.20	83.80	89.20	94.50	104.40	102.10	90.70	105.20	91.40	98.30	112.80	108.20
A 9.97.5		100 x 10 mm	Each	68.40	64.40	68.40	72.40	79.80	78.10	69.50	80.40	70.10	75.20	86.10	82.60
A 9.98		Providing and fixing aluminium pull bolt lock, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws bolts, nut and washers etc. complete.	Each	95.80	90.80	95.80	100.80	110.00	107.80	97.20	110.70	97.90	104.30	117.70	113.50
A 9.99		Providing and fixing 50cm long aluminium kicking plate 100x3.15 mm anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete.	Each	255.20	239.10	255.20	271.30	301.10	294.20	259.80	303.40	262.10	282.70	326.40	312.60
A 9. 100		Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :													
A 9.100.1		125 mm	Each	70.80	66.50	70.80	75.10	83.00	81.20	72.00	83.60	72.60	78.10	89.70	86.00
A 9.100.2		100 mm	Each	62.70	59.00	62.70	66.50	73.40	71.80	63.80	74.00	64.30	69.20	79.30	76.10
A 9.100.3		75 mm	Each	54.20	51.00	54.20	57.40	63.30	61.90	55.10	63.70	55.50	59.60	68.30	65.50
A 9.101		Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete.													
A 9.101.1		Single rubber stopper	Each	40.00	37.60	40.00	42.50	47.00	45.90	40.70	47.30	41.10	44.20	50.80	48.70
A 9.101.2		Twin rubber stopper	Each	74.60	69.90	74.60	79.30	88.00	86.00	75.90	88.70	76.60	82.60	95.40	91.40
A 9.102		Providing and fixing aluminium casement stays, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade with necessary screws etc. complete.	Each	73.90	69.70	73.90	78.10	86.00	84.20	75.10	86.60	75.70	81.10	92.60	89.00
A 9.103		Providing and fixing bright finished brass 100 mm mortice latch and lock, ISI marked, with six levers and a pair of anodised (anodic coating not less than grade AC 10 as per IS : 1868) aluminium lever handles of approved quality with necessary screws etc. complete.	Each	873.90	827.10	873.90	920.60	1007.50	987.40	887.20	1014.20	893.90	954.00	1080.90	1040.90
A 9.104		Providing and fixing aluminium tee channels (heavy duty) with rollers and stop end in pelmets as curtain rod.	Metre	171.50	160.30	171.50	182.70	203.50	198.70	174.70	205.10	176.30	190.70	221.20	211.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.105		Providing and fixing partition upto ceiling height consisting of G.I. frame and required board, including providing and fixing of frame work made of special section power pressed/ roll form G.I. sheet with zinc coating of 120 gms/sqm (both side inclusive), consisting of floor and ceiling channel 50 mm wide having equal flanges of 32 mm and 0.50 mm thick, fixed to the floor and ceiling at the spacing of 610 mm centre to centre with dash fastener of 12.5 mm dia. meter 50 mm length or suitable anchor fastener or metal screws with nylon plugs and the studs 48 mm wide having one flange of 34 mm and other flange 36 mm and 0.50 mm thick fixed vertically within flanges of floor and ceiling channel and placed at a spacing of 610 mm centre to centre by 6 mm dia. bolts and nuts, including fixing of studs along both ends of partition fixed flush to wall with suitable anchor fastener or metal screws with nylon plugs at spacing of 450 mm centre to centre, and fixing of boards to both side of frame work by 25 mm long dry wall screws on studs, floor and ceiling channels at the spacing of 300 mm centre to centre. The boards are to be fixed to the frame work with joints staggered to avoid through cracks, Galvanised M.S. fixing channel of 99 mm width (0.9 mm thick having two flanges of 9.5 mm each with zinc coating of 120 gms/sqm (both side inclusive) to be provided at the horizontal joints of two boards, fixed to the studs using metal to metal flat head screws, including jointing and finishing to a flush finish with recommended jointing compound, jointing tape, angle beads at corners (25 mm x 25 mm x 0.5 mm), joint finisher and two coats of primer suitable for board as per manufacture`s specification and direction of Engineer-in-Charge all complete.													
A 9.105.1		75 mm overall thickness partition with 12.5 mm thick double skin fire rated Glass Reinforced Gypsum (GRC), plaster board conforming to IS : 2095 : (part 3) 1996 (Board with BIS Certification marks)	Sqm	1904.90	1821.90	1904.90	1987.90	2142.10	2106.50	1928.70	2153.90	1940.50	2047.20	2272.50	2201.40
A 9.105.2		75 mm overall thickness partition with 12.5 mm thick double skin tapered edged plain Gypsum plaster board conforming to IS : 2095 : (part 1) 2011 (Board with BIS Certification marks)	Sqm	1830.50	1752.40	1830.50	1908.60	2053.70	2020.20	1852.80	2064.90	1864.00	1964.40	2176.50	2109.50
A 9.105.3		66 mm overall thickness partition with 8 mm thick double skin Calcium Silicate Board made with Calcareous and Siliceous materials reinforced with cellulose fiber manufactured through autoclaving process with Compressive Strength 225 Kg/sq,cm, Bending Strength 100 Kg./ sq.cm	Sqm	1987.30	1898.90	1987.30	2075.60	2239.80	2201.90	2012.50	2252.40	2025.10	2138.80	2378.70	2302.90
A 9.105.4		Details of cost for 21.9 sqm; (partition Panel)	Sqm	1839.10	1760.40	1839.10	1917.80	2063.90	2030.20	1861.60	2075.20	1872.80	1974.00	2187.60	2120.10
A 9.105.5		66 mm overall thickness partition using 8 mm thick double skin multipurpose cement bonded wood particle board manufactured as per IS : 14276 with suitable cement bonded board screws	Sqm	1822.60	1745.00	1822.60	1900.20	2044.40	2011.10	1844.80	2055.50	1855.90	1955.70	2166.40	2099.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.106		Providing and fixing PTMT handles with necessary screws etc. complete.													
A 9.106.1		125x34x24 mm weighing not less than 23 gms	Each	46.70	44.00	46.70	49.40	54.50	53.40	47.50	54.90	47.90	51.40	58.80	56.50
A 9.106.2		150x34x24 mm weighing not less than 26 gms.	Each	46.70	44.00	46.70	49.40	54.50	53.40	47.50	54.90	47.90	51.40	58.80	56.50
A 9.107		Providing and fixing PTMT Butt hinges with necessary screws etc., complete.													
A 9.107.1		75x60x10 mm fitted with 5.5 mm dia M.S. Bright Bar Rod weighing not less than 34gms	Each	75.40	71.60	75.40	79.30	86.40	84.80	76.50	87.00	77.10	82.00	92.50	89.20
A 9.107.2		100x75x10 mm fitted with 5.5 mm dia MS Bright Bar Rod weighing not less than 53gms	Each	95.40	90.20	95.40	100.50	110.10	107.90	96.80	110.80	97.60	104.20	118.20	113.70
A 9.108		Providing and fixing PTMT Tower Bolts with 12 mm one piece rod inside and necessary screws etc., complete.													
A 9.108.1		152x42x18mm weighing not less than 60 gms	Each	89.90	84.40	89.90	95.40	105.50	103.20	91.50	106.30	92.20	99.30	114.10	109.40
A 9.108.2		202x42x18 mm weighing not less than 78 gms	Each	124.30	116.70	124.30	131.90	146.00	142.70	126.40	147.10	127.50	137.30	157.90	151.40
A 9.109		Providing and fixing PTMT door catcher of length 72 mm and dia. of 42 mm with suitable washers weighing not less than 33 gms	Each	237.70	227.30	237.70	248.00	267.20	262.80	240.60	268.70	242.10	255.40	283.40	274.60
A 9. 110		Providing and fixing Bamboo jaffery/ fencing consisting of superior quality 25 mm dia (average) half cut bamboo placed vertically and fixed together with three numbers horizontal running members of hollock wood in scantling of section 50x25 mm, fixed with nails and G.i wire on existing support complete as per direction of Engineer-in-Charge.	Sqm	625.80	595.80	625.80	655.80	711.50	698.60	634.40	715.80	638.60	677.20	758.60	732.90
A 9.111		Providing and fixing wooden moulded corner beading of triangular shape to the junction of panelling etc. with iron screws, plugs and priming coat on unwxposed surface etc. complete 2nd class teak wood.													
A 9.111.1		50x50 mm (base and height)	Metre	208.80	208.50	208.80	209.00	209.50	209.40	208.80	209.50	208.90	209.20	209.80	209.60
A 9.112		Providing and fixing 2nd class teak wood lipping/moulded beading or taj beading of size 18x5 mm fixed with wooden adhesive of approved quality and screws/nails on the edges of the Pre-laminated particle board as per direction of Engineer-in-charge.	Each	81.20	78.20	81.20	84.20	89.80	88.50	82.10	90.30	82.50	86.40	94.60	92.00
A 9.113		Providing and fixing bright finished 10 mm mortice lock with 6 levers without pair of handles of approved quality for aluminium door, with necessary screws etc complete as per direction of Engineer-in-Charge.	Each	747.70	706.70	747.70	788.60	864.70	847.10	759.40	870.50	765.20	817.90	929.00	893.90
A 9.114		Providing and fixing magnetic catcher of approved quality in cupboard/ward robe shutters, incluing fixing with necessary screws etc. complete.													
A 9.114.1		Triple strip vertical type	Each	48.10	44.90	48.10	51.20	57.10	55.70	49.00	57.50	49.40	53.50	62.00	59.30
A 9.114.2		Double strip (horizontal type)	Each	38.20	35.70	38.20	40.70	45.30	44.30	38.90	45.70	39.30	42.50	49.30	47.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.115		Providing and fixing powder coated telescopic drawer channels 300 mm long without necessary screws etc. complete as per direction of Engineer-in-Charge.	Each	4116.20	3846.90	4116.20	4385.40	4885.50	4770.10	4193.10	4924.00	4231.60	4577.80	5308.70	5077.90
A 9.116		Providing and fixing sliding arrangement in racks/cupboards/cabinets shutter by with stainless steel rollers to run inside C or E aluminium channel section (The payment of C or E channel shall be made separately)	Each	18.20	17.00	18.20	19.40	21.70	21.10	18.60	21.80	18.80	20.30	23.50	22.50
A 9.117		Providing and fixing factory made uPVC door frame made of uPVC extruded sections having an overall dimension as below (tolerance ±1 mm), with wall thikness 2.0 mm (± 0.2 mm), corners of the door frame to be Jointed with galvanized brackets and stainless steel screws, joints mitred and Plastic welded. The hinge side vertical of the frames reinforced by galvanized M.S. tube of size 19x19 mm and 1 mm (±0.1 mm) wall thickness and 3 nos. stainless steel hinges fixed to the frame complete as per manufacturer`s specification and direction of Engineer-in-charge.													
A 9.117.1		Extruded section profile size 48x40 mm	Metre	252.30	238.60	252.30	266.10	291.60	285.70	256.20	293.60	258.20	275.90	313.20	301.40
A 9.117.2		Extruded section profile size 42x50 mm	Metre	308.60	291.20	308.60	326.10	358.50	351.00	313.60	360.90	316.10	338.50	385.80	370.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.118		Providing and fixing to existing door frames.													
A 9.118.1		25 mm thick factory made PVC door shutters made of styles and rails of a uPVC hollow section of size 59x24 mm and wall thickness 2 mm (±0.2 mm) with inbuilt edging on both sides. The styles and rails mitred and joint at the corners by means of M.S. galvanised/plastic brackets of size 75x220 mm having wall thickness 1.0 mm and stainless steel screws. The styles of the shutter reinforced by inserting galvanised M.S. tube of size 20x20 mm and 1 mm (±0.1 mm) wall thickness. The lock rail made up of 'H' section, a uPVC hollow section of size 100x24 mm and 2mm (± 0.2 mm) wall thickness, fixed to the shutter styles by means of plastic/galvanised M.S. 'U' cleats. The shutter frame filled with a uPVC multi-chambered single panel of size not less than 620 mm, having over all thickness of 20 mm and 1 mm (±0.1 mm) wall thickness. The panels filled vertically and tie bar at two places by inserting horizontally 6 mm galvanised M.S. rod and fastened with nuts and washers, complete as per manufacturer`s specification and direction of Engineer-in-Charge. (For W.C. and bathroom door shutter).	Sqm	2052.10	1933.30	2052.10	2170.90	2391.50	2340.60	2086.00	2408.50	2103.00	2255.70	2578.20	2476.40
A 9.118.2		30 mm thick factory made polyvinyl Chloride (PVC) door shutters made of styles and rails of a uPVC hollow section of size 60x30 mm and wall thickness 2 mm (±0.2 mm), with inbuilt decorative moulding edging on one sides. The styles and rails mitred and joint at the corners by means of M.S. galvanised/plastic brackets of size 75x220 mm having wall thickness 1.0 mm and stainless steel screws. The styles of the shutter reinforced by inserting galvanised M.S. tube of size 25x20 mm and 1 mm (±0.1 mm) wall thickness. The lock rail made up of 'H' section, a uPVC hollow section of size 100x30 mm and 2mm (± 0.2 mm) wall thickness fixed to the shutter styles by means of plastic/galvanised M.S. 'U' cleats. The shutter frame filled with a uPVC multi-chambered single panel of size not less than 620 mm, having over all thickness of 20 mm and 1 mm (±0.1 mm) wall thickness. The panels filled vertically and tie bar at two places by inserting horizontally 6 mm galvanised M.S. rod and fastened with nuts and washers, complete as per manufacturer`s specification and direction of Engineer-in-Charge.	Sqm	2320.20	2183.90	2320.20	2456.60	2709.80	2651.40	2359.20	2729.30	2378.70	2554.00	2924.10	2807.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.118.3		25 mm thick PVC flush door shutters made out of a one piece Multi chamber extruded PVC section of the size of 762 mm x 25 mm or less as per requirement with an average wall thickness of 1 mm (±0.3 mm). PVC foam end cap of size 23x10 mm are provided on both vertical edges to ensure the overall thickness of 25 mm. M.S. tube having dimensions 19 mm x 19 mm and 1.0 mm (±0.1 mm) is inserted along the hinge side of the door. Core of the door shutter should be filled with High Density Polyurethane foam. The Top and bottom edges of the shutter are covered with an end-cap of the size 25 mm x11 mm. Door shutter shall be	Sqm	3063.00	2878.10	3063.00	3248.00	3591.40	3512.20	3115.90	3617.90	3142.30	3380.10	3882.10	3723.50
A 9.119		Providing and fixing factory made P.V.C. door frame of size 50x47 mm with a wall thickness of 5 mm, made out of extruded 5 mm rigid PVC foam sheet, mitred at corners and joined with 2 Nos of 150 mm long brackets of 15x15 mm M.S. square tube, the vertical door frame profiles to be reinforced with 19x19 mm M.S. square tube of 19 gauge, EPDM rubber gasket weather seal to be provided through out the frame. The door frame to be fixed to the wall using M.S. screws of 65/100 mm size, complete as per manufacturer`s specification and direction of Engineer-in-	Metre	461.50	434.00	461.50	488.90	539.80	528.10	469.30	543.80	473.20	508.50	583.00	559.40
A 9. 120		Providing and fixing factory made P.V.C. door shutter consisting of frame made out of M.S. tubes of 19 gauge thickness and size of 19 mm x 19 mm for styles and 15x15 mm for top and bottom rails. M.S. frame shall have a coat of steel primers of approved make and manufacture. M.S. frame covered with 5 mm thick heat moulded PVC 'C' channel of size 30 mm thickness, 70 mm width out of which 50 mm shall be flat and 20 mm shall be tapered in 45 degree angle on both side forming styles and 5 mm thick, 95 mm wide PVC sheet out of which 75 mm shall be flat and 20 mm shall be tapered in 45 degree on the inner side to form top and bottom rail and 115 mm wide PVC sheet out of which 75 mm shall be flat and 20 mm shall be tapered on both sides to form lock rail. Top, bottom and lock rails shall be provided both side of the panel. 10 mm (5 mm x 2) thick, 20 mm wide cross PVC sheet be provided as gap insert for top rail and bottom rail, panelling of 5 mm thick both side PVC sheet to be fitted in the M.S. frame welded/sealed to the styles and rails with 7 mm (5 mm+2 mm) thick x 15 mm wide PVC sheet beading on inner side, and joined together with solvent cement adhesive. An additional 5 mm thick PVC strip of 20 mm width is to be stuck on the interior side of the 'C' Channel using PVC solvent adhesive etc. complete as per direction of Engineer-in-Charge.													
A 9.120.1		30 mm thick plain PVC door shutters	Sqm	2867.50	2695.40	2867.50	3039.70	3359.40	3285.60	2916.70	3383.90	2941.30	3162.60	3629.90	3482.30
A 9.120.2		30 mm thick pre laminated PVC door shutters	Sqm	2867.50	2695.40	2867.50	3039.70	3359.40	3285.60	2916.70	3383.90	2941.30	3162.60	3629.90	3482.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.121		Providing and fixing Fiber Glass Reinforced plastic (FRP) Door Frames of cross-section 90 mm x 45 mm having single rebate of 32 mm x 15 mm to receive shutter of 30 mm thickness. The laminate shall be moulded with fire resistant grade unsaturated polyester resin and chopped mat. Door frame laminate shall be 2mm thick and shall be filled with suitable wooden block in all the three legs. The frame shall be covered with fiber glass from all sides. M.S. stay shall be provided at the bottom to steady the frame.	Metre	816.10	765.50	816.10	866.80	960.80	939.10	830.60	968.00	837.80	902.90	1040.40	997.00
A 9. 122		Providing and fixing to existing door frames.													
A 9.122.1		30 mm thick Glass Fibre Reinforced Plastic (FRP) panelled door shutter of required colour and approved brand and manufacture, made with fire - retardant grade unsaturated polyester resin, moulded to 3 mm thick FRP laminate for forming hollow rails and styles, with wooden frame and suitable blocks of seasoned wood inside at required places for fixing of fittings, cast monolithically with 5 mm thick FRP laminate for panels conforming to IS: 14856, including fixing to frames.	Sqm	4149.30	3893.30	4149.30	4405.30	4880.70	4771.00	4222.40	4917.30	4259.00	4588.10	5283.00	5063.50
A 9.122.2		30 mm thick Fibre Glass Reinforced Plastic (F.R.P) flush door shutter in different plain and wood finish made with fire retardant grade unsaturated polyester resin, moulded to 3 mm thick FRP laminate all around, with suitable wooden block inside at required places for fixing of fittings and polyurethane foam (PUF)/polystyrene foam to be used as filler material throughout the hollow panel, casted monolithically with testing parameters of F.R.O. laminate conforming to table - 3 of IS: 14856, complete as per direction of Engineer-in-Charge.	Sqm	4723.80	4430.20	4723.80	5017.40	5562.70	5436.80	4807.70	5604.60	4849.70	5227.10	6024.00	5772.40
A 9.123		Providing and fixing factory made door frame (single rebate) made out of single piece extruded solid PVC foam profile with homogenous fine cellukkar structure having smooth outer integral skin having 62 mm width and 32 mm thickness, frame will be mitred and Jointed with self driven self tapping screws of size 38 mm x 4 mm and PVC solvent cement, including fixing the frame to wall with suitable dia. and length anchor fastener as per manufacrer`s specification and direction of Engineer-in-Charge.	Metre	565.90	531.60	565.90	600.10	663.80	649.10	575.70	668.70	580.60	624.60	717.60	688.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 124		Providing and fixing factory made 30 mm thick door shutter made of solid PVC foam profile. The styles and rails shall be of size 75 mm x 30 mm having wall thickness 5 mm. The styles, top and bottom rails shall have one side wall thickness of 15 mm integrally extruded on the hinge side of the profile for better screw holding power. The styles and rails shall be reinforced with M.S. tubes of size 33 mm x 17 mm x 1 mm, painted with primer, all four corners of reinforcement to be welded or sealed. Solid PVC extruded bidding (push fit type) will be set inside the styles and the rails with a cavity, to receive single piece extruded 5 mm PVC sheet as panel. The styles and rails will be mitred cut and join with the help of PVC solvent cement and self driven self tapping screws. Single piece extruded solid PVC lock rail of size 100 mmx 30 mm with wall thickness 5 mm and 15 mm integrally extruded in the middle of the lock rail and fixed with styles with the help of PVC solvent cement and self driven self tapping screws of size 100mm x 8mm complete as per manufacturer`s specifications and direction of Engineer-in-Charge.													
A 9.124.1		Non decorative finish	Sqm	3612.60	3391.70	3612.60	3833.40	4243.70	4149.00	3675.70	4275.20	3707.20	3991.20	4590.80	4401.40
A 9.124.2		Decorative finish (both side wood grained finish)	Sqm	3777.20	3545.50	3777.20	4008.80	4439.10	4339.80	3843.40	4472.20	3876.50	4174.30	4803.10	4604.50
A 9.125		Providing and fixing rigid foam sheet 1 mm thick on existing door shutters (bathroom and W.C. doors) using synthetic rubber based adhesive.	Sqm	28996.50	27144.40	28996.50	30848.50	34288.00	33494.30	29525.60	34552.60	29790.20	32171.40	37198.30	35610.90
A 9.126		Providing and fixing 12 mm thick panelling and glazing in panelled and glazed shutters for door s, windows and clerestory windows (area of opening for panel inserts excluding portion inside grooves or rebates to be measured). Panelling for panelled or panelled and glazed shutters 25 mm to 40 mm thick.													
A 9.126.1		Marine plywood conforming to IS: 710	Sqm	2217.80	2125.60	2217.80	2310.00	2481.20	2441.70	2244.10	2494.30	2257.30	2375.80	2626.00	2547.00
A 9.126.2		Fire retardant plywood conforming to IS : 5509	Sqm	2527.10	2414.70	2527.10	2639.50	2848.30	2800.10	2559.20	2864.30	2575.30	2719.80	3024.90	2928.60
A 9.127		Providing and fixing decorative high pressure laminated sheet of plain/wood grain in gloss/matt/suede finish with high density protective surface later and reverse side of adhesive bonding quality conforming to IS : 2046 Type S, including cost of adhesive of approved quality.													
A 9.127.1		1.5 mm thick	Metre	977.50	923.60	977.50	1031.40	1131.50	1108.40	992.90	1139.20	1000.60	1069.90	1216.20	1170.00
A 9.127.2		1.0 mm thick	Metre	823.60	779.80	823.60	867.40	948.80	930.00	836.10	955.00	842.40	898.70	1017.60	980.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.128		Providing and fixing factory made Fiberglass Reinforced plastics (F.R.P.) chajja 4 mm thick of required colour, size and design made by Resin Transfer Moulding (RTM) Machine Technology, resulting in void free compact laminate in single piece, having smooth gradual slope curvature for easy drainage of water and duly reinforced by 2 nos vertically and 1 nos horizontally 50x2 mm thick M.S. flat with 12 mm in build hole for grouting on the existing wall along with the 50 mm flanges duly inserted and sealed in the wall complete in one single piece casted monolithically, including all necessary fittings. The FRP Chajja should be manufactured using unsaturated Polyester resin as per IS : 6746, duly reinforced with fibre glass chopped strand mat (CSM) as per IS : 11551 complete with protective Gel coat U/V coating on Top for complete resistance from the extreme of temperature, weather and sunlight (Only plan area of chajjas shall be measured for making payment).	Metre	5810.90	5430.80	5810.90	6191.10	6897.10	6734.20	5919.60	6951.40	5973.90	6462.60	7494.50	7168.60
A 9.129		Providing and fixing cup board shutters 25 mm thick, with Pre-laminated flat pressed three layer particle board or graded wood particle board IS : 12823 marked, exterior grade (grade I Type II), having one side decorative lamination and other side balancing lamination, including 2nd class teak wood lipping of 25 mm wide x 12 mm thick with necessary as per direction of the Engineer-in-Charge	Sqm	2185.10	2066.90	2185.10	2303.20	2522.60	2471.90	2218.80	2539.40	2235.70	2387.60	2708.20	2606.90
A 9. 130		Providing and fixing cup board shutters 25 mm thick veneered particle board IS : 3097 marked, exterior grade (grade I), of approved make, including 2nd class teak wood lipping of 25 mm wide x 12 mm thick with necessary screws and bright finished stainless steel piano hinges, complete as per direction of the Engineer-in-Charge.													
A 9.130.1		With decorative veneering on one side and commercial veneering on other side	Sqm	1839.30	1743.80	1839.30	1934.80	2112.20	2071.30	1866.60	2125.80	1880.30	2003.10	2262.30	2180.40
A 9.130.2		With non decorative veneering on both sides	Sqm	1715.90	1628.40	1715.90	1803.30	1965.60	1928.20	1740.80	1978.10	1753.30	1865.70	2103.00	2028.10
A 9.131		Providing and fixing factory made shutters of Pre-laminated particle board flat pressed three layer or graded wood particle board with one side decorative finish and other side balancing lamination conforming to IS : 12823 Grade I Type II, of approved design , and edges sealed with water ressistant paint and lipped with aluminium 'U' type edge beading all- round the shutter, including fixing with angle cleat, grip strip, cadmium plated steel screws, including fixing of aluminium hinges 100x63x4 mm etc. complete as per architectural drawing and direction of Engineer-in-Charge (Cost of 'U' beading and hinges will be paid for separately).													
A 9.131.1		25 mm thick	Sqm	1768.10	1664.80	1768.10	1871.40	2063.30	2019.00	1797.60	2078.00	1812.40	1945.20	2225.60	2137.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.132		Providing and fixing aluminium U beading of required size to Pre-laminated/flush door shutter, including fixing etc. complete as per direction of Engineer-in-Charge.	Kg	637.10	595.40	637.10	678.80	756.20	738.40	649.00	762.20	655.00	708.60	821.70	786.00
A 9.133		Providing and fixing , in position concealed G.I. section for wall paneling using board of required thickness fixed on the 'W' profile (0.55 mm thick) having a knurled web of 51.55 mm and two flanges of 26 mm each with lips of 10.55 mm, placed@610 mm C/C in perimeter channel having one flange of 20 mm and another flange of 30 mm with thickness of 0.55 mm and web of length 27 mm. Perimeter channel is fixed on the floor and the ceiling with the nylon sleeves @ 610 mm C/C with fully threaded self-tapping dry wall screws. Board is fixed to the 'W' profile with 25 mm countersunk ribbed head screws @200 mm C/C., all complete as per the drawing and directions of Engineer-in-Charge, the joints of the boards are finished with specially formulated jointing compound and 48 mm wide jointing tape to provide seamless finish.													
A 9.133.1		Tapered edge calcium silicate board made with calcareous and siliceous materials reinforced with cellulose fiber manufactured through autoclaving process to give stable crystalline structure with compressive strength 225 Kg/sq.cm, Bending strength 100 Kg/sq.cm.													
A 9.133.1.1		10 mm thick	Sqm	1514.90	1452.90	1514.90	1576.90	1692.10	1665.50	1532.60	1700.90	1541.50	1621.20	1789.50	1736.40
A 9.133.2		Multipurpose cement board reinforced with suitable fibre cement screw.													
A 9.133.2.1		8 mm thick cement fibre board as per IS : 14862	Sqm	1152.60	1114.30	1152.60	1190.90	1262.00	1245.60	1163.50	1267.50	1169.00	1218.30	1322.20	1289.40
A 9.133.2.2		8 mm thick cement bonded wood particle board as per IS : 14276	Sqm	1143.50	1105.80	1143.50	1181.30	1251.30	1235.10	1154.30	1256.70	1159.70	1208.20	1310.60	1278.20
A 9.133.3		Plain Gypsum plaster board conforming to IS : 2095 (part I): 2011 (Board with BIS certification marks).													
A 9.133.3.1		12.5 mm thick	Sqm	1147.90	1109.90	1147.90	1185.90	1256.40	1240.20	1158.70	1261.90	1164.20	1213.00	1316.10	1283.60
A 9.134		Providing and fixing wire gauge shutters uingstainless steel grade 304 wire gauge with wire of dia.0.5 mm and average width of aperture 1.4 mm in both directions for doors, windows and clerestory windows with necessary screws:.													
A 9.134.1		35 mm thick shutters													
A 9.134.1.1		With ISI marked M.S. pressed butt hinges bright finished of required size													
A 9.134.1.1.1		Second claas teak wood	Sqm	2820.30	2784.40	2820.30	2856.30	2923.00	2907.60	2830.60	2928.10	2835.70	2881.90	2979.40	2948.60
A 9.134.1.1.2		Kiln seasoned and chemically treated hollock wood	Sqm	3356.50	3217.80	3356.50	3495.20	3752.80	3693.40	3396.20	3772.60	3416.00	3594.30	3970.80	3851.90
A 9.134.1.1.3		kiln seasoned selected class of sheesham wood	Sqm	2770.10	2732.30	2770.10	2808.00	2878.30	2862.00	2780.90	2883.70	2786.30	2835.00	2937.70	2905.30
A 9.134.1.2		With ISI marked stainless steel butt hinges of required size													
A 9.134.1.2.1		Second claas teak wood	Sqm	2976.00	2929.80	2976.00	3022.10	3107.70	3088.00	2989.10	3114.30	2995.70	3055.00	3180.20	3140.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.134.1.2.2		Kiln seasoned and chemically treated hollock wood	Sqm	3512.20	3363.30	3512.20	3661.10	3937.60	3873.80	3554.70	3958.80	3576.00	3767.40	4171.50	4043.90
A 9.134.1.2.3		kiln seasoned selected class of sheesham wood	Sqm	2925.70	2877.70	2925.70	2973.80	3063.00	3042.40	2939.50	3069.90	2946.30	3008.10	3138.50	3097.30
A 9.134.2		30 mm thick shutters													
A 9.134.2.1		With ISI marked M.S. pressed butt hinges bright finished of required size													
A 9.134.2.1.1		Second claas teak wood	Sqm	2574.70	2538.80	2574.70	2610.70	2677.40	2662.00	2585.00	2682.50	2590.10	2636.30	2733.80	2703.00
A 9.134.2.1.2		Kiln seasoned and chemically treated hollock wood	Sqm	3035.70	2911.70	3035.70	3159.70	3390.10	3336.90	3071.10	3407.80	3088.90	3248.30	3585.00	3478.70
A 9.134.2.1.3		kiln seasoned selected class of sheesham wood	Sqm	2531.70	2494.20	2531.70	2569.30	2639.10	2623.00	2542.50	2644.50	2547.80	2596.20	2698.20	2665.90
A 9.134.2.2		With ISI marked M.S. pressed butt hinges bright finished of required size													
A 9.134.2.2.1		Second class teak wood	Sqm	2730.40	2684.20	2730.40	2776.50	2862.10	2842.40	2743.50	2868.70	2750.10	2809.40	2934.60	2895.10
A 9.134.2.2.2		Kiln seasoned and chemically treated hollock wood	Sqm	3191.50	3057.30	3191.50	3325.80	3575.10	3517.50	3229.90	3594.20	3249.10	3421.70	3786.00	3670.90
A 9.134.2.2.3		kiln seasoned selected class of sheesham wood	Sqm	2687.40	2639.60	2687.40	2735.10	2823.80	2803.40	2701.00	2830.70	2707.80	2769.30	2898.90	2857.90
A 9.135		providing and fixing fly proof stainless steel grade 304 wire gauge, to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia. 0.50 mm all complete.													
A 9.135.1		With 2nd claas teak wood beading 62x19 mm	Sqm	1204.10	1154.10	1204.10	1254.10	1347.10	1325.60	1218.40	1354.20	1225.50	1289.90	1425.70	1382.80
A 9.135.2		With 12 mm mild steel U beading	Sqm	1109.50	1054.60	1109.50	1164.50	1266.50	1242.90	1125.20	1274.30	1133.10	1203.70	1352.80	1305.70
A 9.136		Providing and fixing fire resistant door frame of section 143x57 mm having built in rebate made out of 16 SWG G.I. sheet (zinc coating not less than 120 gm/sqm) duly filled with vermiculite based concrete mix, suitable for mounting 60 minutes fire rated door shutters. The frame is fitted with intumescent fire seal strip of size 10x4 mm (minimum) around the frame and fixing wih dash fastener of approved size and make. including applying a coat of approved brand fire resistant primer etc. complete as per direction of Engineer-in-Charge (Dash fastener to be paid for separately).	Metre	1749.30	1636.10	1749.30	1862.50	2072.70	2024.20	1781.60	2088.90	1797.80	1943.30	2250.60	2153.50
A 9.137		Providing and fixing 50 mm thick fire resistant door shutters of 60 minutes fire rating conforming to IS:3 3614 (part II), tested and certified as per laboratory approved by Engineer-in-Charge, with suitable mounting on door frame, consisting of vertical styles, lock rail, top rails 100 mm wide, bottom rail 200mm wide, made out of 16 SWG G.I. sheet (zinc coating not less than 120 gm/m2) duly filled FR insulation material and fixing with necessary stainless steel ball bearing hinges of approved make, including applying a coat of approved fire resistant primer etc. complete as per direction of Engineer-in-Charge (panneling to be paid separately).	Sqm	7486.70	7001.40	7486.70	7972.00	8873.20	8665.30	7625.40	8942.60	7694.70	8318.60	9635.80	9219.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.138		Providing and fixing glazing in fire resistant door shutters, fixed panels and partitions etc., with G.I. beading made out of 1.6 mm thick G.I. sheet (zinc coating not less than 120 gm/m2) of size 20x33 mm screwed with M4x38 mm SS screws at distance 75 mm from the edges and 150 mm c/c, including applying a coat of approved fire resistant primer/powder coating of not less than 30 micron on G.I. beading, and special ceramic tape of 5x20 mm size etc. complete in all respect as per NBC 2016, IS 16231 (part 3) : 2016 and as per direction of Engineer-in-charge with glass of required thickness having 60 minutes of fire resistance both integrity and radiation control (EW60) and minimum 20 minutes of insulation (EI20). The manufacturer have to give test report/certification of fire glass and the glass should have the stamp showing the value of E, EW and EI. The glass shall be tested in approved NABL accredited lab or by any other accreditation body which operates in accordance with ISO/IEC 17011 and accredits lab as per ISO/IEC 17025 for testing and calibration scopes shall be eligible. The maximum glazing size shall not be more than 110x2200 mm (w x h) or 2.42 sqm.	Sqm	44360.10	41458.00	44360.10	47262.10	52651.70	51407.90	45189.20	53066.20	45603.80	49335.00	57212.00	54724.60
A 9.139		Providing and fixing panic bar/latch (Double point) fitted with a single body, Trim Latch and Lock on back side of the Panic Latch of reputed brand and manufacture to be approved by the Engineer-in-Charge, all complete.	Each	8691.20	8130.60	8691.20	9251.90	10293.00	10052.70	8851.40	10373.10	8931.50	9652.30	11174.00	10693.50
A 9. 140		Providing and fixing plain lining with necessary screws/nuts and bolts/nails, including a coat of approved primer on one face, and fixed on wooden /steel frame work, complete as per direction of Engineer-in-Charge (Frame work shall be paid for separately).													
A 9.140.1		12 mm thick commercial ply conforming to IS : 1328 BWR type	Sqm	1191.20	1128.70	1191.20	1253.70	1369.80	1343.00	1209.10	1378.80	1218.00	1298.30	1468.00	1414.50
A 9.141		Providing and fixing PVC Door frame of size 50x47 mm with a wall thickness of 5 mm (±0.2 mm), made out of single piece extruded PVC profile, with mitred cut joints and joint with 2 nos of PVC bracket of size 190 mmx100mm long arms of cross-section size 35x15 mm and self driven self tapping screws, the vertical door profiles to be reinforced with 40x20 mm M.S. rectangular tube of 0.8 mm, including providing EPDM rubber gasket weather seal throughout the frame, including jointing 5 mm PVC frame strip with PVC solvent cement on the back of the profile. The door frame to be fixed to the wall using 8x100 mm long anchor fasteners complete, all as per manufacturer`s specification and direction of Engineer-in-charge.	Metre	49.80	49.30	49.80	50.30	51.30	51.00	50.00	51.30	50.00	50.70	52.00	51.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 142		35 mm thick factory made solid panel PVC Door shutter, made out of single piece extruded solid PVC profiles, 5 mm (±0.2 mm) thick, having styles and rails (except lock rail) of size 95 mm x 35 mm x 5 mm, out of which 75 mm shall be flat and 20 mm shall be tapered (on both side), having one side thickness of 15 mm integrally extruded on the hinge side of the profile for better screw holding power, including reinforcing with MS tube of size 40 mm x 20 mm x 1 mm, joints of styles and rails to be mitered cut and joint with the help of PVC solvent cement, self driven self tapping screws and M.S. rectangular pipes bracket of size 190 mm x 100 mm of cross section size 35 mm x 17 mm x 1 mm at each corner. Single piece extruded 5 mm thick solid PVC Lock rail of size 115 mm x 35 mm, out of which 75 mm to be flat and 20 mm to be tapered at both ends, having 15 mm solid core in middle of rail section integrally extruded, fixing the styles and rails with the help of solvent and self driven self tapping screws of 125 mm x11 mm, including providing 5 mm single piece solid PVC extruded sheet inserted in the door as panel, all complete as per manufacturer`s specification and direction of Engineer-in-Charge.													
A 9.142.1		Non decorative finish (matt finish)	Sqm	3873.30	3635.40	3873.30	4111.30	4553.20	4451.20	3941.30	4587.20	3975.30	4281.20	4927.10	4723.10
A 9.142.2		Decorative finish (wood grained finish)	Sqm	4614.20	4327.80	4614.20	4900.60	5432.50	5309.80	4696.00	5473.40	4736.90	5105.20	5882.60	5637.10
A 9.143		Providing and fixing factory made uPVC door frame, made of uPVC extruded sections, of size 65 mm x 55 mm with wall thickness of 2.0 mm (±0.2 mm), corners of the door frame to be mitred cut and jointed with plastic brackets and stainless steel screws, reinforcing hinge side vertical of the frames with PVC profile of size 28 mm x 30 mm having wall thickness 2 mm (±0.2 mm), including providing and fixing 3 nos of 125 mm long stainless steel hinges to the frame, fixing the frame with jamb with required number and size of anchor dash fasteners, all complete as per manufacturer`s specification and direction of Engineer-in-charge.	Metre	45.20	45.00	45.20	45.40	45.80	45.70	45.30	45.80	45.30	45.60	46.10	45.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.144		Providing and fixing 37 mm thick factory made PVC door shutter, styles and rails made of PVC hollow section of size 100 mm x 37 mm with wall thickness 2 mm (±0.2 mm), with inbuilt bead on one side, styles and rails mitred cut and joint at the corner by means of 2 nos of plastic brackets of size 75 mm x 220 mm at each corner and stainless steel screws, reinforcing the hinge side of style by inserting PVC profile of size 28 mm x 30 mm, with wall thickness 2 mm (±0.2 mm). Lock rail of size 100 mm x 37 mm, wall thickness 2 mm (±0.2 mm) will be fixed to the vertical styles. Providing with PVC snapfit beads and panel of size 100 mm x 20 mm, and inserting 2 nos tie bar of 6 mm dia and fastening with nuts and washers complete, all as per manufacturer`s specification and direction of Engineer-in-charge.	Sqm	4215.50	3955.10	4215.50	4475.80	4959.30	4847.70	4289.90	4996.50	4327.00	4661.80	5368.40	5145.20
A 9.145		Providing and fixing factory made PVC door frame made of PVC extruded sections of size 75 mm x 53 mm, having wall thickness of 2.0 mm (±0.2 mm).Both verticals sides of the frame reinforced with PVC profile of cross section size 28 mm x 30 mm x 2 mm thickness (±2 mm) and 75 mm x 200 mm long , including reinforcing both ends of the top frame with PVC profile. PVC Door Frame and PVC reinforcement profile to be mitred cut, jointed and fusion welded together, including providing and fixing 3 nos of 125 mm long stainless steel hinges to frame, fixing the frame with frame with jamb with required nos and size of anchor dash fasteners, all complete as per manufacturer`s specification and direction of Engineer-in-charge.	Metre	703.80	660.50	703.80	747.00	827.40	808.90	716.10	833.60	722.30	778.00	895.40	858.30
A 9.146		Providing and fixing 37 mm thick factory made PVC door shutter, styles and rails made of PVC hollow extruded printed and laminated section having overall dimension 115 mm x 37 mm with wall thickness 2 mm (±0.2 mm) with inbuilt beading on one side,the styles and rails mitred cut and joint at the corner by inserting 2 nos PVC profile reinforcement of size 75 mm x 200 mm long cross section size of 28 mm x 30 mm having wall thickness 2 mm (±0.2 mm).Styles,rails and reinforcement to be fusion welded together.Only hinge side vertical style to be reinforced with PVC profile reinforcement in full length. Printed and laminated PVC lock rail of size 110 mm x 37 mm having wall thickness 2 mm (±0.2 mm) to be welded horizontallywith the vertical styles after inserting PVC profile reinforcement as in styles and rails, providing with PVC snap fit beading,panels of 100 x 20 mm printed and laminated and inserting 2 nos 6 mm dia bright steel rod horizontally with both side threaded and tightened with check nuts and washers complete, all as per manufacturer's specification and direction of engineer-in-charge.	Sqm	4544.70	4262.90	4544.70	4826.60	5350.10	5229.30	4625.30	5390.40	4665.50	5027.90	5793.00	5551.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147A		Providing and fixing factory made uPVC white colour casement/casement cum fixed glazed windows comprising of uPVC multi-chambered frame,sash and mullion(where ever required) extruded profiles dully reinforced with 1.60± 0.2 mm thick galvanised mild steel section made from roll forming process of required length (shpae and size according to uPVC profile), uPVC extruded glazing beads of appropriate dimension, EPDM gasket, stainless steel (SS 304 grade)friction hinges,zinc alloy (white powdered coated) casement handles, G.I fasteners 100 x 8 mm size for fixing frame to finsihed wall plastic packers, plastic caps and necessary stainless srteel screws etc. Profile of frame and sash shall be mitred cut abd fusion welded at all corners, mullion (if required) shall be also fusion welded including of drilling of holes for fixing hardwares and rainage of water etc. After fixing frame thr gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drwaing and direction of Engineer-in-Charge.(Single/double glass panes and silicon sealant shall be paid separately); NOTE: For uPVC frame, sash and mullion extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable.Variation in profile dimension in higher side shall be accepted but no extra payment on thus account shall be made.													
A 9.147A.1		Casement window single panel with S.S. friction hinges (300 x 19 x 1.9 mm), madde of (small series)frame 47 x 50 mm and sash 47 x68 mm both having wall thickness of 1.9±0.2 mm and single glass pane glazing bead of appropriate dimension. (Area of window upto 0.75 sqm)	Sqm	11367.20	10702.30	11367.20	12032.10	13266.80	12981.90	11557.20	13361.80	11652.20	12507.00	14311.60	13741.80
A 9.147A.2		Casement window double panels with S.S. friction hinges (300 x 19 x 1.9 mm), madde of (small series)frame 47 x 50 mm and sash 47 x68 mm and mullion 47 x 68 mm all having wall thickness of 1.9±0.2 mm and single glazing bead of appropriate dimensions. (Area of window above 0.75 sqm upto 1.50 sqm)	Sqm	20696.50	19498.90	20696.50	21894.10	24118.20	23604.90	21038.70	24289.30	21209.80	22749.50	26000.10	24973.60
A 9.147A.3		Casement window double panels with top fixed with S.S. friction hinges (350 x 19 x 1.9 mm), madde of (small series)frame 47 x 50 mm and sash 47 x68 mm and mullion 47 x 68 mm all having wall thickness of 1.9±0.2 mm and single glazing bead of appropriate dimensions. (Area of window upto 2.50 sqm).	Sqm	26330.00	24857.70	26330.00	27802.30	30536.50	29905.60	26750.70	30746.90	26961.00	28853.90	32850.20	31588.20
A 9.147A.4		Casement window single panel with S.S. friction hinges (400 x 19 x 1.9 mm), made of (big series)frame67 x 60 mm and sash 67 x 80 mm both having wall thickness of 2.3±0.2 mm and single glazing bead of appropriate dimension. (Area of window above 0.75 sqm)	Sqm	11179.50	10526.90	11179.50	11832.10	13044.10	12764.40	11366.00	13137.30	11459.20	12298.30	14069.60	13510.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
9.147A.5		Casement window double panels with S.S. friction hinges (350 x 19 x 1.9 mm), made of (big series) frame 67 x 60 mm and sash/ mullion 67 x 80 mm both having wall thickness of 2.3±0.2 mm and single glazing bead/ double glazing bead of appropriate dimension. (Area of window above 1.50sqm)	Sqm	11592.00	10912.40	11592.00	12271.60	13533.60	13242.40	11786.10	13630.70	11883.20	12757.00	14601.50	14019.00
A 9.147A.6		Casement cum fixed panel window having both end single casement panel, mddlefixed panels and at top completely fixed ventilator with S.S. friction hinges (350 x 19 x 1.9 mm), made of (big series) frame 67 x 60 mm, sash/mullion 67 x 80 mm both having wall thickness of 2.3±0.2 mm and single glazing bead/ double glazing bead of appropriate dimension. (Area of window above 3.00 sqm to 5.00 sqm)	Sqm	8433.80	7960.90	8433.80	8906.80	9785.20	9582.50	8569.00	9852.70	8636.50	9244.60	10528.40	10123.00
A 9.147B		Providing and fixing factory made uPVC white colour fixed glass windows/ventilators comprising of uPVC multi-chambered frame and mullion(where ever required) extruded profiles dully reinforced with 1.60± 0.2 mm thuick galvanised mild steel section made from roll forming process of required length (shpae and size according to uPVC profile), uPVC extruded glazing beads of approriate dimension, EPDM gasket, G.I fasteners 100 x 8 mm size for fixing frame to finisihed wall plastic packers, plastic caps and necessary stainless srteel screws etc. Profile of frame and sash shall be mitred cut and fusion welded at all corners, mullion (if required) shall be also fusion welded including drilling of holes for fixing hardwares and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drwaing and direction of Engineer-in-Charge.(Single/double glass panes and silicon sealant shall be paid separately); NOTE: For uPVC frame, sash and mullion extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable.Variation in profile dimension in higher side shall be accepted but no extra payment on thus account shall be made.	Sqm												
A 9.147B.1		Fixed window/ ventilator made of (small series) frame 47 x 50 mm and mullion 47 x 68 mm both having wall thickness of 1.9 m ± 0.2 mm and singlr glazing bead of appropriate dimension. (Area upto 0.75 sqm)	Sqm	7669.90	7246.90	7669.90	8092.80	8878.40	8697.10	7790.70	8938.80	7851.10	8395.00	9543.10	9180.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147C		Providing and fixing factory made uPVC white colour casement/ Casement cum fixed glass door comprising of uPVC multi-chambered frame, sash and mullion(where ever required) extruded profiles dully reinforced with 1.60± 0.2 mm thuick galvanised mild steel section made from roll forming process of required length (shape and size according to uPVC profile), uPVC extruded glazing beads of appropriate dimension, EPDM gasketzinc alloy(white powder coated) 3D hinges and one handle on each side of panels along with zinc plated mild steel multi point locking having transmission gear cylinder with keeps and one side key, G.I fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless srteel screws etc. Profile of frame and sash shall be mitred cut and fusion welded at all corners, mullion (if required) shall be also fusion welded including drilling of holes for fixing hardwares and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drawing and direction of Engineer-in-Charge.(Single/double glass panes and silicon sealant shall be paid separately); NOTE: For uPVC frame, sash and mullion extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable.Variation in profile dimension in higher side shall be accepted but no extra payment on thus account shall be made.	Sqm												
A 9.147C.1		Casement door with 3D hinges made of (big series) frame 67 x 64 mm and sash 67 x 110 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door upto 2.00sqm)	Sqm	10934.00	10297.50	10934.00	11570.50	12752.70	12479.90	11115.90	12843.60	11206.80	12025.20	13752.90	13207.30
A 9.147C.2		Casement door with top hung ventilator with 3D and S.S.frictionhinges (400 x 19 x 1.9 mm) made of (big series) frame 67 x 64 mm and sash 67 x 110 mm and mullion 67 x 80 mm all having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door upto 2.50 sqm)	Sqm	11176.20	10523.80	11176.20	11828.60	13040.20	12760.60	11362.60	13133.30	11455.80	12294.60	14065.30	13506.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147D		Providing and fixing factory made uPVC white colour sliding glazed window upto 1.50 m in height dimension comprising of uPVC multi-chambered frame with in-bulid roller track and sash extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape and size according to uPVC profile), appropriate dimension of uPVC extruded glazing beads and uPVC extruded interlocks, EPDM gasket, wool pile, zinc alloy (white powder coated) touch locks with hook, zinc alloy body with single nylon rollers (weight bearing capacity to be 40 Kg), G.I. fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless steel screws etc. Profile of frame and sash shall be mitred cut and fusion welded at all corners, including drilling of holes for fixing hardware`s and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealent over backer rod of required size and of approved quality,all complete as per approved drawing and direction of Engineer-in-Charge. (Single/double glass panes, wire mesh and silicon sealent shall be paid separately); NOTE : For uPVC frame and sash extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable. Variation in profile dimension in higher side shall be accepted but no extra payment on this account shall be made.													
A 9.147D.1		Two track two panels sliding window made of (small series) frame 52 x 44 mm and sash 32 x 60 mm both having wall thickness of 1.9 ± 0.2 mm and single glazing bead of appropriate dimension. (Area of window upto 1.75 sqm)	Sqm	8004.70	7559.80	8004.70	8449.60	9275.90	9085.20	8131.80	9339.40	8195.40	8767.40	9975.00	9593.70
A 9.147D.2		Three track three panels sliding window with fly proof SS wire mesh (Two nos. glazed and one no. wire mesh panels) made of (small series) frame 92 x 44 mm and sash 32 x 60 mm both having wall thickness of 1.9 ± 0.2 mm and single glazing bead of appropriate dimension. (Area of window upto 1.75 sqm).	Sqm	10715.90	10093.60	10715.90	11338.10	12493.80	12227.10	10893.70	12582.70	10982.60	11782.60	13471.60	12938.20
A 9.147D.3		Two track two panels sliding window made of (big series) frame 67 x 50 mm and sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of window above 1.75 sqm upto 2.50 sqm).	Sqm	8203.20	7745.30	8203.20	8661.10	9511.40	9315.20	8334.00	9576.80	8399.40	8988.10	10230.90	9838.50
A 9.147D.4		Three track three panels sliding window with fly proof S.S. wire mesh (Two nos. glazed and one no. wire mesh panels) made of (big series) frame 116 x45 mm and sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of window above 1.75 sqm).	Sqm	10293.10	9698.50	10293.10	10887.70	11992.00	11737.20	10463.00	12077.00	10548.00	11312.50	12926.40	12416.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147D.5		Three track three panels sliding window made of (big series) frame 116 x45 mm and sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of window above 1.75 sqm).	Sqm	9759.60	9199.90	9759.60	10319.30	11358.80	11118.90	9919.50	11438.70	9999.50	10719.10	12238.30	11758.60
A 9.147E		Providing and fixing factory made uPVC white colour sliding glazed window above 1.50 m in height dimension comprising of uPVC multi-chambered frame with in-bulid roller track and sash extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape and size according to uPVC profile), appropriate dimension of uPVC extruded glazing beads, uPVC extruded interlocks and uPVC extruded Inline sash adaptor (if required), EPDM gasket, wool pile, zinc alloy (white powder coated) handle on one side of extreme panel along with zinc plated mild steel multi point locking having transmission gear with keeps, zinc alloy (white powder coated) touch locks with hook (if required for wire mesh panel), stainless steel (SS 304 grade) body with adjustable double nylon rollers (weight bearing capacity to be 120 Kg), G.I. fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless steel screws etc. Profile of frame and sash shall be mitred cut and fusion welded at all corners, including drilling of holes for fixing hardware`s and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealent over backer rod of required size and of approved quality,all complete as per approved drawing and direction of Engineer-in-Charge. (Single/double glass panes, wire mesh and silicon sealent shall be paid separately); NOTE : For uPVC frame and sash extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable. Variation in profile dimension in higher side shall be accepted but no extra payment on this account shall be made.													
A 9.147E.1		Two track two panels sliding window made of (big series) frame 67 x 50 mm and sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of window above 2.50 sqm upto 4.00 sqm.)	Sqm	8140.90	7687.10	8140.90	8594.70	9437.50	9243.00	8270.60	9502.40	8335.40	8918.90	10150.70	9761.70
A 9.147E.2		Two track four panels sliding window made of (big series) frame 67 x 50 mm and sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of window above 4.00 sqm upto 8.00 sqm).	Sqm	7009.30	6629.50	7009.30	7389.10	8094.40	7931.60	7117.80	8148.60	7172.10	7660.30	8691.20	8365.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147F		Providing and fixing factory made uPVC white colour sliding glazed door comprising of uPVC multi-chambered frame with in-bulid roller track and sash extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape and size according to uPVC profile), appropriate dimension of uPVC extruded glazing beads, uPVC extruded interlocks and uPVC extruded Inline sash adaptor (if required), EPDM gasket, wool pile, zinc alloy (white powder coated) handle with keyon one side of extreme panels along with zinc plated mild steel multi point locking having transmission gear with keeps, zinc alloy (white powder coated) crescent lock (if required), stainless steel (SS 304 grade) body with adjustable double nylon roller (weight bearing capacity to be 120 Kg), G.I. fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless steel screws etc. Profile of frame and sash shall be mitred cut and fusion welded at all corners, including drilling of holes for fixing hardware`s and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealent over backer rod of required size and of approved quality,all complete as per approved drawing and direction of Engineer-in-Charge. (Single/double glass panes, wire mesh and silicon sealent shall be paid separately); NOTE : For uPVC frame and sash extruded profiles minus 5% tolerance in dimension i.e. in depth and width of profile shall be acceptable. Variation in profile dimension in higher side shall be accepted but no extra													
A 9.147F.1		Two track two panels sliding door made of (big series) frame 67 x 50 mm and sash 46 x 82 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door above 2.50 sqm upto 5.00 sqm.)	Sqm	7086.90	6702.00	7086.90	7471.70	8186.40	8021.50	7196.80	8241.40	7251.80	7746.60	8791.20	8461.30
A 9.147F.2		Two track four panels sliding door made of (big series) frame 67 x 50 mm and sash 46 x 82 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door above 8.00 sqm upto 10.00 sqm).	Sqm	6259.80	5929.00	6259.80	6590.50	7204.80	7063.00	6354.30	7252.00	6401.50	6826.80	7724.50	7441.00
A 9.147F.3		Three track three panels sliding door made of (big series) frame 116 x 45 mm and sash 46 x 82 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door above 5.00 sqm).	Sqm	7160.50	6770.80	7160.50	7550.10	8273.80	8106.80	7271.80	8329.50	7327.50	7828.50	8886.10	8552.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.147F.4		Three track three panels sliding door with fly proof S.S. wire mesh (Two nos. glazed and one no. wire mesh panels) made of (big series) frame 116 x 45 mm and sash 46 x 82 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead/double glazing bead of appropriate dimension. (Area of door above 2.00 sqm upto 5.00 sqm).	Sqm	9264.30	8737.00	9264.30	9791.60	10770.90	10544.90	9415.00	10846.20	9490.30	10168.30	11599.50	11147.60
A 9.148		Providing and fixing stainless steel (SS-304 grade) friction hinges to the side/top hung uPVC windows, of approved quality, with necessary stainless steel screws etc. as per direction of Engineer-in-Charge.													
A 9.148.1		200x19x1.9 mm	Each	359.30	337.10	359.30	381.50	422.80	413.20	365.60	425.90	368.80	397.40	457.70	438.60
A 9.148.2		250x19x1.9 mm	Each	400.40	375.50	400.40	425.30	471.60	460.90	407.50	475.20	411.10	443.10	510.70	489.40
A 9.148.3		300x19x1.9 mm	Each	425.10	398.60	425.10	451.70	500.90	489.50	432.70	504.70	436.50	470.60	542.60	519.90
A 9.148.4		350x19x1.9 mm	Each	589.80	552.50	589.80	627.10	696.30	680.30	600.40	701.60	605.70	653.70	754.90	723.00
A 9.148.5		400x19x1.9 mm	Each	622.70	583.20	622.70	662.10	735.40	718.50	634.00	741.00	639.60	690.30	797.40	763.60
A 9.149		Providing and fixing casement handle made of zinc alloyed (white powder coated) for uPVC casement window with necessary screws etc. complete.	Each	225.00	211.00	225.00	239.10	265.20	259.20	229.10	267.20	231.10	249.20	287.30	275.30
A 9.150		Providing and fixing zinc alloyed (white powder coated) touch lock for uPVC sliding window with necessary screws etc. complete.	Each	183.90	172.50	183.90	195.30	216.40	211.50	187.10	218.00	188.80	203.40	234.30	224.50
A 9.151		Providing and fixing steel roller for uPVC sliding window with necessary screws etc. complete.	Each	103.20	97.10	103.20	109.30	120.60	118.00	105.00	121.50	105.80	113.70	130.20	125.00
A 9.152		Providing and fixing steel roller for uPVC sliding door with necessary screws etc. complete.	Each	167.40	157.10	167.40	177.70	196.80	192.40	170.40	198.30	171.80	185.10	213.00	204.20
A 9.153		Providing and fixing steel (white powder coated) crescent lock for uPVC sliding window/door with necessary screws etc. complete.	Each	200.40	187.90	200.40	212.80	235.90	230.60	203.90	237.70	205.70	221.70	255.50	244.80
A 9.154		Providing and fixing frame work for partitions/wall lining etc. made of 50x50x1.6 mm hollow MS tube, placed along the walls, ceiling and floor in a grid pattern with spacing @ 60 cm centre to centre both ways (vertically and horizontally) or at required spacing near opening, with necessary welding at junctions and fixing the frame to wall/ceiling/floors with steel dash fasteners of 8 mm dia, 75 mm long bolt, including making provision for opening for doors, windows, electrical conduits, switch boards etc., including providing with two coats of approved steel primer etc. complete, all as per direction of Engineer-in-charge.	Kg	140.50	133.30	140.50	147.70	161.00	157.90	142.50	162.10	143.50	152.80	172.30	166.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.155		Providing and fixing panelling or paneling and glazing in panelled or panelled and glazed shutters for doors, windows and clerestory windows (area of opening for panel inserts excluding portion inside grooves or rebated to be measured). Panelling for panelled and glazed shutters 25x mm to 40 mm thick: Pre-laminated with decorative lamination on both side exterior Grade - I MDF Board 12 mm thick conforming to IS : 14587	Sqm	1757.90	1695.80	1757.90	1820.00	1935.30	1908.70	1775.70	1944.20	1784.50	1864.40	2032.90	1979.70
A 9.156		Providing and fixing Pre-laminated medium density fibre board exterior grade (Grade I) IS:14587:1998 marked, to frame, backing or studding with screws etc. complete (Frames, backing or studding to be paid seperately).													
A 9.156.1		Pre-laminated with decorative lamination on both side exterior Grade - I MDF Board 12 mm thick conforming to IS:14587	Sqm	1003.40	950.20	1003.40	1056.70	1155.60	1132.80	1018.60	1163.20	1026.20	1094.70	1239.30	1193.70
A 9.156.2		Pre-laminated with decorative lamination on both side exterior Grade - I MDF Board 18 mm thick conforming to IS:14587	Sqm	1243.20	1174.20	1243.20	1312.10	1440.20	1410.60	1262.90	1450.00	1272.70	1361.40	1548.50	1489.40
A 9.157		Providing and fixing Pre-laminated medium density fibre board IS: 14587:1998 marked, with one side decorative lamination other side balancing lamination Grade I (exterior grade) in shelves with screws and fittings wherever required, edges to be sealed with PVC edge bending tape 2.00 mm thick of approved brand (fittings to be paid separately).													
A 9.157.1		Pre-laminated with decorative lamination one side and other side balancing lamination exterior Grade - I MDF Board 18 mm thick conforming to IS:14587	Sqm	1396.50	1318.70	1396.50	1474.30	1618.80	1585.40	1418.70	1629.90	1429.80	1529.90	1741.00	1674.30
A 9.157.2		Pre-laminated with decorative lamination one side and other side balancing lamination exterior Grade - I MDF Board 25 mm thick conforming to IS:14587	Sqm	1911.40	1800.00	1911.40	2022.90	2230.00	2182.20	1943.30	2245.90	1959.20	2102.60	2405.10	2309.60
A 9.158		Providing and fixing in wall lining medium density fibre board IS: 14587:1998 marked, pre-laminated one side decorative lamination and other side balancing lamination, with necessary arrangement and screws etc. complete.													
A 9.158.1		12 mm thick	Sqm	1207.20	1140.60	1207.20	1273.90	1397.60	1369.00	1226.30	1407.10	1235.80	1321.50	1502.30	1445.20
A 9.158.2		18 mm thick	Sqm	1451.70	1369.10	1451.70	1534.30	1687.80	1652.40	1475.30	1699.60	1487.10	1593.40	1817.60	1746.80
A 9.158.3		25 mm thick	Sqm	1986.00	1868.40	1986.00	2103.50	2321.90	2271.50	2019.60	2338.70	2036.30	2187.50	2506.60	2405.80
A 9.159		Providing and fixing 25 mm thick Pre-laminated medium density fibre board exterior grade (Grade I) IS: 14587:1998 marked with one side decorative and other side balancing lamination for cupboard shutters edges to be sealed with PVC edge bending tape 2.00 mm thick of approved brand including ISI marked nickel plated bright finishing M.S. piano hinges conforming to IS:3818 marked with necessary screws etc all complete.	Sqm	2065.30	1953.10	2065.30	2177.40	2385.60	2337.60	2097.30	2401.70	2113.30	2257.50	2561.80	2465.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9. 160		Providing and fixing skirting with Pre-laminated medium density fibre board exterior grade (Grade-I) conforming to IS: 14587:1998 marked, with one side decorative lamination other side balancing lamination and edges to be sealed with PVC edge bending tape 2.00 mm thick of approved brand with necessary fixing arrangements and screws, including drilling necessary holes for rawl plugs etc. all complete.													
A 9.160.1		18 mm thick	Sqm	2182.20	2051.80	2182.20	2312.50	2554.70	2498.80	2219.40	2573.30	2238.00	2405.70	2759.50	2647.80
A 9.160.2		25 mm thick	Sqm	2716.40	2551.10	2716.40	2881.70	3188.80	3117.90	2763.60	3212.40	2787.30	2999.80	3448.50	3306.80
A 9.161		Providing and fixing factory fire resistant door frame of section 50 x 60 mm on horizontal side and 35 x 60 mm on vertical sides having built in rebate made out of 1.6 mm thick GI sheet (zinc coating not less than 120gm/m2) suitable for mounting 120 min Fire Rated Glazed Door Shutters. The frame shall be filled with Mineral wool insulation having density min 96Kg/m3. The frame will have a provision of G.I. Anchor fastners 14 nos (5 each on vertical style and 4 on horizontal style of size M 10 x 80) suitable for fixing in the opening along with factory made Template for SS Ball Bearing Hinges of size 100x89x3 mm for fixing of fire rated glazed shutter. The frame shall be finished with a approved fire resistant primer or powder coating of not less than 30 micron in desired shade as per the direction of Engineer-in-Charge. (Cost of SS ball bearing hinges is excluded).	Metre	1861.70	1739.90	1861.70	1983.50	2209.70	2157.50	1896.50	2227.10	1913.90	2070.50	2401.10	2296.70
A 9.162		Providing and fixing 60 mm thick glazed fire resistant door shutters of 120 min Fire Rating conforming to IS:3614 (part II) or EN1634-1 : 1999, tested and certified as per laboratory approved by Engineer-in-charge,with suitable mounting on door frame, consisting of vertical style, top rail and side rail 60 mm x 60 mm wide and bottom rail of 110 mm x 60 mm made out of 1.6 mm thick G.I. sheet (zinc coating not lass than 120gm/m2) duly filled mineral wool insulation having density min 96Kg/m3 and fixing with necessary stainless steel ball bearing hinges of size 100x89x3 mm of approved make, including applying a coat of approved fire resistant primer or powder coating not less than 30 micron etc all complete as per the direction of Engineer-in-Charge. (Panelling to be paid separately).	Sqm	10310.70	9636.20	10310.70	10985.30	12238.00	11948.90	10503.50	12334.30	10599.80	11467.10	13298.00	12719.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 9.163		Providing and fixing non load bearing fixed frame for fire resistant glazed partition for 120 minutes Fire Rating, made out to a profile of dimension 60mm x 70 mm of 1.6 mm thick galvanised steel sheet as per test evidence suitable for fixing fire rated glass for 120 minutes of both integrity and radiation control (EW120) and minumum 20 minutes of insulation (EI20). The profile has to be fixed to the supporting construction by means of anchor fasteners of size M10 x 80, every 150 mm from the edges and every 500 mm (approx) c/c. Linear measurement of frame shall be measured for payment. The frame shall be filled with mineral wool insulation of density min 96 Kg/m3. and finished with a approved fire resistant primer or powder coating of not less than 30 micron in desired shade as per NBC 2016, IS 16231 (Part 3) : 2016 and directions of Engineer-in-charge.	Metre	1861.70	1739.90	1861.70	1983.50	2209.70	2157.50	1896.50	2227.10	1913.90	2070.50	2401.10	2296.70
A 9.164		Providing and fixing glazing in fire resistant door shutters, fixed panels and partitions etc., with G.I. beading made out of 1.6 mm thick G.I. sheet (zinc coating not less than 120gm/m2) of size 20 x 33 mm screwed with M\$ x 38 mm SS screws at distance 75 mm from the edges and 150 mm c/c, including applying a coat of approved fire resistant primer/powder coating of not less than 30 micron on G.I. beading, and special ceramic tape of 5 x 20 mm size etc complete in all respect as per NBC 2016, IS 16231 (Part 3) : 2016 and as per directions of Engineer-in-charge with glass of required thickness having 120 minutes of fire resistance both integrity and radiation control (EW120) and minimum 20 minutes of insulation (EI20). The manufacturer have to give test report/certification of fire glass and the glass should have the stamp showing the value of E, EW and EI. The glass shall be tested in approved NABL accredited lab or by any other accreditation body which operates in accordance with ISO/IEC 17011 and accredits labs as per ISO/IEC 17025 for testing and calibration scope shall be eligible. The maximum glazing size shall not be more than 1100x2200 mm (w x h) or 2.42 sqm.	Sqm	48476.00	45305.00	48476.00	51647.00	57537.00	56178.00	49382.00	57990.00	49835.00	53912.00	62520.00	59802.00
A 9.165		Providing and fixing bright/matt finished Stainless Steel handles of approved quality and make with necessary screws etc. all complete.													
A 9.165.1		125 mm	Each	119.20	111.80	119.20	126.60	140.40	137.30	121.30	141.50	122.40	132.00	152.10	145.80
A 9.165.2		100 mm	Each	88.80	83.30	88.80	94.20	104.30	102.00	90.30	105.10	91.10	98.10	112.80	108.20
A 9.165.3		75 mm	Each	55.80	52.50	55.80	59.10	65.20	63.80	56.80	65.70	57.20	61.50	70.40	67.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
10.0 STEEL WORKS															
A 10.1		Structural steel work in single section fixed with or without connecting plate including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	Kg	105.30	104.40	105.30	107.30	109.10	108.70	105.90	109.80	106.70	107.40	113.30	111.30
A 10.2		Structural steel work riveted,bolted or welded in built-up sections, trusses and framework, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete:	Kg	132.90	128.50	131.60	135.40	141.30	139.90	132.70	142.00	133.50	137.30	147.60	127.60
A 10.3		Providing and fixing in position collapsible steel shutters with vertical channels 20x10x2 mm and braced with flat iron diagonals 20x5 mm size, with top and bootom rail of T-iron 40x40x6 mm, with 40 mm dia. Steel pulleys, complete with bolts, nuts, locking arrangement, stoppers, handles, including applying a priming coat of approved steel primer.	Sqm	8994.30	8847.80	8915.60	9021.40	9151.90	9122.00	8946.40	9178.70	8977.10	9050.80	9349.40	9252.00
A 10.4		Providing and fixng 1 mm thick M.S. sheet sliding-shutters with frame and diagonal braces of 40x40x6mm angle iron, 3mm M.S. gusset plates at the junction and corners 25mm dia pulley, 40x40x6mm angle and T-iron guide at the top and bottom respectively including applying a priming coat of approved steel primer.	Sqm	5609.20	5489.90	5609.20	5757.40	5982.60	5930.90	5652.10	6012.70	5685.00	5828.30	6239.10	6107.10
A 10.5		Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6mm angle iron and 3mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer.													
A 10.5.1		Using M.S. angels 40x40x6 mm for diagonal braces	Sqm	4808.50	4702.50	4808.50	4932.60	5131.70	5085.90	4844.30	5155.00	4869.30	4999.30	5341.40	5232.00
A 10.5.2		Using flats 30x6mm for diagonal braces and central cross piece.	Sqm	4616.30	4492.30	4600.90	4723.80	4927.50	4880.70	4636.30	4949.50	4659.60	4794.40	5132.20	5024.50
A 10.6		Supplying and fixing rolling shutters of approved make, made of required size M.S. laths interlocked together through their entire length and jointed together at the end by end locks mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation complete including the cost of providing and fixing necessary 27.5cm long wire springs manufactured from high tensile steel wire of adequate strength conforming to IS: 4454-part I and M.S. top cover of required thickness for rolling shutters.													
A 10.6.1		80x1.25 mm M.S. laths with 1.25 mm thick top cover	Sqm	3387.30	3201.70	3387.30	3572.90	3917.50	3837.90	3440.30	3944.00	3466.80	3705.40	4209.00	4050.00
A 10.6.2		80x1.20 mm M.S. laths with 1.20 mm thick top cover	Sqm	3214.40	3040.20	3214.40	3388.70	3712.30	3637.60	3264.20	3737.20	3289.10	3513.10	3986.10	3836.70
A 10.6.3		80x0.90 mm M.S. laths with 0.90 mm thick top cover	Sqm	3030.60	2868.40	3030.60	3192.80	3494.10	3424.60	3076.90	3517.30	3100.10	3308.70	3749.00	3609.90
A 10.7		Providing and fixing ball bearing for rolling shutters	Nos	516.70	482.90	516.70	550.50	613.20	598.70	526.30	618.10	531.10	574.60	666.30	637.40
A 10.8		Extra for providing mechanical device chain and crank operation for operating rolling shutters													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 10.8.1		Exceeding 10.00 sqm and upto 16.80 sqm in the area	Sqm	1361.60	1272.50	1361.60	1450.70	1616.10	1577.90	1387.00	1628.80	1399.80	1514.30	1756.10	1679.70
A 10.8.2		Exceeding 16.80 sqm in area	Sqm	1361.60	1272.50	1361.60	1450.70	1616.10	1577.90	1387.00	1628.80	1399.80	1514.30	1756.10	1679.70
A 10.9		Extra for providing grilled rolling shutters manufactured out of 8mm dia. M.S. bar instead of laths as per design approved by Engineer-in-Charge. (area of grill to be measured.)	Sqm	823.20	769.30	823.20	877.00	977.00	953.90	838.60	984.70	846.20	915.50	1061.70	1015.50
A 10.10		Fixing standard steel glazed doors, windows and ventilators in walls, including fixing of float glass panes with glazing clips and special medal- sash putty of approved make, or medal beading with screws, (only steel windows, glass panes cut to size and glazing plates or medal beading with screws, shall be supplied by department free of cost.													
A 10.10.1		Fixing with 15x3 mm lugs 10 cm long embeded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size)	Kg	62.20	60.80	62.20	64.50	67.20	66.60	63.10	67.70	63.60	65.20	70.80	69.00
A 10.10.2		Fixing with carbon steel galvanised dash fastener of required dia. And size (to be paid for seperately)	Kg	32.20	31.20	32.20	33.20	35.00	34.60	32.50	35.10	32.60	33.90	36.50	35.70
A 10.11		Providing and fixing factory made ISI marked steel glazed doors, windows and ventilators, side/top/ centre hung, with beading and all members such as F7D, F4B, K11 Band K12 B etc. complete of standard rolled steel sections, joints mitred and flush butt and sash bars tenoned and riveted, including providing and fixing of hinges, pivots, including priming coat of approved steel primer, but excluding the cost of other fittings, complete all as per approved design, (sectional weight of only steel members shall be measured for payment).													
A 10.11.1		Fixing with 15x3 mm lugs 10 cm long embeded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggegate 20 mm nominal size)	Kg	197.50	189.60	197.50	206.60	221.30	218.00	200.40	222.90	201.90	211.80	235.60	228.00
A 10.11.2		Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for seperately)	Kg	116.80	27.70	27.90	28.20	28.70	28.60	28.00	28.80	28.10	28.40	29.10	28.90
A 10.12		Extra for providing and fixing steel beading of size 10x10x1.6 mm (box type), approved shape and section with screws instead of glazing clips and metal sash putty in steel doors, windows, ventilators and composite units.	Metre	55.90	52.20	55.90	59.50	66.30	64.80	56.90	66.80	57.40	62.10	72.10	68.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 10.13		Providing and fixing T-iron frames for doors, windows and ventilators of mild steel Tee-sections, joints mitred and welded, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer.													
A 10.13.1		Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 cement: 3 coarrse sand: 6 graded stone aggregate 20 mm nominal size).	Kg	127.10	125.00	127.00	131.10	135.10	134.10	128.40	136.10	129.60	131.70	142.30	181.80
A 10.13.2		Fixing with carbon steel galvanised dash fatener of required dia and size (to be paid for separately)	Kg	123.00	121.10	123.00	126.10	129.70	128.90	123.90	130.50	124.80	126.90	135.50	132.70
A 10.14.1		Profile B													
A 10.14.1.1		Fixing with adjustable lugs with split end tail to each jamb	Metre	484.70	460.40	484.70	509.80	555.10	544.70	491.90	558.90	495.80	526.80	595.00	573.40
A 10.14.1.2		Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for separately)	Metre	471.60	448.10	471.60	495.70	539.50	529.40	478.50	543.20	482.20	512.20	578.00	557.20
A 10.14.2		Profile C													
A 10.14.2.1		Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for separately)		517.70	491.20	517.70	544.90	594.20	582.80	525.50	598.30	529.60	563.50	637.40	614.10
A 10.14.2.2		Fixing with adjustable lugs with split end tail to each jamb	Metre	504.50	478.90	504.50	530.80	578.50	567.60	512.10	582.50	516.10	548.80	620.50	597.80
A 10.14.3		Profile E													
A 10.14.3.1		Fixing with adjustable lugs with split end tail to each jamb	Metre	567.10	537.30	567.10	597.50	652.80	640.10	575.80	657.40	580.40	618.40	701.10	675.00
A 10.14.3.2		Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for separately)	Metre	553.90	525.00	553.90	583.40	637.20	624.80	562.40	641.60	566.80	603.70	684.20	658.70
A 10.15.1		Fixing with 15x3 mm lugs 10 cm long embedded im cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size)	Metre	158.80	150.20	158.70	168.90	184.90	181.20	162.00	186.60	163.80	174.50	200.80	192.40
A 10.15.2		Fixing with carbon steel galvanised dash fastener of required dia and size (to be paid for separately)	Metre	144.80	137.00	144.80	152.70	167.30	163.90	147.10	168.50	148.20	158.30	179.80	173.00
A 10.16		Steel work in built up tubular (round, square or rectangular hollow tubes etc) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete													
A 10.16.1		Hot finished welded type tubes	Kg	155.60	148.40	155.60	162.90	176.40	173.30	157.70	177.40	158.80	168.10	187.80	181.60
A 10.16.2		Hot finished Seamless type tubes	Kg	172.90	164.50	172.90	181.30	196.90	193.30	175.30	198.10	176.50	187.30	210.10	202.90
A 10.16.3		Electric resistance or induction butt welded tubes	Kg	138.30	132.20	138.30	144.50	155.90	153.20	140.10	156.70	141.00	148.90	165.50	160.20
A 10.17		Providing and fixing M.S Fan Clamp type-I or II of 16 mm dia M.S bar, bent to shape with hooked ends in R.C.C slabs or beams during laying, including painting the exposed portion of loop, all as per standard design complete	Each	193.80	192.10	193.80	197.10	200.30	199.60	194.70	201.30	195.90	197.40	207.00	203.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 10.18		Providing and fixing circular/Hexagonal cast iron or M.S sheet box for ceiling fan clamp, of internal dia 140 mm, 73 mm height, top lid of 1.5 mm thick M.S sheet with its top surface hacked for proper bonding, top lid shall be screwed into the cast iron/M.S sheet box by means of 3.3 mm dia round headed screws, one lock at the corners. Clamp shall be made of 12 mm dia M.S bar bent into shape as per standard drawing:	Each	196.40	189.80	196.40	203.80	216.10	213.20	198.50	217.40	199.90	208.10	228.40	221.90
A 10.19		Providing and fixing mild steel round holding down bolts with nuts and washer plates complete	Kg	93.80	88.40	93.80	99.20	109.30	107.00	95.40	110.10	96.10	103.10	117.80	113.20
A 10.20		Providing and fixing bolts including nuts and washers complete	Kg	136.40	131.20	136.40	141.70	151.50	149.20	138.00	152.30	138.70	145.50	159.80	155.30
A 10.21		Providing and fixing M.S rivets of sizes in position	Kg	226.80	213.50	219.10	224.70	235.20	232.80	220.70	236.00	221.50	228.80	244.00	239.20
A 10.22		Welding by gas or electric plant including transportation of plant at site etc. complete.	Cm	15.30	14.30	15.30	16.30	18.10	17.70	15.60	18.30	15.70	17.00	19.70	18.80
A 10.25		Steel work welded in built up sections/framed work including cutting hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc.as required.													
A 10.25.1		In stringers, treads, landings etc. of stair cases including use of chequered plate wherever required all complete.	Kg	114.80	110.90	114.80	119.50	126.90	125.20	116.10	127.80	117.10	121.90	134.80	130.70
A 10.25.2		In gratings, frames, guard bar, ladders, railings, brackets, gates & similar works.	Kg	147.40	142.80	144.30	146.80	149.60	148.90	145.00	150.30	145.80	147.30	154.50	152.10
A 10.26		Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer													
A 10.26.1		M.S. tube	Kg	158.20	150.80	158.20	165.60	179.40	176.20	160.30	180.50	161.40	170.90	191.10	184.70
A 10.26.2		E.R.W. tubes	Kg	146.90	140.50	146.90	153.30	165.20	162.40	148.80	166.10	149.70	157.90	175.20	169.70
A 10.26.3		G.I. pipes	Kg	174.10	165.50	174.10	182.60	198.50	194.80	176.50	199.70	177.70	188.70	211.90	204.60
A 10.27		Providing and fixing carbon steel galvanised (minimum coating 5 micron) dash fastener of 10 mm dia. Double threaded 6.8 grade (yield strength 480 N/mm ²) counter sunk head, comprising of 10 m dia. Polyamide PA 6 grade sleeve, including drilling of hole in frame, concrete/ masonry, etc. as per direction of Engineer-in-Charge													
A 10.27.1		10x60 mm	Each	99.00	96.20	99.00	101.80	107.00	105.80	99.80	107.40	100.20	103.80	111.40	109.00
A 10.27.2		10x80 mm	Each	7598.00	7594.80	7598.00	7601.30	7607.30	7605.90	7599.00	7607.70	7599.40	7603.60	7612.30	7609.60
A 10.27.3		10x120 mm	Each	130.30	126.40	130.30	134.30	141.60	139.90	131.50	142.10	132.00	137.10	147.70	144.40
A 10.27.4		10x140 mm	Each	144.30	139.50	144.30	149.20	158.20	156.10	145.70	158.90	146.40	152.60	165.80	161.60
A 10.27.5		10x160 mm	Each	179.00	172.80	179.00	185.10	196.60	194.00	180.70	197.50	181.60	189.60	206.40	201.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 10.28		Providing and fixing stainless steel (Grade 304) railing made of hollow tubes, channels, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the railings with necessary accessories and stainless steel dash fasteners, stainless steel bolts etc., of required size, on the top of the floor or the sided of waist slab with suitable arrangement as per approval of Engieer-in-Charge, (for payment purpose only weight of stainless steel members shall be considered excluding fixing accessories such as nuts, bolts, fasteners etc.)	Kg	664.60	627.40	664.60	701.90	771.10	755.10	675.30	776.40	680.60	728.50	829.70	797.70
A 10.29		Providing and fixing fly proof wire guaze to windows, clerestory windows and doors with M.S. Flat 15x3 mm and nuts and bolts complete													
A 10.29.1		Galvanised M.S. Wire gauge with 0.63 mm dia. Wire and 1.4 mm aperture on both sides	Sqm	9656.60	9617.70	9650.90	9685.40	9747.20	9732.90	9660.80	9752.50	9666.20	9708.50	9802.40	9772.60
A 10.29.2		Stainless steel (Grade 304) wire gauge of 0.5 mm dia. Wire and 1.4mm aperture on both sides	Sqm	1072.90	1016.30	1067.20	1119.40	1214.20	1192.30	1082.10	1222.00	1090.10	1155.20	1297.20	1252.30
A 10. 30		Providing and fixing glass panes with putty and glazing clips in steel doors, windows, clerestory window, all complete with:	Sqm												
A 10.30.1		4.0mm thick glass panes	Sqm	1061.10	998.50	1061.10	1123.70	1240.00	1213.20	1079.00	1248.90	1088.00	1168.40	1338.30	1284.70
A 10.30.2		5.5mm thick glass panes	Sqm	1423.30	1337.00	1423.30	1509.60	1669.90	1632.90	1448.00	1682.20	1460.30	1571.30	1805.50	1731.50
A 10. 31		Providing and fixing angle iron frames for doors, windows and ventilators of mild steel angle section of size 35x35x5 mm, joints mitred and welded by angle iron 35x35x5 mm or 35x5 mm flat pieces to the existing T-iron frame or to the wall with dash fastener, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer, all complete as per the direction of Engineer-in-Charge	Kg	117.50	116.00	117.50	120.10	122.90	122.20	118.20	123.60	119.10	120.50	128.00	125.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
11.0 FLOORING															
A 11.1		Brick on edge flooring with bricks of class designation 7.5 on a bed of 12mm cement mortar, including filling the joints with same mortar, with common burnt clay non-modular bricks:													
A 11.1.1	MF	1:4 (1 cement : 4 coarse sand)	Sqm	1441.30	1274.60	1441.30	1821.40	2166.90	2087.20	1529.30	2299.60	1688.50	1821.60	3016.30	2618.10
A 11.1.2	MF	1:6 (1 cement : 6 coarse sand)	Sqm	1384.60	1220.90	1384.60	1754.60	2092.30	2014.30	1469.20	2221.90	1624.70	1754.80	2922.40	2533.20
A 11.2		Dry brick on edge flooring in required pattern with bricks of class designation 7.5 on a bed of 12mm mud mortar, including filling joints with Jamunna sand, with common burnt clay non modular bricks.	Sqm	1184.50	1033.00	1184.50	1516.70	1824.50	1753.50	1257.90	1941.80	1398.50	1518.10	2576.40	2223.80
A 11.3		Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry, but excluding the cost of nosing of steps etc. complete.													
A 11.3.1	MF	40mm thick with 20mm nominal size stone aggregate	Sqm	609.50	585.90	609.50	677.80	731.30	718.90	633.40	751.30	657.40	678.50	860.10	799.60
A 11.4	MF	52 mm thick cement concrete flooring with concrete hardener topping, under layer 40 mm thick cement concrete 1:2:4 (1 cement: 2 coarse sand:4 graded stone aggregate 20 mm nominal size) and top layer 12mm thick cement hardener consisting of mix 1:2 (1 cement hardener mix: 2 graded stone aggregate, 6mm nominal size) by volume, hardening compound mixed @2 litre per 50 kg of cement or as per manufacturer's specification. This includes cost of cement slurry, but excluding the cost of nosing of steps etc. complete.	Sqm	890.70	862.60	890.70	973.40	1037.70	1022.90	920.90	1061.20	949.00	975.00	1189.50	1118.10
A 11.5	MF	62 mm thick cement concrete flooring with concrete hardener topping, under layer 50 mm thick cement concrete 1:2:4 (1 cement: 2 coarse sand:4 graded stone aggregate 20 mm nominal size) and top layer 12mm thick cement hardener consisting of mix 1:2 (1 cement hardener mix: 2 graded stone aggregate, 6mm nominal size) by volume, hardening compound mixed @2 litre per 50 kg of cement or as per manufacturer's specification. This includes cost of cement slurry, but excluding the cost of nosing of steps etc. complete.	Sqm	985.30	952.10	985.30	1083.00	1158.70	1141.30	1020.80	1186.60	1054.20	1084.60	1338.60	1254.00
A 11.6		Cement plaster skirting upto 30 cm height with cement mortar 1:3 (1 cement : 3 coarse sand), finished with a floating coat of neat cement.													
A 11.6.1	MF	18 mm thick	Sqm	575.60	548.20	575.60	644.60	704.90	691.00	594.00	727.80	621.40	645.00	851.70	782.80
A 11.7	MF	Cement concrete pavement with 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20mm nominal size), including finishing complete.	Cum	10456.80	9938.00	10456.80	11965.30	13127.80	12859.50	10987.90	13570.70	11519.20	11970.50	15967.40	14635.50
A 11.8		Extra for making chequers of approved pattern on cement concrete floors, steps, landing, pavements etc.	Sqm	55.00	54.70	55.00	55.30	55.90	55.70	55.10	55.90	55.20	55.50	56.30	56.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11. 9	MF	40mm thick marble chips flooring rubbed and polished to granolithic finish, under layer 34mm thick cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 12.5mm nominal size) and top layer 6mm thick with white, black, chocolate, grey, yellow or green marble chips of sizes from 1mm to 4mm nominal size, laid in cement marble powder mix 3:1 (3 cement: 1 marble powder) by weight in proportion of 4:7 (4 cement marble powder mix: 7 marble chips) by volume, including cement slurry etc. complete:													
A 11.9.1		Dark shade pigment with ordinary cement.	Sqm	937.10	899.70	927.80	997.10	1058.50	1044.30	951.60	1077.80	974.60	1002.50	1187.00	1125.90
A 11.9.2		Light shade pigment with white cement	Sqm	1030.80	986.80	1021.50	1092.40	1164.50	1147.90	1045.40	1182.90	1067.10	1104.10	1293.00	1230.80
A 11.9.3		Medium shade pigment with 50% white cement and 50% ordinary cement.	Sqm	979.90	939.40	970.60	1040.40	1106.70	1091.30	994.30	1125.50	1016.60	1048.80	1234.70	1173.30
A 11.9.4		White cement without any pigment.	Sqm	1005.40	963.10	996.20	1065.40	1134.40	1118.50	1019.60	1152.50	1041.00	1075.80	1260.30	1199.50
A 11.9.5		Light shade pigment with ordinary cement.	Sqm	932.42	895.33	923.12	992.12	1052.95	1038.88	946.84	1072.21	969.79	997.30	1180.97	1120.13
A 11.9.6		Ordinary cement without any pigment.	Sqm	901.90	866.80	892.60	959.60	1016.80	1003.60	915.80	1035.70	938.50	963.40	1141.70	1082.50
A 11. 10		40mm thick marble chips flooring, rubbed and polished to granolithic finish, under layer 31mm thick cement concrete 1:2:4 (1 cement 2 : coarse sand: 4 graded stone aggregate 12.5mm nominal size) and top layer 9mm thick with white, black, chocolate, grey, yellow or green marble chips of sizes from 4mm to 7mm nominal size, laid in cement marble powder mix 3:1 (3 cement: 1 marble powder) by weight in proportion of 4:7 (4 cement marble powder: 7 marble chips) by volume, including cement slurry etc. complete													
A 11.10.1	MF	Dark shade pigment with ordinary cement.	Sqm	942.70	905.10	933.40	1002.50	1064.40	1050.10	957.10	1083.60	979.90	1008.30	1192.60	1131.60
A 11.10.2	MF	Light shade pigment with white cement	Sqm	1076.50	1029.40	1067.20	1138.60	1215.70	1197.90	1091.00	1233.60	1111.90	1153.30	1343.90	1281.40
A 11.10.3	MF	Medium shade pigment with 50% white cement and 50% ordinary cement.	Sqm	1003.60	961.70	994.30	1064.10	1132.90	1117.00	1017.90	1151.40	1039.70	1074.10	1260.50	1199.10
A 11.10.4	MF	White cement without any pigment.	Sqm	1059.10	1013.20	1049.80	1120.10	1195.10	1177.80	1073.20	1212.90	1094.00	1134.00	1321.50	1259.90
A 11.10.5	MF	Light shade pigment with ordinary cement.	Sqm	938.00	900.70	928.70	997.50	1058.90	1044.70	952.30	1078.00	975.10	1003.10	1186.60	1125.80
A 11.10.6	MF	Ordinary cement without any pigment.	Sqm	909.80	874.40	900.50	967.50	1025.40	1012.00	923.50	1044.20	946.00	971.70	1150.20	1091.00
A 11.11		40mm thick marble chips flooring, rubbed and polished to granolithic finish, under layer 28mm thick cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 12.5mm nominal size) and top layer 12mm thick with white, black, chocolate, grey, yellow or green marble chips of sizes from 7mm to 10mm nominal size, laid in cement marble powder mix 3:1 (3 cement : 1 marble powder) by weight in proportion of 2:3 (2 cement marble powder mix : 3 marble chips) by volume, including cement slurry etc. complete:													
A 11.11.1	MF	Dark shade pigment with ordinary cement.	Sqm	990.10	949.80	980.90	1052.40	1119.80	1104.30	1005.10	1139.20	1028.10	1060.50	1251.70	1188.50
A 11.11.2	MF	Light shade pigment with white cement	Sqm	1177.60	1124.00	1168.40	1243.10	1331.90	1311.40	1192.70	1349.50	1213.10	1263.70	1463.70	1398.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.11.3	MF	Medium shade pigment with 50% white cement and 50% ordinary cement.	Sqm	1075.40	1029.10	1066.20	1138.80	1215.90	1198.10	1090.40	1234.30	1111.90	1152.80	1346.90	1283.10
A 11.11.4	MF	White cement without any pigment.	Sqm	923.40	887.40	914.10	981.30	1040.60	1026.90	937.10	1059.40	959.40	986.30	1165.50	1106.10
A 11.11.5	MF	Light shade pigment with ordinary cement.	Sqm	980.80	941.10	971.60	1042.50	1108.70	1093.50	995.60	1128.00	1018.50	1050.10	1239.70	1177.00
A 11.11.6	MF	Ordinary cement without any pigment.	Sqm	923.40	887.40	914.10	981.20	1040.50	1026.90	937.10	1059.40	959.40	986.20	1165.50	1106.10
A 11.12		Marble chips skirting upto 30 cm height, rubbed and polished to granolithic finish,top layer 6 mm thick with white, black, chocolate, grey, yellow or green marble chips of sizes from smallest to 4 mm nominal size, laid in cement marble powder mix 3:1 (3 cement: 1 marble powder) by weight in proportion of 4:7 (4 cement marble powder mix: 7 marble chips) by volume:													
A 11.12.1		18 mm thick with under layer 12 mm thick in cement plaster 1:3 (1 cement: 3 coarse sand):													
A 11.12.1.1	MF	Dark shade pigment with ordinary cement.	Sqm	1373.80	1279.50	1309.20	1372.80	1436.10	1421.50	1326.60	1455.50	1349.70	1378.90	1566.10	1504.10
A 11.12.1.2	MF	Light shade pigment with white cement	Sqm	1467.50	1366.60	1402.90	1468.10	1542.10	1525.10	1420.40	1560.60	1442.20	1480.50	1672.10	1609.00
A 11.12.1.3	MF	Medium shade pigment with 50% white cement and 50% ordinary cement.	Sqm	1416.60	1319.20	1352.00	1416.10	1484.30	1468.50	1369.30	1503.20	1391.70	1425.20	1613.80	1551.50
A 11.12.1.4	MF	White cement without any pigment.	Sqm	1343.70	1251.40	1279.10	1340.80	1400.40	1386.60	1296.00	1419.60	1318.80	1345.50	1527.40	1467.10
A 11.12.1.5	MF	Light shade pigment with ordinary cement.	Sqm	1369.10	1275.10	1304.50	1367.80	1430.60	1416.10	1321.80	1449.90	1344.90	1373.70	1560.10	1498.30
A 11.12.1.6	MF	Ordinary cement without any pigment.	Sqm	1341.20	1249.00	1276.60	1338.00	1397.40	1383.70	1293.40	1416.50	1316.20	1342.60	1524.00	1463.90
A 11.13		Providing and fixing glass strips in joints of terrazo/ cement concrete floors.													
A 11.13.1		40mm wide and 4mm thick.	Metre	75.80	73.10	75.80	78.50	83.40	82.30	76.60	83.80	76.90	80.40	87.60	85.30
A 11.14		Extra for laying terrazo flooring on staircase treads not exceeding 30cm in width, including cost of forming, nosing etc.	Sqm	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20
A 11.15		Crazy marble stone flooring, including filling the gaps with light shade pigment with white cement marble powder mixture (3 parts of white cement: 1 part of marble powder) by weight in proportion of 4:7(4 cement marble powder mix: 7 white, black or white and black marble chips of sizes from 1 mm to 4mm nominal size by volume), with under layer 25mm thick cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 12.5 mm nominal size), including rubbing, polishing and cement slurry etc. complete:													
A 11.15.1	MF	18 mm thick crazy marble stone white, black or as specified	Sqm	1441.10	1360.20	1394.90	1459.30	1530.30	1513.90	1416.20	1546.30	1434.90	1473.40	1645.80	1589.30
A 11.16		Precast terrazo tiles 22mm thick with graded marble chips of size upto 12mm, laid in floors, and landings, jointed with neat cement slurry mixed with pigment to match the shade of the tiles, including rubbing and polishing complete, on 20mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand):													
A 11.16.1	MF	Light shade pigment using white cement	Sqm	1459.20	1375.40	1450.00	1563.70	1711.20	1677.20	1481.20	1739.70	1514.00	1598.90	1926.20	1819.50
A 11.16.2	MF	Medium shade using 50% white cement and 50% ordinary cement	Sqm	1367.50	1290.00	1358.30	1468.50	1605.20	1573.60	1388.70	1633.80	1421.90	1498.40	1816.00	1712.20
A 11.16.3	MF	Dark shade pigment using ordinary cement.	Sqm	1284.90	1213.10	1275.70	1383.00	1510.00	1480.70	1305.50	1538.90	1339.10	1408.00	1717.60	1616.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.16.4	MF	Ordinary cement without any pigment	Sqm	1216.70	1149.30	1207.50	1310.30	1429.00	1401.60	1236.00	1457.20	1269.00	1332.10	1629.60	1531.90
A 11.17	MF	Extra if terrazo tiles are laid in treads of steps not exceeding 30 cm in width.	Sqm	80.40	74.40	74.40	74.40	74.40	74.40	74.40	74.40	74.40	74.40	74.40	74.40
A 11.18		Precast terrazo tiles 22mm thick with graded marble chips of sizes upto 12 mm in skirting and risers of steps not exceeding 30 cm in height on 12 mm thick cement plaster 1:3 (1 cement:3 coarse sand), jointed with neat cement slurry mixed with pigment to match the shade of the tiles, including rubbing and polishing complete with tiles of:													
A 11.18.1	MF	Light shade using white cement.	Sqm	2029.20	1888.20	1959.10	2054.00	2191.00	2159.40	1985.30	2212.20	2009.10	2093.40	2362.90	2275.70
A 11.18.2	MF	Medium shade pigment using 50% white cement and 50% ordinary cement	Sqm	2023.20	1882.90	1953.00	2051.20	2188.10	2156.50	1980.50	2210.70	2006.10	2088.80	2367.20	2276.90
A 11.18.3	MF	Dark shade pigment using ordinary cement.	Sqm	1804.00	1678.50	1733.90	1821.40	1932.30	1906.70	1758.60	1954.30	1784.00	1847.20	2096.70	2015.30
A 11.18.4	MF	Ordinary cement without any pigment.	Sqm	1718.10	1598.20	1647.90	1729.80	1830.20	1807.10	1671.00	1851.40	1695.60	1751.60	1985.90	1909.20
A 11.19		Chequered terrazo tiles 22mm thick with graded marble chips of size up to 6mm in floors, jointed with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing complete on 20mm thick bed of cement mortar 1:4 (1 cement:4 coarse sand):													
A 11.19.1	MF	Light shade using white cement.	Sqm	1486.40	1375.40	1450.00	1563.70	1711.20	1677.20	1481.20	1739.70	1514.00	1598.90	1926.20	1819.50
A 11.19.2	MF	Medium shade pigment using 50% white cement and 50% ordinary cement.	Sqm	1430.90	1349.20	1421.60	1536.00	1680.40	1647.10	1453.30	1709.70	1487.00	1568.90	1897.80	1790.30
A 11.19.3	MF	Dark shade pigment using ordinary cement.	Sqm	1312.10	1238.40	1302.80	1411.90	1542.20	1512.20	1333.20	1571.30	1367.00	1438.20	1752.70	1649.60
A 11.19.4	MF	Ordinary cement without any pigment.	Sqm	1243.90	1174.70	1234.60	1339.20	1461.30	1433.10	1263.70	1489.70	1296.90	1362.30	1664.70	1565.40
A 11.20		Chequerred precast cement concrete tiles 22mm thick in footpath & courtyard, jointed with neat cement slurry mixed with pigment to match the shade of tiles, including rubbing and cleaning etc. complete, on 20mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand)													
A 11.20.1	MF	Light shade using white cement.	Sqm	1483.80	1398.60	1483.80	1607.60	1774.60	1736.10	1517.90	1804.40	1551.90	1650.70	2004.80	1889.70
A 11.20.2	MF	Medium shade pigment using 50% white cement and 50% ordinary cement	Sqm	1311.30	1238.00	1311.30	1426.10	1571.90	1538.30	1343.10	1601.10	1376.70	1459.80	1789.60	4168.90
A 11.20.3	MF	Dark shade pigment using ordinary cement.	Sqm	1055.30	998.80	1055.30	1156.40	1272.30	1245.50	1083.40	1300.10	1116.10	1177.30	1469.90	1373.70
A 11.20.4	MF	Ordinary cement without any pigment.	Sqm	987.10	935.00	987.10	1083.70	1191.30	1166.50	1013.90	1218.50	1045.90	1101.40	1381.90	1289.60
A 11.21		Providing and fixing 10mm thick acid and/ or alkali resistant tiles of approved make and colour using acid and/ or alkali resisting mortar bedding, and joints filled with acid and/ or alkali resisting cement as per IS : 4457, complete as per the direction of Engineer-in- Charge.													
A 11.21.1		In flooring on a bed of 10 mm thick mortar 1:4 (1 Acid proof cement:4 coarse sand)													
A 11.21.1.1	MF	Acid and alkali resistant tile	Sqm	1720.20	1622.10	1720.20	1830.30	2014.40	1971.90	1750.30	2034.60	1772.10	1893.50	2202.20	2103.50
A 11.21.2		In dado/ skirting on 12 mm thick mortar 1:4 (1 acid proof cement: 4 coarse sand)													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.21.2.1	MF	Acid and alkali resistant tile	Sqm	1829.90	1728.30	1829.90	1941.80	2131.40	2087.70	1860.00	2151.90	1881.90	2007.40	2322.80	2222.00
A 11.22		Tile work in skirting, risers of steps and dado upto 2m height over 12mm thick bed of cement mortat 1:3 (1 cement: 3 coarse sand) and joint with grey cement slurry @ 3.3 kg/sqm, including pointing in white cement mixed with pigment of matching shade complete.													
A 11.22.1		Marble tiles (polished) Raj Nagar													
A 11.22.1.1		8mm thick	Sqm	1443.60	1369.10	1443.60	1545.70	1690.70	1657.20	1472.20	1713.60	1498.10	1586.80	1875.20	1781.80
		STONE FLOORING													
A 11.23		Marble stone flooring with 18mm thick marble stone, as per sample of marble approved by Engineer-in-charge, over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with grey cement slurry, including rubbing and polishing complete with:													
A 11.23.1		Markrana White Second quality	Sqm	4204.40	3925.00	4158.20	4431.50	4873.90	4771.80	4235.10	4925.40	4290.90	4579.80	5339.90	5096.50
A 11.23.2		Raj nagar plain	Sqm	2212.30	2063.20	2166.20	2309.10	2509.50	2463.30	2205.80	2542.40	2243.00	2364.40	2770.70	2639.00
A 11.23.3		Agaria White	Sqm	3159.00	2947.90	3112.80	3317.60	3633.10	3560.30	3170.10	3674.80	3216.20	3417.20	3991.60	3806.80
A 11.23.4		Black Zebra	Sqm	2780.30	2594.00	2734.20	2914.20	3183.70	3121.50	2784.40	3221.90	2826.90	2996.00	3503.30	3339.70
A 11.23.5		Udaipur green marble	Sqm	2250.20	2098.60	2204.00	2349.40	2554.50	2507.20	2244.40	2587.70	2282.00	2406.50	2819.60	2685.70
A 11.23.6		Pink plain marble	Sqm	2297.50	2142.80	2251.40	2399.80	2610.70	2562.00	2292.60	2644.30	2330.60	2459.10	2880.60	2744.10
A 11.24		Extra for pre finished nosing to treads of steps of marble stone	Sqm	485.70	461.40	462.60	463.70	465.90	465.40	462.90	466.10	463.10	464.60	467.70	466.70
A 11.25		Extra for marble stone flooring in treads of steps and risers using single length up to 2.00 metre	Sqm	563.00	533.10	533.70	534.20	535.30	535.10	533.80	535.40	533.90	534.70	536.20	535.70
A 11.26		Kota stone slab flooring over 20mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1:4 (1 cement: 4 coarse													
A 11.26.1		25 mm thick	Sqm	1680.60	1565.40	1634.40	1745.20	1883.20	1851.40	1665.00	1911.90	1698.20	1775.70	2094.80	1990.40
A 11.27		Kota stone slabs 20 mm thick in risers of steps, skirting, dado and pillars laid on 12 mm (average) thick cement mortar 1:3 (1 cement: 3 coarse sand) and jointed with grey cement slurry mixed with pigment to match the shade of the slabs, including rubbing and polishing complete.	Sqm	1453.80	1346.50	1407.60	1500.70	1622.10	1594.10	1433.90	1644.80	1460.00	1530.60	1795.10	1708.90
A 11.28		40 mm thick fine dressed stone flooring over 20 mm (average) thick base of cement mortar 1:5 (1 cement: 5 coarse sand) with joints finished flush.	Sqm												
A 11.28.1		Red sand stone	Sqm	995.10	946.40	995.10	1079.30	1177.20	1154.60	1017.20	1201.10	1045.10	1096.60	1345.80	1263.90
A 11.28.2		White sand stone	Sqm	995.10	946.40	995.10	1079.30	1177.20	1154.60	1017.20	1201.10	1045.10	1096.60	1345.80	1263.90
A 11.29		40 mm thick fine dressed stone flooring over 20 mm (average) thick base of cement mortar 1:5 (1 cement: 5 coarse sand), including pointing with cement mortar 1:2 (1 cement: 2 stone dust) with an admixture of pigment to match the shade of stone.													
A 11.29.1		Red sand stone	Sqm	1167.40	1117.50	1167.40	1255.20	1355.90	1332.70	1190.90	1380.70	1219.90	1272.70	1530.50	1445.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.29.2		White sand stone	Sqm	1167.40	1117.50	1167.40	1255.20	1355.90	1332.70	1190.90	1380.70	1219.90	1272.70	1530.50	1445.70
A 11. 30		40 mm thick rubbed stone flooring over 20 mm (average) thick base of cement mortar 1:5 (1 cement: 5 coarse sand) with joints 3 mm thick, side buttered with cement mortar 1:2 (1 cement: 2 stone dust) with an admixed with pigment to match the shade of stone and pointing with same mortar.	Sqm												
A 11.30.1		Red sand stone	Sqm	1254.10	1198.50	1248.40	1336.20	1436.90	1413.70	1271.90	1461.70	1300.90	1353.70	1611.50	1526.70
A 11.30.2		White sand stone	Sqm	1254.10	1198.50	1248.40	1336.20	1436.90	1413.70	1271.90	1461.70	1300.90	1353.70	1611.50	1526.70
A 11.31		Extra for pre finished nosing in treads of steps of kota stone/ sand stone slab.	Sqm	140.00	140.00	140.00	140.00	140.00	140.00	140.00	140.00	140.00	140.00	140.00	140.00
A 11.32		Extra for kota stone/ sand stone in treads of steps and risers using single length up to 1.05 m.	Sqm	28.10	28.10	28.10	28.10	28.10	28.10	28.10	28.10	28.10	28.10	28.10	28.10
A 11. 33		25mm wooden planking, tongued and grooved in flooring, including fixing with iron screws complete with:	Sqm												
A 11.33.1		2nd class Teak wood	Sqm	2400.60	2350.10	2400.60	2451.20	2545.00	2523.30	2415.10	2552.20	2422.30	2487.20	2624.30	2581.10
A 11.33.2		2nd class deodar wood	Sqm	1798.30	1760.70	1798.30	1835.80	1905.50	1889.40	1809.00	1910.90	1814.40	1862.60	1964.50	1932.30
A 11. 34		38 mm thick wood block flooring of 1st class teak wood laid over 25 mm thick leveling layer of cement concrete 1:2:4 (1 cement:2 coarse sand: 4 graded stone aggregate 10 mm nominal size) to be paid seperately, coated with a thin layer of hot bitumen penetration 80/ 25 (blown type) @2.45 kg/sqm, including fixing blocks in position after dipping in hot bitumen (blown type) upto half depth, planned, levelled smooth and finished complete.	Sqm	634.80	631.50	634.80	638.20	644.40	642.90	635.80	644.90	636.20	640.50	649.60	646.80
A 11.35		Providing and fixing M.S. angle 50x50x5 mm to act as nosing with lugs of M.S. flat 10x5 mm, 10 cm long, forked at end 60 cm apart (minimum three lugs to be provided), including necessary welding and applying a priming coat of approved primer on exposed surface etc. complete.	Sqm	148.80	147.50	148.70	151.00	153.20	152.70	149.30	153.90	150.10	151.20	157.80	155.60
A 11.37	MF	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with grey cement slurry @3.3kg/sqm including pointing the joints with white cement and matching pigment etc. complete.	Sqm	1071.30	1011.60	1071.30	1171.30	1291.20	1263.60	1098.40	1318.30	1129.90	1195.10	1486.30	1390.80
A 11.37A	MF	Providing and fixing 1st quality ceramic glazed floor tiles conforming to IS : 15622 (thickness to be specified by the manufacturer) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Eningeer-in-Charge in skirting, risers of steps and dados over 12 mm thick bed of Cement Mortar 1:3 (1 Cement: 3 Coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm including pointing in white cement mixed with pigment of matching shade	Sqm	1073.80	1023.40	1073.80	1151.60	1251.80	1228.70	1095.50	1271.20	1117.90	1175.50	1398.20	1325.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.38	MF	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer), of 1st quality conforming to IS: 15622, of approved make, in all colours, shades except White, Ivory, Grey, Fume Red Brown, laid on 20mm thick bed of Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with Grey cement slurry @3.3 kg/sqm including pointing the joints with white cement and matching pigments etc., complete.	Sqm	1157.40	1092.10	1157.40	1263.00	1393.40	1363.30	1186.10	1421.20	1218.40	1290.90	1597.30	1497.00
A 11.39	MF	Providing and laying rectified Glazed Ceramic floor tiles of size 300x300 mm or more (thickness to be specified by the manufacturer), of 1st quality conforming to IS: 15622, of approved make, in colours White, Ivory, Grey, Fume Red Brown, laid on 20mm thick Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with Grey cement slurry @3.3 kg/sqm including grouting the joints with white cement and matching pigments etc., complete.	Sqm	1270.20	1197.50	1270.20	1383.20	1527.30	1494.10	1301.00	1556.20	1334.40	1416.40	1742.80	1636.20
A 11. 40	MF	Providing and laying rectified Glazed Ceramic floor tiles of size 300x300 mm or more (thickness to be specified by the manufacturer), of 1st quality conforming to IS: 15622, of approved make, in all colours, shades, except White, Ivory, Grey, Fume Red Brown, laid on 20mm thick Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with Grey cement slurry @3.3 kg/sqm including pointing the joints with white cement and matching pigments etc., complete.	Sqm	1371.50	1292.10	1371.50	1491.10	1647.50	1611.40	1404.20	1677.30	1438.50	1529.00	1873.40	1761.10
A 11. 41		Providing and laying Vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorbtion less than 0.08% and conforming to IS: 15622, of approved make, in all colours, shades, laid on 20mm thick Cement Mortar 1:4 (1 Cement : 4 Coarse sand), jointing with Grey cement slurry @3.3 kg/sqm including grouting the joints with white cement and matching pigments etc., complete.													
A 11.41.1	MF	Size of Tile 500x500 mm	Sqm	1491.00	1403.80	1491.00	1618.40	1789.30	1749.90	1525.90	1820.30	1561.30	1661.90	2027.50	1908.50
A 11.41.2	MF	Size of Tile 600x600 mm	Sqm	1777.00	1671.00	1777.00	1924.00	2129.00	2082.00	1818.00	2163.00	1856.00	1980.00	2397.00	2262.00
A 11.41.3	MF	Size of Tile 800x800 mm	Sqm	2098.50	1971.60	2098.50	2265.60	2510.40	2453.90	2144.80	2547.00	2185.90	2337.50	2811.00	2658.00
A 11.41.4	MF	Size of Tile 1000x1000 mm	Sqm	3009.70	2823.20	3009.70	3236.50	3592.00	3509.90	3073.00	3637.10	3122.70	3350.90	3986.30	3782.10
A 11.42		Deduct for not using 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) bedding in laying of floor tiles and jointing with Grey Cement slurry @3.3kg/sqm	Sqm	785.30	744.30	785.30	866.50	951.70	932.00	807.00	976.10	835.80	877.00	1117.30	1037.90
A 11.43		Fixing glazed/ Ceramic/ Vitrified floor tiles with cement based high polymer modified quick- set tile adhesive (water based) conforming to IS: 15477, in average 3 mm thickness.	Sqm	603.50	584.20	603.50	622.90	658.80	650.50	609.10	661.60	611.80	636.70	689.20	672.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.44	MF	Crazy ceramic tile flooring, with under layer 12 mm thick cement mortar 1:4 (1 cement: 4 coarse sand), with joints not exceeding 5 mm, including filling the gaps with ordinary cement mixture and mixing with synthetic polyester fibre, triangular in shape having specific gravity of 1.34 to 1.40, cross section size ranging from 10 to 40 micron and length up to 6 mm, mixing fibre @125 gms/ 50 kg of cement in cement mortar, including providing and mixing water proofing material in mortar @1 kg/ 50 kg of cement, all complete as per direction of Engineer-in-Charge.	Sqm	697.40	673.20	697.40	752.20	804.30	792.30	712.20	821.70	732.80	755.60	918.40	864.40
A 11. 45		Providing and laying 500x500x40 mm thick Turf paver (Turf pave XD) on 150 mm thick subgrade of compacted bed of 20 mm thick nominal size stone aggregate and base course and filling with 150 mm thick Jamunna sand including spreading, well ramming, consolidating and finishing smooth etc. all complete as per direction of Engineer-in-Charge.	Sqm	1901.40	1844.50	1901.40	2086.50	2192.20	2167.80	2045.90	2200.30	2054.00	2127.10	2281.60	2232.80
A 11. 46		Providing and laying Vitrified tiles in different sizes (thickness to be specified by the manufacturer), with water absorbtion less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 Cement : 3 Coarse sand), jointing with Grey cement slurry @3.3 kg/sqm including grouting the joints with white cement and matching pigments etc., complete.													
A 11.46.1	MF	Size of Tile 500x500 mm	Sqm	1490.50	1412.80	1490.50	1595.20	1745.90	1711.10	1519.80	1769.10	1545.90	1638.60	1934.50	1838.80
A 11.46.2	MF	Size of Tile 600x600 mm	Sqm	1776.90	1680.40	1776.90	1900.30	2085.80	2043.00	1811.50	2111.70	1840.40	1957.10	2303.90	2192.10
A 11.46.3	MF	Size of Tile 800x800 mm	Sqm	2098.00	1980.50	2098.00	2242.40	2467.00	2415.10	2138.60	2495.90	2170.50	2314.30	2718.00	2588.20
A 11.46.4	MF	Size of Tile 1000x1000 mm	Sqm	3009.20	2832.20	3009.20	3213.30	3548.50	3471.20	3066.90	3585.90	3107.20	3327.70	3893.20	3712.30
A 11. 46A	MF	Providing and fixing glazed screen printed border tile 75 mm wide having thickness 5 mm, of approved quality and make, in all shades, design and prints, in dado, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand) and jointing with grey cement slurry @3.3 kg/ sqm including pointing with white cement mixed with pigment of matching shade, all complete as approved by Engineer-in-Charge.	Sqm	2575.90	2427.20	2575.90	2751.70	3034.30	2969.10	2625.60	3067.60	2661.80	2845.80	3334.40	3177.80
A 11. 47		Providing and laying Vitrified tiles in different sizes (thickness to be specified by the manufacturer), with water absorbtion less than 0.08% and conforming to IS: 15622, of approved brand and manufactured, in all colours and shades, in skirting, riser of steps, laid with cement base high polymer modified quick set tile adhesive (water based) conforming to IS: 15477, in average 6 mm thickness, including grouting of joints (payment for grouting of joints to be made seperately).													
A 11.47.1		Size of Tile 500x500 mm	Sqm	1598.80	1529.20	1598.80	1668.40	1797.60	1767.80	1618.70	1807.60	1628.60	1718.10	1907.00	1847.30
A 11.47.2		Size of Tile 600x600 mm	Sqm	1885.20	1796.90	1885.20	1973.50	2137.60	2099.70	1910.50	2150.20	1923.10	2036.60	2276.40	2200.70
A 11.47.3		Size of Tile 800x800 mm	Sqm	2206.30	2097.00	2206.30	2315.60	2518.70	2471.80	2237.60	2534.30	2253.20	2393.70	2690.50	2596.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.47.4		Size of Tile 1000x1000 mm	Sqm	3117.60	2948.60	3117.60	3286.50	3600.30	3527.80	3165.80	3624.40	3190.00	3407.20	3865.70	3720.90
A 11. 48		Grouting the joints of flooring tiles having joints of 3mm width, using epoxy grout mix of 0.70 kg of organic coated filler of desired shade (0.10 kg of hardener and 0.20 kg of resin per kg), including filling/ grouting and finishing complete as per direction of Engineer-in -Charge.													
A 11.48.1		Size of Tile 500x500 mm	Sqm	298.60	289.10	298.60	308.10	325.60	321.60	301.30	327.00	302.60	314.80	340.50	332.40
A 11.48.2		Size of Tile 600x600 mm	Sqm	249.00	241.00	249.00	258.00	273.00	270.00	252.00	274.00	253.00	264.00	286.00	279.00
A 11.48.3		Size of Tile 800x800 mm	Sqm	200.40	193.30	200.40	207.50	220.60	217.60	202.40	221.60	203.40	212.50	231.70	225.70
A 11.48.4		Size of Tile 1000x1000 mm	Sqm	145.20	139.70	145.20	150.70	160.80	158.50	146.80	161.60	147.50	154.60	169.40	164.70
A 11. 49		Providing and laying Vitrified tiles in different sizes (thickness to be specified by the manufacturer), with water absorbtion less than 0.08% and conforming to IS: 15622, of approved brand and manufactured, in all colours and shades, laid with cement base high polymer modified quick set tile adhesive (water based) conforming to IS: 15477, in average 6 mm thickness, including grouting of joints (payment for grouting of joints to be made seperately).													
A 11.49.1		Size of Tile 500x500 mm	Sqm	1491.80	1422.20	1491.80	1561.40	1690.60	1660.80	1511.70	1700.50	1521.60	1611.10	1799.90	1740.30
A 11.49.2		Size of Tile 600x600 mm	Sqm	1778.00	1690.00	1778.00	1867.00	2031.00	1993.00	1803.00	2043.00	1816.00	1930.00	2169.00	2094.00
A 11.49.3		Size of Tile 800x800 mm	Sqm	2099.30	1990.00	2099.30	2208.60	2411.60	2364.80	2130.50	2427.30	2146.10	2286.70	2583.40	2489.70
A 11.49.4		Size of Tile 1000x1000 mm	Sqm	3010.50	2841.60	3010.50	3179.50	3493.20	3420.80	3058.80	3517.40	3082.90	3300.10	3758.70	3613.90
A 11. 50		Deduct for not grouting the joints with white cement and matching pigment in the items of fixing of vitrified tiles.	Sqm	13.60	12.70	13.60	14.50	16.10	15.70	13.80	16.20	13.90	15.10	17.50	16.70
A 11.51		Providing and laying machine cut, mirror polished, Italian marble stone flooring laid in required pattern in linear portion of the building all complete as per Architectural drawings, with 18 mm thick stone slabs laid over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with white cement slurry @4.4 kg/ sqm including pointing with white cement slurry admixed with pigment to match the marble shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-charge.													
A 11.51.1		18 mm thick Italian marble stone slab, Perlato, Rosso Verona, Fire Red or Dark Emperadore etc.	Sqm	7237.60	6759.10	7191.40	7657.50	8467.60	8280.70	7322.90	8545.20	7404.40	7949.90	9233.50	8825.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.52		Providing and laying machine cut, mirror polished, marble stone flooring, in required design (Simple geometrical, abstract etc.) and in pattern in combination with Italian marble stones of different colours, shades and finished surface texture etc., in linear portion of the building, all complete as per Architectural drawings, with 18 mm thick stone slabs laid over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with white cement slurry @4.4 kg/ sqm including pointing with white cement slurry admixed with pigment to match the marble shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-charge.													
A 11.52.1	MF	18 mm thick Italian marble stone slab, Perlato, Rosso Verona, Fire Red or Dark Emperadore etc.	Sqm	7568.30	7072.50	7522.10	8005.50	8847.70	8653.30	7658.60	8927.80	7742.50	8310.30	9640.70	9217.60
A 11.53		Providing and fixing Glass mosaic tiles on finished plain wall surface of size 20mm x20mm x4mm in all colours, design, fixing in customized design as per direction of Engineer- in-Charge. The glass mosaic tiles to be fixed on the wall surface with the help of approved adhesive applied @2.5 kg/ sqm and grouting of the same. The rate is inclusive of all operation, material and required pattern approved by Engineer-in-charge:	Sqm	3860.00	3627.60	3860.00	4092.40	4524.00	4424.40	3926.40	4557.20	3959.60	4258.40	4889.20	4690.00
A 11.54		Providing and fixing removable raised/false access flooring with system and its components of approved make for different plenum height with possible height adjustment upto 50mm, comprising of modular load bearing floor panels supported on G.I. rectangular stinger frame work and G.I Pedestal etc. all complete, as per the architectural drawings, as specified and as directed by Engineer-in-charge consisting of: (a) Providing at required spacing to form modular framework, pedestals made out of GI tube of thickness minimum 2mm and 25 mm outer diameter, fully welded on to the G.I. Base plate of size 100mm x 100mm x 3mm at the bottom of the pedestal tube, G.I. pedestal head of size 75mmx75mmx3.5mm welded with GI fully threaded stud 16mm outer diameter with two GI Check nuts screwed on the stud for level adjustment upto 50mm, locking and stabilizing the pedestal head in position at the required level. The pedestals shall be fixed to the subfloor (base) through base plate using epoxy based adhesive of approved make or the machine screw with rawl plug. (b) Stringers system in all steel construction hot dipped galvanized of rectangular size 570x20x30x0.80 mm thick having holes at both ends for securing the stringers on to the pedestal head using fully threaded screws ensuring maximum lateral stability in all directions.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		The grid formed by the pedestal and stringer assembly shall recieved the floor panel, the system shall provide a minimum clear uninterrupted clearance between the bottom of the floor for electrical conduits and wiring etc. all complete as per the Architectural drawings, as specified and as directed by the Engineer-in-Charge. (c) providing and fixing Access floor panel of 600x600x32 mm medium grade Filled Steel anti static high pressure Lamination of 800H grade (FS800H). Access Floor panel shall be steel welded construction with an enclosed bottom pan with uniform pattern of 64 hemispherical cones. The top and bottom plates of steel Guages: top 0.6 mm and bottom 0.7 mm fused spot welded together (minimum 64 welds in each dome and 20 welds along each flange). The panel should be corro resist epoxy coated for lifetime rust protection and cavity formed by the top and bottom plate is filled with Pyrogrip non-combustible portland cementitious core mixed with light weight foaming compound. The Access floor shall be factory finished with Anti-static High pressure laminate with Non Warp technology up to 1mm thickness for superior adhesion and surface flatness within 0.75mm. The panel is to withstand a concentrated Load of 363 kgs applied on area 25mmX25mm without collapse in the centre of the panel which is placed on four steel blocks.													
		The panel will withstand and Uniformly Distributed Load (UDL) minimum 1250 kg/ sqm and an impact load of 50 kg all complete as per the approved manufacturers specification and as per the direction of the Engineer-in-Charge.													
A 11.54.1		300mm Finished Floor Height (FFH)	Sqm	6080.30	5707.70	6080.30	6452.90	7144.90	6985.20	6186.70	7198.10	6240.00	6719.00	7730.40	7411.00
A 11.54.2		450mm Finished Floor Height (FFH)	Sqm	6435.90	6040.00	6435.90	6831.80	7567.00	7397.30	6549.00	7623.50	6605.50	7114.50	8189.00	7849.70
A 11.55		Providing and laying flamed finished Granite Stone flooring in required design and patterns, in linear as well as curvilinear portion of the building, all complete as per Architectural drawings, with 18 mm thick stone slabs over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-charge.													
A 11.55.1	MF	Flamed finish Granite Stone slab Jet Black, Cherry Red, Elite Brown, Cat Eye or equivalent.	Sqm	2877.50	2673.30	2831.30	3029.30	3332.00	3262.10	2886.70	3372.70	2931.80	3123.90	3679.80	3500.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 11.56		Providing and laying polished Granite Stone flooring in required design and patterns, in linear as well as curvilinear portion of the building, all complete as per the Architectural drawings, with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-charge.													
A 11.56.1	MF	Polished Granite Stone slab Jet Black, Cherry Red, Elite Brown, Cat Eye or equivalent.	Sqm	4472.40	4169.10	4426.20	4723.30	5210.00	5097.70	4509.90	5264.90	4569.10	4888.70	5713.50	5449.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
12.0 ROOFING															
A 12.1		Providing corrugated G.S. sheet roofing including vertical/ curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal/ vertical or curved surfaces), excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required.													
A 12.1.1		0.80mm thick with zinc coating not less than 275gm/m ²	Sqm	1784.80	1678.00	1784.80	1891.60	2089.90	2044.10	1815.30	2105.10	1830.50	1967.80	2257.70	2166.20
A 12.1.2		0.63mm thick with zinc coating not less than 275gm/m ²	Sqm	1500.50	1412.30	1500.50	1588.70	1752.50	1714.70	1525.70	1765.10	1538.30	1651.70	1891.00	1815.50
A 12.1.3		0.50mm thick with zinc coating not less than 275gm/m ²	Sqm	1223.30	1153.20	1223.30	1293.40	1423.50	1393.40	1243.30	1433.50	1253.30	1343.40	1533.50	1473.50
A 12.1.4		0.45 mm thick with zinc coating not less than 275gm/m ²	Sqm	1128.80	1064.90	1128.80	1192.70	1311.30	1283.90	1147.10	1320.40	1156.20	1238.30	1411.70	1356.90
A 12.1.5		0.40 mm thick with zinc coating not less than 275gm/m ²	Sqm	1031.90	974.40	1031.90	1089.50	1196.30	1171.70	1048.40	1204.50	1056.60	1130.60	1286.70	1237.40
A 12.1.6		0.35 mm thick with zinc coating not less than 275gm/m ²	Sqm	935.10	883.90	935.10	986.30	1081.40	1059.40	949.70	1088.70	957.00	1022.80	1161.80	1117.90
A 12.1.7		0.30 mm thick with zinc coating not less than 275gm/m ²	Sqm	828.80	784.50	828.80	873.00	955.20	936.20	841.40	961.50	847.70	904.60	1024.70	986.80
A 12.2		Extra for straight cutting in C.G.S. sheet roofing for making opening of area exceeding 40 sq decimetre for chimney stacks, sky light etc.													
A 12.2.1		0.80mm thick	Metre	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50
A 12.2.2		0.63 mm thick	Metre	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50
A 12.2.3		0.50 mm thick & less	Metre	56.40	56.40	56.40	56.40	56.40	56.40	56.40	56.40	56.40	56.40	56.40	56.40
A 12.3		Extra for circular cutting in C.G.S. sheet roofing for making opening of area exceeding 40 square decimetre													
A 12.3.1		0.80mm thick	Metre	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70
A 12.3.2		0.63 mm thick	Metre	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70	340.70
A 12.3.3		0.50 mm thick & less	Metre	310.90	310.90	310.90	310.90	310.90	310.90	310.90	310.90	310.90	310.90	310.90	310.90
A 12.4		Providing ridges or hips of width 60 cm over all width plain G.S. sheet fixed with polymer coated J or L hooks, bolts and nuts 8mm dia G.I. limpet and bitumen washers complete.													
A 12.4.1		0.80mm thick with zinc coating not less than 275gm/m ²	Metre	1085.10	1037.20	1085.10	1133.10	1222.30	1201.70	1098.90	1229.10	1105.70	1167.40	1297.70	1256.50
``		0.63mm thick with zinc coating not less than 275gm/m ²	Metre	948.20	909.20	948.20	987.20	1059.70	1043.00	959.40	1065.30	964.90	1015.10	1121.10	1087.60
A 12.5		Providing valleys of 90cm wide overall in plain G.S. sheet fixed with polymer coated J, or L hooks, bolts and nuts 8mm dia. G.I. limpet and bitumen washers complete.	Metre												
A 12.5.1		1.60mm thick with zinc coating not less than 350gm/m ²	Metre	2086.90	1975.90	2086.90	2197.90	2404.00	2356.50	2118.60	2419.90	2134.50	2277.20	2578.50	2483.30
A 12.6		Providing and fixing of 40cm over all width plain G.S. sheet fixed with polymer coated J or L hooks, bolts and nuts, G.1. limpet and bitumen washer complete, bent to shape and fixed in wall with cement mortar 1:3 (1cement : 3 coarse sand)													
A 12.6.1		1.00mm thick with zinc coating not less than 275gm/m ²	Metre	825.30	795.70	825.30	854.80	909.70	897.00	833.70	913.90	837.90	875.90	956.10	930.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.7		Providing and fixing 15 cm wide, 45cm over all semi circular plain G.S. sheet gutter with iron brackets 40x3mm size, bolts, nuts and washers etc. including making necessary connections with rain water pipes complete.													
A 12.7.1		0.80mm thick with zinc coating not less than 275gm/m ²	Metre	962.70	923.80	958.80	994.60	1059.70	1044.70	969.00	1065.10	974.50	1019.20	1116.80	1085.90
A 12.7.2		0.63mm thick with zinc coating not less than 275gm/m ²	Metre	848.70	817.20	844.80	873.20	924.40	912.60	852.90	928.70	857.30	892.40	969.70	945.20
A 12.8		Providing reinforced by organic fibres and/ or inorganic synthetics fibres cement 6mm thick corrugated sheet (as per IS: 14871) roofing up to any pitch and fixing with polymer coated J, or L hooks, bolts and nuts 8mm dia. G.I. plain and bitumen washers or with self drilling fastener and EPDM washers etc. complete (excluding the cost of purlins, rafters and trusses), including cutting sheets to size and shape wherever required.	Sqm	525.10	495.40	525.10	554.80	610.00	597.30	533.60	614.20	537.80	576.00	656.70	631.20
A 12.9		The panel will withstand and Uniformly Distributed Load (UDL) minimum 1250 kg/ sqm and an impact load of 50 kg all complete as per the approved manufacturers specification and as per the direction of the Engineer-in-Charge.	Metre	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50	61.50
A 12.10		Extra for circular cutting in reinforced by organic fibres and/ or inorganic synthetic fibres cement corrugated, semi-corrugated 6mm thick sheet roofing for making openings of area exceeding 40 square decimeter.	Metre	170.00	170.00	170.00	170.00	170.00	170.00	170.00	170.00	170.00	170.00	170.00	170.00
A 12.11		Extra for providing and fixing wind ties of 40x6mm flat iron section.	Metre	194.60	183.60	185.20	189.00	192.30	191.50	186.30	193.40	187.70	189.10	199.90	196.30
A 12.12		Providing and fixing ridges and hips in fibres cement reinforced by organic fibres and/ or inorganic synthetic fibres roofing with suitable fixing accessories or self drilling fastener and EPDM washer etc. complete.													
A 12.12.1		Corrugated serrated adjustable ridges	Metre	494.90	467.60	494.90	522.20	573.00	561.30	502.70	576.90	506.60	541.70	615.90	592.50
A 12.12.2		Plain wing adjustable ridges	Metre	494.90	467.60	494.90	522.20	573.00	561.30	502.70	576.90	506.60	541.70	615.90	592.50
A 12.12.3		Close fitting adjustable ridges	Metre	560.70	529.10	560.70	592.40	651.10	637.60	569.80	655.60	574.30	615.00	700.80	673.70
A 12.12.4		Unserrated adjustable hips	Metre	494.90	467.60	494.90	522.20	572.90	561.20	502.70	576.80	506.60	541.70	615.90	592.50
A 12.13.1		Corrugated apron pieces	Metre	422.70	397.60	422.70	447.80	494.50	483.70	429.90	498.10	433.50	465.80	534.00	512.40
A 12.13.2		Eave's filler pieces	Metre	339.40	319.70	339.40	359.10	395.60	387.10	345.00	398.40	347.80	373.10	426.50	409.60
A 12.13.3		North light curves	Metre	575.50	540.90	575.50	610.10	674.40	659.60	585.40	679.40	590.40	634.90	728.80	699.20
A 12.13.4		Ventilator curves	Metre	627.70	589.70	627.70	665.70	736.30	720.00	638.60	741.80	644.00	692.90	796.10	763.50
A 12.13.5		Barge boards	Metre	750.40	703.50	750.40	797.30	884.40	864.30	763.80	891.10	770.50	830.80	958.10	917.90
A 12.13.6		Ridge finials	Metre	320.80	299.80	320.80	341.70	380.70	371.70	326.80	383.70	329.70	356.70	413.70	395.70
A 12.13.7		Special north light curves	Metre	1048.90	983.40	1048.90	1114.50	1236.20	1208.10	1067.60	1245.60	1077.00	1161.30	1339.20	1283.00
A 12.13.8		S type louvers	Metre	482.90	463.70	482.90	502.10	537.80	529.60	488.40	540.60	491.10	515.90	568.10	551.60
A 12.14		Providing flat iron brackets 50x3mm size with necessary bolts, nuts and washers etc. for fixing G.S. sheets gutters with purlins	Metre	81.50	78.00	78.70	80.00	81.30	81.00	79.10	81.70	79.50	80.20	83.90	82.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.15		Painting top of roof with bitumen of approved quality @17kg/10sqm impregnated with a coat of coarse sand at 60cutm/10sqm, including cleaning the slab surface with brushes and finally with a piece of cloth lightly soaked in kerosene oil complete:													
A 12.15.1		With residual type petroleum bitumen of grade VG- 10	Sqm	196.40	189.00	196.40	210.20	224.50	221.20	199.00	229.40	204.90	211.00	256.40	241.30
A 12.16		10cm thick (average) mud phaska of damped brick earth on roofs laid to slope consolidated and plastered with 25mm thick mud mortar mixed with bhusa @35kg/cum of earth and gobri leaping with mix 1:1 (1 clay: 1 cow dung) and covered with flat tile bricks, grouted with cement mortar 1:3 (1 cement:3 fine sand) mixed with 2% of integral water proofing compound by weight of cement and finished neat:													
A 12.16.1		With common burnt clay F.P.S. (non modular) brick tile of class designation 10	Sqm	1053.60	1008.70	1053.60	1108.60	1194.30	1174.50	1068.90	1205.40	1081.20	1136.00	1290.40	1240.80
A 12.17		10cm thick (average) mud phaska of damped brick earth on roofs laid to slope consolidated and plastered with 25mm thick mud mortar with bhusa @35kg/cum of earth and gobri leaping with mix 1:1 (1 clay: 1 cow dung) and covered with machine moulded tile bricks, grouted with cement mortar 1:3 (1 cement:3 fine sand) mixed with 2% of integral water proofing compound by weight of cement and finished neat:													
A 12.17.1		With machine moulded common burnt clay F.P.S. (non modular) brick tile of class designation 12.5, conforming to IS 2690	Sqm	1078.60	1032.10	1078.60	1135.30	1224.00	1203.50	1094.40	1235.30	1106.90	1163.80	1322.70	1271.60
A 12.18		Extra for every additional 1 cm thickness of mud phaska	Sqm	39.90	37.80	39.90	42.10	46.10	45.20	40.60	46.40	40.90	43.60	49.50	47.70
A 12.19		Providing and laying brick tiles over mumty roofs, grouted with cement mortar 1:3 (1 cement:3 fine sand) mixed with 2% of integral water proofing compound by weight of cement, over 12mm layer of cememt mortar 1:3 (1 cement: 3 fine sand) and finished neat:													
A 12.19.1		With common burnt clay F.P.S. (non modular) brick tile of class designation 10	Sqm	579.00	540.80	579.00	646.90	724.50	706.60	597.30	743.70	619.80	660.20	859.60	794.00
A 12. 20		Providing and laying pressed clay tiles (as per approved pattern 20mm nominal thickness of approved size) on roofs jointed with cement mortar 1:4 (1 cement:4 coarse sand) mixed with 2% of integral water proofing compound, laid over a bed of 20mm thick cement mortar 1:4 (1 cement: 4 coarse sand) and finished neat:	Sqm	685.70	643.70	685.70	767.00	853.40	833.50	707.00	877.90	735.90	777.90	1020.20	940.10
A 12.21		Providing gola 75x75 mm in cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 stone aggregate 10mm and down gauge), including finishing with cement mortar 1:3 (1 cement: 3 fine sand) as per standard design:													
A 12.21.1		In 75x75 mm deep chase	Metre	241.60	235.60	241.60	258.50	271.90	268.80	247.30	276.90	253.30	258.70	304.20	289.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.22		Making khurras 45x45 cm with average minimum thickness of 5cm cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate of 20mm nominal size) over P.V.C. sheet 1mx1mx400 micron, finished with 12mm cement plaster 1:3 (1 cement:3 coarse sand) and a coat of neat cement, rounding the edges and making and finishing the outlet complete.	Metre	303.70	286.30	303.70	338.50	374.40	366.10	314.40	384.00	325.70	343.80	440.60	408.70
A 12.23		Providing sand stone slab for roofing and laying them in cement mortar 1:4 (1 cement:4 coarse sand) over wooden karries or R.C.C. battens or structural steel sections (Karries or battens or structural steel sections to be paid seperately), including pointing the ceiling joints with cement mortar 1:3 (1 cement: 3 fine sand) complete:													
A 12.23.1		Red sand stone slab													
A 12.23.1.1		40 to 50 mm thick	Sqm	783.20	754.40	783.20	814.70	868.70	856.30	792.10	874.10	797.70	834.00	920.80	893.20
A 12.23.2		White sand stone slab	Sqm												
A 12.23.2.1		40 to 50 mm thick	Sqm	810.30	779.80	810.30	843.60	901.00	887.70	819.70	906.60	825.60	864.20	955.90	926.70
A 12.24		Providing and fixing insulating board ceiling of approved quality with necessary nails etc. complete (frame work to be paid seperately):													
A 12.24.1		Natural colour insulating board													
A 12.24.1.1		12mm thick	Sqm	764.20	737.40	764.20	791.00	840.70	829.30	771.80	844.60	775.70	810.10	882.90	859.90
A 12.24.2		White face insulating board													
A 12.24.2.1		12mm thick	Sqm	809.50	779.70	809.50	839.20	894.50	881.70	818.00	898.70	822.20	860.50	941.20	915.70
A 12.24.3		Flame retardant face insulating board													
A 12.24.3.1		12mm thick	Sqm	1067.30	1014.80	1067.30	1107.20	1193.10	1160.60	1074.20	1187.00	1074.50	1140.20	1253.00	390.70
A 12.25		Providing and fixing flat pressed 3 layer medium density particle board or graded particle board (Grade I) IS: 3087 marked, in ceiling with necessary nails etc. complete (frame work to be paid seperately):													
A 12.25.1		12mm thick	Sqm	905.40	869.40	905.40	941.50	1008.40	993.00	915.70	1013.50	920.90	967.20	1065.00	1034.10
A 12.26		Providing and fixing plain multipurpose cement board(high pressure steam cured) with suitable screws for cement particle board in ceiling etc. complete (frame work to be paid seperately):													
A 12.26.1		6mm thick cement fibre board as per IS: 14862	Sqm	764.20	737.40	764.20	791.00	840.70	829.30	771.80	844.60	775.70	810.10	882.90	859.90
A 12.26.2		6mm thick cement bonded wood particle board as per IS: 14276	Sqm	737.00	712.00	737.00	762.00	808.50	797.80	744.20	812.10	747.70	779.90	847.80	826.40
A 12.27		Extra for circular cutting including wastage in ceiling with:													
A 12.27.1		2nd class teak wood planks 20mm thick	Metre	398.00	397.60	398.00	398.40	399.20	399.10	398.10	399.30	398.20	398.70	399.90	399.60
A 12.27.2		Natural colour insulating board													
A 12.27.2.1		12mm thick	Metre	342.30	338.80	342.30	345.70	352.20	350.70	343.30	352.70	343.80	348.20	357.70	354.70
A 12.27.3		White face insulating board:													
A 12.27.3.1		12mm thick	Metre	347.90	344.00	347.90	351.70	358.90	357.20	349.00	359.50	349.50	354.50	365.00	361.70
A 12.27.4		Flame retardant face insulating board													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.27.4.1		12mm thick	Metre	380.00	373.30	380.00	385.10	396.00	391.90	380.90	395.30	380.90	389.30	403.70	296.30
A 12.27.5		Standard quality hard board sheet:													
A 12.27.5.1		3mm thick	Metre	325.40	323.00	325.40	327.70	332.20	331.10	326.00	332.50	326.40	329.40	335.90	333.90
A 12.27.5.2		4.5 mm thick	Metre	342.30	338.80	342.30	345.70	352.20	350.70	343.30	352.70	343.80	348.20	357.70	354.70
A 12.28		Extra for providing and fixing ceiling to curved surfaces in narrow widths	Sqm	294.30	294.30	294.30	294.30	294.30	294.30	294.30	294.30	294.30	294.30	294.30	294.30
A 12.31		Providing 10mm thick plaster of paris (gypsum anhydrous) ceiling upto a height of 5m above floor level, over first class kail wood strips 25x6mm with 10mm gap in between and reinforced with rabbit wire mesh fixed to wooden frame (frame work to be paid seperately):													
A 12.31.1		Flat surfaces	Sqm	1289.90	1270.00	1289.90	1309.80	1346.70	1338.20	1295.60	1349.50	1298.40	1324.00	1377.90	1360.90
A 12.31.2		Curved surfaces	Sqm	1520.70	1500.80	1520.70	1540.60	1577.50	1569.00	1526.40	1580.30	1529.20	1554.80	1608.70	1591.70
A 12.32		Extra for sunk or raised mouldings in the Plaster of Paris (Gypsum anhydrous) ceiling.	Sqm	419.40	413.10	419.40	425.60	437.10	434.40	421.10	438.00	422.00	430.00	446.80	441.50
A 12.33		Extra for providing Plaster of Paris (Gypsum anhydrous) ceiling above 5m height from floor level.	Sqm	175.00	174.70	175.00	175.30	175.90	175.70	175.10	175.90	175.20	175.50	176.30	176.10
A 12.34		Providing and fixing thermal insulation of ceiling (under deck insulation) with Resin Bonded fibre glass wool conforming to IS: 8183, density 24 kg/ m ³ , 50mm thick, wrapped in 200 G Virgin Polythene bags, fixed to ceiling with metallic cleats (50x50x3mm) @60cm and wire mesh of 12.5mmx24 gauge wire mesh, for top most ceiling of building.	Sqm	622.90	596.10	622.90	649.60	699.30	687.80	630.50	703.10	634.30	668.70	741.30	718.40
A 12.35		Providing and fixing thermal insulation of ceiling (under deck insulation) with Resin Bonded fibre glass wool conforming to IS: 8183. density 16 kg/ m ³ , 50mm thick, wrapped in 200 G Virgin Polythene bags placed over existing false ceiling and held in position by criss-crossing G.I. wire.	Sqm	275.10	262.20	275.10	288.10	312.20	306.60	278.90	314.10	280.70	297.40	332.60	321.50
A 12.36		Thermal Insulation of roofing with expanded polystyrene fixed with suitable adhesive to the false ceiling as per the directions of the Engineer-in-Charge:													
A 12.36.1		With Type N- Normal 50mm thick	Sqm	308.70	293.60	308.70	323.90	352.10	345.60	313.10	354.20	315.20	334.70	375.90	362.90
A 12.36.2		With Type SE- Self Extinguishing type 50mm thick	Sqm	354.00	335.90	354.00	372.10	405.80	398.00	359.20	408.40	361.80	385.10	434.30	418.70
A 12.37		Providing and fixing 100mm dia. And 60cm long rain water spout in cement mortar 1:4 (1 cement: 4 fine sand)													
A 12.37.1		Stone ware spout	Each	128.30	123.50	128.30	133.00	141.70	139.70	129.60	142.40	130.30	136.30	149.10	145.10
A 12.38		Providing and fixing M.S holder bat clamps of approved design to C.I. or S.C.I. rain water pipes embedded in and including cement concrete blocks 10x10x10cm of 1:2:4 mix (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size) and cost of cutting holes and making good the walls etc.:													
A 12.38.1		100mm diameter	Each	267.60	263.50	267.60	272.60	280.40	278.60	269.10	281.30	270.20	275.20	288.80	284.40
A 12.38.2		150mm diameter	Each	292.30	286.60	292.30	299.00	309.70	307.20	294.30	310.90	295.60	302.70	320.70	314.90
A 12.39		Providing lead caulked joints to sand cast iron rain water pipes and fittings:													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.39.1		100 mm dia. Pipe	Each	439.90	422.70	439.90	457.10	489.10	481.80	444.80	491.60	447.30	469.50	516.20	501.40
A 12.39.2		150 mm dia. Pipe	Each	604.70	580.20	604.70	629.30	674.90	664.30	611.70	678.40	615.20	646.80	713.40	692.40
A 12.40		Providing, fixing and embedding sand cast iron accessories for rain water pipes in the masonry surrounded with 12 mm thick cement mortar of the same mix, as that of masonry (lead caulking will be paid for seperately):													
A 12.40.1		Sand cast iron plain shoes													
A 12.40.1.1		150mm dia.	Each	527.00	492.50	527.00	561.50	625.50	610.70	536.80	630.40	541.80	586.10	679.70	650.10
A 12.41		Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A, including jointing with seal ring conforming to IS: 5382, leaving 10mm gap for thermal expansion, (i) single socketed pipes.													
A 12.41.1		75mm dia.	Metre	207.10	198.50	207.10	215.60	231.60	227.90	209.50	232.80	210.70	221.80	245.10	237.70
A 12.41.2		110mm dia.	Metre	322.00	307.00	322.00	336.90	364.70	358.30	326.20	366.80	328.40	347.60	388.20	375.40
A 12.42		Providing and fixing on wall face unplasticised- PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS: 13592 Type A, including jointing with seal ring conforming to IS: 5382, leaving 10mm gap for thermal expansion.													
A 12.42.1		Coupler													
A 12.42.1.1		75mm	Each	65.00	60.70	65.00	69.20	77.10	75.30	66.20	77.70	66.80	72.20	83.80	80.10
A 12.42.1.2		110mm	Each	109.00	102.00	109.00	117.00	130.00	127.00	111.00	131.00	112.00	122.00	141.00	135.00
A 12.42.2		Single pushfit Coupler													
A 12.42.2.1		75mm	Each	65.00	60.70	65.00	69.20	77.10	75.30	66.20	77.70	66.80	72.20	83.80	80.10
A 12.42.2.2		110mm	Each	97.90	91.50	97.90	104.30	116.20	113.40	99.70	117.10	100.60	108.90	126.30	120.80
A 12.42.3		Single tee with door													
A 12.42.3.1		75x75x75mm	Each	172.10	160.80	172.10	183.30	204.20	199.40	175.30	205.80	176.90	191.40	221.90	212.30
A 12.42.3.2		110x110x110mm	Each	143.10	133.80	143.10	152.50	169.90	165.90	145.80	171.20	147.10	159.20	184.60	176.60
A 12.42.4		Single tee without door													
A 12.42.4.1		75x75x75mm	Each	150.70	140.80	150.70	160.50	178.80	174.60	153.50	180.20	154.90	167.60	194.30	185.90
A 12.42.4.2		110x110x110mm	Each	232.00	216.90	232.00	247.20	275.40	268.90	236.40	277.60	238.50	258.10	299.30	286.20
A 12.42.5		Bend 87.5°													
A 12.42.5.1		75mm bend	Each	79.80	74.60	79.80	85.00	94.70	92.50	81.30	95.40	82.00	88.70	102.90	98.40
A 12.42.5.2		110mm bend	Each	124.20	116.10	124.20	132.40	147.50	144.00	126.60	148.60	127.70	138.20	160.20	153.30
A 12.42.6		Shoe (plain)													
A 12.42.6.1		75mm shoe	Each	66.60	62.30	66.60	71.00	79.10	77.20	67.90	79.70	68.50	74.10	85.90	82.20
A 12.42.6.2		110mm shoe	Each	104.50	97.60	104.50	111.30	124.00	121.10	106.40	125.00	107.40	116.20	134.70	128.90
A 12.43		Providing and fixing unplasticised- PVC pipe clips of approved design to unplasticised- PVC rain water pipes by means of 50x50x50mm hard wood plugs, screwed with M.S. screws of required length, including cutting brick work and fixing in cement mortar 1:4 (1 cement: 4 coarse sand) and making good the wall etc. complete.													
A 12.43.1		75mm	Nos	269.50	265.20	269.50	273.80	281.80	279.90	270.80	282.40	271.40	276.90	288.50	284.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.43.2		110mm	Nos	267.90	263.70	267.90	272.10	279.80	278.00	269.10	280.40	269.70	275.00	286.40	282.80
A 12.44		Providing and fixing to the inlet mouth of rain water pipe cast iron grating 15cm diameter and weighing not less than 440 grams	Each	44.50	41.50	44.50	47.40	52.80	51.50	45.30	53.20	45.70	49.40	57.30	54.80
A 12.45		Providing and fixing false ceiling at all height including providing and fixing of frame work made of special sections, power pressed from M.S sheets and galvanised with zinc coating of 120gms/sqm (both side inclusive) as per IS: 277 and consisting of angle cleats of size 25mm wide x 1.6mm thick with flanges of 27mm and 37mm, at 1200mm centre to centre, one flange fixed to the ceiling with dash fastener 12.5mm dia x 50mm long with 6mm dia bolt, other flange of cleat fixed to the angle hangers of 25x10x0.50mm of required length with nuts and bolts of required size and other end of angle hanger fixed with intermediate G.I. channels 45x15x0.9 mm running at the spacing of 1200mm centre to centre, to which the ceiling section 0.5mm thick bottom wedge of 80mm with tapered flanges of 26mm each having lips of 10.5mm, at 450mm centre to centre shall be fixed in a direction perpendicular to G.I. intermediate channel with connecting clips made out of 2.64mm dia x 230mm long G.I. wire at every junction, including fixing perimeter channels 0.5mm thick 27mm high having flanges of 20mm and 30mm long, the perimeter of ceiling fixed to wall/ partition with the help of rawl plugs at 450mm centre, with 25mm long dry wall screws @230mm interval, including fixing of gypsum board to ceiling section and perimeter channel with the help of dry wall screws of size 3.5x25mm at 230mm c/c,													
		including jointing and finishing to a flush finish of tapered and square edges of the board with recommended jointing compound, jointing tapes, finishing with jointing compound in 3 layers covering up to 150mm on both sides of joints and two coats of primer suitable for board, all as per manufacturer's specification and also including the cost of making openings for light fittings, grills, diffusers, cutouts made with frame of perimeter channels suitably fixed, all complete as per drawing, specification and direction of the Engineer-in-Charge but excluding the cost of painting with:													
A 12.45.1		12.5mm thick tapered edge gypsum plain board conforming to IS: 2095- (Part- I): 2011 (Board with BIS Certification marks)	Sqm	1276.20	1225.60	1276.20	1326.90	1421.00	1399.30	1290.70	1428.30	1298.00	1363.10	1500.60	1457.20
A 12.45.2		12.5mm thick tapered edge Glass Reinforced Gypsum (GRG) board conforming to IS: 2095- (Part- III): 1996 (Board with BIS Certification marks)	Sqm	1315.30	1262.10	1315.30	1368.60	1467.40	1444.60	1330.50	1475.00	1338.10	1406.60	1551.00	1505.40
A 12.45.3		12.5mm thick tapered edge Gypsum moisture resistant board		1375.80	1318.60	1375.80	1433.00	1539.20	1514.70	1392.20	1547.40	1400.30	1473.90	1629.10	1580.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.45.4		Fully perforated Gypsum Plaster Board of size 1200x2400x12.5mm heavy approx. 15% perforated area with perforation size and pattern as approved by the Engineer-in-Charge and as per manufacturer's specification, with all 4 side tapered and backed by acoustical tissue with NRC value not less than 0.60		1609.20	1536.70	1609.20	1681.60	1816.20	1785.10	1629.90	1826.50	1640.20	1733.40	1930.00	1867.90
A 12. 46		Providing and fixing to the inlet mouth of rain water pipe PTMT (an Engineering Thermoplastic) grating square (Slit) 150 mm square with a height of 8mm and weighing not less than 100 gms.	Each	109.90	102.70	109.90	117.10	130.40	127.40	111.90	131.50	113.00	122.20	141.70	135.60
A 12. 47		Providing and fixing UV stabilised fibreglass reinforced plastic sheet roofing up to any pitch, including fixing with polymer coated 'J' or 'L' hooks, bolts and nuts 8mm dia. G.I. plain/bitumen washers complete but excluding the cost of purlins, rafters, trusses etc. the sheet shall be manufactured out of 2400 TEX panel roving incorporating minimum 0.3% ultra-violet stabiliser in resin system under approximately 2400 psi and hot cured. They shall be of uniform pigmentation and thickness without air pocket and shall conform to IS: 10192 and IS: 12866. The sheet shall be opaque or translucent, clear or pigmented, textured or smooth as specified													
A 12. 47.1		2mm thick corrugated (2.5" or 4.2" or 6") or step-down (2" or 3" or 6") as specified	Sqm	1290.30	1214.00	1290.30	1366.60	1508.20	1475.50	1312.10	1519.10	1323.00	1421.00	1628.00	1562.70
A 12. 47.2		2mm thick flat	Sqm	1172.30	1103.80	1172.30	1240.90	1368.20	1338.80	1191.90	1378.00	1201.70	1289.80	1475.90	1417.10
A 12. 48		Providing and fixing on roof pressed clay tile (Mangalore tile) of 20mm nominal thickness and of approved size and as per approved pattern on steel frame work complete (steel frame work to be paid separately)		337.00	323.00	337.00	351.10	377.20	371.20	341.00	379.20	343.10	361.10	399.30	387.30
A 12. 49		Providing and laying on roof pressed clay tile rich (Mangalore tile) of 20mm thickness and of approved pattern on steel frame work complete (steel frame work to be paid separately)	Metre	74.00	70.90	74.00	77.00	82.60	81.30	74.80	83.10	75.30	79.20	87.40	84.80
A 12. 50		Providing and fixing pre-coated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer-in-Charge) 0.50mm (+0.05%) total coated thickness with zinc coating 120gms/sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns. Sheet should have protective guard film of 25 microns minimum to avoid scratches during transportation and should be supplied in single length upto 12m or as desired by Engineer-in Charge. The sheet shall be fixed using self-drilling/self tapping screws of size (5.5x55mm) with EPDM seal, complete upto any pitch in horizontal/ vertical or curved surfaces, excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required.	Sqm	740.20	696.40	740.20	784.00	865.30	846.60	752.70	871.60	759.00	815.30	934.10	896.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12. 51		Providing and fixing precoated galvanised steel sheet roofing accessories 0.50mm (+0.05%) total coated thickness, zinc coating 120gms/sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns using selfdrilling/ self tapping screws complete:													
A 12. 51.1		Ridges plain (500-600mm)	Metre	473.90	447.90	473.90	499.80	548.00	536.90	481.30	551.70	485.00	518.30	588.80	566.50
A 12. 51.2		Flashings/ Aprons. (upto 600mm)	Metre	424.90	399.00	424.90	450.80	498.90	487.80	432.30	502.60	436.00	469.30	539.60	517.40
A 12. 51.3		North light curves	Metre	521.80	490.70	521.80	552.90	610.70	597.40	530.70	615.10	535.20	575.10	659.60	632.90
A 12. 51.4		Barge board (upto 300mm)	Metre	415.90	391.30	415.90	440.50	486.20	475.70	422.90	489.70	426.50	458.10	524.90	503.80
A 12. 51.5		Crimp curve	Sqm	514.80	484.00	514.80	545.60	602.90	589.60	523.60	607.30	528.00	567.60	651.30	624.90
A 12. 51.6		Gutter (600mm over all girth)	Metre	1154.10	1100.30	1150.50	1201.50	1294.80	1273.30	1165.10	1302.40	1172.70	1237.00	1375.60	1331.80
A 12.52		Providing and fixing tiled false ceiling of specified materials of size 595x595mm in true horizontal level, suspended on inter locking matel grid of hot dipped galvanised steel sections (galvanised @120gms/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38mm made from 0.30mm thick (minimum) sheet, spaced at 1200mm centre to centre and "T" of size 24x25mm made of 0.30mm thick (minimum) sheet, 1200mm long spaced between main "T" at 600mm centre to centre to form a grid of 1200x600mm and secondary cross "T" of length 600mm and size 24x25mm made of 0.30mm thick (minimum) sheet to be inter locked at middle of the 1200x600mm panel to form grids of 600x600mm and wall angle of size 24x24x0.3mm and laying false ceiling tiles of approved texture in the grid including, required cutting/ making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspende from ceiling using G.I. slotted cleats of size 27x37x25x1.6mm fixed to ceiling with 12.5mm dia and 50mm long dash fasteners, 4mm G.I. adjustable rods with galvanised butterfly level clips of size 85x30x0.8mm spaced at 1200mm centre to centre along main T, bottom exposed width of 24mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-charge.													
A 12.52.1		G.I. Metal Ceiling Lay in plain Tegular edge Global white colour tiles of size 595x595mm, and 0.5mm thick with 8mm drop; made of G.I. sheet having galvanising of 100 gms/sqm (both sides inclusives) and eletro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending.	Sqm	1697.50	1612.70	1697.50	1782.30	1939.90	1903.50	1721.70	1952.00	1733.90	1842.90	2073.20	2000.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.52.2		G.I. Metal Ceiling Lay in perforated Tegular edge Global white colour tiles of size 595x595mm, and 0.5mm thick with 8mm drop; made of G.I. sheet having galvanising of 100 gms/sqm (both sides inclusives) and 20% perforation with 1.8mm dis. holes and having NRC (noise reduction coefficient) of 0.5, eletro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending and perforation, and backed with a black glass fiber acoustical fleece.	Sqm	1875.60	1779.10	1875.60	1972.00	2151.20	2109.90	1903.10	2165.00	1916.90	2041.00	2302.80	2220.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.52.3		12.5 mm thick square edge PVC Laminated Gypsum Tile of size 595x595 mm, made of Gypsum plasterboard, manufactured from natural gypsum as per IS 2095 part I and laminated with white 0.16mm thick fire retardant PVC film on the face side and 12micron metalized ployester on the back side with all edges sealed with the face side PVC film which goes around and wraps the edges and is bonded to the edges and the back side metalized polyester film so as to make the tile a completely sealed unit.	Sqm	2160.80	2045.60	2160.80	2275.90	2489.80	2440.40	2193.70	2506.20	2210.10	2358.20	2670.70	2572.00
A 12.52.4		12.5 mm thick fully Perforated Gypsum Board Tile made from plasterboard having glass fibre conforming to IS: 2095 part I, of size 595x595 mm, having perforation of 9.7x9.7 mm at 19.4 mm c/c with center borders of 48 mm and the side borders of 30 mm, backed with non woven tissue on the back side, having an NRC (Noise Reduction Coefficient) of 0.79, with 50mm resin bonded glass wool backing.	Sqm	1287.80	1229.80	1287.80	1345.80	1453.60	1428.80	1304.40	1461.90	1312.70	1387.30	1544.80	1495.10
A 12.53		Providing and fixing 15mm thick densified taguler edge eco friendly calcium silicate false ceiling of approved texture of size 595x595mm in true horizontal level, suspended on inter locking matel grid of hot dipped galvanised steel sections (galvanised @120gms/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38mm made from 0.33mm thick (minimum) sheet, spaced at 1200mm centre to centre, and cross "T" of size 24x28mm made of 0.33mm thick (minimum) sheet, 1200mm long spaced between main "T" at 600mm centre to centre to form a grid of 1200x600mm and secondary cross "T" of length 600mm and size 24x28mm made of 0.33mm thick (minimum) sheet to be inter locked at middle of the 1200x600mm panel to form grids of size 600x600mm, resting on periphery wall/partitions on a perimeter wall angle pre-coated steel of size 24x24x3000mm made of 0.40mm thick (minimum) sheet with the help of rawl plugs at 450mm centre to centre with 25mm long dry wall screws @ 230mm interval and laying 15mm thick densified edges calcium silicate ceiling tiles of approved texture in the grid, including, cutting/ making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc., wherever required													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.53		Main "T" runners to be suspende from ceiling using G.I. slotted cleats of size 25x35x1.6mm fixed to ceiling with 12.5mm dia and 50mm long dash fasteners, 4mm G.I. adjustable rods with galvanised steel level clips of size 85x30x0.8mm, spaced at 1200mm centre to centre along main T, bottom exposed width of 24mm of all T-sections shall be pre-painted with polyester baked paint,for all heights, as per specifications, drawings and as directed by Engineer-in-charge.	Sqm	1864.30	1768.50	1864.30	1960.00	2137.80	2096.80	1891.60	2151.50	1905.30	2028.40	2288.30	2206.20
A 12.54		Providing and fixing G.I. Clip in Metal Ceiling System of 600x600mm module which includes providing and fixing "C" wall angle of size 20x30x20mm made of 0.5mm thick pre painted steel along the perimeter of the room with help of nylon sleeves and wooden screws at 300mm c/c, suspending the main C carrier of size 10x38x10mm made of G.I steel 0.7mm thick from the soffit with help of soffit cleat 37x27x25x1.6mm, rawl plugs of size 38x12mm and C carrier suspension clip and main carrier bracket at 1000mm c/c. Inverted triangle shaped spring Tee having height of 24mm and width of 34mm made of G.I. steel 0.45mm thick is then fixed to the C carrier and in direction perpendicular to itat 600 mm centers with help of suspension brackets. Wherever the main C carrier and spring T have to join, C carrier and spring T connectors have to be used. All sections to be galvanised @120gms/ sqm (both side inclusive), fixing with clip in tiles into spring T with:													
A 12.54.1		G.I. Metal Ceiling Clip in plain Beveled edge Global white colour tiles of size 600x600, and 0.5mm thick with 25mm height; made of G.I. sheet having galvanising of 100 gms/sqm (both sides inclusives) and eletro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending.	Sqm	1980.10	1876.80	1980.10	2083.40	2275.30	2231.00	2009.60	2290.00	2024.40	2157.20	2437.70	2349.10
A 12.54.2		G.I. Metal Ceiling Clip in plain Beveled edge Global white colour tiles of size 600x600, and 0.5mm thick with 25mm height; made of G.I. sheet having galvanising of 100 gms/sqm (both sides inclusives) and 20% perforation area with 1.8mm dia holes and having NRC of 0.5, eletro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending and perforation.	Sqm	2161.60	2046.40	2161.60	2276.80	2490.70	2441.40	2194.50	2507.20	2211.00	2359.10	2671.70	2573.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12. 55		Providing and fixing Heat Resistant Terrace Tiles (300x300x20mm) with SRI (Solar refractive index)> 78, solar reflection> 0.70 and initial emittance> 0.75 on waterproof and slope surface of terrace, laid on 20mm thick cement sand mortar in the ratio of 1:4 (1 cement: 4 coarse sand) and grouting the joints with mix of white cement and marble powder in the ratio of 1:1, including rubbing and polishing of the surface upto 3 cuts complete, including providing skirting upto 150mm height along the parapet walls inthe same manner.	Sqm	1616.20	1566.80	1686.80	1805.70	1913.30	1805.10	1776.10	1866.60	1718.50	1971.90	2100.90	1661.80
A 12. 56		Providing and laying roof insulation with 40mm thick impervious sprayed, closed cell free Rigid Polyurethane Foam over deck insulation conforming to IS- 12432 Pt.III (density of foam being 40-45 kg/ cum), over a cooat of Polyurethane primer applied @6-6 sqm/ litre, laying 400 G polythene sheet over PUF spray and providing a wearing coarse of 40mm thick cement screed 1:2:4 (1 cement: 2 coarse sand: 4 stone aggregate nominal size) in chequered rough finish, in panels of 2.5x2.5m and embedding with 24 G wire netting and sealing the joints with polymerized mastic, all complete as per direction of Engineer-in-Charge.	Sqm	1738.40	1624.70	1738.40	1852.20	2063.40	2014.60	1770.90	2079.60	1787.20	1933.40	2242.10	2144.60
A 12. 57		Providing and fixing thermal insulation with Resin Bonded Fibre glass wool conforming to IS: 8183 having density 24kg/m ³ , 50mm thick, wrapped in 200 G Virgin polythene bags fixed to wall with screw, rawl plug and washers and held in position by criss crossing G.I. wire etc. complete as per direction of Engineer-in Charge.	Sqm	359.60	341.10	359.60	378.10	412.40	404.50	364.90	415.10	367.50	391.30	441.50	425.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.58		Providing and fixing tiled false ceiling of specified materials of size 595x595mm in true horizontal level, suspended on interlocking matel grid of hot dipped galvanised steel sections (Galvanised @120gms/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required leength and of size 24x38mm made from 0.30mm thick (minimum) sheet, spaced at 1200mm c/c and cross "T" of size 24x25mm made of 0.30mm thick (minimum) sheet, 1200mm long spaced between main "T" at 600mm c/c to form a grid of 1200x600mm and ssecondary cross "T" of length 600mm and size 24x25mm made of 0.30mm thick (miimium) sheet to be interlocked at middle of the 1200x600mm panel to form grids of 600x600mm and wall angle of size 24x24x0.3mm and laying false ceiling tiles of approved texture in the grid including, required cutting/ making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using G.I. slotted cleats of size 27x37x25x1.6mm fixed to ceiling with 12.5mm dia and 50mm long dash fasteners, 4mm G.I. adjusytable rods with galvanised butterflylevel clips of size 85x30x0.8mm spaced at 1200mm c/c along main T, bottom exposed width of 24mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-Charge													
A 12.58.1		8mm thick fully perforated calcium silicate board made with Calcereous and Siliceous materials reinforced with cellulose fibre manufactured through autoclaving process to give suitable crystalline structure with minimum compressive strength 225kg/sq.cm, bending strength 100 kg/sq.cm, of size 595x595mm, having perforation of dia 10mm with minimum perforated area 18% with non-woven tissue on the backside, having an NRC (Noise Reduction Coefficient) of 0.85, with 50mm thick rockwool of 48kg/cum backing.	sqm	2014.60	1909.00	2014.60	2120.20	2316.20	2271.00	2044.80	2331.30	2059.80	2195.60	2482.20	2391.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12.59		Providing and fixing false ceiling at all height including providing and fixing of frame work made of special sections, power pressed from M.S sheets and galvanised with zinc coating of 120gms/sqm (both side inclusive) as per IS: 277 and consisting of angle cleats of size 25mm wide x 1.6mm thick with flanges of 27mm and 37mm, at 1200mm centre to centre, one flange fixed to the ceiling with dash fastener 12.5mm dia x 50mm long with 6mm dia bolt, other flange of cleat fixed to the angle hangers of 25x10x0.50mm of required length with nuts and bolts of required size and other end of angle hanger fixed with intermediate G.I. channels 45x15x0.9 mm running at the spacing of 1200mm centre to centre, to which the ceiling section 0.5mm thick bottom wedge of 80mm with tapered flanges of 26mm each having lips of 10.5mm, at 450mm centre to centre shall be fixed in a direction perpendicular to G.I. intermediate channel with connecting clips made out of 2.64mm dia x 230mm long G.I. wire at every junction, including fixing perimeter channels 0.50mm thick 27mm high having flanges of 20mm and 30mm long, the perimeter of ceiling fixed to wall/ partition with the help of rawl plugs at 450mm centre, with 25mm long dry wall screws @230mm interval, including fixing of Calcium Silicate board to ceiling section and perimeter channel with the help of dry wall screws of size 3.5x25mm at 230mm c/c, including jointing and finishing to a flush finish of tapered and square edges of the board with recommended jointing compound, jointing tapes, finishing with jointing compound in 3 layers covering up to 150mm on both sides of joints and two coats of primer suitable for board, all as per manufacturer's specification and also including the cost of making openings for light fittings, grills, diffusers, cutouts made with frame of perimeter channels suitably fixed, all complete as per drawing, specification and direction of the Engineer-in-Charge but excluding the cost of painting with:													
A 12.59.1		8mm thick Calcium Silicate Board made with Calcareous and Siliceous materials reinforced with cellulose fibre manufactured through autoclaving process.	Sqm	1358.60	1302.50	1358.60	1414.70	1518.80	1494.80	1374.60	1526.80	1382.60	1454.70	1606.90	1558.80
A 12. 60		Providing and fixing thermal insulation of ceiling (under deck insulation) with Resin Bonded Rockwool conforming to IS: 8183 having density 48kg/m ³ , 50mm thick, wrapped in 200 G Virgin polythene bags fixed to ceiling with metallic cleats (50x50x3mm) @60cm and wire mesh of 12.5mmx24 gauge wire mesh, for top most ceiling of building.	Sqm	622.90	596.10	622.90	649.60	699.30	687.80	630.50	703.10	634.30	668.70	741.30	718.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 12. 61		Providing and fixing thermal insulation with Resin Bonded Rockwool conforming to IS: 8183, having density 48kg/m ³ , 50mm thick, wrapped in 200 G Virgin polythene bags placed over existing false ceiling and held in position by criss-crossing G.I. wire.	Sqm	353.00	335.00	353.00	371.10	404.60	396.90	358.20	407.20	360.80	384.00	433.00	417.50
A 12. 62		Providing and fixing thermal insulation with Resin Bonded Rockwool conforming to IS: 8183, having density 48kg/m ³ , 50mm thick, wrapped in 200 G Virgin polythene bags fixed to wall with screw, rawl plug and washers and held and in position by criss-crossing G.I. wire etc. complete as per the direction of the Engineer-in Charge.	Sqm	359.60	341.10	359.60	378.10	412.40	404.50	364.90	415.10	367.50	391.30	441.50	425.70
A 12. 63		Providing and applying two coats of High Albedo paint having minimum Solar Reflective Index (SRI) 108 (with Solar Reflectants and Thermal emittance tested as per ASTM C 1549 and ASTM C 1371 respectively), VOC less than 10 cc/gm. The coating thickness and the methodology of application shall strictly as per manufacturer's specifications and as approved by Engineer-in Charge. Surface preparation includes cleaning with metal wire brush to remove all dust, fungus etc. washing with water all complete. The contractor shall give guarantee for the performance of SRI and also the durability of coating, all complete as per direction of Engineer-in-Charge.	Sqm	351.80	333.80	351.80	369.90	403.40	395.70	357.00	406.00	359.50	382.80	431.80	416.30
		Zinc Aluminium Alloy Galvanized coloured profile steel (DYNA, DURASHINE, BLUESCOPE etc)													
A 12. 64		Providing Zinc Aluminium Alloy Galvanized coloured trapezoidal profile steel (width 1120 mm) (DYNA, DURASHINE, BLUESCOPE etc) complete (upto a pitch of 60 degrees) excluding the cost of purlins, rafters and trusses.													
A 12.64.1		0.40 mm thick	Sqm	1794.60	1740.00	1794.60	1849.20	1950.60	1927.20	1810.20	1958.40	1818.00	1888.20	2036.40	1989.60
A 12.64.2		0.50 mm thick	Sqm	1924.00	1861.70	1924.00	1986.30	2102.00	2075.30	1941.80	2110.90	1950.70	2030.80	2199.80	2146.50
A 12.64.3		0.60 mm thick	Sqm	2109.00	2035.00	2109.00	2183.00	2320.40	2288.70	2130.10	2331.00	2140.70	2235.80	2436.70	2373.20
A 12.64.4		0.80 mm thick	Sqm	2407.40	2314.60	2407.40	2500.10	2672.30	2632.50	2433.80	2685.50	2447.10	2566.30	2818.00	2738.50
A 12.65		Providing Plain sheet ridges, gutter, valley fixed with polymer coated J. or L hooks, bolts and nuts and Screws complete													
A 12.65.1		0.40 mm thick	Meter	728.90	696.40	728.90	761.40	821.70	807.80	738.20	826.40	742.80	784.60	872.80	845.00
A 12.65.2		0.50 mm thick	Meter	786.10	749.90	786.10	822.40	889.70	874.20	796.50	894.90	801.70	848.30	946.70	915.60
A 12.65.3		0.60 mm thick	Meter	843.40	803.40	843.40	883.40	957.70	940.50	854.80	963.40	860.50	912.00	1020.50	986.20
A 12.65.4		0.80 mm thick	Meter	943.60	897.10	943.60	990.20	1076.60	1056.70	956.90	1083.30	963.60	1023.40	1149.80	1109.90
A 12.66		Providing Zinc Aluminium Alloy Galvanized coloured tile profile steel (DYNA, DURASHINE, BLUESCOPE etc) complete (upto a pitch of 60 degrees) excluding the cost of purlins, rafters and trusses.													
A 12.66.1		0.40 mm thick	Sqm	1947.80	1883.10	1947.80	2012.40	2132.40	2104.70	1966.20	2141.60	1975.50	2058.60	2234.00	2178.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		POLYCARBONATE ROOF													
A 12.67		Providing and fixing of 10 mm thick multiwall laxan Polycarbonate sheet of approved IS Quality to be done with specially designed aluminium profile section and EPDM rubber to make the entire system water tight, Silicon sealants to be used complete with fitting and fixing in place excluding the cost of purlins, rafters and trusses.	Sqm	3471.10	3319.40	3471.10	3622.90	3904.60	3839.60	3514.50	3926.30	3536.20	3731.20	4143.10	4013.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
13.0 FINISHING															
A 13.1		12 mm Cement Plaster of mix:													
A 13.1.1	MF	1:4(1 cement: 4 fine sand)	Sqm	265.40	250.30	265.40	302.20	334.90	327.40	274.90	347.30	289.70	302.50	414.30	377.00
A 13.1.2	MF	1:6 (1 cement: 6 fine sand)	Sqm	246.60	232.50	246.60	280.00	310.10	303.20	254.90	321.50	268.50	280.30	383.10	348.80
A 13.2		15 mm Cement Plaster on the rough side of single or half brick wall of mix:													
A 13.2.1	MF	1:4 (1 cement: 4 fine sand)	Sqm	308.00	290.00	308.00	351.80	390.80	381.80	319.20	405.60	336.90	352.10	485.50	441.10
A 13.2.2	MF	1:6 (1 cement: 6 fine sand)	Sqm	211.80	195.00	211.80	251.70	287.50	279.20	221.70	301.10	237.90	252.00	374.50	333.70
A 13.3		20 mm Cement Plaster of mix:													
A 13.3.1	MF	1:4 (1 cement: 4 fine sand)	Sqm	371.40	348.00	371.40	428.40	479.10	467.40	386.00	498.30	409.00	428.80	602.20	544.40
A 13.3.2	MF	1:6 (1 cement:6 fine sand)	Sqm	342.10	320.30	342.10	394.00	440.50	429.80	355.00	458.20	376.10	394.30	553.70	500.60
A 13.4		12 mm Cement Plaster of mix:													
A 13.4.1	MF	1:4 (1 cement: 4 coarse sand)	Sqm	298.20	283.10	298.20	335.00	367.70	360.10	307.60	380.10	322.50	335.30	447.00	409.80
A 13.4.2	MF	1:6 (1 cement: 6 coarse sand)	Sqm	279.40	265.30	279.40	312.80	342.90	336.00	287.70	354.30	301.30	313.10	415.90	381.60
A 13.5		15 mm Cement Plaster on rough side of single or half brick wall of mix:													
A 13.5.1	MF	1:4 (1 cement: 4 coarse sand)	Sqm	347.10	329.10	347.10	391.00	430.00	421.00	358.40	444.70	376.10	391.30	524.70	480.20
A 13.5.2	MF	1:6 (1 cement: 6 coarse sand)	Sqm	324.60	307.80	324.60	364.50	400.40	392.10	334.50	413.90	350.80	364.80	487.40	446.60
A 13.6		20 mm Cement Plaster of mix:													
A 13.6.1	MF	1:4 (1 cement: 4 coarse sand)	Sqm	422.40	399.00	422.40	479.40	530.00	518.40	437.00	549.20	460.00	479.80	653.20	595.40
A 13.6.2	MF	1:6 (1 cement: 6 coarse sand)	Sqm	393.10	371.30	393.10	445.00	491.50	480.80	406.00	509.20	427.10	445.30	604.70	551.60
A 13.7		12 mm cement plaster finished with a floating coat of neat cement of mix:													
A 13.7.1	MF	1:3 (1 cement: 3 fine sand)	Sqm	345.00	327.60	345.00	388.80	427.20	418.40	356.80	441.70	374.10	389.20	520.10	476.50
A 13.7.2	MF	1:4 (1 cement: 4 fine sand)	Sqm	326.10	309.80	326.10	366.60	402.50	394.20	336.80	415.90	352.90	367.00	488.90	448.30
A 13.8		15 mm cement plaster on rough side of single or half brick wall finished with a floating coat of neat cement of mix:													
A 13.8.1	MF	1:3 (1 cement: 3 fine sand)	Sqm	391.20	370.70	391.20	442.70	487.90	477.50	405.00	505.00	425.40	443.20	597.40	546.00
A 13.8.2	MF	1:4 (1 cement: 4 fine sand)	Sqm	368.70	349.40	368.70	416.30	458.40	448.60	381.20	474.20	400.20	416.70	560.20	512.40
A 13.9		Cement plaster 1:3 (1 cement: 3 coarse sand) finished with a floating coat of neat cement.													
A 13.9.1	MF	12 mm cement plaster	Sqm	377.70	360.40	377.70	421.60	460.00	451.10	389.60	474.50	406.90	422.00	552.90	509.30
A 13.9.2	MF	20 mm cement plaster	Sqm	512.40	486.20	512.40	578.30	636.10	622.80	530.00	658.00	556.20	578.80	776.40	710.60
A 13.10	MF	15 mm cement plaster 1:3 (1 cement: 3 coarse sand) finished with a floating coat of neat cement on the rough side of single or half brick wall.	Sqm	430.30	409.90	430.30	481.90	527.10	516.70	444.20	544.10	464.60	482.30	636.60	585.20
A 13.11	MF	18 mm cement plaster in two coats under layer 12 mm thick cement plaster 1:5 (1 cement: 5 coarse sand) finished with a top layer 6mm thick cement plaster 1:6 (1 cement: 6 fine sand).	Sqm	413.60	392.10	413.60	465.20	511.30	500.60	426.50	528.80	447.50	465.50	623.40	570.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.12	MF	18 mm cement plaster in two coats under layer 12 mm thick cement plaster 1:5 (1 cement: 5 coarse sand) and a top layer 6 mm thick cement plaster 1:3 (1 cement: 3 coarse sand) finished rough with sponge.	Sqm	448.80	426.30	448.80	503.70	552.40	541.20	462.90	570.90	485.10	504.10	671.00	615.40
A 13.13	MF	12 mm cement plaster 1:2 (1 cement: 2 stone dust).	Sqm	303.40	297.70	303.40	323.70	338.00	334.70	311.90	343.30	318.20	324.00	372.20	356.10
A 13.14	MF	15 mm cement plaster 1:2 (1 cement: 2 stonedust) on the rough side of single or half brick wall.	Sqm	353.30	346.60	353.30	377.50	394.60	390.60	363.40	400.90	371.00	377.80	435.30	416.10
A 13.15	MF	20 mm cement plaster 1:2 (1 cement: 2 stone dust):	Sqm	430.40	421.80	430.40	461.90	483.90	478.80	443.60	492.10	453.40	462.20	536.80	512.00
A 13.16	MF	6 mm cement cement plaster of mix:													
A 13.16.1	MF	1:3 (1 cement: 3 fine sand)	Sqm	215.70	207.30	215.70	236.20	254.60	250.30	221.10	261.30	229.20	236.60	298.10	277.60
A 13.17	MF	6mm cement plaster 1:3 (1 cement: 3 fine sand) finished with a floating coat of neat cement and thick coat of Lime wash on top of walls when dry for bearing of R.C.C. slabs and beams.	Sqm	287.70	277.80	287.70	312.00	333.80	328.80	294.40	341.70	303.80	312.70	384.70	360.70
A 13.18		Neat Cement Punning:	Sqm	62.70	61.40	62.70	66.80	70.20	69.40	64.10	71.40	65.50	66.90	78.00	74.30
A 13.19		Rough cast plaster upto 10m height above ground level with a mixture of sand and gravel or crushed stone from 6 mm to 10mm nominal size, dashed over and including the fresh plaster in two layers, under layer 12mm cement plaster 1:4 (1 cement: 4 coarse sand) and top layer 10 mm cement plaster 1:3 (1 cement: 3 fine sand) mixed with 10 % finely grounded hydrated lime by volume of cement.													
A 13.19.1	MF	Ordinary cement finish using ordinary cement	Sqm	686.10	656.10	686.10	757.60	822.40	807.40	704.70	846.10	733.00	759.20	975.30	903.40
A 13. 20	MF	Pebble dash plaster upto 10m height above ground level with a mixture of washed pebble or crushed stone 6mm to 12.5mm nominal size, dashed over and including the fresh plaster in two layers under 12mm cement plaster 1:4 (1 cement: 4 coarse sand) and top layer 10mm cement plaster with cement mortar 1:3 (1 cement: 3 fine sand) mixed with 10% finely grounded hydrated lime by volume of cement.	Sqm	649.00	619.00	649.00	720.70	785.60	770.70	667.70	809.30	696.10	722.30	938.80	866.70
A 13.21		Extra for providing and mixing water proofing material in cement plaster work in proportion recommended by the manufacturers.	Sqm	73.50	68.70	73.50	78.30	87.30	85.20	74.90	88.00	75.60	81.80	94.80	90.70
A 13.22		Extra for plastering exterior walls of height more than 10m from ground level for every additional height of 3m or part thereof:	Sqm	50.40	50.20	50.40	50.50	50.80	50.70	50.40	50.80	50.40	50.60	51.00	50.90
A 13.23		Extra for plastering on circular work not exceeding 6m in radius													
A 13.23.1		In One coat	Sqm	30.50	0.00	30.50	30.60	30.90	30.80	30.50	30.90	30.50	30.70	31.10	31.00
A 13.23.2		In Two coats	Sqm	46.60	46.30	46.60	46.80	47.40	47.30	46.60	47.40	46.70	47.00	47.80	47.60
A 13.24		Extra for plastering done on moulding, cornices or architraves including neat finish to line and level:													
A 13.24.1		In One coat	Sqm	442.60	442.30	442.60	442.90	443.40	443.30	442.70	443.40	442.70	443.10	443.90	443.60
A 13.24.2		In Two coats	Sqm	728.90	728.60	728.90	729.20	729.70	729.60	729.00	729.80	729.00	729.40	730.20	729.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.25		Extra for plastering:													
A 13.25.1		Spherical ceiling	Sqm	113.60	113.00	113.60	114.20	115.30	115.00	113.80	115.40	113.90	114.60	116.20	115.70
A 13.25.2		Groined ceiling	Sqm	123.60	122.90	123.60	124.30	125.70	125.40	123.80	125.80	123.90	124.90	126.90	126.20
A 13.25.3		Flewing soffits	Sqm	74.70	74.40	74.70	74.90	75.50	75.40	74.70	75.50	74.80	75.10	75.90	75.70
A 13.26		Providing and applying plaster of paris putty of 2mm thickness over plastered surface to prepare the surface even and smooth completes.	Sqm	186.60	183.60	186.60	189.60	195.30	194.00	187.50	195.70	187.90	191.80	200.10	197.50
A 13.27		Extra for lining out plaster to imitate stone or concrete blocks walling.	Sqm	70.80	70.80	70.80	70.90	71.00	70.90	70.90	71.00	70.90	70.90	71.00	71.00
A 13.28		12 mm thick plain cement mortar bands in cement mortar 1:4 (1 cement: 4 fine sand):													
A 13.28.1		Flush Band	Sqm	51.50	50.10	51.50	55.10	58.30	57.60	52.50	59.50	53.90	55.20	66.00	62.40
A 13.28.2		Sunk Band	Sqm	56.00	54.50	56.00	59.60	62.80	62.00	56.90	64.00	58.30	59.60	70.50	66.90
A 13.28.3		Raised Band	Sqm	63.20	61.70	63.20	66.80	70.10	69.30	64.10	71.30	65.60	66.90	77.80	74.20
A 13.28.4		Moulded Band	Sqm	105.00	103.50	105.00	108.60	111.70	111.00	105.90	113.00	107.30	108.60	119.50	115.80
A 13.29		18 mm thick plain cement mortar band in cement mortar 1:4 (1 cement: 4 fine sand):													
A 13.29.1		Flush Band	Sqm	63.70	61.50	63.70	68.80	73.30	72.30	65.00	75.00	67.00	68.80	84.40	79.20
A 13.29.2		Sunk Band	Sqm	69.50	67.40	69.50	74.60	79.20	78.10	70.80	80.90	72.90	74.70	90.20	85.10
A 13.29.3		Raised Band	Sqm	78.50	76.30	78.50	83.60	88.30	87.20	79.80	90.00	81.90	83.70	99.40	94.20
A 13.29.4		Moulded Band	Sqm	141.90	139.30	141.90	148.00	153.50	152.20	143.40	155.50	145.90	148.10	166.70	160.50
A 13. 30		18mm thick moulded cement mortar band in two coat under layer 12 mm thick with cement mortar 1:5 (1 cement: 5 coarse sand) top layer 6mm thick with cement mortar 1:4 (1 cement: 4 fine sand).	Sqm	144.10	141.60	144.10	150.00	155.40	154.10	145.60	157.40	148.00	150.10	168.30	162.20
A 13.31		Pointing on brick work or brick flooring with cement mortar 1:3 (1 Cement: 3 fine sand):													
A 13.31.1		Flush/Ruled/Struk or weathered pointing	Sqm	170.50	166.70	170.50	179.20	187.30	185.50	172.80	190.20	176.20	179.60	205.80	197.10
A 13.31.2		Raised and cut pointing	Sqm	277.50	272.00	277.50	290.80	302.80	300.00	281.00	307.10	286.20	291.20	330.90	317.60
A 13.32		Pointing on tile brick work with cement mortar 1:3 (1 Cement: 3 fine sand):													
A 13.32.1		Flush/Ruled/Struk or weathered pointing	Sqm	233.50	227.90	233.50	246.70	258.70	255.90	236.90	263.10	242.10	247.10	286.80	273.60
A 13.33		Pointing on stone work with cement mortar 1:3 (1 Cement: 3 fine sand):													
A 13.33.1		Flushed/ Ruled pointing	Sqm	245.30	242.30	245.30	252.20	258.70	257.20	247.10	260.90	249.80	252.60	273.10	266.30
A 13.33.2		Raised and cut pointing	Sqm	444.90	440.20	444.90	455.90	466.00	463.70	447.80	469.60	452.10	456.30	489.30	478.30
A 13.34		Raised and cut pointing on stone work in white cement mortar 1:3 (1 white cement: 3 marble dust).	Sqm	489.90	484.50	489.90	495.30	505.30	503.00	491.40	506.00	0.00	499.10	513.70	509.10
A 13.35		Pointing on stone slab ceiling with cement mortar 1:2 (1 cement: 2 fine sand):													
A 13.35.1		Flush/Ruled pointing	Sqm	138.60	136.70	138.60	143.30	147.60	146.60	139.90	149.10	141.70	143.50	157.20	152.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.36		Extra for pointing on walls on the outside at hieght more than 10 m from ground level for every additional height of 3 m or part thereof.	Sqm	8.80	8.20	8.80	9.40	10.50	10.20	9.00	10.50	9.10	9.80	11.40	10.90
A 13.37		White wash with Lime to give an even shade:													
A 13.37.1		New work (three or more coat)	Sqm	25.00	24.60	25.00	25.40	26.10	25.90	25.10	26.10	25.20	25.60	26.60	26.30
A 13.38		Satna lime wash on walls one coat.	Sqm	10.10	10.00	10.10	10.30	10.60	10.50	10.20	10.60	10.20	10.40	10.80	10.70
A 13.39		Colour washing such as green, blue or buff to give an even shade:													
A 13.39.1		New work (two or more coats) with a base coat of white washing with lime	Sqm	34.40	33.80	34.40	34.90	35.90	35.70	34.50	36.00	34.60	35.30	36.80	36.30
A 13.39.2		New work (two or more coats) with a base coat of whiting	Sqm	27.90	27.80	27.90	28.00	28.20	28.20	27.90	28.20	27.90	28.10	28.40	28.30
A 13. 40		Distempering with dry distemper of approved brand and manufacture (two or more coats) of required shades on new work, over and including water thinnable priming coat to give an even shade.	Sqm	107.00	105.80	107.00	108.20	110.50	110.00	107.30	110.70	107.50	109.10	112.40	111.40
A 13.41		Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade:													
A 13.41.1		New work (two or more coats) over and including water thinnable priming coat with cement primer	Sqm	135.70	134.00	135.70	137.40	140.40	139.70	136.20	140.70	136.40	138.50	143.00	141.60
A 13.42		Distempering with 1st quality acrylic distemper (ready mixed) having VOC content less than 50 gms/litre, of approved manufacturer, of required shade and colour complete, as per manufacturer's specification.													
A 13.42.1		Two or more coats on new work	Sqm	80.10	78.70	80.10	81.40	83.90	83.30	80.50	84.00	80.60	82.30	85.90	84.80
A 13.43		Applying one coat of water thinnable cement primer of approved brand and manufacture on wall surface:													
A 13.43.1		Water thinnable cement primer	Sqm	54.90	54.20	54.90	55.60	56.90	56.60	55.10	57.00	55.20	56.10	58.00	57.40
A 13.44		Finishing walls with water proofing cement paint of required shade:													
A 13.44.1		New work (Two or more coat applied @ 3.84 kg/10 sqm)	Sqm	87.00	85.10	87.00	88.90	92.50	91.70	87.60	92.80	87.80	90.30	95.60	93.90
A 13.45		Finishing walls with textured exterior paint of required shade:													
A 13.45.1		New work (Two or more coats applied @ 3.28 ltr/10 sqm) over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm	Sqm	255.40	243.20	255.40	267.50	290.10	284.90	258.80	291.80	260.60	276.20	309.20	298.80
A 13.46		Finishing walls with Acrylic Smooth exterior paint of required shade:													
A 13.46.1		New work (Two or more coats applied @ 1.67ltr/10 sqm) over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm	Sqm	172.50	165.80	172.50	179.30	191.80	188.90	174.50	192.70	175.40	184.10	202.40	196.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.47		Finishing walls with Premium Acrylic Smooth exterior paint with silicone additives of required shade:													
A 13.47.1		New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	Sqm	167.70	161.20	167.70	174.10	186.00	183.20	169.50	186.90	170.40	178.70	196.10	190.60
A 13.48		Finishing walls with Delux Multi surface paint system for interior and exteriors using Primer as per manufactures Specifications:													
A 13.48.1		Two or more coats applied on wall @ 1.25 ltr/10 sqm over and including one coat of special primer applied @ 0.75 ltr/10 sqm.	Sqm	144.30	139.40	144.30	149.20	158.30	156.20	145.70	159.00	146.40	152.70	166.00	161.80
A 13.48.2		Painting wood work with Delux Multi Surface Paint of required shade. Two or more coat applied @0.90 ltr/10 sqm over an under coat of primer applied @0.75 ltr/10 sqm of approved brand or manufacture:	Sqm	129.60	125.70	129.60	133.50	140.80	139.10	130.70	141.40	131.30	136.30	147.00	143.60
A 13.48.3		Painting Steel work with Delux Multi Surface Paint to give an even shade. Two or more coat applied @0.90 ltr/10 sqm over an under coat of primer applied @0.80 ltr/10 sqm of approved brand or manufacture:	Sqm	124.20	120.60	124.20	127.70	134.40	132.90	125.20	134.90	125.70	130.30	140.00	136.90
A 13.48A		Finishing walls with 100% premium acrylic emulsion paint having VOC less than 50 gm/litre and UV resistance as per I.S-15489:2004, Alkali and fungal resistance, dirt resistance exterior paint of required shape (Company depot tinted) with silicon additive.													
A 13.48A.1		New work (Two or more coats applied @ 1.43 litre/10 sqm. Over and including priming coat of exterior primer applied @ 0.90 litre/10 sqm.	Sqm	149.60	144.20	149.60	155.10	165.20	162.90	151.20	166.00	152.00	159.00	173.80	169.10
A 13.50		Applying Primiming coat:													
A 13.50.1		With ready mixed pink or grey primer of approved brand and manufacture on wood work (hard and soft wood)	Sqm	54.30	53.00	54.30	55.50	57.90	57.30	54.70	58.10	54.80	56.40	59.80	58.80
A 13.50.2		With ready mixed aluminium primer of approved brand and manufacture on resinous wood and plywood	Sqm	54.90	53.60	54.90	56.20	58.60	58.10	55.30	58.80	55.50	57.10	60.60	59.50
A 13.50.3		With ready mixed red oxide zinc chromate primer of approved brand and manufacture on Steel galvanised iron/steel works	Sqm	47.00	46.20	47.00	47.90	49.50	49.20	47.30	49.70	47.40	48.50	50.90	50.20
A 13.50.4		With ready mixed red oxide zinc chromate primer of approved brand and manufacture on on steel work (second coat):	Sqm	25.70	25.20	25.70	26.30	27.40	27.10	25.90	27.50	26.00	26.70	28.30	27.80
A 13.51		Painting with silicon and acrylic emulsion based water thinnable sealer of approved brand and manufacture on wet or patchy portion of plastered surfaces:													
A 13.51.1		One Coat	Sqm	82.70	79.70	82.70	85.60	91.00	89.80	83.50	91.40	83.90	87.70	95.60	93.10
A 13.51.2		Two Coats	Sqm	131.40	126.80	131.40	136.10	144.70	142.70	132.80	145.40	133.40	139.40	152.00	148.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.52		Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete													
A 13.52.1		On Steel Works:	Sqm	183.00	178.30	183.00	187.70	196.40	194.40	184.30	197.10	185.00	191.10	203.80	199.80
A 13.52.2		On Concrete Works:	Sqm	182.50	177.80	182.50	187.20	195.90	193.80	183.80	196.50	184.50	190.50	203.20	199.20
A 13.53		Painting on G.S. sheet with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade:													
A 13.53.1		New work (two or more coats) including a coat of approved steel primer but excluding a coat of mordant solution	Sqm	127.50	125.30	127.50	129.80	134.10	133.10	128.20	134.40	128.50	131.50	137.60	135.70
A 13.54		Applying a coat of mordant solution on G.S. sheet													
A 13.54.1		With a solution of 38gms of copper acetate in a litre of soft water.	Sqm	108.50	106.90	108.50	110.10	113.00	112.40	109.00	113.30	109.20	111.20	115.50	114.20
A 13.54.2		With a solution of 13gms of hydrochloric acid in a solution of 13gms each of copper chloride, copper nitrate and ammonium chloride dissolved in a litre of soft water.	Sqm	43.90	43.20	43.90	44.50	45.80	45.50	44.10	45.90	44.10	45.00	46.80	46.20
A 13.55		Painting (two or more coats) on rain water soil, waste and vent pipes and fittings with black anticorrosive bitumastic paint approved brand and manufacture over and including a priming of ready mixed zinc chromate yellow primer on new work:													
A 13.55.1		100 mm Diameter pipes	Sqm	54.90	53.70	54.90	56.10	58.40	57.90	55.30	58.60	55.50	57.00	60.30	59.20
A 13.55.2		150 mm Diameter pipes	Sqm	82.00	80.10	82.00	83.80	87.10	86.30	82.50	87.40	82.70	85.10	90.00	88.40
A 13.56		Painting (two or more coats) on rain water soil, waste and vent pipes and fittings with synthetic enamel paint of approved brand and manufacture and required colour over a priming coat of approved steel primer on new work													
A 13.56.1		100 mm Diameter pipes	Sqm	61.70	60.10	61.70	63.40	66.40	65.70	62.20	66.70	62.40	64.50	69.00	67.60
A 13.56.2		150 mm Diameter pipes	Sqm	84.80	82.30	84.80	87.20	91.80	90.80	85.50	92.20	85.80	89.00	95.70	93.60
A 13.57		Painting with oil type wood preservative of approved brand and manufacture													
A 13.57.1		New Work (Two or more coat)	Sqm	45.10	43.60	45.10	46.70	49.60	49.00	45.60	49.90	45.80	47.80	52.10	50.70
A 13.58		Providing and applying two coat of fire retardant paint on cleaned wood/ ply surface @ 3.5 sqm per litre per coat including preparation of base surface as per recommendation of manufacturer to make the surface fire retardant.	Sqm	324.70	308.40	324.70	341.00	371.20	364.30	329.40	373.60	331.70	352.60	396.80	382.90
A 13.59		Coal tarring two coats on new work using 0.16 litre and 0.12 litre coal tar per sqm in the first coat and second coat respectively	Sqm	47.30	46.40	47.80	49.20	51.90	51.30	48.20	52.10	48.40	50.30	54.20	52.90
A 13. 60		Wall painting with Acrylic emulsion paint of approved brand and manufacture to give even shade													
A 13.60.1		Two or more coats on new work	Sqm	123.70	120.60	123.70	126.80	132.60	131.30	124.60	133.10	125.00	129.10	137.60	134.90
A 13.61		Painting with synthetic enamel paint of approval brand and manufacture to give an even shade													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.61.1		Two or more coats on new work	Sqm	115.00	112.40	115.00	117.50	122.30	121.20	115.70	122.60	116.10	119.30	126.30	124.10
A 13.62		Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade													
A 13.62.1		Two or more coats on new work over an under coat of suitable shade with ordinary paint of approved brand and manufacture	Sqm	167.50	163.80	167.50	171.20	178.10	176.50	168.60	178.60	169.10	173.80	183.90	180.70
A 13.63		Painting with aluminium paint of approved brand and manufacture to give an even shade:													
A 13.63.1		Two or more coats on new work	Sqm	103.50	101.70	103.50	105.30	108.70	107.90	104.10	109.00	104.30	106.60	111.60	110.00
A 13.64		Painting with acid proof paint of approved brand and manufacture of required colour to give an even shade													
A 13.64.1		Two or more coats on new work	Sqm	125.50	122.20	125.50	128.70	134.70	133.30	126.40	135.20	126.90	131.00	139.80	137.10
A 13.65		Painting with black anti corrosive bitumastic paint of approved brand and manufacture to give an even shade													
A 13.65.1		Two or more coats on new work	Sqm	95.90	94.60	95.90	97.20	99.70	99.10	96.30	99.80	96.50	98.20	101.70	100.60
A 13.66		Floor Painting with floor enamel paint of approved brand and manufacture of required colour to give an even shade													
A 13.66.1		Two or more coats on new work	Sqm	143.40	139.00	143.40	147.80	156.00	154.10	144.70	156.70	145.30	151.00	163.00	159.20
A 13.67		Varnishing with varnish of approved brand and manufacture:													
A 13.67.1		Two or more coat of glue sizing with copal varnish over an under coat of flatting varnish.	Sqm	167.10	164.50	167.10	169.80	174.70	173.60	167.90	175.10	168.30	171.70	178.90	176.60
A 13.67.2		Two or more coat of glue sizing with spar varnish or an under coat of flatting varnish.	Sqm	168.20	165.40	168.20	170.90	176.00	174.80	168.90	176.30	169.30	172.80	180.20	177.90
A 13.68		French Spirit polishing													
A 13.68.1		Two or more coats on new works including a coat of wood filler.	Sqm	320.90	318.30	320.90	323.50	328.40	327.20	321.60	328.70	322.00	325.40	332.50	330.20
A 13.69		Polishing on wood work with ready mixed wax polish of approved brand and manufacture													
A 13.69.1		New Work	Sqm	135.00	133.60	135.00	136.50	139.30	138.60	135.50	139.50	135.70	137.60	141.60	140.30
A 13.70		Floor polishing on masonry or concrete floors with wax polish of approved brand and manufacture	Sqm	64.40	63.90	64.40	64.90	65.90	65.70	64.50	66.00	64.60	65.30	66.80	66.30
A 13.71		Lettering with Black Japan paint of approved brand and manufacture	Sqm	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10
A 13.72		Washed stone grit plaster on exterior walls of hieght upto 10 metre above ground level in two layers, under layer 12 mm cement plaster 1:4 (1 cement : 4 coarse sand) furrowing the under layer with scratching tool, applying cement slurry on the under layer @ 2 kg of cement per square metre, top layer 15 mm cement plaster 1:1/2:2 (1 cement : 1/2 coarse sand: 2 stone chipping 10 mm nominal size) in panels with groove all around as per approved pattern, including scrubbing and washing, the top layer with brushes and water to expose the stone chippings, complete as per specification and direction of Engineer-in-Charge (Payment for providing grooves shall be made separately)	Sqm	883.10	856.10	883.10	950.40	1010.50	996.60	901.90	1032.10	927.70	952.40	1150.20	1084.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.73		Forming groove of uniform size in the top layer of washed stone grit plaster as per approved pattern using wooden battens, nailed to the under layer including removal of wooden battens, repair to the edge of panels and finishing the groove complete as per specifications and direction of the Engineer-in-Charge:													
A 13.73.1		15mm wide and 15mm deep groove	Sqm	52.70	52.20	52.70	53.20	54.20	54.00	52.90	54.30	52.90	53.60	55.10	54.60
A 13.73.2		20 mm wide and 15mm deep groove	Sqm	53.20	52.70	53.20	53.80	54.80	54.50	53.40	54.80	53.50	54.20	55.60	55.10
A 13.74		Extra for washed grit plaster on exterior walls of height more than 10m from ground level for every additional height of 3m or part thereof:	Sqm	136.50	131.20	136.50	141.70	151.50	149.30	138.00	152.30	138.70	145.50	159.80	155.30
A 13.75		Extra for washed stone grit plaster on circcular work not exceeding 6m in radius (in two coats)	Sqm	94.70	93.50	94.70	95.80	98.00	97.50	95.00	98.10	95.10	96.60	99.80	98.80
A 13.76		Forming groove of uniform size from 12*12 mm and upto 25*15 mm in the top layer of washed stone grit plastered surface as per approved pattern, including providing and fixing Aluminium Channels of appropriate size and thickness (not less than 2mm) nailed to the under layer with rust proof screws and nails and finishing the groove complete as per specifications and direction of the engineer-in-Charge	Sqm	96.10	90.80	96.10	101.40	111.20	108.90	97.60	111.90	98.30	105.10	119.50	114.90
A 13.77		Extra for using white cement in place of ordinary cement in the top layer of the item of washed stone grit plaster.	Sqm	243.00	225.90	243.00	247.70	275.50	269.10	243.40	273.40	240.20	263.70	276.60	273.40
A 13.78		Providing and applying 12 mm thick (average) premixed formulated one coat gypsum lightweight plaster having additives and light weight aggregates as vermiculite /perlite respectively conforming to IS:2547 (part- I & II) 1976, applied on hacked/ uneven background such as bare brick/block/RCC work on walls and ceiling at all floors and locations, finishing in smooth line and level etc complete.	Sqm	340.10	328.90	340.10	351.40	372.20	367.40	343.30	373.80	344.90	359.40	389.80	380.20
A 13.79		Extra for addition of synthetic polyster triangular fibre of length 6mm, effective diameter 10-40 microns and specific gravity of 1.34 to 1.40 in cement plaster/mortar by using 125 gms of synthetic polyster triangular fibre for 50 kgs cement used in cement mortar as per direction of Engineer-in-Charge	Sqm	82.30	76.90	82.30	87.70	97.70	95.40	83.90	98.50	84.60	91.50	106.20	101.50
A 13.80		Providing and applying white cement based putty of average thickness 1 mm, of of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete	Sqm	113.60	110.70	113.60	116.50	121.90	120.70	114.40	122.30	114.90	118.60	126.50	124.00
A 13.81		Distempering with 1st quality acrylic distemper, having VOC (Volatile Organic Compound) content less than 50 grams/litre, of approved brand and manufacturer, including applying additional coat wherever required, to achieve even shade and colour.													
A 13.81.1		One Coat	Sqm	46.50	45.80	46.50	47.10	48.30	48.00	46.70	48.40	46.80	47.60	49.30	48.80
A 13.81.2		Two Coats	Sqm	73.60	72.70	73.60	74.50	76.20	75.80	73.80	76.30	74.00	75.10	77.60	76.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.82		Wall painting with Acrylic emulsion paint, having VOC (Volatile organic compound) content less than 50 gm/liter, of approved brand and manufacturer, including applying additional coats wherever required, to achieve even shade and colour.													
A 13.82.1		One Coat	Sqm	63.80	63.00	63.80	64.70	66.30	65.90	64.10	66.40	64.20	65.30	67.70	66.90
A 13.82.2		Two Coats	Sqm	95.10	93.90	95.10	96.40	98.70	98.20	95.50	98.90	95.60	97.30	100.70	99.60
A 13.83		Wall painting with Premium Acrylic emulsion paint of interior grade, having VOC (Volatile organic compound) content less than 50 gm/litre, of approved brand and manufacturer, including applying additional coats wherever required, to achieve even shade and colour.													
A 13.83.1		One Coat	Sqm	69.40	68.20	69.40	70.60	72.90	72.40	69.70	73.10	69.90	71.50	74.80	73.80
A 13.83.2		Two Coats	Sqm	103.80	102.00	103.80	105.70	109.10	108.30	104.40	109.30	104.60	107.00	111.90	110.40
A 13.85		Applying priming coat with primer of approved brand and manufacture, having low VOC (Volatile Organic Compound) content.													
A 13.85.1		With ready mixed pink or grey primer on wood work (hard and soft wood) having VOC content less than 50 gm/litre	Sqm	54.30	53.00	54.30	55.50	57.90	57.30	54.70	58.10	54.80	56.40	59.80	58.80
A 13.85.3		With water thinnable cement primer on wall surface having VOC content less than 50 grams/litre	Sqm	52.30	51.70	52.30	52.80	53.80	53.60	52.40	53.90	52.50	53.20	54.60	54.20
A 13.86		6mm plaster on cement concrete or reinforced cement concrete work with white cement based polymer modified self curing mortars of approved make as per the direction of Engineer-in-Charge.	Sqm	208.00	200.00	208.00	215.90	230.70	227.30	210.20	231.90	211.40	221.60	243.30	236.40
A 13.87		White washing with lime to give an even shade													
A 13.87.1		Old work (two or more coats)	Sqm	14.70	14.50	14.70	15.00	15.40	15.30	14.80	15.50	14.90	15.20	15.80	15.60
A 13.87.2		Old work (one or more coats)	Sqm	8.10	8.00	8.10	8.20	8.40	8.30	8.10	8.40	8.10	8.30	8.50	8.40
A 13.88		Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc complete	Sqm	12.00	11.90	12.00	12.10	12.30	12.20	12.00	12.30	12.00	12.20	12.40	12.40
A 13.89		Distempering with dry distemper of approved brand and manufacture (one or more coats) and of required shade on old work to give an even shade.	Sqm	44.90	44.30	44.90	45.40	46.40	46.20	45.00	46.50	45.10	45.80	47.20	46.80
A 13.90		Distempering with 1st quality acrylic distemper (Ready mix) having VOC content less than 50 grams/litre of approved brand and manufacture to give an even shade:													
A 13.90.1		Old work (one or more coats)	Sqm	51.00	50.10	51.00	52.00	53.70	53.30	51.30	53.80	51.40	52.60	55.20	54.40
A 13.91		Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc complete	Sqm	15.60	15.50	15.60	15.80	16.10	16.10	15.70	16.20	15.70	15.90	16.40	16.30
A 13.92		Painting on G.S. sheet with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13.92.1		Old work (one or more coats)	Sqm	64.50	63.60	64.50	65.50	67.20	66.80	64.80	67.30	64.90	66.10	68.60	67.80
A 13.93		Painting (two or more coats) on rain water,soil, waste and vent pipes and fittings with black anti corrosive bitumastic paint of approved brand and manufacture over and including a priming coat of ready mixed zinc chromate yellow primer on new work:													
A 13.93.1		75 mm diameter pipes	Sqm	41.10	40.20	41.10	41.90	43.60	43.20	41.30	43.70	41.40	42.60	44.90	44.20
A 13.94		Painting (one or more coats) on rain water,soil, waste and vent pipes and fittings with black anti corrosive bitumastic paint of approved brand and manufacture on old work:													
A 13.94.1		75 mm diameter pipes	Sqm	17.20	16.90	17.20	17.50	18.10	18.00	17.30	18.10	17.40	17.70	18.60	18.30
A 13.94.2		100 mm diameter pipes	Sqm	22.70	22.30	22.70	23.00	23.70	23.60	22.80	23.80	22.80	23.30	24.30	24.00
A 13.94.3		150 mm diameter pipes	Sqm	32.20	31.70	32.20	32.70	33.60	33.40	32.40	33.70	32.40	33.10	34.40	34.00
A 13.95		Painting (two or more coats) on rain water,soil, waste and vent pipes and fittings with aluminium paint of approved brand and manufacture over a priming coat of ready mixed zinc chromate yellow primer on new work:													
A 13.95.1		75 mm diameter pipes	Metre	40.50	39.70	40.50	41.30	42.90	42.50	40.70	43.00	40.90	41.90	44.20	43.50
A 13.95.2		100 mm diameter pipes	Metre	57.20	55.80	57.20	58.50	61.10	60.50	57.60	61.20	57.80	59.50	63.20	62.00
A 13.95.3		150 mm diameter pipes	Metre	90.10	87.80	85.30	87.30	91.10	90.20	85.90	91.40	86.20	88.80	94.30	92.50
A 13.96		Painting (one or more coats) on rain water,soil waste and vent pipes and fittings with synthetic enamel paint of approved brand and manufacture and required colour on old work:													
A 13.96.1		75 mm diameter pipes	Metre	20.60	20.10	20.60	21.10	22.00	21.80	20.80	22.10	20.80	21.50	22.80	22.40
A 13.96.2		100 mm diameter pipes	Metre	26.50	25.90	26.50	27.10	28.30	28.00	26.70	28.40	26.80	27.60	29.30	28.70
A 13.96.3		150 mm diameter pipes	Metre	37.90	37.00	37.90	38.70	40.30	40.00	38.10	40.40	38.20	39.30	41.70	40.90
A 13.97		Painting with oil type wood preservative of approved brand and manufacture:													
A 13.97.1		Old work (one or more coats)	Sqm	34.60	33.30	34.60	35.80	38.20	37.60	34.90	38.30	35.10	36.70	40.10	39.10
A 13.98		Wall painting with plastic emulsion paint of approved brand and manufacture to give an even shade:													
A 13.98.1		One or more coats on old work	Sqm	79.70	77.80	79.70	81.60	85.10	84.30	80.20	85.40	80.50	82.90	88.10	86.50
A 13.99		Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade :													
A 13.99.1		One or more coats on old work	Sqm	75.50	73.80	75.50	77.10	80.10	79.40	75.90	80.40	76.20	78.30	82.70	81.30
A 13. 100		Painting with aluminium paint of approved brand and manufacture to give an even shade :													
A 13.100.1		One or more coats on old work	Sqm	67.20	66.20	67.20	68.30	70.40	69.90	67.60	70.50	67.70	69.10	72.10	71.10
A 13. 101		Painting with acid proof paint of approved brand and manufacture of required colour to give an even shade :													
A 13.101.1		One or more coats on old work	Sqm	81.80	79.80	81.80	83.90	87.70	86.80	82.40	87.90	82.70	85.30	90.90	89.10
A 13. 102		Painting with black anti-corrosive bitumastic paint of approved brand and manufacture to give an even shade :													
A 13.102.1		One or more coats on old work	Sqm	64.40	63.50	64.40	65.30	66.90	66.60	64.60	67.10	64.80	65.90	68.40	67.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13. 103		French spirit polishing :													
A 13.103.1		One or more coats on old work	Sqm	161.80	160.50	161.80	163.20	165.70	165.10	162.20	165.90	162.40	164.10	167.80	166.60
A 13. 104		Polishing on wood work with ready made wax polish of approved brand and manufacture :													
A 13.104.1		Old work	Sqm	68.50	67.70	68.50	69.30	70.80	70.40	68.70	70.90	68.80	69.90	72.00	71.40
A 13. 105		Re-lettering with black Japan paint of approved brand and manufacture.	Cm	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60	2.60
A 13. 106		Painting (one or more coats) with black Japan paint of approved brand and manufacture to give an even shade.	Sqm	66.30	65.20	66.30	67.30	69.20	68.70	66.50	69.30	66.70	68.00	70.80	69.90
A 13. 107		Painting and fixing C.P. brass chain and rubber plug complete for sink or wash basin:													
A 13.107.1		32 mm dia	Each	92.40	86.30	92.40	98.40	109.70	107.10	94.10	110.50	95.00	102.80	119.20	114.00
A 13. 107.2		40 mm dia	Each	92.40	86.30	92.40	98.40	109.70	107.10	94.10	110.50	95.00	102.80	119.20	114.00
A 13. 108		Distempering with 1st quality acrylic distemper (ready made) having VOC content less than 50 gm per ltr. Of approved manufacturee and of required shade and colour complete. As per manufacturer`s specification.													
A 13.108.1		One or more coats on old work	Sqm	45.20	44.30	45.20	46.10	47.90	47.50	45.50	48.00	45.60	46.80	49.30	48.50
A 13. 109		Finishing walls with water proofing cement paint of required shade:													
A 13.109.1		Old work (one or more coats applied @ 2.20 kg/10 sqm)over priming coat of primer applied @ 0.80 litres/10 sqm complete including coast of Priming coat.	Sqm	83.30	81.40	83.30	85.20	88.70	87.90	83.80	89.00	84.10	86.60	91.70	90.10
A 13.109.2		Old work (one or more coats @ 2.20 kg/10 sqm) complete	Sqm	56.10	55.00	56.10	57.30	59.40	58.90	56.40	59.50	56.60	58.10	61.20	60.20
A 13. 110		Finishing walls with textured exterior paint of required shade:													
A 13.110.1		Old work (Two or more coats on existing cement paint surface applied @ 3.28 lit/10 sqm)	Sqm	185.40	176.60	185.40	194.20	210.50	206.80	187.90	211.80	189.20	200.50	224.40	216.80
A 13.110.2		Old work (One or more coats) applied @ 1.82 lit/10 sqm)	Sqm	113.60	108.60	113.60	118.70	128.00	125.90	115.10	128.70	115.80	122.30	135.90	131.60
A 13. 111		Finishing walls with Acrylic Smooth exterior paint of required shade:													
A 13.111.1		Old work (Two or more coats applied @ 1.67 ltr/10 sqm) on existing cement paint surface.	Sqm	100.90	97.60	100.90	104.10	110.20	108.80	101.80	110.70	102.30	106.50	115.40	112.60
A 13.111.2		Old work (One or more coats applied @ 0.90 ltr/10 sqm).	Sqm	66.90	64.90	66.90	68.90	72.60	71.70	67.50	72.80	67.80	70.30	75.70	74.00
A 13. 112		Finishing walls with Premium Acrylic Smooth exterior paint with silicon additives of required shade:													
A 13.112.1		Old work (Two or more coats applied @ 1.43 ltr/10 sqm) over existing cement paint surface.	Sqm	98.20	95.10	98.20	101.30	107.00	105.70	99.00	107.50	99.50	103.50	111.90	109.20
A 13.112.2		Old work (One or more coats applied @ 0.83 ltr/10 sqm).	Sqm	66.30	64.40	66.30	68.30	71.90	71.00	66.90	72.10	67.20	69.70	74.90	73.20
A 13. 113		Varnishing with varnish of approved brand and manufacture:													
A 13.113.1		One or more coats with copal varnish	Sqm	67.40	66.30	67.40	68.50	70.50	70.00	67.70	70.70	67.90	69.30	72.20	71.30
A 13.113.2		One or more coats with Spar varnish	Sqm	67.90	66.80	67.90	69.10	71.20	70.70	68.30	71.30	68.40	69.90	73.00	72.00
A 13. 114		Melamine polishing on wood work (one or more coat).	Sqm	108.10	106.00	108.10	110.30	114.30	113.40	108.70	114.60	109.10	111.80	117.70	115.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 13. 115		Varnishing with flatting varnish of approved brand and manufacture (one or more coats on old work)	Sqm	71.00	69.60	71.00	72.30	74.80	74.20	71.30	75.00	71.50	73.20	76.90	75.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
14.0 REPAIRS TO BUILDINGS															
A 14.1		Repairs to plaster of thickness 12mm to 20 mm in patches of area 2.5 sqm and under, including cutting the patch in proper shape, racking out joints and preparing and plastering the surface of the walls complete, including disposal of rubbish of the dumping ground, all complete as per the direction of Engineer-in-charge													
A 14.1.1	MF	With cement mortar 1:4 (1 cement: 4 fine sand)	Sqm	402.00	382.80	402.00	448.70	490.20	480.60	413.90	505.90	432.80	449.00	591.00	543.70
A 14.1.2	MF	With cement mortar 1:4 (1 cement: 4 coarse sand)	Sqm	443.60	424.40	443.60	490.30	531.90	522.30	455.60	547.60	474.40	490.70	632.70	585.40
A 14.2		Fixing chowkhats in existing opening including embedding chowkhats in floors or walls cutting masonry for holdfasts, embedding hold fasts in cement concrete blocks of size 15x10x10 cm with cement concrete 1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size) painting two coats of approved wood preservative to sides of chowkhats and making good the damages to walls and floors as required complete, including disposal of rubbish to the dumping ground, all complete as per direction of Engineer-in-Charge													
A 14.2.1		Door Chowkhats	Each	1312.80	1279.20	1312.80	1386.80	1456.70	1440.60	1335.90	1478.10	1361.20	1393.70	1599.70	1531.50
A 14.2.2		Window Chowkhats	Each	811.40	793.40	811.40	855.40	893.70	884.90	825.30	906.90	841.00	857.30	979.80	939.10
A 14.2.3		Clerestory Window Chowkhats	Each	581.20	570.80	581.20	604.60	626.30	621.30	588.60	633.10	596.60	606.50	671.50	650.00
A 14.3		Fixing chowkhat in existing opening in brick/RCC wall with dash fasteners/chemical fastners of appropriate size (3 nos on each vertical member of door chowkhat and 2 nos. on each vertical member of window chowkhats), including cost of dash fasteners/chemical fasteners.	Each	221.20	209.10	221.20	233.30	255.70	250.50	224.60	257.40	226.40	241.90	274.60	264.30
A 14.4		Making the opening in brick masonry including dismantling in floor or walls by cutting masonry and making good the damages to walls, flooring and jambs complete, to match existing surface i/c disposal of mulba/rubbish to the nearest municipal dumping ground, all complete as per direction of Engineer-in-Charge.													
A 14.4.1		For door/ window/ clerestory window	Sqm	801.10	792.80	801.10	816.50	833.30	829.40	805.00	837.90	810.50	818.80	865.00	849.70
A 14.5		Renewing glass panes, with putty and nails wherever necessary including racking out the old putty													
A 14.5.1		Float glass panes of nominal thickness 4 mm (weight not less than 10 Kg/sqm)	Sqm	950.50	909.50	950.50	991.50	1067.80	1050.20	962.20	1073.60	968.10	1020.90	1132.30	1097.10
A 14.5.2		Float glass panes of nominal thickness 5 mm (weight not less than 12.5 kg/sqm)	Sqm	1312.70	1248.00	1312.70	1377.40	1497.70	1469.90	1331.20	1506.90	1340.40	1423.70	1599.40	1543.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.6		Renewing glass panes, with wooden fillets wherever necessary													
A 14.6.1		Float glass panes of nominal thickness 4 mm (weight not less than 10 Kg/sqm)	Sqm	1332.60	1295.10	1324.60	1370.10	1439.70	1423.60	1343.30	1445.00	1348.70	1396.80	1498.60	1466.40
A 14.6.2		Float glass panes of nominal thickness 5 mm (weight not less than 12.5 kg/sqm)	Sqm	1597.00	1535.80	1588.90	1658.10	1771.70	1745.50	1614.40	1780.50	1623.20	1701.80	1867.90	1815.40
A 14.7		Renewing glass panes and refixing existing wooden fillets:													
A 14.7.1		Float glass panes of nominal thickness 4 mm (weight not less than 10 kg/sqm)	Sqm	1028.50	988.80	1028.50	1068.20	1142.00	1125.00	1039.90	1147.70	1045.50	1096.60	1204.40	1170.40
A 14.7.2		Float glass panes of thickness 5 mm (weight not less than 12.5 kg/sqm)	Sqm	1390.70	1327.30	1390.70	1454.10	1571.90	1544.70	1408.80	1580.90	1417.90	1499.40	1671.50	1617.20
A 14.8		Supplying and fixing new wooden fillets whever necessary:													
A 14.8.1		2nd class teak wood fillets	Meter	80.30	77.30	80.30	83.20	88.70	87.50	81.10	89.10	81.60	85.30	93.40	90.80
A 14.8.2		Hollock wood fillets	Meter	51.50	50.40	51.50	52.60	54.60	54.10	51.80	54.70	52.00	53.30	56.30	55.30
A 14.9		Renewal of old putty of glass panes (length)	Meter	37.90	37.50	37.90	38.20	38.90	38.70	38.00	38.90	38.00	38.50	39.40	39.10
A 14.10		Refixing old glass panes with putty and nails	Sqm	492.30	487.60	492.30	496.90	505.50	503.50	493.60	506.20	494.30	500.20	512.80	508.80
A 14.11		Fixing old glass panes with wooden fillets (excluding cost of fillets)	Sqm	439.00	437.90	439.00	440.10	442.30	441.80	439.30	442.40	439.50	441.00	444.10	443.10
A 14.12		Providing and fixing 16 mm M.S. Fan clamps of standard shape and size in existing R.C.C. slab including cuting chase, anchoring clamps to reinforcement bar, including cleaning, refilling, making good the chase with matching concrete, plastering and painting the exposed portion of the clamps complete.	Each	399.90	394.40	399.90	406.10	416.30	414.00	401.70	417.40	402.80	409.70	426.50	421.10
A 14.13		Regarding terracing of mud phaska covered with tiles or brick, in cement mortar by dismantling tiles or bricks, removing mud plaster, preparing the surface of mud phaska to proper slope, relaying mud plaster gobri leaping and tiles or bricks, grouted in cement mortar 1:3 (1 cement: 3 fine sand) including replacing unserviceable tiles or bricks with new ones and disposal of unserviseable material to the dumping ground (the cost of the new tiles or brick excluded) all complete as per the direction of Engineeer-in-Charge.	Meter	520.70	508.60	520.70	543.00	567.80	562.10	526.70	574.20	534.20	546.90	612.40	590.80
A 14.14		Replacing sand stone slabs in roofing, laid in cement mortar 1:4 (1 cement : 4 coarse sand) including necessary repairs and cement pointing with same mortar complete, including disposal of rubbish to dumping ground, all complete as per direction of Engineer-In-Charge :													
A 14.14.1		Red/ White sand stone slabs 30 to 50 mm thick	Meter	923.20	893.40	923.20	955.90	1012.00	999.10	932.50	1017.60	938.40	975.90	1066.20	1037.40
A 14.15		Renewing wooden battens in roofs,including making good the holes in wall and painting with oil type wood preservative of approved brand and manufacture complete, including removal of rubbish to the dumping ground, all complete as per direction of Engineer-In-Charge :													
A 14.15.1		Sal wood battens	Cudm	40.90	40.80	40.90	41.00	41.30	41.20	40.90	41.30	40.90	41.10	41.50	41.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.16		Renewing wooden beams in roofs including making good the holes in walls and painting with oil type wood preservative of approved brand and manufacture complete, including removal of rubbish to the dumping ground, all complete as per direction of Engineeer-in-Charge.													
A 14.16.1		Not exceeding 4.00 metres in length.													
A 14.16.1.1		Sal Wood Beams	Cudm	43.90	43.90	43.90	44.00	44.20	44.20	44.00	44.20	44.00	44.10	44.40	44.30
A 14.16.1.2		Hollock wooden beam	Cudm	70.20	66.30	70.20	74.20	81.60	79.90	71.40	82.20	71.90	77.10	87.90	84.40
A 14.16.2		Above 4.00 metres and upto 5.00 metres length													
A 14.16.2.1		Sal wood beams	Cudm	48.30	48.20	48.30	48.40	48.60	48.60	48.40	48.60	48.40	48.50	48.80	48.70
A 14.16.2.2		Hollock wood beams	Cudm	71.80	67.80	71.80	75.70	83.10	81.40	72.90	83.70	73.50	78.60	89.40	86.00
A 14.17		Raking out joints in lime or cement mortar and preparing the surface for re-pointing or replastering, including diaposal of rubbish to the dumping all complete as per direction of Engineeer-in-Charge.	Sqm	41.90	41.80	41.90	41.90	42.00	42.00	41.90	42.00	41.90	41.90	42.00	42.00
A 14.18		Flush pointing with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% of integral water proofing compound by weight of cement for flat tile bricks on top of mud phaska:													
A 14.18.1		With F.P.S. brick tiles	Sqm	94.20	92.10	94.20	98.80	103.30	102.30	95.40	104.80	97.20	99.20	112.90	108.40
A 14.18.2		With modular brick tiles	Sqm	96.00	93.60	96.00	101.20	106.10	105.00	97.40	107.80	99.30	101.50	117.00	111.80
A 14.19		Taking out wind ties from roof including cutting out rusted bolts, nuts etc. and removing materials to any distance within compound and stacking.	Kg	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40
A 14.20		Fixing of old wind tie with new fittings including painting two or more coats with anticorrosive bitumastic paint of approved brand & manufacturer over and including priming coat of ready mixed zinc chromate yellow primer of approved brand.	Meter	111.40	106.50	111.40	116.40	125.50	123.40	112.80	126.20	113.60	119.90	133.30	129.10
A 14.21		Renewing bottom rail and / or top runner of collapsible gate including making good all damages and applying priming coat of zinc chromate yellow primer of approved brand and manufacturer.	Kg	233.40	229.80	233.40	242.70	250.20	248.50	236.90	252.70	239.90	243.20	266.70	258.90
A 14.22		Renewing Wrought Iron or M.S. Wheel or roller of steel door or gate and fitting and fixing the same with necessary clamps, nuts and bolts/welding and erection etc. complete.													
A 14.22.1		Wheel 50 mm dia. and below.	Each	177.40	166.70	175.70	185.10	201.90	198.10	178.40	203.40	179.90	191.40	217.00	208.90
A 14.22.2		Wheel above 50 mm dia.	Each	285.00	269.30	280.30	292.30	312.90	308.10	283.70	314.90	285.90	299.70	332.70	322.20
A 14.23		Pumping out water caused by springs, tidal or river seepage, broken water mains or drains and the like.	KL	144.90	144.90	144.90	144.90	144.90	144.90	144.90	144.90	144.90	144.90	144.90	144.90
A 14.24		Mud Mortar made with local clay good earth	Cum	904.60	884.10	904.60	925.20	963.50	954.60	910.50	966.40	913.50	939.90	995.80	978.20
A 14.25		Brick work with common burnt clay bricks of class designation 7.5 in mud mortar	Cum	9254.90	8163.60	9254.90	11618.50	13829.30	13319.10	9776.70	14660.30	10773.00	11642.60	19169.90	16662.40
A 14.26		Providing and fixing 25 mm thick shutters for cup board etc.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.26.1		Panelled or panelled & glazed shutters													
A 14.26.1.1		Superior class teak wood including nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2509.60	2484.90	2509.60	2534.40	2580.30	2569.70	2516.70	2583.80	2520.20	2552.00	2619.20	2598.00
A 14.26.1.2		Ist class teak wood including nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2497.50	2472.80	2497.50	2522.30	2568.20	2557.60	2504.60	2571.80	2508.10	2539.90	2607.10	2585.90
A 14.26.2		Glazed shutters													
A 14.26.2.1		Superior class teak wood including nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2364.90	2331.30	2364.90	2398.50	2460.80	2446.40	2374.50	2465.60	2379.30	2422.40	2513.60	2484.80
A 14.26.2.2		First class teak wood including nickel plated bright finished M.S. piano hinges with necessary screws	Sqm	2351.90	2318.30	2351.90	2385.50	2447.80	2433.40	2361.50	2452.60	2366.30	2409.40	2500.60	2471.80
A 14.27		Providing and fixing plain jaffri door and window shutters including bright or/and black enamelled M.S. butt hinges with necessary screws 35x10 mm laths placed 35 mm apart (frames to be paid separately), including fixing 50x12 mm beading complete with:													
A 14.27.1		Second class teak wood	Sqm	2345.00	2333.80	2185.50	2356.30	2377.10	2372.30	2348.30	2378.70	2349.90	2364.20	2394.70	2385.10
A 14.28		Providing and fixing Brass curtain rods of wall thickness 1.25 mm with two brass brackets fixed with brass screws and wooden plugs etc. wherever necessary complete.													
A 14.28.1		20 mm diameter	Metre	338.90	318.20	338.90	359.70	398.10	389.30	344.80	401.10	347.80	374.50	430.70	413.00
A 14.28.2		25 mm diameter	Metre	421.20	395.20	421.20	447.40	495.80	484.60	428.70	499.50	432.40	466.00	536.90	514.50
A 14.29		Providing and fixing M.S. round or square bars wuth M.S. flats at required spacings in wooden frame of windows and clerestory Windows	Kg	109.30	107.40	108.40	110.50	112.40	111.90	109.00	113.00	109.80	110.60	116.60	114.60
A 14.30		Providing joists (karries) including hoisting fixing in position and applying wood preservative on unexposed surface etc. complete with:													
A 14.30.1		Sal wood	Cudm	39.50	39.50	39.50	39.50	39.60	39.60	39.50	39.60	39.50	39.60	39.60	39.60
A 14.30.2		Hollock wood	Cudm	65.50	61.70	65.50	69.40	76.60	74.90	66.60	77.10	67.20	72.20	82.70	79.30
A 14.31		Providing and fixing bright finished brass single acting spring hinges with necessary brass screws etc. complete													
A 14.31.1		150 mm	Each	778.20	730.50	778.20	825.80	914.40	893.90	791.80	921.20	798.60	859.90	989.30	948.40
A 14.31.2		125 mm	Each	547.70	515.10	547.70	580.30	640.80	626.80	557.00	645.50	561.70	603.60	692.00	664.10
A 14.31.3		100 mm	Each	490.10	461.20	490.10	518.90	572.40	560.10	498.30	576.50	502.40	539.50	617.70	593.00
A 14.32		Providing and fixing bright finished brass double acting spring hinges with necessary brass screws etc. complete													
A 14.32.1		150 mm	Each	868.70	815.10	0.00	0.00	1021.80	998.90	884.00	1029.50	891.70	960.60	1106.10	1060.10
A 14.32.2		125 mm	Each	737.00	692.00	737.00	782.00	865.50	846.20	749.90	871.90	756.30	814.10	936.20	897.60
A 14.32.3		100 mm	Each	720.50	676.60	720.50	764.40	846.00	827.20	733.10	852.20	739.40	795.80	915.00	877.30
A 14.33		Providing and fixing bright finished brass flush bolts with necessary screws etc. complete													
A 14.33.1		250 mm	Each	275.60	258.80	275.60	292.40	323.60	316.40	280.40	326.00	282.80	304.40	350.00	335.60
A 14.33.2		150 mm	Each	239.80	225.20	239.80	254.50	281.70	275.40	244.00	283.80	246.10	264.90	304.70	292.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.33.3		100 mm	Each	174.00	163.60	174.00	184.30	203.50	199.10	176.90	205.00	178.40	191.70	219.80	210.90
A 14.34		Providing and fixing 150 mm bright finished floor brass door stopper with rubber cushion,necessary brass screws etc. to suit shutter thickness complete	Each	283.30	265.20	283.30	301.40	335.00	327.20	288.40	337.60	291.00	314.30	363.40	347.90
A 14.35		Providing and fixing bright finished brass hard drawn hooks and eyes													
A 14.35.1		300 mm	Each	104.40	97.90	104.40	110.90	122.90	120.10	106.20	123.80	107.20	115.50	133.00	127.50
A 14.35.2		250 mm	Each	100.10	93.90	100.10	106.30	117.80	115.10	101.90	118.70	102.80	110.70	127.50	122.20
A 14.35.3		200 mm	Each	89.60	84.10	89.60	95.10	105.30	102.90	91.20	106.10	91.90	99.00	113.90	109.20
A 14.35.4		150 mm	Each	71.50	67.20	71.50	75.80	83.80	81.90	72.70	84.40	73.30	78.90	90.60	86.90
A 14.35.5		100 mm	Each	62.40	58.70	62.40	66.10	73.00	71.40	63.50	73.60	64.00	68.80	78.90	75.70
A 14.36		Providing and fixing bright finished brass fan light pivot with necessary screws etc. complete.	Each	46.30	43.80	46.30	48.90	53.60	52.50	47.10	54.00	47.40	50.70	57.60	55.40
A 14.37		Providing and fixing 300 mm long bright finished brass chain with hook for fan light including necessary screws etc. complete.	Each	75.20	70.90	75.20	79.50	87.50	85.70	76.40	88.10	77.10	82.60	94.30	90.60
A 14.38		Providing and fixing bright finished brass quadrant stay 300mm long with necessary brass screws etc. complete.	Each	197.00	184.80	197.00	209.30	232.10	226.90	200.60	233.90	202.30	218.10	251.40	240.90
A 14.39		Providing and fixing bright finished brass helical door spring (superior quality).	Each	544.70	512.30	544.70	577.10	637.30	623.40	554.00	641.90	558.60	600.30	688.20	660.40
A 14.40		Providing and fixing chromium plated brass butt hinges with necessary chromium plated brass screws etc. complete.													
A 14.40.1		125x70x4 mm (ordinary type)	Each	201.10	189.20	201.10	213.00	235.10	230.00	204.50	236.80	206.20	221.50	253.80	243.60
A 14.40.2		100x70x4 mm (ordinary type)	Each	170.90	161.00	170.90	180.90	199.30	195.00	173.80	200.70	175.20	187.90	214.90	206.40
A 14.40.3		75x65x4 mm (heavy type)	Each	191.80	180.50	191.80	203.10	224.10	219.30	195.10	225.70	196.70	211.20	241.90	232.20
A 14.40.4		75x40x2.5 mm (ordinary type)	Each	112.20	106.10	112.20	118.20	129.50	126.90	113.90	130.40	114.80	122.60	139.10	133.90
A 14.40.5		50x40x2.5 mm (ordinary type)	Each	125.40	122.80	125.40	128.00	132.90	131.80	126.10	133.30	126.50	129.90	137.00	134.80
A 14.41		Providing and fixing 85x42mm chromium plated brass pull bolt lock with necessary screws, nuts, bolts and washers etc. complete	Each	293.80	275.90	293.80	311.70	345.00	337.30	298.90	347.50	301.50	324.50	373.10	357.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.72		Providing and fixing double scaffolding system (cup lock type) on the exterior side, up to seven story height made with 40 mm dia M.S. tube 1.5 m centre to centre, horizontal and vertical tubes joining with cup and lock system with M.S. tubes, M.S. tube challies, M.S. clamps and M.S. staircase system in the scaffolding for working platform etc. and maintaining it in a serviceable condition for the required duration as approved and removing it there after. The scaffolding system shall be stiffened with bracings, runners, connection with the building etc wherever required for inspection of work at required locations with essential safety features for the workmen etc. complete as per directions and approval of Engineer-in-Charge. The elevational area of the scaffolding shall be measured for payment purpose. The payment will be made once irrespective of duration of scaffolding. NOTE:- This item to be used for maintenance work judicially,necessary deduction for scaffolding in the existing item to be done.	Sqm	227.30	223.20	227.30	231.50	239.20	237.40	228.50	239.80	229.10	234.50	245.70	242.20
A 14.72X		Scaffolding	once	9445.90	8828.00	9445.90	10063.90	11211.50	10946.70	9622.50	11299.80	9710.80	10505.30	12182.60	11652.90
A 14.73		Providing and fixing bright finished brass casement window fasteners or pegs stay to windows/ventilators with necessary welding and machine screws etc. complete.	Kg	577.20	539.40	577.20	614.90	685.10	668.90	588.00	690.40	593.40	641.90	744.40	712.00
A 14.74		Providing and fixing 14 mm bright finished brass spring catch to steel centre hung ventilators with necessary welding and machine screws etc. complete.	Each	321.20	300.20	321.20	342.20	381.30	372.30	327.20	384.30	330.20	357.30	414.30	396.30
A 14.75		Repair to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sqm and ynder, including cutting the patch in proper shape, ranking out joints and preparing plastering the wall surface with white cement based polymer modified self curing mortar, including disposal of rubbish, all complete as per the direction of Engineer-in-Charge.	Sqm	528.00	507.00	528.00	548.90	587.90	578.90	533.90	590.90	536.90	563.90	620.90	602.90
A 14.75A		Cleaning of terrace/loft water storage tank (inside surface area) upto 2000 litre capacity at all heights with coconut brushes, duster etc., removal of slit, rubbish from the tank and cleaning the tank with fresh water disinfecting with bleaching powder @ 0.5 gm per litre capacity of tank including marking the date of cleaning on the side of tank body with the help of stencil and paint and disposing of malba all complete as per direction of Engineer-in-Charge. (The old date already written on tank should be removed with paint remover or black paint and if Date is not written with the stencil or old date is not removed deduction will be made @ Rs. 0.10 per litre) (if during cleaning any GI fittings or ball cock is damaged that is to be repaired by contractor at his own cost and nothing extra will be paid on this account)	Litre	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A A 14.76		Cleaning and desilting of gully trap chamber, including removal of rubbish mixed with earth etc. and disposal of same, all as per the direction of Engineer-in-Charge.	Each	63.90	63.70	63.90	64.10	64.60	64.50	64.00	64.60	64.00	64.30	65.00	64.80
A A 14.77		Cleaning of chocked sewer line by diesel running vehicle mounting hydraulic operated high pressure suction cum jetting sewer cleaning machine fitted with pump having 4000 litres suction capacity and 6000 litres water jetting tank capacity including skilled operator, supervising engineer etc. for cleaning and partial desilting of manholes and dechocking of sewer lines. Dechocking and flushing of sewer line from one manhole to another by high pressure jetting system of 2200 PSI for sewer line from 150 mm dia upto 300mm	Metre	281.90	279.80	280.10	280.50	281.20	281.00	280.30	281.20	280.30	280.80	281.70	281.40
A 14.78		Cleaning of under ground sump, Over Head R.C.C. tank (independent staging) including disposal of slit and rubbish, all as per direction of Engineer-in-Charge. The cleaning shall consist following operation:	Sqm	59.20	58.90	59.20	59.40	59.90	59.80	59.20	59.90	59.30	59.60	60.30	60.10
		(i) Tank shall be emptied of water by pumping and bottom shall be cleaned of slit and other deposits.													
		(ii) Entire surface area of the sump shall then scrubbed thoroughly with wire brushes etc. and pressure washed with water.													
		(iii) Chlorination of RCC internal surface by liquid chlorine													
		(iv) The treated surface shall be dried using air jetting and all loose particles shall be removed from the surface.													
		(v) Finally the surface shall be treated with UV radiation etc. as per direction of Engineer-in-Charge.													
A 14.79		Disconnecting damage overhead/terrace PVC water storage tank of any size from water supply line and removing from the terrace including shifting at ground level as per direction of Engineer-in-Charge.	Each	264.50	264.30	264.50	264.80	265.20	265.10	264.60	265.20	264.60	264.90	265.60	265.40
A 14.80		Providing & Fixing vitreous China water closet squatting pan (Indian type) along with "S" or "P" trap including dismantling of old WC seat and S or P trap at site complete with all operations including all necessary materials, labour and disposal of dismantled material i/c mulba, all complete as per direction of Engineer-in-Charge.													
A 14.80.1		Long pattern W.C Pan of size 580x440 mm.	Each	2752.40	2662.70	2752.40	2842.00	3008.60	2970.20	2778.00	3021.40	2790.80	2906.10	3149.50	3072.70
A 14.80.2		Orissa pattern W.C Pan of size 580x440 mm	Each	3777.30	3617.60	3777.30	3937.00	4233.60	4165.10	3822.90	4256.40	3845.80	4051.10	4484.50	4347.70
A 14.81		Cutting holes of required size in brick masonry wall for fixing of exhaust fan including providing and fixing 300 mm diameter PVC pipe conforming BIS-12818 and making good the same etc. complete as per direction of Engineer-in Charge.	Each	217.40	210.00	217.40	231.20	246.20	242.70	221.00	250.30	225.80	233.30	274.30	260.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.82		Dismantling W.C Pan of all sizes including disposal of dismantled materials i/c Malba all complete as per direction of Engineer-in-Charge.	Each	78.60	78.30	78.60	78.80	79.20	79.10	78.60	79.20	78.60	78.90	79.50	79.30
A 14.83		Hacking of CC flooring including cleaning for surface etc complete as per direction of Engineer-in-Charge.	Metre	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
A 14.84		Dismantling 15 to 40 mm dia G.I pipe including stacking of dismantled pipes (within 50 meters lead) as per direction of Engineer-in-Charge.	Metre	3.30	3.10	3.30	3.50	3.90	3.80	3.40	3.90	3.40	3.70	4.20	4.10
A 14.85		Taking out existing wooden door shutter, repair by cutting, painting etc and refixing of repaired door shutters to existing door frames, including replacement of hinges with screws, etc as required, all complete as per direction og Engineer-in-Charge.	Each	253.90	252.50	253.90	255.40	258.00	257.40	254.40	258.20	254.60	256.40	260.30	259.00
A 14.86		Providing and laying in situ seven course water proofing treatment with APP (atactic polypropylene) modified polymeric membrane over roof consisting of first coat of bitumen primer @ 0.4 litre/sqm, 2nd, 4th and 6th courses of bonding material @ 1.20 Kg/sqm, which shall consist of blown type bitumen of grade 85/25 conforming to IS 702, 3rd and 5th layer of roofing membrane APP modified polymeric membrane 1.5 mm thick of 2.25 Kg/sqm weight consisting of 5 layers pre fabricated with centre core as 20 micron HMHDPE film sandwiched on both sides with polymeric mixed and the polymeric mixed is protected on both side with 20 micron HMHDPE film. 7th, the top most layer shall be finished with brick tiles of class designation 10 grouted with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% integral water proofing compound by weight of cement over a 12 mm layer of cement mortar 1:3 (1 cement: 3 fine sand) and finished neat (item of laying brick tiles shall be paid for separately)	Sqm	669.90	634.50	669.90	705.30	771.10	755.90	680.00	776.20	685.10	730.60	826.80	796.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.87		Providing and laying in situ five course water proofing treatment with APP (atactic polypropylene) modified polymeric membrane over roof consisting of first coat of bitumen primer @ 0.40 litre/sqm, 2nd & 4th courses of bonding material @ 1.20 Kg/sqm, which shall consist of blown type bitumen of grade 85/25 conforming to IS 702, 3rd layer of roofing membrane APP modified polymeric membrane 2 mm thick of 3.00 Kg/sqm weight consisting of 5 layers pre fabricated with centre core as 100 micron HMHDPE film sandwiched on both sides with polymeric mixed and the polymeric mixed is protected on both side with 20 micron HMHDPE film. 5th, the top most layer shall be finished with brick tiles of class designation 10 grouted with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% integral water proofing compound by weight of cement over a 12 mm layer of cement mortar 1:3 (1 cement: 3 fine sand) and finished neat (item of laying brick tiles shall be paid for separately)	Sqm	459.50	435.60	459.50	483.50	527.90	517.60	466.40	531.30	469.80	500.50	565.50	545.00
A 14.88		Providing and laying in situ seven course water proofing treatment with APP (atactic polypropylene) modified polymeric membrane over roof consisting of first coat of bitumen primer @ 0.40 litre/sqm, 2nd, 4th & 6th courses of bonding material @ 1.20 Kg/sqm, which shall consist of blown type bitumen of grade 85/25 conforming to IS 702, 3rd & 5th layer of roofing membrane APP modified polymeric membrane 2.00 mm thick of 3.00 Kg/sqm weight consisting of 5 layers pre fabricated with centre core as 100 micron HMHDPE film sandwiched on both sides with polymeric mixed and the polymeric mixed is protected on both side with 20 micron HMHDPE film. 7th, the top most layer shall be finished with brick tiles of class designation 10 grouted with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% integral water proofing compound by weight of cement over a 12 mm layer of cement mortar 1:3 (1 cement: 3 fine sand) and finished neat (item of laying brick tiles shall be paid for separately)	Sqm	742.30	702.20	742.30	782.50	857.10	839.90	753.80	862.80	759.60	811.20	920.20	885.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.89		Providing and fixing APP (atactic polypropylene) modified pre fabricated 5 layer, 2 mm thick water proofing membrane,black finish reinforced with glass fibre matt consisting of a coat of bitumen primer for bitumen membrane @ 0.40 litre/sqm by the same membrane manufactured of density at 25°C, 0.87-0.89 kg/litre and viscosity 70-160 cps. over the primer coat the layer of membrane shall be laid using butane torch and sealing all joints etc. and preparing the surface complete.The vital physical and chemical parameters of the membrane shall be as under:Joint strength in longitudinal and transverse direction at 23°C as 350/300 N/5 cm. Tear strength in longitudinal and transverse direction as 60/80 N. Softening point of membrane not less than 150°C. Cold flexibility shall be upto -2°C when tested in accordance with ASTM, D-5147. The laying of membrane shall be got done through the authorised applicator of the manufacturer of the membrane:													
A 14.89.1		2 mm (for corrugated roof sheets)	Sqm	455.90	436.90	455.90	474.90	510.10	501.90	461.30	512.80	464.00	488.40	539.80	523.60
A 14.90		Providing and laying APP (atactic polypropylene) modified pre fabricated 5 layer, 3 mm thick water proofing membrane,black finish reinforced with glass fibre matt consisting of a coat of bitumen primer for bitumen membrane @ 0.40 litre/sqm by the same membrane manufactured of density at 25°C, 0.87-0.89 kg/litre and viscosity 70-160 cps. over the primer coat the layer of membrane shall be laid using butane torch and sealing all joints etc. and preparing the surface complete.The vital physical and chemical parameters of the membrane shall be as under:Joint strength in longitudinal and transverse direction at 23°C as 350/300 N/5 cm. Tear strength in longitudinal and transverse direction as 60/80 N. Softening point of membrane not less than 150°C. Cold flexibility shall be upto -2°C when tested in accordance with ASTM, D-5147. The laying of membrane shall be got done through the authorised applicator of the manufacturer of the membrane:													
A 14.90.1		3 mm thick	Sqm	571.80	545.30	571.80	598.30	647.60	636.20	579.40	651.40	583.20	617.30	689.30	666.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 14.91		Providing and laying APP (atactic polypropylene) modified pre fabricated 5 layer, 3 mm thick water proofing membrane,black finish reinforced with non woven polyster matt consisting of a coat of bitumen primer for bitumen membrane @ 0.40 litre/sqm by the same membrane manufactured of density at 25 ⁰ C, 0.87-0.89 kg/litre and viscosity 70-160 cps. over the primer coat the layer of membrane shall be laid using butane torch and sealing all joints etc. and preparing the surface complete.The vital physical and chemical parameters of the membrane shall be as under:Joint strength in longitudinal and transverse direction at 23 ⁰ C as 650/450 N/5 cm. Tear strength in longitudinal and transverse direction as 300/250 N. Softening point of membrane not less than 150 ⁰ C. Cold flexibility shall be upto -2 ⁰ C when tested in accordance with ASTM, D-5147. The laying of membrane shall be got done through the authorised applicator of the manufacturer of the membrane:													
A 14.91.1		3 mm thick	Sqm	599.00	570.60	599.00	627.30	679.90	667.70	607.10	683.90	611.10	647.50	724.40	700.10
A 14.92		Extra for covering top of membrane with Geo-textile, 120 gsm non woven, 100% polyster of thickness 1 to 1.25 mm bonded to the membrane with intermittent touch by heating the membrane by butane torch as per manufacturers recommendation.	Sqm	111.50	106.00	111.50	117.00	127.20	124.80	113.10	127.90	113.80	120.90	135.80	131.10
A 14.93		Providing round the clock security guard without gun for watch and ward of Government premises and its all belongings by deploying neatly dressed security guards in 8 hour's shift including necessary T&P like torch, Lathi and uniform etc. complete as per the direction of Engineer-in-Charge. (one job means 8 hour's duty)	Each	835.70	833.50	835.70	837.80	841.80	840.90	836.30	842.20	836.60	839.40	845.20	843.40
A 14.94		Providing round the clock security guard with gun for watch and ward of Government premises and its all belongings by deploying neatly dressed security guards in 8 hour's shift including necessary T&P like torch, Lathi and uniform etc. complete as per the direction of Engineer-in-Charge. (one job means 8 hour's duty)	Each	969.50	967.30	969.50	971.60	975.60	974.70	970.10	975.90	970.40	973.20	979.00	977.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		15.0 DISMANTLING & DEMOLISHING													
A 15.1		Demolishing lime concrete manually/ by mechanical means and disposal of material within 50 metres lead as per direction of Engineer-in-Charge.	Cum	491.10	490.90	491.10	491.30	491.70	491.60	491.20	491.80	491.20	491.50	492.10	491.90
A 15.2		Demolishing Cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer-in-Charge.													
A 15.2.1		Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	Cum	1406.60	1405.60	1406.60	1407.70	1409.60	1409.10	1406.90	1409.70	1407.10	1408.40	1411.20	1410.30
A 15.2.2		Nominal concrete 1:4:8 or leaner mix (i/c equivalent design mix)	Cum	867.40	867.00	867.40	867.80	868.60	868.40	867.50	868.60	867.60	868.10	869.20	868.90
A 15.3		Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.	Cum	2052.10	2050.60	2052.10	2053.60	2056.40	2055.80	2052.50	2056.60	2052.70	2054.70	2058.80	2057.50
A 15.4		Demolishing R.B. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.	Cum	1833.70	1832.70	1833.70	1834.70	1836.50	1836.10	1834.00	1836.70	1834.10	1835.40	1838.10	1837.30
A 15.5		Extra for cutting reinforcement bars manually/ by mechanical means in R.C.C. or R.B. work (Payment shall be made on the cross sectional area of R.C.C. or R.B. work) as per direction of Engineer-in-Charge.	Sqm	780.00	777.10	780.00	782.80	788.20	787.00	780.80	788.60	781.20	784.90	792.70	790.30
A 15.6		Extra for scrapping, cleaning and straightening reinforcement from R.C.C. or R.B. work	Kg	5.90	5.90	5.90	6.00	6.00	6.00	5.90	6.00	5.90	6.00	6.10	6.00
A 15.7		Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.													
A 15.7.1		In mud mortar	Cum	406.80	406.60	406.80	407.00	407.50	407.40	406.90	407.50	406.90	407.20	407.80	407.60
A 15.7.2		In lime mortar with old mughal bricks	Cum	1026.90	1026.70	1026.90	1027.20	1027.60	1027.50	1027.00	1027.60	1027.00	1027.30	1027.90	1027.70
A 15.7.3		In lime mortar	Cum	491.10	490.90	491.10	491.30	491.70	491.60	491.20	491.80	491.20	491.50	492.10	491.90
A 15.7.4		In cement mortar	Cum	1188.20	1187.70	1188.20	1188.70	1189.70	1189.50	1188.30	1189.80	1188.40	1189.10	1190.60	1190.10
A 15.8		Removing mortar from bricks and cleaning bricks including stacking within a lead of 50 m. (stacks of cleaned bricks shall be measured):													
A 15.8.1		From brick work in mud mortar	1000 Nos	2735.40	2735.00	2735.40	2735.80	2736.50	2736.30	2735.50	2736.60	2735.60	2736.10	2737.10	2736.80
A 15.8.2		From brick work in lime mortar	1000 Nos	3200.40	3198.50	3200.40	3202.40	3206.00	3205.10	3201.00	3206.20	3201.30	3203.80	3209.00	3207.30
A 15.8.3		From brick work in cement mortar	1000 Nos	4032.30	4030.60	4032.30	4034.10	4037.30	4036.50	4032.80	4037.50	4033.10	4035.30	4040.00	4038.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.9		Demolishing stone rubble masonry manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.													
A 15.9.1		In lime mortar	Cum	668.70	668.30	668.70	669.10	669.90	669.70	668.80	670.00	668.90	669.40	670.60	670.20
A 15.9.2		In cement mortar	Cum	1417.80	1417.20	1417.80	1418.40	1419.50	1419.30	1418.00	1419.60	1418.10	1418.80	1420.40	1419.90
A 15.10		Dismantling dressed stone work ashlar face stone work, marble work or precast concrete work manually/ by mechanical means including stacking of serviceable and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.													
A 15.10.1		In lime mortar	Cum	845.90	845.30	845.90	846.50	847.50	847.30	846.00	847.60	846.10	846.90	848.50	848.00
A 15.10.2		In cement mortar	Cum	1658.70	1658.10	1658.70	1659.30	1660.30	1660.10	1658.80	1660.40	1658.90	1659.70	1661.30	1660.80
A 15.11		Removing mortar from stones and cleaning stones and concrete articles (net quantity of stacks of cleaned materials will be measured)													
A 15.11.1		In lime mortar	Cum	282.70	282.60	282.70	282.80	283.00	283.00	282.70	283.00	282.70	282.90	283.20	283.10
A 15.11.12		In cement mortar	Cum	404.40	404.20	404.40	404.60	404.90	404.90	404.40	405.00	404.50	404.70	405.20	405.10
A 15.12		Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 metres lead:													
A 15.12.1		Of area 3 sq. metres and below	Each	236.80	236.50	236.80	237.10	237.70	237.60	236.90	237.80	237.00	237.40	238.20	237.90
A 15.12.2		Of area beyond 3 sq. metres	Each	324.70	324.20	324.70	325.30	326.40	326.20	324.90	326.50	325.00	325.80	327.30	326.80
A 15.13		Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead:													
A 15.13.1		Of area 3 sq. metres and below	Each	90.00	89.90	90.00	90.10	90.30	90.30	90.00	90.40	90.10	90.20	90.50	90.40
A 15.13.2		Of area beyond 3 sq. metres	Each	119.40	119.20	119.40	119.60	120.00	119.90	119.50	120.00	119.50	119.70	120.30	120.10
A 15.14		Dismantling wood work in frames, trusses, purlins and rafters upto 10 metres span and 5 metres height including stacking the material within 50 metres lead:													
A 15.14.1		Of sectional area 40 square centimetres and above	Cum	2853.80	2850.90	2853.80	2856.60	2862.00	2860.80	2854.60	2862.40	2855.00	2858.70	2866.50	2864.10
A 15.14.2		Of sectional area below 40 square centimetres	Metre	11.40	11.40	11.40	11.40	11.40	11.40	11.40	11.40	11.40	11.40	11.50	114.00
A 15.15		Extra for dismantling trusses, rafters, purlins etc. of wood work for every additional span of one metre or part thereof beyond 10 metres:													
A 15.15.1		Of sectional area 40 square centimetres and above	Cum/Metre	398.60	395.80	398.60	401.50	406.90	405.60	399.50	407.30	399.90	403.60	411.40	408.90
A 15.15.2		Of sectional area below 40 square centimetres metre	Metre/Metre span	1.10	1.10	1.10	1.10	1.20	1.20	1.10	1.20	1.10	1.10	1.20	12.00
A 15.16		Extra for dismantling trusses, rafters, purlins etc. of wood work for every additional height of one metre or part thereof beyond 5 metres:													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.16.1		Of sectional area 40 square centimetres and above	Cum/Metre	562.50	559.70	562.50	565.40	570.80	569.50	563.40	571.20	563.80	567.50	575.30	572.80
A 15.16.2		Of sectional area below 40 square centimetres	Metre/Metre height	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	2.20	22.00
A 15.17		Dismantling steel work in single sections including dismembering and stacking within 50 metres lead in:													
A 15.17.1		R.S. Joists	Cum	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
A 15.17.2		Channels, angles, tees and flats	Cum	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
A 15.18		Dismantling steel work in built up sections in angles, tees, flats and channels including all gusset plates, bolts, nuts, cutting rivets, welding etc. including dismembering and stacking within 50metres lead.	Kg	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.70	3.60
A 15.19		Dismantling steel work manually / by mechanical means in built up sections without dismembering and stacking within 50 metres lead as per direction of Engineer-in-Charge.	Kg	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	229.00
A 15.20		Extra for dismantling trusses, rafters, purlins etc. of steel work for every additional span of one metre or part thereof beyond 10 metres	Kg / metre	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	51.00
A 15.21		Extra for dismantling trusses, rafters, purlins etc. of steel work for every additional height of one metre or part thereof beyond 5 metres	Kg / metre	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	51.00
A 15.22		Extra for marking of structural steel work required to be re-erected.	Kg	3.10	3.10	3.10	3.10	3.10	3.10	3.10	3.10	3.10	3.10	3.10	308.00
A 15.23		Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead.													
A 15.23.1		For thickness of tiles 10 mm to 25 mm	Sqm	46.70	46.60	46.70	46.70	46.80	46.80	46.70	46.80	46.70	46.80	46.90	46.90
A 15.23.2		For thickness of tiles above 25 mm and upto 40 mm	Sqm	73.50	73.50	73.50	73.60	73.70	73.70	73.60	73.70	73.60	73.60	73.80	73.80
A 15.24		Demolishing dry brick pitching in floors, drains etc. including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Cum	761.60	761.00	761.60	762.20	763.30	763.00	761.70	763.30	761.80	762.60	764.20	763.70
A 15.25		Dismantling stone slab flooring laid in cement mortar including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	154.40	154.20	154.40	154.50	154.90	154.80	154.40	154.90	154.50	154.70	155.10	1550.00
A 15.26		Demolishing brick tile covering in terracing including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	68.20	68.20	68.20	68.30	68.40	68.40	68.30	68.40	68.30	68.30	68.50	68.40
A 15.27		Demolishing mud phaska in terracing and disposal of material within 50 metres lead	Cum	527.20	527.00	527.20	527.50	527.90	527.80	527.30	527.90	527.30	527.60	528.20	528.00
A 15.28		Dismantling roofing including ridges, hips valleys and gutters etc., and stacking the material within 50 metres lead of:													
A 15.28.1		G.S. Sheet	Sqm	102.60	102.40	102.60	102.70	103.00	102.90	102.60	103.00	102.60	102.80	103.20	1031.00
A 15.28.2		Asbestos Sheet	Sqm	47.90	47.80	47.90	48.00	48.20	48.20	47.90	48.30	48.00	48.10	48.40	483.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.29		Dismantling stone slab roofing over wooden karries or R.C.C. battens (dismantling karries and battens to be paid for separately) including stacking of serviceable material and disposal of unserviceable material within 50 metres lead:	Cum	1543.80	1542.00	1543.80	1545.50	1548.70	1548.00	1544.30	1549.00	1544.50	1546.70	1551.40	1550.00
A 15.30		Dismantling jack arch roofing and floors including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	147.20	147.00	147.20	147.30	147.60	147.60	147.20	147.70	147.20	147.40	147.90	147.80
A 15.31		Dismantling tiled roofing with battens, boarding etc. complete including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	121.90	121.70	121.90	122.00	122.40	122.30	121.90	122.40	121.90	122.20	122.60	1225.00
A 15.32		Demolishing thatch roofing including mats, bamboo, jaffari etc. complete including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	33.70	33.60	33.70	33.80	33.90	33.90	33.70	33.90	33.70	33.80	34.10	340.00
A 15.33		Dismantling wooden ballies in posts and struts including stacking within 50 metres lead.	Metre	12.10	12.10	12.10	12.10	12.10	12.10	12.10	12.10	12.10	12.10	12.10	12.10
A 15.34		Dismantling and stacking within 50 metres lead, fencing posts or struts including all earrrth work and dismantling of concrete etc. in base of:													
A 15.34.1		T' or 'L' iron or pipe	Each	154.40	151.20	154.40	157.70	163.70	162.30	155.30	164.20	155.80	160.00	168.80	166.00
A 15.34.2		R.C.C.	Each	175.00	169.70	175.00	180.30	190.00	187.80	176.50	190.80	177.30	184.00	198.30	193.80
A 15.35		Cutting ballies or wooden posts of fencing at the point of projection above the concrete or ground and stacking the same within 50 metres lead.	Each	13.70	12.80	13.70	14.60	16.30	15.90	14.00	16.40	14.10	15.20	17.70	16.90
A 15.36		Dismantling barbed wire or flexible wire rope in fencing including	Kg	21.20	21.20	21.20	21.30	21.30	21.30	21.30	21.30	21.30	21.30	21.30	21.30
A 15.37		Dismantling wooden trellis work excluding frames but including stacking the serviceable material within 50 metres lead.	Sqm	39.00	39.00	39.00	39.10	39.20	39.20	39.00	39.20	39.10	39.10	39.30	39.20
A 15.38		Dismantling expanded metal or I.R.C. fabrics with necessary battens and beading including stacking the serviceable material within 50 metres lead.	Sqm	45.50	45.40	45.50	45.60	45.80	45.70	45.50	45.80	45.60	45.70	45.90	45.80
A 15.39		Dismantling wooden boardings in lining of walls and partitions, excluding supporting members but including stacking within 50 metres lead:													
A 15.39.1		Upto 10 mm thick	Sqm	37.90	37.80	37.90	38.00	38.20	38.20	37.90	38.20	37.90	38.10	38.40	38.30
A 15.39.2		Thickness above 10 mm upto 25 mm	Sqm	48.40	48.20	48.40	48.50	48.80	48.70	48.40	48.80	48.40	48.60	49.00	48.90
A 15.39.3		Thickness above 25 mm upto 40 mm	Sqm	56.60	56.30	56.60	56.90	57.40	57.30	56.70	57.50	56.70	57.10	57.90	57.60
A 15.40		Dismantling precast concrete or stone slabs in walls, partition walls etc. including stacking within 50 metres lead:													
A 15.40.1		Thickness upto 40 mm	Sqm	171.00	170.70	171.00	171.30	171.80	171.70	171.10	171.80	171.10	171.50	172.30	172.00
A 15.40.2		Thickness above 40 mm upto 75 mm	Sqm	256.10	255.70	256.10	256.50	257.20	257.10	256.20	257.30	256.20	256.80	257.90	257.50
A 15.41		Dismantling cement asbestos or other hard board ceiling or partition walls including stacking of serviceable materials and disposal of unserviceable materials within 50 metres lead.	Sqm	35.90	35.80	35.90	36.00	36.20	36.20	35.90	36.20	35.90	36.10	36.40	36.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.42		Dismantling C.I. or asbestos rain water pipe with fittings and clamps including stacking the material within 50 metres lead													
A 15.42.1		75 to 80 mm dia pipe.	Metre	43.60	43.60	43.60	43.70	43.70	43.70	43.70	43.70	43.70	43.70	43.70	43.70
A 15.42.2		100 mm dia pipe	Metre	45.10	45.00	45.10	45.10	45.20	45.10	45.10	45.20	45.10	45.10	45.20	45.20
A 15.42.3		150 mm dia pipe	Metre	46.40	46.40	46.40	46.50	46.60	46.60	46.50	46.60	46.50	46.50	46.60	46.60
A 15.43		Dismantling manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-Charge.													
A 15.43.1		Water bound macadam road	Sqm	128.60	128.10	128.60	129.20	130.20	129.90	128.80	130.20	128.80	129.50	131.00	130.50
A 15.43.2		Bituminous road	Sqm	250.70	250.00	250.70	251.30	252.50	252.20	250.90	252.60	250.90	251.80	253.50	253.00
A 15.44		Dismantling G.I. pipes (external work) including excavation and refilling trenches after taking out the pipes manually/ by mechanical means including stacking of pipes within 50 metres lead as per direction of Engineer-in-Charge													
A 15.44.1		15 mm to 40 mm nominal bore	Metre	91.30	90.50	91.30	92.10	93.50	93.20	91.50	93.60	91.60	92.60	94.70	94.00
A 15.44.2		Above 40 mm nominal bore	Metre	103.10	101.60	103.10	104.60	107.50	106.90	103.50	107.70	103.80	105.80	109.90	108.60
A 15.45		Dismantling C.I. pipes including excavation and refilling trenches after taking out the pipes manually/ by mechanical means, breaking lead caulked joints, melting of lead and making into blocks including stacking of pipes and lead at site within 50 metre lead as per direction of Engineer-in-Charge.													
A 15.45.1		Upto 150 mm diameter	Metre	273.00	272.30	273.00	273.70	274.90	274.60	273.20	275.00	273.30	274.10	275.90	275.40
A 15.45.2		Above 150 mm dia upto 300 mm dia.	Metre	356.80	355.20	356.80	358.30	361.10	360.50	357.20	361.30	357.40	359.40	363.50	362.20
A 15.45.3		Above 300 mm diameter	Metre	458.10	455.90	458.10	460.20	464.30	463.30	458.70	464.60	459.00	461.80	467.70	465.80
A 15.46		Dismantling steel cylinder R.C. pipes including excavation and refilling trenches after taking out the pipes, manually/ by mechanical means breaking lead caulked joints, melting of lead and making into blocks including stacking of pipes, lead at site within 50 metres lead as per direction of Engineer-in-Charge:													
A 15.46.1		Upto 600 mm diameter	Metre	427.50	424.60	427.50	430.40	435.70	434.50	428.30	436.20	428.70	432.40	440.30	437.80
A 15.46.2		Above 600 mm diameter	Metre	1081.40	1075.70	1081.40	1087.20	1097.80	1095.40	1083.00	1098.60	1083.90	1091.30	1106.90	1101.90
A 15.47		Dismantling asbestos cement pressure pipes including excavation and refilling trenches after taking out the pipes manually/ by mechanical means and stacking the pipes within 50 metres lead as per direction of Engineer-in-Charge													
A 15.47.1		Upto 150 mm diameter	Metre	191.20	191.20	191.20	191.30	191.30	191.30	191.20	191.30	191.30	191.30	191.40	191.40
A 15.47.2		Above 150 mm diameter	Metre	232.30	232.20	232.30	232.40	232.50	232.50	232.30	232.50	232.30	232.40	232.70	232.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.48		Taking out C. I. cover with frame from R.C.C. top slab of manholes of various sizes including demolishing of R.C.C. work manually/ by mechanical means and stacking of useful materials near the site and disposal of unserviceable materials into municipal dumps within 50 metres lead as per direction of Engineer-in-Charge.	Each	413.10	411.30	413.10	415.00	418.30	417.60	413.70	418.60	413.90	416.30	421.20	419.60
A 15.49		Taking out C.I. cover with frame from R.C.C. top slab of inspection chambers of various sizes including demolishing of R.C.C. work manually/ by mechanical means and stacking of useful materials near the site and disposal of unserviceable materials into municipal dumps within 50 metres lead as per direction of Engineer-in-charge.	Each	242.50	241.20	242.50	243.70	246.10	245.60	242.80	246.30	243.00	244.70	248.20	247.10
A 15.50		Dismantling of R.C.C. spun vent shaft including excavating the cement concrete pit completely, taking out the shaft, refilling the excavated gap, stacking the useful materials near the site and disposal of unserviceable materials within 50 metres lead	Each	2832.00	2819.90	2832.00	2844.10	2866.60	2861.40	2835.50	2868.30	2837.20	2852.80	2885.60	2875.20
A 15.51		Dismantling of road gully chamber of various sizes including C.I. grating with frame including stacking of useful materials near the site and disposal of unserviceable materials into municipal dumps within 50 metres lead including refilling the excavated gap	Each	775.10	759.50	775.10	790.80	819.80	813.10	779.60	822.10	781.80	802.00	844.40	831.00
A 15.52		Dismantling of flushing cistern of all types (C.I./PVC/Vitrious China) including stacking of useful materials near the site and disposal of unserviceable materials within 50 metres lead.	Each	594.20	590.40	594.20	598.10	605.30	603.60	595.30	605.80	595.90	600.90	611.40	608.00
A 15.53		Dismantling of C.I. sluice valve including stacking of useful materials within a lead of 50 metres	Each												
A 15.53.1		Upto 150 mm diameter	Each	214.20	212.20	214.20	216.10	219.70	218.90	214.70	220.00	215.00	217.50	222.70	221.10
A 15.53.2		Above 150 mm diameter	Each	763.30	761.30	763.30	765.20	768.80	768.00	763.80	769.10	764.10	766.60	771.80	770.20
A 15.54		Dismantling of spindle fire hydrant including stacking of useful materials within 50 metres lead.	Each	461.60	461.60	461.60	461.60	461.60	461.60	461.60	461.60	461.60	461.60	461.60	461.60
A 15.55		Dismantling of cement concrete platform along with curtain walls and base concrete etc. including stacking of useful materials near the site and disposal of unserviceable materials within 50 metres lead:													
A 15.55.1		120 x 120 cm (outside to outside)	Each	636.90	636.60	636.90	637.20	637.80	637.60	637.00	637.80	637.00	637.40	638.20	638.00
A 15.55.2		210 x 120 cm (outside to outside)	Each	977.00	976.50	977.00	977.50	978.50	978.30	977.20	978.60	977.30	977.90	979.30	978.80
A 15.55.3		320 x 120 cm (outside to outside)	Each	1382.60	1381.90	1382.60	1383.20	1384.40	1384.10	1382.80	1384.50	1382.80	1383.70	1385.40	1384.90
A 15.56		Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead.	Sqm	31.60	31.60	31.60	31.70	31.70	31.70	31.70	31.70	31.70	31.70	31.80	31.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 15.57		Dismantling aluminium/Gypsum partitions, doors, windows, fixed glazing and false ceiling including disposal of unserviceable material and stacking of serviceable material with in 50 meters lead as directed by Engineer-in-charge.	Sqm	35.90	35.80	35.90	36.00	36.20	36.20	35.90	36.20	35.90	36.10	36.40	36.30
A 15.58		Demolishing R.C.C. work by mechanical means and stock piling at designated locations and disposal of dismantled materials upto a lead of 1 kilometre,, staking of seviceable and unservicable materials separately including cutting reinforcement bars.	Cum	1905.90	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70	1859.70
A 15.59		Dismantling of flexible pavement (bituminous courses) by mechanical means and disposal of dismantled material upto a lead of 1 kilometre, as per direction of Engineer-in-Charge.	Cum	270.10	270.10	270.10	270.10	270.10	270.10	270.10	270.10	270.10	270.10	270.10	270.10
A 15. 60		Disposal of building rubbish / mulba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved.	Cum	160.60	160.60	160.60	160.60	160.60	160.60	160.60	160.60	160.60	160.60	160.60	160.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
16.0 ROAD WORKS															
A 16.70		Providing and fixing G.I Chain Link Fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete as per the direction of Engineer-in-Charge.													
A 16.70.1		Made of G.I wire of dia 4 mm	Sqm	809.00	774.00	809.00	843.00	908.00	893.00	819.00	913.00	823.00	868.00	962.00	933.00
A 16.70.2		Made of G.I wire of dia 4 mm , PVC coated to achieve outer dia not less than 5 mm in required colour and shade	Sqm	842.00	806.00	842.00	879.00	948.00	932.00	853.00	953.00	858.00	906.00	1006.00	974.00
A 16.71		Providing and fixing G.I chain link fabric fencing of required width in mesh size 25x25 mm made of G.I wire of dia 3mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete as per the direction of Engineer-in-Charge.	Sqm	896.00	855.00	896.00	936.00	1011.00	994.00	907.00	1017.00	913.00	965.00	1075.00	1040.00
A 16.84		Laying old cement concrete interlocking paver blocks of any design/shape laid in required line, level, curvature, colour and pattern over and including 50mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-Charge. (Old CC paver blocks shall be supplied by the department free of cost)	Sqm	290.00	253.00	290.00	375.00	452.00	435.00	309.00	482.00	345.00	375.00	643.00	554.00
A 16.91		Providing and laying factory made chamfered edge cement concrete paver blocks in footpath, parks, lawns, drive ways or light traffic parking etc. of required strength, thickness and size/shape, made by table vibratory method using PU mould laid in required colour and pattern over 50mm thick compacted bed of sand, compacting and proper embedding/laying of inter locking paver blocks into the sand bedding layer through vibratory compaction by using plate vibrator, filling the joints with sand and cutting of paver blocks as per required size and pattern, finishing and sweeping extra sand, complete all as per direction of Engineer-in-charge													
A 16.91.1		60mm thick cement concrete paver block of M-35 grade with approved colour, design and pattern	Sqm	880.00	979.00	969.00	1101.00	1226.00	1296.00	1151.00	1222.00	1214.00	1121.00	1450.00	1490.00
A 16.91.2		80mm thick cement concrete paver block of M-30 grade with approved colour, design and pattern	Sqm	1188.00	1089.00	1188.00	1347.00	1540.00	1496.00	1227.00	1586.00	1280.00	1383.00	1866.00	1707.00
	NOTE : FOR OTHER ITEMS ON ROADWORKS, REFER, SCHEDULE OF RATES 2021 VOLUME-II (ROAD WORKS)														

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
17.0 SANITARY INSTALLATIONS															
A 17.1		Providing and fixing water closet squatting pan (Indian type W.C. pan) with 100mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS: 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required.													
A 17.1.1		White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests	Each	5867.30	5630.10	5867.30	6104.60	6545.10	6443.50	5935.10	6579.00	5969.00	6274.00	6917.90	6714.60
A 17.1.2		Stainless Steel AISI-304(18/8) Orissa pattern W.C. pan of size 585x480 mm with flush pipe and integrated type foot rests.	Each	11300.20	10707.60	11300.20	11892.90	12993.50	12739.50	11469.50	13078.20	11554.20	12316.20	13924.80	13416.80
A 17.2		Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required :													
A 17.2.1		W.C. pan with ISI marked white solid plastic seat and lid	Each	5669.80	5445.50	5669.80	5894.10	6310.60	6214.50	5733.90	6342.70	5765.90	6054.30	6663.10	6470.90
A 17.2.2		W.C. pan with ISI marked black solid plastic seat and lid	Each	5521.60	5307.00	5521.60	5736.20	6134.80	6042.80	5582.90	6165.40	5613.60	5889.50	6472.00	6288.10
A 17.3		Providing and fixing white vitreous china pedestal type water closet (European type) with seat and lid, 10 litre low level white vitreous china flushing cistern & C.P. flush bend with fittings & C.I. brackets, 40mm flush bend, overflow arrangement with specials of standard make and mosquito proof coupling of approved municipal design complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required :													
A 17.3.1		W.C. pan with ISI marked white solid plastic seat and lid	Each	7352.40	7033.40	7352.40	7671.50	8264.10	8127.30	7443.60	8309.70	7489.20	7899.40	8765.50	8492.00
A 17.3.2		W.C. pan with ISI marked Black solid plastic seat and lid.	Each	7204.30	6894.90	7204.30	7513.70	8088.20	7955.60	7292.70	8132.40	7336.90	7734.60	8574.40	8309.20
A 17.4		Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350mm and 340x410x265mm sizes respectively with automatic flushing cistern with standard flush pipe and C.P. brass spreaders with brass unions and G.I clamps complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required :													
A 17.4.1		One urinal basin with 5 litre white P.V.C. automatic flushing cistern	Each	5165.70	4994.70	5165.70	5336.80	5654.40	5581.10	5214.60	5678.80	5239.00	5458.90	5923.10	5776.50
A 17.4.2		Range of two urinal basins with 5 litre white P.V.C. automatic flushing cistern	Each	7979.00	7719.60	7979.00	8238.40	8720.20	8609.00	8053.10	8757.20	8090.20	8423.70	9127.80	8905.50
A 17.4.3		Range of three urinal basins with 10 litre white P.V.C. automatic flushing cistern	Each	10986.40	10630.90	10986.40	11341.80	12002.00	11849.70	11087.90	12052.80	11138.70	11595.80	12560.70	12256.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.4.4		Range of four urinal basins with 10 litre white P.V.C. automatic flushing cistern	Each	15088.00	14626.10	15088.00	15549.90	16407.70	16209.80	15220.00	16473.70	15286.00	15879.80	17133.60	16737.60
A 17.5		Providing and fixing white vitreous china flat back half stall urinal of size 580x380x350mm with white PVC automatic flushing cistern, with fittings, standard size C.P. brass flush pipe, spreaders with unions and clamps (all in C.P. brass) with waste fitting as per IS : 2556, C.I. trap with outlet grating and other couplings in C.P. brass, including painting of fittings and cutting and making good the walls and floors wherever required:													
A 17.5.1		Single half stall urinal with 5 litre P.V.C. automatic flushing cistern.	Each	9207.70	8992.70	9207.70	9422.80	9822.20	9730.00	9269.20	9852.90	9299.90	9576.40	10160.20	9975.80
A 17.5.2		Range of two half stall urinals with 5 litre P.V.C. automatic flushing cistern.	Each	13821.70	13490.70	13821.70	14152.60	14767.10	14625.30	13916.20	14814.40	13963.50	14388.90	15287.10	15003.50
A 17.5.3		Range of Three half stall urinals with 10 litre P.V.C. automatic flushing cistern.	Each	17271.00	16815.10	17271.00	17726.90	18573.60	18378.20	17401.30	18638.70	17466.40	18052.60	19290.00	18899.30
A 17.5.4		Range of Four half stall urinals with 10 litre P.V.C. automatic flushing cistern.	Each	20541.40	19972.20	20541.40	21110.50	22167.60	21923.70	20704.00	22248.90	20785.30	21517.10	23062.10	22574.20
A 17.6		Providing and fixing one piece construction white vitreous china squatting plate with an integral longitudinal flushing pipe, white P.V.C. automatic flushing cistern, with fittings, standard size G.I./PVC flush pipe for back and front flush with standard spreader pipes with fittings, G.I clamps and C.P. brass coupling complete, including painting of fittings and cutting and making good the walls and floors etc. wherever required :													
A 17.6.1		Single squatting plate with 5 litre P.V.C. automatic flushing cistern	Each	7263.70	7059.80	7263.70	7467.50	7846.10	7758.80	7321.90	7875.30	7351.10	7613.20	8166.50	7991.70
A 17.6.2		Range of two squatting plates with 5 litre P.V.C. automatic flushing cistern	Each	10768.50	10436.00	10768.50	11101.00	11718.50	11576.00	10863.50	11766.00	10911.00	11338.50	12241.00	11956.00
A 17.6.3		Range of three squatting plate with 10 litre P.V.C. automatic flushing cistern	Each	14307.10	13843.70	14307.10	14770.40	15630.80	15432.30	14439.40	15697.00	14505.60	15101.30	16358.90	15961.80
A 17.6.4		Range of four squatting plate with 10 litre P.V.C. automatic flushing cistern	Each	17369.50	16771.50	17369.50	17967.50	19078.10	18821.80	17540.30	19163.50	17625.80	18394.70	20017.90	19505.30
A 17.7		Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require:													
A 17.7.1		White vitreous china basin size 630X450 mm with a pair of 15 mm C.P.brass pillar taps	Each	3403.60	3247.70	3403.60	3559.40	3848.80	3782.00	3448.10	3871.10	3470.30	3670.70	4093.70	3960.10
A 17.7.2		White Vitreoud China Wash basin size 630X450 mm with a single 15 mm C.P. brass pillar tap	Each	3010.60	2877.10	3010.60	3144.10	3392.10	3334.90	3048.70	3411.20	3067.80	3239.50	3602.00	3487.50
A 17.7.3		White Vitreous China Wash basin size 550x400 mm with a pair of 15 mm C.P.brass pillar taps	Each	2621.60	2516.90	2621.60	2726.20	2920.60	2875.80	2651.50	2935.60	2666.40	2801.00	3085.10	2995.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.7.4		White Vitreous China Flat back wash basin size 550x400 mm with single 15 mm C.P. brass pillar tap	Each	2228.60	2146.20	2228.60	2311.00	2464.00	2428.60	2252.10	2475.70	2263.90	2369.80	2593.40	2522.80
A 17.7.5		White Vitreous China Angle back wash basin size 600x480 mm with single 15 mm C.P.brass pillar tap	Each	3010.60	2877.10	3010.60	3144.10	3392.10	3334.90	3048.70	3411.20	3067.80	3239.50	3602.00	3487.50
A 17.7.6		White Vitreous China Angle back wash basin size 400x400 mm with single 15 mm C.P.brass pillar tap	Each	2516.70	2415.50	2516.70	2617.90	2805.90	2762.50	2545.60	2820.40	2560.10	2690.20	2965.00	2878.20
A 17.7.7		White Vitreous China Flat back wash basin size 450x300 mm with single 15 mm C.P.brass pillar tap	Each	2327.40	2238.50	2327.40	2416.20	2581.20	2543.10	2352.70	2593.90	2365.40	2479.70	2720.80	2644.70
A 17.7.8		White Vitreous China Surgeon type wash basin of size 660x460 mm with a pair of 15 mm C.P. brass pillar taps with elbow operated levers.	Each	4590.60	4357.10	4590.60	4824.10	5257.70	5157.60	4657.30	5291.00	4690.60	4990.80	5624.60	5424.50
A 17.7.9		White Vitreous China Surgeon type wash basin of size 660x460 mm with single 15 mm C.P. brass pillar taps with elbow operated levers ISI marked.	Each	3830.50	3643.30	3830.50	4017.60	4365.30	4285.00	3883.90	4392.00	3910.70	4151.30	4659.40	4499.00
A 17.7.10		Stainless Steel AISI-304(18/8) Round basin 405x355mm with single 15 mm C.P. brass pillar tap	Each	4286.50	4069.50	4286.50	4503.50	4906.50	4813.50	4348.50	4937.50	4379.50	4658.50	5247.50	5061.50
A 17.7.11		Stainless Steel AISI-304(18/8) Wash basin 530x345 mm with single 15 mm C.P. brass pillar tap	Each	5109.70	4838.80	5109.70	5380.50	5883.60	5767.50	5187.10	5922.30	5225.70	5574.00	6309.20	6077.00
A 17.7A		Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass single hole basin mixer of approved quality and make, including painting of fittings and brackets, cutting and making good the walls wherever require:-													
		(a) White vitreous china basin size 550X400 mm with a pair of 15 mm C.P.brass single hole basin mixer	Each	4550.00	4317.60	4550.00	4782.40	5214.10	5114.40	4616.40	5247.30	4649.60	4948.40	5579.30	5380.10
A 17.7B		Providing and fixing wash basin with C.I. brackets, 15 mm PTMT pillar cock, 32 mm PTMT waste coupling of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require:-													
		White vitreous china Flat back wash basin size 550X400 mm with single 15 mm PTMT pillar cock.	Each	2070.00	2001.40	2070.00	2138.60	2266.00	2236.60	2089.60	2275.80	2099.40	2187.60	2373.80	2315.00
A 17.8		Providing and fixing white vitreous china pedestal for wash basin completely recessed at the back for the reception of pipes and fittings.	Each	1747.50	1633.20	1747.50	1861.80	2074.20	2025.20	1780.20	2090.50	1796.50	1943.50	2253.80	2155.80
A 17.9		Providing and fixing kitchen sink with C.I. brackets, C.P. brass chain with rubber plug, 40 mm C.P. brass waste complete, including painting the fittings and brackets, cutting and making good the walls wherever required:													
A 17.9.1		White glazed fire clay kitchen sink of size 600x450x 250 mm	Each	3561.90	3384.70	3561.90	3739.20	4068.40	3992.40	3612.60	4093.70	3637.90	3865.80	4347.00	4195.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.10		Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per I.S. 13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls wherever required :													
A 17.10.1		Kitchen sink with drain board													
A 17.10.1.1		510x1040mm bowl depth 250 mm	Each	5856.50	5555.90	5856.50	6157.10	6715.30	6586.50	5942.40	6758.30	5985.30	6371.80	7187.70	6930.00
A 17.10.1.2		510x1040mm bowl depth 225 mm	Each	6712.60	6356.00	6712.60	7069.20	7731.40	7578.60	6814.50	7782.40	6865.40	7323.90	8291.80	7986.20
A 17.10.1.3		510x1040mm bowl depth 200 mm	Each	6383.30	6048.30	6383.30	6718.40	7340.60	7197.00	6479.00	7388.50	6526.90	6957.70	7867.20	7580.00
A 17.10.1.4		510x1040mm bowl depth 178 mm	Each	5889.40	5586.70	5889.40	6192.20	6754.40	6624.70	5975.90	6797.70	6019.20	6408.40	7230.20	6970.70
A 17.10.2		Kitchen sink without drain board													
A 17.10.2.1		610x510mm bowl depth 200 mm	Each	4138.20	3923.20	4138.20	4353.10	4752.40	4660.20	4199.60	4783.10	4230.30	4506.70	5090.20	4905.90
A 17.10.2.2		610x460mm bowl depth 200 mm	Each	3150.40	3000.00	3150.40	3300.70	3579.90	3515.50	3193.30	3601.40	3214.80	3408.10	3816.20	3687.30
A 17.10.2.3		470x420mm bowl depth 178 mm	Each	2903.40	2769.20	2903.40	3037.60	3286.80	3229.30	2941.80	3306.00	2960.90	3133.50	3497.70	3382.70
A 17.11		Providing and fixing white vitreous china laboratory sink with C.I. brackets, C.P. brass chain with rubber plug, 40mm C.P brass waste and 40mm C.P.brass trap with necessary C.P. brass unions complete, including painting of fittings and brackets, cutting and making good the wall wherever required :													
A 17.11.1		Size 450x300x150mm	Each	4742.40	4487.90	4742.40	4996.80	5469.50	5360.40	4815.10	5505.80	4851.40	5178.60	5869.40	5651.30
A 17.11.2		Size 600x450x200mm	Each	6388.70	6026.50	6388.70	6750.90	7423.50	7268.30	6492.20	7475.30	6543.90	7009.60	7992.70	7682.20
A 17.12		Providing and fixing draining board with C.I. brackets including painting of brackets, cutting and making good the walls wherever required :													
A 17.12.1		White glazed fire clay draining board of size 600x450x25mm	Each	1512.40	1436.30	1512.40	1588.60	1730.10	1697.50	1534.20	1741.00	1545.10	1643.10	1849.80	1784.50
A 17.13		Providing and fixing white vitreous china water closet squatting pan (Indian type) :													
A 17.3.1		Long pattern W.C. pan of size 580 mm	Each	1598.80	1544.50	1598.80	1653.00	1753.80	1730.60	1614.30	1761.60	1622.00	1691.80	1839.10	1792.60
A 17.13.2		Orissa pattern W.C. pan of size 580x440 mm	Each	2833.50	2698.50	2833.50	2968.60	3219.40	3161.50	2872.10	3238.60	2891.40	3065.00	3431.60	3315.80
A 17.14		Extra for using coloured W.C. pan instead of white W.C. pan :													
A 17.14.1		Orissa pattern W.C. pan 580x440 mm	Each	1037.20	969.30	1037.20	1105.00	1231.10	1202.00	1056.60	1240.70	1066.30	1153.50	1337.70	1279.50
A 17.15		Providing and fixing white vitreous china pedestal type (European type/wash down type) water closet pan.	Each	2459.70	2349.10	2459.70	2570.30	2775.70	2728.30	2491.30	2791.50	2507.10	2649.30	2949.50	2854.70
A 17.16		Extra for using coloured pedestal type W.C. pan (European type) with low level cistern of same colour instead of white vitreous china W.C. pan and cistern.	Each	321.00	300.00	321.00	342.00	381.00	372.00	327.00	384.00	330.00	357.00	414.00	396.00
A 17.16A		Providing and fixing 8 mm dia C.P. / S.S. jet with flexible tube upto 1 metre long with S.S. triangular plate to European type W.C. of quality and make as approved by Engineer-in-charge.	Each	366.10	342.20	366.10	390.10	434.60	424.30	373.00	438.00	376.40	407.20	472.20	451.70
A 17.17		Providing and fixing a pair of white vitreous china foot rests of standard pattern for squatting pan water closet:													
A 17.17.1		250x130x30 mm	Each	220.80	210.10	220.80	231.60	251.60	247.00	223.90	253.10	225.40	239.30	268.50	259.30
A 17.17.2		250x125x25 mm	Each	220.80	210.10	220.80	231.60	251.60	247.00	223.90	253.10	225.40	239.30	268.50	259.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.18		Providing and fixing P.V.C. low level flushing cistern with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete.													
A 17.18.1		10 litre capacity - White	Each	1139.00	1077.00	1139.00	1200.90	1315.90	1289.40	1156.70	1324.80	1165.50	1245.10	1413.20	1360.10
A 17.18.2		10 litre capacity - coloured	Each	1097.80	1038.60	1097.80	1157.00	1267.10	1241.70	1114.70	1275.50	1123.20	1199.40	1360.10	1309.40
A 17.19		Providing and fixing controlled flush, low level cistern made of vitreous china with all fittings complete.													
A 17.19.1		10 litre (full flush) capacity-white	Each	1921.70	1846.40	1921.70	1997.10	2137.20	2104.80	1943.30	2147.90	1954.10	2051.00	2255.60	2191.00
A 17.19.2		10 litre (full flush) capacity-coloured	Each	2662.60	2538.70	2662.60	2786.50	3016.50	2963.40	2698.00	3034.20	2715.70	2874.90	3211.10	3105.00
A 17.20		Providing and fixing solid plastic seat with lid for pedestal type W.C. pan complete :													
A 17.20.1		White solid plastic seat with lid	Each	658.50	615.50	658.50	701.60	781.60	763.20	670.80	787.80	677.00	732.40	849.30	812.40
A 17.20.2		Black solid plastic seat with lid	Each	510.40	477.00	510.40	543.80	605.80	591.40	519.90	610.50	524.70	567.60	658.20	629.60
A 17.20.3		Coloured (other than black & white) solid plastic seat with lid	Each	642.10	600.10	642.10	684.10	762.10	744.10	654.10	768.10	660.10	714.10	828.10	792.10
A 17.22		Providing and fixing G. I. inlet connection for flush pipe connecting with W.C. pan.	Each	98.80	92.30	98.80	105.20	117.20	114.50	100.60	118.20	101.50	109.90	127.40	121.90
A 17.22A		Providing and fixing CP Brass 32 mm size Bottle Trap of approved quality & make and as per the direction of Engineer-in-charge.	Each	1020.70	953.90	1020.70	1087.50	1211.50	1182.90	1039.80	1221.10	1049.30	1135.20	1316.50	1259.20
A 17.22B		Providing and fixing CP Brass Single lever telephonic wall mixer of quality & make as approved by Engineer-in-charge.													
		(a) 15 mm nominal dia	Each	7408.50	6923.80	7408.50	7893.20	8793.30	8585.50	7547.00	8862.50	7616.20	8239.40	9554.90	9139.50
A 17.23		Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350mm and 340x410x 265mm sizes respectively.	Each	1342.00	1292.40	1342.00	1391.50	1483.50	1462.30	1356.10	1490.60	1363.20	1426.90	1561.40	1518.90
A 17.24		Providing and fixing white vitreous china squatting plate urinal with integral rim longitudinal flush pipe.	Each	3307.70	3192.00	3307.70	3423.50	3638.40	3588.80	3340.80	3655.00	3357.30	3506.10	3820.30	3721.10
A 17.25		Providing and fixing white vitreous china wash basin including making all connections but excluding the cost of fittings:													
A 17.25.1		Flat back wash basin of size 630x450mm.	Each	1370.80	1281.10	1370.80	1460.50	1627.00	1588.60	1396.40	1639.80	1409.20	1524.50	1768.00	1691.10
A 17.25.2		Flat back wash basin of size 550x400mm.	Each	588.80	550.30	588.80	627.30	698.80	682.30	599.80	704.40	605.30	654.80	759.40	726.40
A 17.25.3		Angle back wash basin of size 600x480mm.	Each	1370.80	1281.10	1370.80	1460.50	1627.00	1588.60	1396.40	1639.80	1409.20	1524.50	1768.00	1691.10
A 17.25.4		Angle back wash basin of size 400x400mm.	Each	876.90	819.50	876.90	934.30	1040.80	1016.20	893.30	1049.00	901.50	975.20	1131.00	1081.80
A 17.25.5		Flat back wash basin of size 450x300mm.	Each	687.60	642.60	687.60	732.60	816.10	796.80	700.40	822.50	706.90	764.70	886.80	848.20
A 17.25.6		Surgeon type wash basin of size 660x460mm.	Each	1823.50	1704.20	1823.50	1942.80	2164.40	2113.30	1857.60	2181.40	1874.70	2028.10	2351.90	2249.60
A 17.26		Providing and fixing kitchen sink including making all connections excluding cost of fittings.													
A 17.26.1		White glazed fire clay sink of size 600x450x250 mm.	Each	2245.40	2098.50	2245.40	2392.30	2665.10	2602.10	2287.30	2686.00	2308.30	2497.20	2895.90	2770.00
A 17.27		Providing and fixing white vitreous china laboratory sink including making all connections excluding cost of fittings:													
A 17.27.1		Size 450x300x150 mm.	Each	2602.60	2432.40	2602.60	2772.90	3089.10	3016.10	2651.30	3113.40	2675.60	2894.50	3356.70	3210.70
A 17.27.2		Size 600x450x200 mm.	Each	4249.00	3971.00	4249.00	4526.90	5043.10	4924.00	4328.40	5082.90	4368.10	4725.50	5480.00	5241.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.28		Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete.													
A 17.28.1		Semi rigid pipe													
A 17.28.1.1		32 mm dia	Each	41.20	38.50	41.20	43.90	48.90	47.70	41.90	49.20	42.30	45.80	53.10	50.80
A 17.28.1.2		40 mm dia	Each	54.30	50.80	54.30	57.90	64.50	63.00	55.30	65.00	55.90	60.40	70.10	67.00
A 17.28.2		Flexible pipe													
A 17.28.2.1		32 mm dia	Each	57.60	53.90	57.60	61.40	68.40	66.80	58.70	68.90	59.20	64.10	74.30	71.10
A 17.28.2.2		40 mm dia	Each	57.60	53.90	57.60	61.40	68.40	66.80	58.70	68.90	59.20	64.10	74.30	71.10
A 17.29		Providing and fixing 100 mm sand cast Iron grating for gully trap.	Each	41.20	38.50	41.20	43.90	48.90	47.70	41.90	49.20	42.30	45.80	53.10	50.80
A 17.30		Providing and fixing in position 25 mm diameter mosquito proof coupling of approved municipal design.	Each	49.40	46.20	49.40	52.60	58.60	57.20	50.30	59.10	50.80	54.90	63.70	60.90
A 17.31		Providing and fixing 600x450 mm bevelled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers complete.	Each	1281.00	1233.50	1281.00	1328.90	1417.10	1396.80	1294.60	1423.90	1301.40	1362.90	1492.20	1451.50
A 17.32		Providing and fixing mirror of superior glass (of approved quality) and of required shape and size with plastic moulded frame of approved make and shade with 6 mm thick hard board backing													
A 17.32.1		Circular shape 450mm dia.	Each	1306.10	1251.00	1306.10	1361.20	1463.60	1440.00	1321.90	1471.50	1329.70	1400.60	1550.20	1503.00
A 17.32.2		Rectangular shape 453x357mm dia.	Each	1156.30	1111.00	1156.30	1201.60	1285.80	1266.40	1169.30	1292.30	1175.70	1234.00	1357.00	1318.20
A 17.32.3		Oval shape 450x350mm (outer dimensions)	Each	1236.70	1186.20	1236.70	1287.30	1381.20	1359.60	1251.20	1388.50	1258.40	1323.40	1460.70	1417.40
A 17.32.4		Rectangular shape 1500x450 mm	Each	1976.20	1877.20	1976.20	2075.10	2258.90	2216.50	2004.50	2273.00	2018.60	2145.80	2414.40	2329.60
A 17.33		Providing and fixing 600x120x5mm glass shelf with edges round of supported on anodised aluminium angle frame with C.P. brass brackets and guard rail complete fixed with 40mm long screws, rawl plugs etc., complete	Each	864.20	830.60	864.20	897.80	960.10	945.70	873.80	964.90	878.60	921.70	1012.80	984.10
A 17.34		Providing and fixing toilet paper holder													
A 17.34.1		C.P. brass	Each	590.50	565.90	590.50	615.40	661.10	650.50	597.60	664.60	601.10	632.90	700.00	678.90
A 17.34.2		Vitreous china	Each	410.70	397.90	410.70	423.80	447.70	442.10	414.40	449.50	416.20	433.00	468.10	457.00
A 17.35		Providing and fixing soil, waste and vent pipes :													
A 17.35.1		100 mm dia.													
A 17.35.1.1		Sand cast iron S&S pipe IS: 1729	Each	21096.70	19784.20	21096.70	22409.30	24846.90	24284.40	21471.80	25034.40	21659.30	23346.80	26909.50	25784.40
A 17.35.1.2		Centrifugally cast (spun) iron socket & spigot (S&S) pipe as per IS:3989	Each	22220.40	20834.30	22220.40	23606.40	26180.50	25586.50	22616.40	26378.50	22814.40	24596.50	28358.60	27170.60
A 17.35.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside IS:15905	Each	1269.00	1189.80	1269.00	1348.30	1495.50	1461.50	1291.70	1506.80	1303.00	1404.90	1620.10	1552.10
A 17.35.2		75 mm dia.													
A 17.35.2.1		Sand cast iron S&S pipe as per IS: 1729	Each	1114.40	1044.70	1114.40	1184.00	1313.40	1283.60	1134.30	1323.40	1144.20	1233.80	1422.90	1363.20
A 17.35.2.2		Centrifugally cast (spun) iron socketed pipe as per IS: 3989	Each	1198.40	1123.30	1198.40	1273.50	1412.90	1380.70	1219.80	1423.60	1230.60	1327.10	1530.80	1466.50
A 17.35.2.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside IS:15905	Each	1036.70	972.00	1036.70	1101.30	1221.50	1193.70	1055.10	1230.70	1064.40	1147.50	1323.10	1267.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.36		Providing and filling the joints with spun yarn, cement slurry and cement mortar 1:2 (1 cement :2 fine sand) in S.C. 1 /C. I. pipes:													
A 17.36.1		75 mm dia pipe	Each	113.40	113.00	113.40	113.70	114.40	114.30	113.50	114.50	113.50	114.00	115.00	114.70
A 17.36.2		100 mm dia pipe	Each	133.60	133.10	133.60	134.00	134.80	134.60	133.70	134.90	133.80	134.30	135.50	135.10
A 17.37		Providing and fixing M.S. holder-bat clamps of approved design to Sand Cast iron/cast iron (spun) pipe embedded in and including cement concrete blocks 10x10x10cm of 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size), including cost of cutting holes and making good the walls etc. :													
A 17.37.1		For 100 mm dia. pipe	Each	269.20	265.00	269.20	274.40	282.30	280.50	270.80	283.30	271.80	277.00	290.90	286.40
A 17.37.2		For 75 mm dia pipe	Each	264.30	260.40	264.30	269.10	276.50	274.80	265.80	277.40	266.80	271.50	284.50	280.40
A 17.38		Providing and fixing bend of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete.													
A 17.38.1		100 mm													
A 17.38.1.1		Sand cast iron S&S as per IS - 1729	Each	568.10	530.90	568.10	605.20	674.20	658.30	578.70	679.50	584.00	631.80	732.60	700.80
A 17.38.1.2		Sand Cast iron S&S as per IS-3989	Each	568.10	530.90	568.10	605.20	674.20	658.30	578.70	679.50	584.00	631.80	732.60	700.80
A 17.38.1.3		Hubless centrifugally cast (spun) iron epoxy coated inside and outside as per IS-15905	Each	675.10	630.90	675.10	719.20	801.20	782.30	687.70	807.60	694.00	750.80	870.60	832.80
A 17.38.2		75 mm dia													
A 17.38.2.1		Sand cast iron S&S as per IS - 1729	Each	457.00	427.10	457.00	486.90	542.40	529.60	465.50	546.70	469.80	508.20	589.40	563.80
A 17.38.2.2		Sand cast iron S&S as per IS-3989	Each	473.50	442.50	473.50	504.40	561.90	548.70	482.30	566.40	486.70	526.50	610.60	584.10
A 17.38.2.3		Hubless centrifugally cast (spun) iron epoxy coated inside and outside as per IS-15905	Each	506.40	473.30	506.40	539.50	601.00	586.80	515.80	605.80	520.60	563.20	653.10	624.70
A 17.39		Providing and fixing plain bend of required degree.													
A 17.39.1		100 mm													
A 17.39.1.1		Sand cast iron S&S as per IS-1729	Each	469.30	438.60	469.30	500.00	557.00	543.80	478.00	561.40	482.40	521.90	605.20	578.90
A 17.39.1.2		Sand Cast iron S&S as per IS-3989	Each	480.80	449.30	480.80	512.20	570.70	557.20	489.80	575.20	494.30	534.70	620.10	593.10
A 17.39.1.3		Hubless centrifugally cast (spun) iron pipe epoxy coated inside and outside IS-15905	Each	423.20	395.50	423.20	450.90	502.30	490.40	431.10	506.20	435.00	470.60	545.80	522.00
A 17.39.2		75 mm													
A 17.39.2.1		Sand cast iron S&S as per IS-1729	Each	381.30	356.30	381.30	406.20	452.50	441.80	388.40	456.10	391.90	424.00	491.70	470.30
A 17.39.2.2		Sand cast iron S&S as per IS-3989	Each	356.60	333.20	356.60	379.90	423.20	413.20	363.20	426.50	366.60	396.60	459.90	439.90
A 17.39.2.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside and outside I.S-15905	Each	298.90	279.40	298.90	318.50	354.80	346.40	304.50	357.60	307.30	332.50	385.60	368.80
A 17.40		Providing and fixing heel rest sanitary bend													
A 17.40.1		100 mm dia													
A 17.40.1.1		Sand cast iron S&S as per IS-1729	Each	615.80	575.50	615.80	656.10	730.90	713.60	627.30	736.70	633.10	684.90	794.20	759.70
A 17.40.1.2		Sand cast iron S&S as per IS-3989	Each	531.80	497.00	531.80	566.60	631.20	616.30	541.80	636.20	546.70	591.50	685.90	656.10
A 17.40.2		75 mm dia													
A 17.40.2.1		Sand cast iron S&S as per IS-1729	Each	486.60	454.80	486.60	518.50	577.60	563.90	495.70	582.10	500.30	541.20	627.60	600.30
A 17.40.2.2		Sand Cast Iron S&S as per I.S-3989	Each	447.10	417.90	447.10	476.40	530.70	518.10	455.50	534.90	459.60	497.30	576.60	551.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.41		Providing and fixing double equal junction of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete.													
A 17.41.1		100x100x100x100mm													
A 17.41.1.1		Sand cast iron S&S as per I.S-1729	Each	1250.90	1169.00	1250.90	1332.70	1484.70	1449.60	1274.20	1496.30	1285.90	1391.10	1613.20	1543.10
A 17.41.1.2		Sand cast iron S&S as per I.S-3989	Each	1086.20	1015.20	1086.20	1157.30	1289.20	1258.80	1106.50	1299.40	1116.70	1208.00	1400.90	1340.00
A 17.41.2		75x75x75x75mm													
A 17.41.2.1		Sand cast iron S&S as per IS-1729	Each	885.00	827.10	885.00	942.90	1050.50	1025.60	901.60	1058.70	909.80	984.30	1141.40	1091.80
A 17.41.2.2		Sand Cast Iron S&S as per IS-3989	Each	852.10	796.40	852.10	907.90	1011.40	987.50	868.00	1019.30	876.00	947.70	1099.00	1051.20
A 17.42		Providing and fixing double equal plain junction of required degree.													
A 17.42.1		100x100x100x100mm													
A 17.42.1.1		Sand cast iron S&S as per IS- 1729	Each	1015.90	949.40	1015.90	1082.30	1205.70	1177.30	1034.80	1215.20	1044.30	1129.80	1310.20	1253.20
A 17.42.1.2		Sand Cast iron S&S as per IS-3989	Each	1065.20	995.60	1065.20	1134.90	1264.40	1234.50	1085.20	1274.30	1095.10	1184.70	1373.90	1314.10
A 17.42.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	884.10	826.30	884.10	942.00	1049.40	1024.60	900.70	1057.70	908.90	983.30	1140.30	1090.70
A 17.42.2		75x75x75x75mm													
A 17.42.2.1		Sand cast iron S&S as per IS-1729	Each	664.40	621.00	664.40	707.90	788.60	770.00	676.80	794.80	683.10	738.90	856.90	819.70
A 17.42.2.2		Sand cast iron S&S as per IS-3989	Each	796.10	744.00	796.10	848.20	944.90	922.60	811.00	952.40	818.50	885.40	1026.80	982.10
A 17.42.2.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	488.30	456.30	488.30	520.20	579.50	565.80	497.40	584.10	502.00	543.00	629.70	602.40
A 17.43		Providing and fixing single equal plain junction of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete.													
A 17.43.1		100x100x100x100mm													
A 17.43.1.1		Sand cast iron S&S as per IS-1729	Each	740.90	692.40	740.90	789.40	879.40	858.60	754.80	886.30	761.70	824.00	955.60	914.00
A 17.43.1.2		Sand cast iron S&S as per IS-3989	Each	889.10	830.90	889.10	947.20	1055.30	1030.30	905.70	1063.60	914.00	988.80	1146.70	1096.80
A 17.43.2		75x75x75x75mm													
A 17.43.2.1		Sand cast iron S&S as per IS-1729	Each	588.70	550.20	588.70	627.20	698.70	682.20	599.70	704.20	605.20	654.70	759.30	726.20
A 17.43.2.2		Sand cast ironS&S as per IS-3989	Each	676.00	631.70	676.00	720.20	802.30	783.30	688.60	808.60	694.90	751.80	871.80	833.90
A 17.44		Providing and fixing single equal plain junction of required degree.													
A 17.44.1		100x100x100mm													
A 17.44.1.1		Sand cast iron S&S as per IS-1729	Each	637.20	595.50	637.20	678.90	756.30	738.40	649.10	762.30	655.10	708.70	821.80	786.10
A 17.44.1.2		Sand cast iron S&S as per I.S-3989	Each	821.60	767.80	821.60	875.30	975.20	952.10	836.90	982.80	844.60	913.70	1059.60	1013.50
A 17.44.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	703.00	657.10	703.00	749.00	834.50	814.70	716.20	841.00	722.80	781.90	906.70	867.30
A 17.44.2		75x75x75mm													
A 17.44.2.1		Sand cast iron S&S as per IS-1729	Each	493.20	460.90	493.20	525.50	585.40	571.60	502.40	590.00	507.00	548.50	636.10	608.40
A 17.44.2.2		Sand Cast Iron S&S as per IS-3989	Each	578.80	541.00	578.80	616.70	687.00	670.80	589.60	692.40	595.00	643.70	746.50	714.10
A 17.44.2.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	389.50	364.00	389.50	415.00	462.30	451.40	396.80	465.90	400.40	433.20	502.30	480.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.45		Providing and fixing double unequal junction of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete													
A 17.45.1		100x100x75x75mm													
A 17.45.1.1		Sand cast iron S&S as per IS-1729	Each	1226.60	1146.30	1226.60	1306.80	1455.90	1421.50	1249.50	1467.30	1261.00	1364.10	1581.90	1513.20
A 17.45.1.2		Sand cast iron S&S as per IS-3989	Each	1473.50	1377.10	1473.50	1569.90	1749.00	1707.60	1501.10	1762.70	1514.80	1638.80	1900.40	1817.80
A 17.46		Providing and fixing double unequal plain junction of required degree:													
A 17.46.1		100x100x75x75mm													
A 17.46.1.1		Sand cast iron S&S as per IS-1729	Each	1057.00	987.90	1057.00	1126.20	1254.60	1224.90	1076.80	1264.50	1086.60	1175.60	1363.20	1304.00
A 17.46.1.2		Sand Cast Iron S&S as per IS-3989	Each	1361.60	1272.50	1361.60	1450.70	1616.10	1577.90	1387.00	1628.80	1399.80	1514.30	1756.10	1679.70
A 17.46.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	703.00	657.10	703.00	749.00	834.50	814.70	716.20	841.00	722.80	781.90	906.70	867.30
A 17.47		Providing and fixing single unequal junction of required degree with access door, insertion rubber washer 3 mm thick, bolts and nuts complete:													
A 17.47.1		100x100x75mm													
A 17.47.1.1		Sand cast iron S&S as per IS-1729	Each	979.60	915.50	979.60	1043.70	1162.70	1135.30	997.90	1171.90	1007.10	1089.50	1263.50	1208.50
A 17.47.1.2		Sand cast iron S&S as per IS-3989	Each	1127.80	1054.00	1127.80	1201.60	1338.60	1307.00	1148.90	1349.10	1159.40	1254.30	1454.60	1391.30
A 17.48		Providing and fixing single unequal plain junction of required degree:													
A 17.48.1		100x100x75mm													
A 17.48.1.1		Sand cast iron S&S as per IS-1729	Each	857.80	801.70	857.80	913.90	1018.10	994.10	873.80	1026.20	881.90	954.00	1106.30	1058.20
A 17.48.1.2		Sand cast iron S&S as per IS-3989	Each	982.90	918.60	982.90	1047.20	1166.70	1139.10	1001.30	1175.80	1010.50	1093.20	1267.70	1212.60
A 17.48.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	661.90	618.60	661.90	705.20	785.60	767.10	674.30	791.80	680.40	736.10	853.70	816.50
A 17.49		Providing and fixing double equal plain invert branch of required degree:													
A 17.49.1		100x100x100x100mm													
A 17.49.1.1		Sand cast iron S&S as per IS-1729	Each	950.00	887.90	950.00	1012.10	1127.60	1100.90	967.80	1136.40	976.60	1056.50	1225.20	1172.00
A 17.49.1.2		Sand cast iron S&S as per IS-3989	Each	917.10	857.10	917.10	977.10	1088.50	1062.80	934.20	1097.10	942.80	1019.90	1182.80	1131.30
A 17.49.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	1073.50	1003.20	1073.50	1143.70	1274.10	1244.00	1093.50	1284.20	1103.60	1193.90	1384.50	1324.30
A 17.49.2		75x75x75x75mm													
A 17.49.2.1		Sand cast iron S&S as per IS-1729	Each	710.50	664.00	710.50	757.00	843.30	823.40	723.80	850.00	730.40	790.20	916.40	876.50
A 17.49.2.2		Sand cast iron S&S as per IS-3989	Each	735.20	687.10	735.20	783.30	872.60	852.00	749.00	879.50	755.80	817.70	948.20	907.00
A 17.50		Providing and fixing single equal plain invert branch of required degree:													
A 17.50.1		100x100x100mm													
A 17.50.1.1		Sand cast iron S&S as per IS-1729	Each	719.50	672.40	719.50	766.60	854.00	833.80	733.00	860.70	739.70	800.20	928.00	887.60
A 17.50.1.2		Sand Cast Iron S&S as per IS-3989	Each	744.20	695.50	744.20	792.90	883.30	862.40	758.10	890.30	765.10	827.70	959.80	918.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.50.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	686.60	641.70	686.60	731.50	814.90	795.70	699.40	821.30	705.80	763.60	885.50	847.00
A 17.50.2		75x75x75mm													
A 17.50.2.1		Sand cast iron S&S as per IS-1729	Each	562.40	525.60	562.40	599.10	667.50	651.70	572.90	672.70	578.10	625.40	725.30	693.70
A 17.50.2.2		Sand cast iron S&S as per IS-3989	Each	567.30	530.20	567.30	604.40	673.30	657.40	577.90	678.60	583.20	630.90	731.60	699.80
A 17.50.2.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	463.60	433.20	463.60	493.90	550.20	537.20	472.20	554.60	476.60	515.60	597.90	571.90
A 17.51		Providing and fixing double unequal invert branch of required degree:													
A 17.51.1		100x100x75x75mm													
A 17.51.1.1		Sand cast iron S&S as per IS-1729	Each	982.90	918.60	982.90	1047.20	1166.70	1139.10	1001.30	1175.80	1010.50	1093.20	1267.70	1212.60
A 17.51.1.2		Sand Cast Iron S&S as per IS-3989	Each	1238.10	1157.10	1238.10	1319.10	1469.50	1434.80	1261.20	1481.10	1272.80	1377.00	1596.80	1527.40
A 17.52		Providing and fixing single unequal plain invert branch of required degree:													
A 17.52.1		100x100x75mm													
A 17.52.1.1		Sand cast iron S&S as per IS-1729	Each	859.50	803.20	859.50	915.70	1020.10	996.00	875.50	1028.10	883.50	955.80	1108.50	1060.30
A 17.52.1.2		Sand Cast Iron S&S as per IS-3989	Each	941.80	880.20	941.80	1003.40	1117.80	1091.40	959.40	1126.60	968.20	1047.40	1214.60	1161.80
A 17.52.1.3		Hubless centrifugally cast (spun) iron pipes epoxy coated inside & outside I.S-15905	Each	752.40	703.20	752.40	801.70	893.10	872.00	766.50	900.10	773.50	836.80	970.40	928.20
A 17.53		Providing and fixing sand cast iron S&S offsets as per IS-1729													
A 17.53.1		75 mm off sets													
A 17.53.1.1		With 75 mm dia. pipe	Each	394.40	368.60	394.40	420.20	468.20	457.10	401.80	471.80	405.50	438.70	508.70	486.60
A 17.53.1.2		With 100 mm dia. pipe	Each	633.10	591.70	633.10	674.60	751.50	733.70	645.00	757.40	650.90	704.20	816.60	781.10
A 17.53.2		114 mm off sets													
A 17.53.2.1		With 75 mm dia. pipe	Each	538.40	503.20	538.40	573.60	639.10	624.00	548.50	644.10	553.50	598.80	694.40	664.20
A 17.53.2.2		With 100 mm dia. pipe	Each	675.10	630.90	675.10	719.20	801.20	782.30	687.70	807.60	694.00	750.80	870.60	832.80
A 17.53.3		152 mm off sets													
A 17.53.3.1		With 75 mm dia. pipe	Each	648.50	606.00	648.50	690.90	769.70	751.50	660.60	775.70	666.60	721.20	836.30	800.00
A 17.53.3.2		With 100 mm dia. pipe	Each	808.20	755.30	808.20	861.00	959.20	936.50	823.30	966.80	830.80	898.80	1042.30	997.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.53A		Providing and fixing Hubless centrifugally cast iron offsets epoxy coated inside & outside as per IS-15905													
A 17.53A.1		65 mm off sets													
A 17.53A.1.1		With 100 mm dia. pipe	Each	628.20	587.10	628.20	669.30	745.60	728.00	639.90	751.50	645.80	698.70	810.20	775.00
A 17.53A.1.2		With 75mm dia. pipe	Each	521.20	487.10	521.20	555.30	618.60	604.00	530.90	623.50	535.80	579.60	672.20	643.00
A 17.54		Providing and fixing Sand cast iron S&S offsets as per IS-3989													
A 17.54.1		75 mm off sets													
A 17.54.1.1		With 75 mm dia. pipe	Each	406.00	379.40	406.00	432.50	481.80	470.40	413.50	485.60	417.30	451.50	523.60	500.80
A 17.54.2		150 mm off sets													
A 17.54.2.1		With 75 mm dia. pipe	Each	522.30	488.10	522.30	556.50	619.90	605.30	532.00	624.80	536.90	580.90	673.60	644.30
A 17.54.2.2		With 100 mm dia. pipe	Each	695.10	649.70	695.10	740.60	825.10	805.60	708.10	831.60	714.60	773.10	896.50	857.60
A 17.54A		Providing and fixing Hubless centrifugally cast iron offsets epoxy coated inside & outside as per IS-15905													
A 17.54A.1		130 mm off sets													
A 17.54A.1.1		With 100 mm dia. pipe	Each	768.90	718.60	768.90	819.20	912.60	891.10	783.30	919.80	790.50	855.10	991.70	948.60
A 17.54A.1.2		With 75mm dia. pipe	Each	545.90	510.20	545.90	581.60	647.90	632.60	556.10	653.00	561.20	607.10	704.00	673.40
A 17.55		Providing and fixing door piece, insertion rubber washer 3 mm thick, bolts & nuts complete													
A 17.55.1		100 mm													
A 17.55.1.1		Sand cast iron S&S as per IS-1729	Each	856.20	800.10	856.20	912.20	1016.20	992.20	872.20	1024.20	880.20	952.20	1104.20	1056.20
A 17.55.1.2		Sand Cast iron S&S as per IS-3989	Each	732.70	684.80	732.70	780.60	869.60	849.10	746.40	876.50	753.20	814.90	945.00	903.90
A 17.55.2		75 mm													
A 17.55.2.1		Sand cast iron S&S as per IS-1729	Each	527.80	527.80	527.80	527.80	527.80	527.80	527.80	527.80	527.80	527.80	527.80	527.80
A 17.55.2.2		Sand Cast Iron S&S as per IS-3989	Each	720.40	673.30	720.40	767.50	855.10	834.90	733.90	861.80	740.60	801.20	929.10	888.70
A 17.56		Providing and fixing terminal guard:													
A 17.56.1		100 mm													
A 17.56.1.1		Sand cast iron S&S as per IS 1729	Each	438.00	409.30	438.00	466.60	519.90	507.60	446.20	524.00	450.30	487.10	564.90	540.30
A 17.56.1.2		Sand cast iron S&S as per IS 3989	Each	479.10	447.80	479.10	510.50	568.70	555.30	488.10	573.20	492.60	532.90	618.00	591.10
A 17.56.1.3		Hubless centrifugally cast (spun) iron epoxy coated inside and outside as per IS 15905	Each	489.00	457.00	489.00	521.00	580.40	566.70	498.20	585.00	502.70	543.90	630.70	603.30
A 17.56.2		75 mm													
A 17.56.2.1		Sand cast iron S&S as per IS 1729	Each	350.00	327.10	350.00	372.90	415.40	405.60	356.50	418.70	359.80	389.20	451.40	431.70
A 17.56.2.2		Sand cast iron S&S as per IS 3989	Each	381.30	356.30	381.30	406.20	452.50	441.80	388.40	456.10	391.90	424.00	491.70	470.30
A 17.57		Providing and fixing collar:													
A 17.57.1		100 mm													
A 17.57.1.1		Sand cast iron S&S as per IS 1729	Each	449.50	420.10	449.50	478.90	533.50	520.90	457.90	537.70	462.10	499.90	579.70	554.50
A 17.57.1.2		Sand cast iron S&S as per IS 3989	Each	503.80	470.90	503.80	536.80	598.00	583.90	513.30	602.70	518.00	560.30	649.80	621.60
A 17.57.2		75 mm													
A 17.57.2.1		Sand cast iron S&S as per IS 1729	Each	326.90	305.50	326.90	348.30	388.00	378.90	333.00	391.10	336.10	363.60	421.60	403.30
A 17.57.2.2		Sand cast iron S&S as per IS 3989	Each	315.40	294.80	315.40	336.00	374.40	365.50	321.30	377.30	324.20	350.80	406.80	389.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.57A		Providing and fixing shielded coupling for hubless centrifugally cast iron pipe													
A 17.57A.1		100 mm dia													
A 17.57A.1.1		SS 304 grade coupling with EPBN rubber gasket	Each	497.30	464.70	497.30	529.80	590.20	576.30	506.60	594.90	511.20	553.00	641.30	613.40
A 17.57A.2		75 mm dia													
A 17.57A.2.1		SS 304 grade coupling with EPBN rubber gasket	Each	447.10	417.90	447.10	476.40	530.70	518.10	455.50	534.90	459.60	497.30	576.60	551.60
A 17.58		Providing lead caulked joints to sand cast iron/centrifugally cast (spun) iron pipes and fittings of diameter:													
A 17.58.1		100 mm	Each	514.10	492.10	514.10	536.20	577.20	567.80	520.40	580.40	523.60	552.00	611.90	593.00
A 17.58.2		75 mm	Each	439.10	419.60	439.10	458.60	494.80	486.40	444.60	497.50	447.40	472.50	525.40	508.70
A 17.58.3		50 mm	Each	358.00	358.00	358.00	358.00	358.00	358.00	358.00	358.00	358.00	358.00	358.00	358.00
A 17.59		Providing and fixing M.S. stays and clamps for sand cast iron/centrifugally cast (spun) iron pipes of diameter:													
A 17.59.1		100 mm	Each	155.60	145.50	155.60	165.80	184.70	180.40	158.60	186.20	160.00	173.10	200.70	192.00
A 17.59.2		75 mm	Each	96.40	90.10	96.40	102.80	114.50	111.80	98.20	115.40	99.10	107.30	124.40	119.00
A 17.59.3		50 mm	Each	88.90	83.10	88.90	94.70	105.50	103.00	90.50	106.30	91.40	98.80	114.60	109.60
A 17.60		Providing and fixing trap of self cleansing design with screwed down or hinged grating with or without vent arm complete, including cost of cutting and making good the walls and floors													
A 17.60.1		100 mm inlet and 100 mm outlet													
A 17.60.1.1		Sand cast iron S&S as per IS 3989	Each	1554.70	1503.30	1554.70	1606.10	1701.50	1679.50	1569.40	1708.80	1576.70	1642.80	1782.20	1738.20
A 17.60.1.2		Sand Cast Iron S&S as per IS 1729	Each	1260.00	1227.90	1260.00	1292.10	1351.70	1337.90	1269.20	1356.30	1273.70	1315.00	1402.10	1374.60
A 17.60.1.3		Hubless centrifugally cast (spun) iron epoxy coated inside and outside as per IS 15905	Each	933.50	872.50	933.50	994.60	1108.00	1081.90	951.00	1116.80	959.70	1038.20	1204.00	1151.70
A 17.60.2		100 mm inlet and 75 mm outlet													
A 17.60.2.1		Sand cast iron S&S as per IS 3989	Each	1637.00	1580.20	1637.00	1693.80	1799.20	1774.90	1653.20	1807.30	1661.30	1734.30	1888.40	1839.70
A 17.60.2.2		Sand Cast Iron S&S as per IS 1729	Each	1172.70	1146.30	1172.70	1199.10	1248.10	1236.80	1180.30	1251.90	1184.00	1218.00	1289.60	1267.00
A 17.60.2.3		Hubless centrifugally cast (spun) iron epoxy coated inside and outside as per IS 15905	Each	678.40	634.00	678.40	722.70	805.20	786.10	691.00	811.50	697.40	754.40	874.90	836.80
A 17.61		Cutting chases in brick masonry walls for following diameter sand cast iron/centrifugally cast (spun) iron pipes and making good the same with cement concrete 1:3:6 (1 cement :3 coarse sand 6 graded stone aggregate 12.5 mm nominal size) including necessary plaster and pointing in cement mortar 1:4 (1 cement 4 coarse sand)													
A 17.61.1		100 mm dia	Each	531.60	518.30	531.60	572.30	600.60	594.10	550.70	609.90	561.80	574.30	661.90	632.80
A 17.61.2		75 mm dia	Each	378.60	369.40	378.60	406.50	426.10	421.60	391.70	432.50	399.20	408.00	468.20	448.20
A 17.61.3		50 mm dia	Each	241.00	235.90	241.00	256.10	267.00	264.50	248.10	270.40	252.10	257.10	289.80	278.90
A 17.62		Painting C.I. cistern with bitumastic or any other anti-corrosive paint inside and white paint over a coat of zinc chromate yellow primer (of approved quality) on the outside surface of the cistern flush pipe, other fittings, etc. complete for new work.	Each	703.40	690.20	703.40	716.60	741.10	735.50	707.20	743.00	709.10	726.10	761.90	750.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.63		Re-painting C. I. cistern with bitumastic or any other anti-corrosive paint inside and white paint on the outside surface of the cistern, flush pipe, other fittings, etc. complete including polishing of wooden seat and lid and cleaning of W.C. pan with acid wherever necessary.	Each	493.20	481.30	493.20	505.10	527.30	522.20	496.60	529.00	498.30	513.60	546.00	535.80
A 17.64		Repainting C.I. cistern with synthetic enamel paint of approved colour brand and manufacture on the outside surface of cistern flush pipe, other fittings etc. complete	Each	209.20	204.90	209.20	213.40	221.30	219.40	210.40	221.90	211.00	216.40	227.90	224.30
A 17.65		Painting sand cast iron/centrifugally cast (spun) iron soil, waste vent pipes and fittings with two coats of synthetic enamel paint of any colour such as chocolate grey, or buff etc. over a coat of primer (of approved quality) for new work													
A 17.65.1		100 mm diameter pipe	Each	61.70	60.20	61.70	63.20	66.10	65.50	62.20	66.40	62.40	64.30	68.60	67.30
A 17.65.2		75 mm diameter pipe	Each	47.10	45.90	47.10	48.30	50.60	50.10	47.50	50.80	47.70	49.20	52.50	51.50
A 17.66		Repainting sand cast iron/centrifugally cast iron (spun) iron, soil, waste. vent pipes and fittings with one coat of synthetic enamel paint of any colour such as chocolate, grey or buff etc													
A 17.66.1		100 mm diameter pipe	Each	30.10	29.30	30.10	31.00	32.50	32.10	30.40	32.60	30.50	31.60	33.80	33.10
A 17.66.2		75 mm diameter pipe	Each	22.60	21.90	22.60	23.20	24.40	24.10	22.70	24.50	22.80	23.70	25.30	24.80
A 17.67		Repainting bath tub of size 1700x730x430mm with enamel paint.	Each	617.90	600.50	617.90	635.40	667.80	660.30	622.90	670.30	625.40	647.90	695.20	680.30
A 17.68		Providing and fixing vitreous china dual purpose closet suitable for use as squatting pan or European type water closet (Anglo Indian W.C pan) with seat lid with C.P. brass hinges and rubber buffers,10 litre low level flushing cistern with fitting and brackets, 40mm flush bend 20mm overflow pipe with specials of standard make and mosquito proof coupling of approved municipal design complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required.													
A 17.68.1		White vitreous china dual purpose WC pan with white solid plastic seat and lid with white vitreous china flushing cistern and C.P. flush bend.	Each	11071.00	10508.60	11071.00	11633.30	12677.70	12436.70	11231.70	12758.00	11312.00	12035.00	13561.40	13079.30
A 17.69		Providing and fixing PTMT Waste Coupling for wash basin and sink. of approved quality and colour													
A 17.69.1		Waste coupling 31 mm dia of 79mm length and 62mm breadth weighing not less than 45gms.	Each	122.80	114.70	122.80	130.80	145.70	142.30	125.00	146.80	126.20	136.50	158.30	151.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.69.2		Waste coupling 38mm dia of 83mm length and 77mm breadth, weighing not less than 60gms.	Each	145.80	136.30	145.80	155.30	173.10	169.00	148.50	174.40	149.90	162.20	188.00	179.90
A 17.70		Providing and fixing PTMT Bottle Trap for Wash basin and sink.													
A 17.70.1		Bottle trap 31 mm single piece moulded with height of 270mm, effective length of tail pipe 260mm from the centre of the waste coupling 77mm breadth with 25mm minimum water seal, weighing not less than 260gms.	Each	412.50	385.50	412.50	439.50	489.60	478.00	420.20	493.50	424.10	458.80	532.00	508.90
A 17.70.2		Bottle trap 38mm single piece moulded with height of 270mm, effective length of tail pipe 260mm from the centre of the waste coupling 77mm breadth with 25mm minimum water seal, weighting not less than 263gms.	Each	429.00	400.90	429.00	457.00	509.10	497.10	437.00	513.20	441.00	477.10	553.20	529.20
A 17.71		Providing and fixing PTMT liquid soap container 109mm wide, 125mm high and 112mm distance from wall of standard shape with bracket of the same materials with snap fittings of approved quality and colour, weighing not less than 105gms.	Each	195.10	182.40	195.10	207.90	231.60	226.10	198.80	233.40	200.60	217.00	251.70	240.70
A 17.72		Providing and fixing PTMT towel ring trapezoidal shape 215mm long, 200mm wide with a minimum distances of 37mm from wall face with concealed fittings arrangement of approved quality and colour, weighing not less than 88 gms	Each	280.80	262.40	280.80	299.20	333.30	325.40	286.00	335.90	288.70	312.30	362.20	346.40
A 17.73		Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with Chromium Plated brass screws with concealed fitting arrangement of approved quality & colour.													
A 17.73.1		450mm long towel rail with total length of 495mm, 78mm wide and effective height of 88mm, weighing not less than 170gms.	Each	2284.70	2153.90	2284.70	2415.80	2658.80	2602.70	2322.10	2677.50	2340.80	2509.20	2864.60	2752.50
A 17.73.2		600mm long towel rail with total length of 645mm, width 78mm and effective height of 88mm, weighing not less than 190gms.	Each	2334.10	2200.00	2334.10	2468.40	2717.40	2660.00	2372.40	2736.60	2391.60	2564.20	2928.30	2813.40
A 17.74		Providing and fixing PTMT shelf 440 mm long, 124 mm width and 36 mm height of approved quality & colour, weighing not less than 300gms	Each	2391.70	2253.90	2391.70	2529.80	2785.80	2726.70	2431.10	2805.50	2450.80	2628.30	3002.70	2884.50
A 17.75		Providing and fixing PTMT 15 mm Urinal spreader size 95x69x100 mm with 1/2" BSP thread and shapes, weighing not less than 60gms	Each	147.40	137.70	147.40	157.00	174.90	170.80	150.10	176.30	151.50	163.90	190.10	181.80
A 17.76		Providing and fixing PTMT urinal cock of approved quality & colour.													
A 17.76.1		15 mm nominal bore, 80 mm long, 42 mm high and 30 mm wide with BSP female threads weighing not less than 48gms	Each	201.90	188.70	201.90	215.10	239.60	233.90	205.60	241.50	207.50	224.50	260.40	249.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 17.77		Providing and fixing M.S. holder bat clamp of approved design to sand cast iron/cast iron (spun) pipes comprising of M.S. flat brackets made of 50x5 mm flat of specified shape, projecting 75mm outside the wall surface and fixed on wall with 4 nos., 6mm dia expansion hold fasteners including drilling necessary holes in brick wall/ CC /RCC surface and the cost of the bolts etc. The pipes shall be fixed to the already fixed brackets with the help of 30mm x 1.6 mm galvanised M.S. flats of specified shape and of total length 420mm and shall be fixed with M.S. nuts, bolts & washers of size 25x6mm, one bolt on each side of the pipe.													
A 17.77.1		Total bracket length 580 mm of approved shape and design (for single 100mm dia pipe)	Each	283.50	276.20	283.50	292.20	305.90	302.50	285.90	307.50	287.70	296.30	320.60	312.80
A 17.77.2		Total bracket length 810 mm of approved shape and design (for two 100mm dia pipe)	Each	349.60	341.80	349.60	359.70	374.50	370.90	352.40	376.60	354.70	363.90	391.90	382.80
A 17.77.3		Total bracket length 1040 mm of approved shape and design (for three 100mm dia pipe)	Each	414.00	405.70	414.00	425.20	441.00	437.10	417.10	443.50	419.90	429.40	460.80	450.60
A 17.78		Providing and fixing white vitreous China extended wall mounting water closet of size 780x370x690 mm of approved shape including providing & fixing white vitreous China cistern with dual flush fittings, of flushing capacity 3 litres/ 6 litres (adjustable to 4 litres/ 8 litres, including seat cover, and cistern fittings, nuts, bolys and gaskets etc complete.	Each	16172.00	15275.90	16172.00	17068.00	18732.10	18348.10	16428.00	18860.10	16556.00	17708.10	20140.20	19372.20
A 17.79		Providing and fixing white vitreous China waterless urinal of size 600x330x315mm having anti-bacterial/germs free ceramic surface, fixed with cartridge having debris catcher and hygiene seal	Each	20458.80	19170.70	20458.80	21746.90	24139.00	23587.00	20826.80	24323.00	21010.80	22666.90	26163.20	25059.10
A 17. 80		Providing and fixing white vitreous China battery based infrared sensor operated urinal of approx. size 610x390x370mm having pre & post flushing with water (250ml & 500ml consumption),having water inlet from back side, including fixing to the wall with suitable brackets all as per manufacturers specifications and direction of Engineer-in-Charge.	Each	8210.00	7723.30	8210.00	8696.80	9600.80	9392.20	8349.10	9670.40	8418.70	9044.50	10365.80	9948.50
A 17.81		Providing and fixing floor mounted, white vitreous china single pieces, double traps syphonic water closet of approved brand/make, shape, size and pattern including integrated white vitreous china cistern of capacity 10 litres with dual flushing system, including all fittings and fixtures with seat cover, cistern fittings, nuts, bolts and gasket etc including making connection with the existing P/S trap, complete in all respect as per directions of Engineer-in-Charge.	Each	18147.60	17122.30	18147.60	19172.90	21077.00	20637.60	18440.50	21223.50	18587.00	19905.20	22688.20	21809.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		18.0 WATER SUPPLY													
A 18.1		Providing and fixing Polyethelene-Aluminium-Polyethylene PE-AL-PE Composite Pressure Pipes conforming to IS-15450, U.V stabillised with carbon black having thermal stability for hot & cold water supply, capable to withstand temperatures upto 80° C, including all special fittings of composite material(Engineering plastic blend and brass inserts wherever required) e.g, elbows, tees, reducers, couplers & connectors etc., with clamps at 1.00 meter spacing. This includes testing of joints complete as per direction of the Engineer-in-Charge.													
		INTERNAL WORK - EXPOSED ON WALL													
A 18.1.1		1216 (16 mm OD) pipe	Metre	226.60	219.90	226.60	233.30	245.80	243.00	228.50	246.80	229.50	238.10	256.40	250.70
A 18.1.2		1620 (20 mm OD) pipe	Metre	265.80	257.30	265.80	274.20	290.00	286.30	268.20	291.20	269.40	280.30	303.20	296.00
A 18.1.3		2025 (25 mm OD) pipe	Metre	331.30	319.40	331.30	343.20	365.30	360.20	334.70	367.00	336.40	351.70	384.00	373.80
A 18.1.4		2532 (32 mm OD) pipe	Metre	428.40	411.40	428.40	445.40	477.00	469.70	433.30	479.40	435.70	457.60	503.70	489.10
A 18.1.5		3240 (40 mm OD) pipe	Metre	603.60	578.20	603.60	629.00	676.20	665.30	610.80	679.90	614.50	647.20	716.20	694.40
A 18.1.6		4050 (50 mm OD) pipe	Metre	760.00	724.30	760.00	795.60	861.90	846.60	770.20	867.00	775.30	821.10	917.90	887.30
A 18.2		Providing and fixing Polyethelene-Aluminium-Polyethylene PE-AL-PE Composite Pressure Pipes conforming to IS-15450, U.V stabillised with carbon black having thermal stability for hot & cold water supply, capable to withstand temperatures upto 80° C, including all special fittings of composite material (Engineering plastic blend and brass inserts wherever required) e.g, elbows, tees, reducers, couplers & connectors etc., with clamps at 1.00 meter spacing. This includes the cost of cutting chases and including testing of joints complete as per direction of the Engineer-in-Charge.													
		Concealed work, including cutting chases and making good the wall etc.													
A 18.2.1		1216 (16 mm OD) pipe	Metre	366.40	357.70	366.40	380.10	396.90	393.00	371.70	399.40	374.60	384.90	417.90	407.20
A 18.2.2		1620 (20 mm OD) pipe	Metre	392.70	382.30	392.70	408.10	428.10	423.50	398.50	430.90	401.60	414.20	451.80	439.70
A 18.2.3		2025 (25 mm OD) pipe	Metre	445.40	431.60	445.40	464.30	490.70	484.60	452.20	494.00	455.80	472.80	519.80	504.70
A 18.2.4		2532 (32 mm OD) pipe	Metre	522.80	503.90	522.80	546.70	582.50	574.30	531.00	586.50	535.30	558.90	619.60	600.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.3		Providing and fixing Polyethelene-Aluminium-Polyethylene PE-AL-PE Composite Pressure Pipes conforming to IS-15450, U.V stabillised with carbon black having thermal stability for hot & cold water supply, capable to withstand temperatures upto 80° C, including all special fittings of composite material(Engineering plastic blend and brass inserts wherever required) e.g, elbows, tees, reducers, couplers & connectors etc., with with trenching, refilling and testing of joints complete as per direction of the Engineer-in-Charge.													
		EXTERNAL WORK													
A 18.3.1		1216 (16 mm OD) pipe	Metre	198.70	192.00	198.70	205.30	217.80	214.90	200.60	218.70	201.50	210.10	228.20	222.50
A 18.3.2		1620 (20 mm OD) pipe	Metre	225.00	216.60	225.00	233.40	249.00	245.40	227.40	250.20	228.60	239.40	262.20	255.00
A 18.3.3		2025 (25 mm OD) pipe	Metre	277.70	265.80	277.70	289.50	311.50	306.50	281.10	313.20	282.80	298.00	330.20	320.00
A 18.3.4		2532 (32 mm OD) pipe	Metre	355.10	355.10	355.10	355.10	355.10	355.10	355.10	355.10	355.10	355.10	355.10	355.10
A 18.3.5		3240 (40 mm OD) pipe	Metre												
A 18.3.6		4050 (50 mm OD) pipe	Metre	658.00	622.00	658.00	693.00	759.00	744.00	668.00	764.00	673.00	719.00	815.00	785.00
A 18.4		Providing and fixing 3-Layer PP-R (Poly propylene Random Copolymer) Pipes conforming to IS-15801, U.V stabillised & anti-microbial fusion welded, having thermal stability for hot & cold water supply, including all PP-R plain and brass threaded polypropylene random fittings, including fixing the pipe with clamps at 1.00 metre spacing. This includes testing of joints complete as per direction of engineer-in-charge.													
		Internal Exposed on Walls													
A 18.4.1		PN - 16 pipe, 20mm OD (SDR-7.4)	Metre	209.00	204.00	209.00	213.00	222.00	220.00	210.00	223.00	211.00	217.00	230.00	225.00
A 18.4.2		PN - 16 pipe, 25mm OD (SDR-7.4)	Metre	260.00	253.00	260.00	267.00	281.00	278.00	262.00	282.00	263.00	273.00	292.00	286.00
A 18.4.3		PN - 16 pipe, 32 mm OD (SDR-7.4)	Metre	328.00	316.00	328.00	339.00	361.00	356.00	331.00	363.00	333.00	348.00	379.00	369.00
A 18.4.4		PN - 16 pipe, 40 mm OD (SDR-7.4)	Metre	481.90	464.40	481.90	499.30	531.80	524.30	486.90	534.30	489.40	511.80	559.20	544.20
A 18.4.5		PN - 16 pipe, 50 mm OD (SDR-7.4)	Metre	631.90	604.70	631.90	659.20	709.90	698.20	639.70	713.80	643.60	678.70	752.70	729.40
A 18.5		Providing and fixing 3-Layer PP-R (Poly propylene Random Copolymer) Pipes conforming to IS-15801, U.V stabillised & anti-microbial fusion welded, having thermal stability for hot & cold water supply, including all PP-R plain and brass threaded polypropylene random fittings, including fixing the pipe with clamps at 1.00 metre spacing. This includes the cost of cutting chases and making good the same including testing of joints complete as per direction of engineer-in-charge.													
		Concealed work, including cutting chases and making good the wall etc.													
A 18.5.1		PN - 16 pipe, 20mm OD (SDR-7.4)	Metre	335.60	328.90	335.60	347.20	360.30	357.30	340.30	362.50	342.90	350.70	378.10	369.20
A 18.5.2		PN - 16 pipe, 25 mm OD (SDR-7.4)	Metre	374.30	365.10	374.30	388.50	406.30	402.20	379.80	408.90	382.70	393.70	428.10	417.00
A 18.5.3		PN - 16 pipe, 32 mm OD (SDR-7.4)	Metre	441.30	427.70	441.30	459.80	485.70	479.80	448.00	489.00	451.50	468.20	514.40	499.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.6		Providing and fixing 3-Layer PP-R (Poly propylene Random Copolymer) Pipes conforming to IS-15801, U.V stabillised & anti-microbial fusion welded, having thermal stability for hot & cold water supply, including all PP-R plain and brass threaded polypropylene random fittings, including trenching, refilling & testing of joints complete as per direction of engineer-in-charge.													
		EXTERNAL WORK													
A 18.6.1		PN - 16, 20 mm OD (SDR-7.4)	Metre	167.80	163.20	167.80	172.50	181.20	179.20	169.20	181.80	169.80	175.80	188.50	184.50
A 18.6.2		PN - 16, 25 mm OD (SDR-7.4)	Metre	215.70	208.50	215.70	222.90	236.30	233.20	217.80	237.30	218.80	228.10	247.60	241.40
A 18.6.3		PN - 16, 32 mm OD (SDR-7.4)	Metre	282.70	271.10	282.70	294.30	315.80	310.80	286.00	317.40	287.70	302.50	334.00	324.00
A 18.6.4		PN - 16, 40 mm OD (SDR-7.4)	Metre	379.50	362.20	379.50	396.80	429.10	421.60	384.50	431.50	386.90	409.20	456.30	441.50
A 18.6.5		PN - 16, 50 mm OD (SDR-7.4)	Metre	529.60	502.40	529.60	556.70	607.20	595.50	537.30	611.10	541.20	576.10	649.90	626.60
A 18.6.6		PN - 16, 63 mm OD (SDR-7.4)	Metre	606.40	576.10	606.40	636.80	693.10	680.10	615.10	697.50	619.40	658.50	740.80	714.80
A 18.6.7		PN - 16, 75 mm OD (SDR-7.4)	Metre	831.10	786.00	831.10	876.10	959.80	940.50	844.00	966.20	850.40	908.30	1030.50	991.90
A 18.6.8		PN - 16, 90 mm OD (SDR-7.4)	Metre	1173.30	1108.90	1173.30	1237.60	1357.20	1329.60	1191.70	1366.40	1200.90	1283.60	1458.30	1403.20
A 18.6.9		PN - 16, 110 mm OD (SDR-7.4)	Metre	1647.80	1552.30	1647.80	1743.20	1920.30	1879.50	1675.00	1934.00	1688.60	1811.30	2070.30	1988.50
A 18.6.10		PN - 16, 160 mm OD (SDR-7.4)	Metre	4501.70	4226.30	4501.70	4777.10	5288.60	5170.60	4580.40	5328.00	4619.70	4973.90	5721.50	5485.40
A 18.6A		Providing and fixing PPR Unions													
A 18.6A.1		PPR Union 20 mm	Metre	25.40	24.90	25.40	26.00	27.00	26.80	25.60	27.10	25.70	26.40	27.90	27.40
A 18.6A.2		PPR Union 25 mm	Metre	334.90	324.10	334.90	345.80	365.90	361.30	338.00	367.50	339.60	353.50	382.90	373.60
A 18.6A.3		PPR Union 32 mm	Metre	401.10	385.90	401.10	416.30	444.50	438.00	405.50	446.60	407.60	427.10	468.30	455.30
A 18.6A.4		PPR Union 40 mm	Metre	479.50	459.20	479.50	499.80	537.50	528.80	485.30	540.40	488.20	514.30	569.40	552.00
A 18.6A.5		PPR Union 50 mm	Metre	756.10	717.70	756.10	794.50	865.80	849.30	767.00	871.20	772.50	821.90	926.10	893.20
A 18.6A.6		PPR Union 63 mm	Metre	971.40	918.90	971.40	1023.90	1121.30	1098.90	986.40	1128.80	993.90	1061.40	1203.80	1158.80
A 18.6A.7		PPR Union 75 mm	Metre	1711.30	1610.40	1711.30	1812.10	1999.50	1956.30	1740.10	2013.90	1754.50	1884.20	2158.00	2071.60
A 18.7		Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) Pipes, having thermal stability for hot & cold water supply, including all CPVC plain and brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of engineer-in-charge.													
		Internal Work - Exposed on wall													
A 18.7.1		15 mm nominal outer dia Pipes	Metre	217.30	212.00	217.30	222.60	232.40	230.10	218.80	233.20	219.60	226.40	240.70	236.20
A 18.7.2		20 mm nominal outer dia Pipes	Metre	278.30	269.90	278.30	286.70	302.40	298.80	280.70	303.60	281.90	292.80	315.70	308.40
A 18.7.3		25 mm nominal outer dia Pipes	Metre	337.20	324.90	337.20	349.50	372.40	367.10	340.70	374.10	342.50	358.30	391.70	381.10
A 18.7.4		32 mm nominal outer dia Pipes	Metre	439.40	421.70	439.40	457.10	490.00	482.40	444.40	492.50	447.00	469.70	517.80	502.60
A 18.7.5		40 mm nominal outer dia Pipes	Metre	593.20	568.50	593.20	618.00	663.90	653.30	600.30	667.50	603.80	635.60	702.80	681.60
A 18.7.6		50 mm nominal outer dia Pipes	Metre	834.50	794.00	834.50	875.00	950.30	932.90	846.10	956.10	851.90	904.00	1014.00	979.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.8		Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) Pipes, having thermal stability for hot & cold water supply, including all CPVC plain and brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer-in-charge.													
		Concealed work, including cutting chases and making good the walls etc.													
A 18.8.1		15 mm nominal outer dia Pipes	Metre	344.30	337.00	344.30	356.50	370.60	367.40	349.10	372.90	351.80	360.30	389.30	379.90
A 18.8.2		20 mm nominal outer dia Pipes	Metre	392.40	382.00	392.40	407.80	427.80	423.20	398.20	430.50	401.30	413.90	451.40	439.30
A 18.8.3		25 mm nominal outer dia Pipes	Metre	451.30	437.10	451.30	470.60	497.70	491.50	458.20	501.10	461.90	479.40	527.40	512.00
A 18.8.4		32 mm nominal outer dia Pipes	Metre	533.70	514.10	533.70	558.40	595.50	587.00	542.20	599.60	546.60	571.10	633.70	613.70
A 18.9		Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) Pipes, having thermal stability for hot & cold water supply, including all CPVC plain and brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer-in-charge.													
		External work													
A 18.9.1		15 mm nominal outer dia Pipes	Metre	176.50	171.30	176.50	181.80	191.50	189.20	178.00	192.20	178.80	185.50	199.70	195.20
A 18.9.2		20 mm nominal outer dia Pipes	Metre	224.70	216.30	224.70	233.10	248.60	245.00	227.10	249.80	228.30	239.00	261.80	254.60
A 18.9.3		25 mm nominal outer dia Pipes	Metre	292.80	280.60	292.80	305.00	327.70	322.50	296.30	329.50	298.00	313.80	347.00	336.50
A 18.9.4		32 mm nominal outer dia Pipes	Metre	375.20	357.60	375.20	392.80	425.50	418.00	380.20	428.10	382.70	405.40	453.20	438.10
A 18.9.5		40 mm nominal outer dia Pipes	Metre	490.80	466.20	490.80	515.50	561.20	550.70	497.90	564.70	501.40	533.10	599.90	578.80
A 18.9.6		50 mm nominal outer dia Pipes	Metre	732.10	691.70	732.10	772.50	847.60	830.30	743.70	853.40	749.40	801.40	911.10	876.50
A 18.9.7		62.50 mm nominal outer dia Pipes	Metre	1448.70	1363.20	1448.70	1534.10	1692.80	1656.20	1473.10	1705.00	1485.30	1595.10	1827.00	1753.80
A 18.9.8		75 mm nominal outer dia Pipes	Metre	1840.10	1729.00	1840.10	1951.10	2157.40	2109.80	1871.80	2173.20	1887.70	2030.40	2331.90	2236.70
A 18.9.9		100 mm nominal outer dia Pipes	Metre	2604.10	2446.20	2604.10	2762.10	3055.50	2987.80	2649.30	3078.10	2671.80	2875.00	3303.70	3168.30
A 18.9.10		150 mm nominal outer dia Pipes	Metre	5469.50	5130.80	5469.50	5808.20	6437.30	6292.20	5566.30	6485.70	5614.70	6050.20	6969.70	6679.30
A 18.10		Providing and fixing G.I. pipes complete with G.I. fittings and clamps, including cutting and making good the walls etc.													
		Internal work - Exposed on wall													
A 18.10.1		15mm dia. nominal bore	Metre	299.50	288.00	299.50	311.00	332.30	327.40	302.80	334.00	304.40	319.20	350.40	340.60
A 18.10.2		20mm dia. nominal bore	Metre	367.20	352.10	367.20	382.30	410.30	403.90	371.50	412.50	373.70	393.10	434.10	421.10
A 18.10.3		25mm dia. nominal bore	Metre	477.60	456.10	477.60	499.00	538.90	529.70	483.70	542.00	486.80	514.40	572.70	554.30
A 18.10.4		32mm dia. nominal bore	Metre	580.10	553.20	580.10	607.10	657.10	645.50	587.80	660.90	591.70	626.30	699.40	676.30
A 18.10.5		40mm dia. nominal bore	Metre	694.50	663.10	694.50	725.80	784.10	770.70	703.40	788.60	707.90	748.20	833.40	806.50
A 18.10.6		50mm dia nominal bore	Metre	854.40	815.60	854.40	893.20	965.30	948.70	865.50	970.80	871.10	920.90	1026.30	993.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.11		Providing & fixing G.I Pipes complete with G.I fittings and clamps, including making good the walls etc. concealed pipes, including painting with anti-corrosive bitumastic paint, cutting chases and making good the wall:													
A 18.11.1		15 mm dia nominal bore	Metre	448.40	434.60	448.40	467.10	493.30	487.20	455.10	496.50	458.70	475.60	522.20	507.10
A 18.11.2		20 mm dia nominal bore	Metre	503.30	485.90	503.30	525.60	558.40	550.80	511.10	562.20	515.10	536.70	593.00	574.90
A 18.12		Providing and fixing G. I. pipes complete with G. I. fittings including trenching and refilling etc. (External work)													
A 18.12.1		15mm dia. nominal bore	Metre	251.20	241.10	251.20	261.30	280.10	275.70	254.10	281.50	255.50	268.50	295.90	287.30
A 18.12.2		20 mm dia. nominal bore	Metre	299.90	286.60	299.90	313.20	337.90	332.20	303.70	339.80	305.60	322.70	358.80	347.40
A 18.12.3		25 mm dia. nominal bore	Metre	395.10	376.20	395.10	414.10	449.20	441.10	400.60	451.90	403.30	427.60	479.00	462.80
A 18.12.4		32 mm dia. nominal bore	Metre	469.00	445.30	469.00	492.80	536.90	526.70	475.80	540.30	479.20	509.80	574.30	553.90
A 18.12.5		40 mm dia. nominal bore	Metre	537.30	509.60	537.30	564.90	616.30	604.50	545.20	620.30	549.10	584.70	659.80	636.10
A 18.12.6		50 mm dia. nominal bore	Metre	638.00	603.80	638.00	672.30	735.90	721.20	647.80	740.80	652.70	696.80	789.70	760.40
A 18.12.7		65 mm dia. nominal bore	Metre	810.40	766.70	810.40	854.10	935.20	916.50	822.90	941.40	829.10	885.30	1003.80	966.40
A 18.12.8		80 mm dia. nominal bore	Metre	995.10	939.30	995.10	1050.90	1154.40	1130.50	1011.00	1162.40	1019.00	1090.70	1242.10	1194.30
A 18.13		Making connection of G.I. distribution branch with G.I.main of following sizes by providing and fixing tee,including cutting and threading the pipe etc. complete.													
A 18.13.1		25 to 40 mm nominal bore	Each	632.30	624.20	632.30	640.50	655.60	652.10	634.60	656.80	635.80	646.30	668.40	661.40
A 18.13.2		50 to 80 mm nominal bore	Each	1495.20	1442.70	1495.20	1547.80	1645.30	1622.80	1510.20	1652.80	1517.70	1585.30	1727.80	1682.80
A 18.14		Fixing water meter and stop cock in G.I. pipe line including cutting and threading the pipe and making long screws etc. complete (cost of water meter and stop cock to be paid separately).	Metre	550.00	547.20	550.00	552.80	557.90	556.70	550.80	558.30	551.20	554.70	562.20	559.90
		BRASS FITTINGS													
A 18.15		Providing and fixing brass bib cock of approved quality.													
A 18.15.1		15 mm nominal bore	Each	372.30	347.90	372.30	396.60	441.90	431.40	379.20	445.30	382.70	414.00	480.10	459.20
A 18.15.2		20 mm nominal bore	Each	401.70	375.40	401.70	427.90	476.80	465.50	409.20	480.50	412.90	446.70	518.00	495.50
A 18.16		Providing and fixing brass stop cock of approved quality:													
A 18.16.1		15 mm nominal bore	Each	372.30	347.90	372.30	396.60	441.90	431.40	379.20	445.30	382.70	414.00	480.10	459.20
A 18.16.2		20 mm nominal bore	Each	401.70	375.40	401.70	427.90	476.80	465.50	409.20	480.50	412.90	446.70	518.00	495.50
A 18.17		Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) :													
A 18.17.1		25 mm nominal bore	Each	611.70	571.70	611.70	651.80	726.10	708.90	623.20	731.80	628.90	680.40	789.00	754.70
A 18.17.1A		20 mm nominal bore	Each	566.30	529.30	566.30	603.40	672.20	656.30	576.90	677.40	582.20	629.80	730.40	698.60
A 18.17.2		32 mm nominal bore	Each	715.20	668.40	715.20	762.00	848.90	828.90	728.60	855.60	735.30	795.40	922.40	882.30
A 18.17.3		40 mm nominal bore	Each	834.80	780.10	834.80	889.40	990.80	967.40	850.40	998.60	858.20	928.40	1076.60	1029.80
A 18.17.4		50 mm nominal bore	Each	1069.50	999.60	1069.50	1139.50	1269.40	1239.40	1089.50	1279.40	1099.50	1189.50	1379.40	1319.40
A 18.17.5		65 mm nominal bore	Each	1831.10	1711.30	1831.10	1950.90	2173.40	2122.00	1865.30	2190.50	1882.50	2036.50	2361.60	2258.90
A 18.17.6		80 mm nominal bore	Each	2729.10	2550.60	2729.10	2907.70	3239.20	3162.70	2780.10	3264.70	2805.60	3035.20	3519.80	3366.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.18		Providing and fixing ball valve (brass) of approved quality high or low pressure, with plastic floats complete:													
A 18.18.1		15 mm nominal bore	Each	416.80	389.50	416.80	444.10	494.70	483.00	424.60	498.60	428.50	463.50	537.50	514.20
A 18.18.2		20 mm nominal bore	Each	475.50	444.40	475.50	506.60	564.40	551.00	484.40	568.80	488.80	528.80	613.30	586.60
A 18.18.3		25 mm nominal bore	Each	484.80	453.10	484.80	516.50	575.40	561.80	493.90	580.00	498.40	539.20	625.30	598.10
A 18.19		Providing and fixing gun metal non- return valve of approved quality (screwed end)													
A 18.19.1		25 mm nominal bore													
A 18.19.1.1		Horizontal	Each	587.80	549.40	587.80	626.30	697.70	681.20	598.80	703.20	604.30	653.70	758.10	725.10
A 18.19.1.2		Vertical	Each	620.70	580.10	620.70	661.30	736.80	719.40	632.30	742.60	638.10	690.30	800.60	765.80
A 18.19.2		32 mm nominal bore													
A 18.19.2.1		Horizontal	Each	789.60	738.00	789.60	841.30	937.20	915.10	804.40	944.60	811.80	878.20	1018.40	974.10
A 18.19.2.2		Vertical	Each	872.00	814.90	872.00	929.00	1034.90	1010.50	888.30	1043.10	896.40	969.80	1124.60	1075.70
A 18.19.3		40 mm nominal bore													
A 18.19.3.1		Horizontal	Each	975.00	911.20	975.00	1038.80	1157.30	1129.90	993.20	1166.40	1002.40	1084.40	1257.50	1202.80
A 18.19.3.2		Vertical	Each	1205.50	1126.60	1205.50	1284.40	1430.80	1397.00	1228.00	1442.10	1239.30	1340.70	1554.80	1487.20
A 18.19.4		50 mm nominal bore													
A 18.19.4.1		Horizontal	Each	1407.80	1315.70	1407.80	1499.90	1670.90	1631.40	1434.10	1684.10	1447.20	1565.70	1815.60	1736.70
A 18.19.4.2		Vertical	Each	1539.50	1438.80	1539.50	1640.20	1827.20	1784.10	1568.30	1841.60	1582.60	1712.10	1985.50	1899.20
A 18.19.5		65 mm nominal bore													
A 18.19.5.1		Horizontal	Each	2515.10	2350.60	2515.10	2679.60	2985.20	2914.70	2562.10	3008.70	2585.60	2797.20	3243.80	3102.70
A 18.19.5.2		Vertical	Each	2531.60	2365.90	2531.60	2697.20	3004.80	2933.80	2578.90	3028.40	2602.50	2815.50	3265.00	3123.10
A 18.19.6		80 mm nominal bore													
A 18.19.6.1		Horizontal	Each	3557.00	3324.30	3557.00	3789.70	4221.90	4122.10	3623.50	4255.10	3656.70	3955.90	4587.50	4388.10
A 18.19.6.2		Vertical	Each	4182.60	3909.00	4182.60	4456.20	4964.40	4847.10	4260.80	5003.50	4299.90	4651.70	5394.40	5159.90
A 18.20		Providing and fixing brass ferrule with C.I. mouth cover including boring and tapping the main.													
A 18.20.1		15 mm nominal bore	Each	363.20	339.40	363.20	386.90	431.10	420.90	370.00	434.50	373.40	403.90	468.40	448.00
A 18.20.2		20 mm nominal bore	Each	418.80	391.40	418.80	446.20	497.10	485.30	426.60	501.00	430.50	465.80	540.10	516.60
A 18.20.3		25 mm nominal bore	Each	539.40	504.10	539.40	574.70	640.20	625.10	549.50	645.30	554.50	599.90	695.70	665.40
A 18.21		Providing and fixing unplasticised PVC connection pipe with brass unions													
A 18.21.1		30 cm length													
A 18.21.1.1		15 mm nominal bore	Each	89.60	83.80	89.60	95.50	106.40	103.90	91.30	107.20	92.10	99.70	115.60	110.60
A 18.21.1.2		20 mm nominal bore	Each	97.90	91.50	97.90	104.30	116.10	113.40	99.70	117.10	100.60	108.80	126.20	120.70
A 18.21.2		45 cm length													
A 18.21.2.1		15 mm nominal bore	Each	102.10	95.50	102.10	108.80	121.20	118.40	104.00	122.20	105.00	113.60	131.70	126.00
A 18.21.2.2		20 mm nominal bore	Each	124.00	115.00	124.00	132.00	147.00	143.00	126.00	148.00	127.00	137.00	159.00	152.00
A 18.22		Providing and fixing C.P. brass shower rose with 15 or 20mm inlet													
A 18.22.1		100mm diameter	Each	187.00	175.00	187.00	199.00	222.00	217.00	190.00	224.00	192.00	208.00	241.00	231.00
A 18.22.2		150 mm diameter	Each	232.00	217.00	232.00	248.00	276.00	269.00	237.00	278.00	239.00	258.00	300.00	287.00
A 18.23		Laying in position centrifugally cast (spun) iron S&S or flanged pipes (excluding cost of pipe)	Quintal	224.00	223.00	224.00	224.00	226.00	225.00	224.00	226.00	224.00	225.00	227.00	226.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.24		Laying in position S&S or flanged C. I. special such as tees, bends, collars, tapers and caps etc.(excluding cost of specials)	Quintal	427.70	426.50	427.70	429.00	431.30	430.70	428.10	431.40	428.30	429.80	408.80	408.80
A 18.25		Providing and laying S&S C.I. standard specials such as tees, bends, collars, tapers, caps etc. (Heavy class)													
A 18.25.1		Upto 300mm dia.	Quintal	6354.50	5965.60	6354.50	6743.50	7465.90	7299.10	6465.70	7521.40	6521.30	7021.30	8052.70	7720.40
A 18.25.2		Over 300mm dia.	Quintal	6519.10	6119.40	6519.10	6918.90	7661.30	7489.90	6633.40	7718.30	6690.50	7204.40	8265.00	7923.50
A 18.26		Providing and laying flanged C.I. standard specials such as tees, bends, collars, tapers, caps etc. suitable for flange jointing as per IS-1538:													
A 18.26.1		Upto 300mm dia.	Quintal	9482.50	8889.00	9482.50	10076.20	11178.60	10924.10	9652.20	11263.30	9737.00	10500.10	12087.00	11579.20
A 18.26.2		Over 300mm dia.	Quintal	9482.50	8889.00	9482.50	10076.20	11178.60	10924.10	9652.20	11263.30	9737.00	10500.10	12087.00	11579.20
A 18.27		Providing and laying S&S centrifugally cast (spun) iron pipes (Class LA) conforming to IS - 1536													
A 18.27.1		100 mm dia. pipe	Metre	1455.30	1362.80	1455.30	1547.60	1719.40	1679.60	1481.60	1732.60	1494.80	1613.70	1864.60	1785.30
A 18.27.2		125 mm dia. pipe	Metre	1814.40	1699.30	1814.40	1929.30	2143.30	2093.80	1847.30	2159.70	1863.70	2011.70	2324.10	2225.40
A 18.27.3		150 mm dia. pipe	Metre	2189.30	2050.50	2189.30	2327.80	2585.70	2526.00	2228.90	2605.50	2248.70	2427.10	2803.70	2684.60
A 18.27.4		200 mm dia. pipe	Metre	3711.00	3474.60	3711.00	3946.80	4385.80	4284.30	3778.40	4419.50	3812.10	4115.80	4757.00	4554.30
A 18.27.5		250 mm dia. pipe	Metre	4845.80	4537.50	4845.80	5153.50	5726.30	5593.70	4933.70	5770.20	4977.70	5373.90	6210.40	5946.00
A 18.27.6		300 mm dia. pipe	Metre	6533.10	6116.90	6533.10	6948.50	7721.70	7542.80	6651.80	7781.00	6711.20	7246.10	8375.30	8018.40
A 18.27.7		350 mm dia. pipe	Metre	7835.40	7336.80	7835.40	8332.80	9258.80	9044.60	7977.50	9329.90	8048.60	8689.20	10041.60	9614.10
A 18.27.8		400 mm dia. pipe	Metre	10315.50	9657.80	10315.50	10972.00	12193.60	11911.00	10503.10	12287.40	10596.90	11442.10	13226.40	12662.50
A 18.27.9		450 mm dia. pipe	Metre	12490.50	11694.00	12490.50	13285.50	14764.80	14422.60	12717.60	14878.40	12831.20	13854.80	16015.60	15332.70
A 18.27.10		500 mm dia. pipe	Metre	14507.40	13582.50	14507.40	15430.50	17148.50	16751.10	14771.20	17280.40	14903.00	16091.70	18600.90	17807.90
A 18.27.11		600 mm dia. pipe	Metre	20276.40	18982.10	20276.40	21568.30	23972.30	23416.20	20645.50	24156.80	20830.10	22493.50	26004.80	24895.10
A 18.28		Providing lead caulked joints to spun iron or C. I. pipes and specials including testing of joints but excluding the cost of pig lead.													
A 18.28.1		100 mm diameter pipe	Each	338.50	335.60	338.50	341.40	346.80	345.50	339.30	347.20	339.70	343.40	351.30	348.80
A 18.28.2		125 mm diameter pipe	Each	500.90	497.10	500.90	504.80	512.10	510.40	502.10	512.60	502.60	507.60	518.20	514.80
A 18.28.3		150 mm diameter pipe	Each	508.40	504.00	508.40	512.80	520.90	519.00	509.60	521.50	510.30	515.90	527.80	524.00
A 18.28.4		200 mm diameter pipe	Each	674.60	669.00	674.60	680.30	690.70	688.30	676.30	691.50	677.10	684.30	699.50	694.70
A 18.28.5		250 mm diameter pipe	Each	843.20	836.20	843.20	850.30	863.30	860.30	845.20	864.30	846.20	855.30	874.30	868.30
A 18.28.6		300 mm diameter pipe	Each	1015.10	1006.50	1015.10	1023.70	1039.80	1036.10	1017.60	1041.00	1018.80	1029.90	1053.40	1045.90
A 18.28.7		350 mm diameter pipe	Each	1040.50	1030.20	1040.50	1050.90	1070.00	1065.60	1043.50	1071.50	1045.00	1058.20	1086.20	1077.30
A 18.28.8		400 mm diameter pipe	Each	1362.20	1350.10	1362.20	1374.30	1396.80	1391.60	1365.70	1398.50	1367.40	1382.90	1415.80	1405.40
A 18.28.9		450 mm diameter pipe	Each	1528.30	1515.00	1528.30	1541.70	1566.40	1560.70	1532.10	1568.30	1534.10	1551.20	1587.40	1576.00
A 18.28.10		500 mm diameter pipe	Each	1616.80	1602.50	1616.80	1631.10	1657.70	1651.50	1620.90	1659.70	1622.90	1641.30	1680.20	1667.90
A 18.28.11		600 mm diameter pipe	Each	2185.40	2167.60	2185.40	2203.20	2236.30	2228.70	2190.50	2238.80	2193.10	2215.90	2264.30	2249.00
A 18.29		Supplying pig lead at site of work.	Quintal	28975.40	27079.90	28975.40	30871.00	34391.40	33579.00	29517.00	34662.20	29787.80	32225.00	37370.20	35745.40
A 18.30		Providing flange joints to double flanged C.I /D.I pipes and specials, including testing of joints:													
A 18.30.1		80 mm dia pipe	Each	173.90	167.40	173.90	180.50	192.60	189.80	175.80	193.50	176.70	185.10	202.80	197.20
A 18.30.2		100 mm dia pipe	Each	279.60	268.10	279.60	291.10	312.40	307.50	282.90	314.10	284.50	299.30	330.50	320.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.30.3		125 mm dia pipe	Each	296.00	283.50	296.00	308.60	332.00	326.60	299.60	333.80	301.40	317.60	351.80	341.00
A 18.30.4		150mm dia pipe	Each	350.30	335.10	350.30	365.40	393.60	387.10	354.60	395.80	356.80	376.30	417.40	404.40
A 18.30.5		200 mm dia pipe	Each	384.80	367.40	384.80	402.30	434.60	427.20	389.80	437.10	392.30	414.70	462.00	447.10
A 18.30.6		250 mm dia pipe	Each	531.50	506.40	531.50	556.60	603.30	592.50	538.70	606.90	542.30	574.60	642.70	621.20
A 18.30.7		300 mm dia pipe	Each	539.80	514.10	539.80	565.40	613.00	602.00	547.10	616.70	550.80	583.70	653.30	631.40
A 18.30.8		350 mm dia pipe	Each	735.50	699.00	735.50	772.00	839.80	824.20	745.90	845.00	751.10	798.10	897.20	865.90
A 18.30.9		400mm dia pipe	Each	1037.70	981.40	1037.70	1094.00	1198.50	1174.40	1053.80	1206.50	1061.80	1134.20	1286.90	1238.70
A 18.30.10		450 mm dia pipe	Each	1282.80	1212.40	1282.80	1353.20	1483.90	1453.70	1302.90	1494.00	1312.90	1403.50	1594.50	1534.20
A 18.30.11		500mm dia pipe	Each	1458.80	1377.90	1458.80	1539.80	1690.10	1655.40	1482.00	1701.70	1493.50	1597.60	1817.30	1747.90
A 18.30.12		600 mm dia pipe	Each	1711.00	1615.50	1711.00	1806.50	1983.90	1943.00	1738.30	1997.60	1751.90	1874.70	2134.00	2052.10
A 18.31		Providing and fixing C.I. sluice valves (with cap) complete with bolts, nuts, rubber insertions etc. (the tail pieces if required will be paid separately).													
A 18.31.1		100 mm diameter													
A 18.31.1.1		Class I	Each	4716.30	4433.20	4716.30	4999.50	5525.10	5403.80	4797.30	5565.70	4837.60	5201.60	5959.30	5717.20
A 18.31.1.2		Class II	Each	5245.10	4930.60	5245.10	5559.60	6143.60	6008.80	5335.00	6188.60	5379.90	5784.20	6624.10	6355.20
A 18.31.2		125 mm diameter													
A 18.31.2.1		Class I	Each	5113.30	5080.30	5394.70	5709.40	6293.80	6158.90	5484.60	6338.70	5529.60	5934.10	6769.90	6501.00
A 18.31.2.2		Class II	Each	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40	6152.40
A 18.31.3		150 mm diameter													
A 18.31.3.1		Class I	Each	6937.50	6518.50	6937.50	7356.40	8134.50	7954.90	7057.10	8194.40	7117.10	7655.70	8775.10	8416.70
A 18.31.3.2		Class II	Each	7655.90	7193.60	7655.90	8118.00	8976.50	8778.40	7787.90	9042.50	7854.00	8448.20	9681.60	9286.40
A 18.31.4		200 mm diameter													
A 18.31.4.1		Class I	Each	13636.70	12792.70	13636.70	14481.10	16048.70	15686.90	13878.00	16169.20	13998.70	15083.90	17345.50	16623.30
A 18.31.4.2		Class II	Each	16065.60	15070.50	16065.60	17061.20	18909.40	18482.90	16350.10	19051.50	16492.40	17771.90	20436.70	19585.20
A 18.31.5		250mm diameter													
A 18.31.5.1		Class I	Each	19909.20	18674.20	19909.20	21144.30	23438.10	22908.60	20262.20	23614.40	20438.70	22026.40	25334.70	24278.10
A 18.31.5.2		Class II	Each	25918.10	24303.40	25918.10	27533.00	30532.00	29839.70	26379.60	30762.50	26610.40	28686.30	33013.20	31631.60
A 18.31.6		300mm diameter													
A 18.31.6.1		Class I	Each	27634.50	25910.80	27634.50	29358.30	32559.40	31820.50	28127.00	32805.50	28373.40	30589.20	35208.80	33734.10
A 18.31.6.2		Class II	Each	32340.50	30325.20	32340.50	34355.80	38098.40	37234.50	32916.40	38386.20	33204.40	35795.00	41191.10	39467.10
A 18.32		Constructing masonry Chamber 30x30x50 cm, inside in brick work in cement mortar 1:4 (1 cement :4 coarse sand) for stop cock, with C. I surface box 100x100 x75 mm (inside) with hinged cover fixed in cement concrete slab 1:2:4 mix (1 cement :2 coarse sand: 4 graded stone aggregate 20 mm nominal size) i/c necessary excavation, foundation concrete 1:5:10 (1 cement :5 fine sand: 10 graded stone aggregate 40mm nominal size) and inside plastering with cement mortar 1:3 (1 cement :3 coarse sand) 12mm thick finished with a floating coat of neat cement complete as per standard design.													
A 18.32.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	2219.20	2032.80	2219.20	2654.20	3040.90	2951.70	2340.20	3180.90	2507.60	2665.20	3946.50	3520.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.33		Constructing masonry Chamber 60x60x75 cm. inside, in brick work in cement mortar 1:4 (1 cement :4 coarse sand) for sluice valve, with C.I. surface box 100mm. top diameter. 160 mm bottom diameter and 180 mm deep (inside) with chained lid and RCC top slab 1:2:4 mix (1 cement :2 coarse sand : 4 graded stone aggregate 20mm nominal size) i/c necessary excavation foundation concrete 1:5:10 (1 cement :5 fine sand:10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement :3 coarse sand) 12 mm thick, finished with a floating coat of neat cement complete as per standard design.													
A 18.33.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	13065.50	12080.40	13065.50	15409.30	17464.40	16989.90	13699.90	18234.90	14623.10	15434.70	22418.10	20092.30
A 18.34		Constructing masonry Chamber 90x90x100 cm inside, in brick work in cement mortar 1:4 (1 cement :4 coarse sand) for sluice valve, with C.I. surface box 100 mm. top diameter, 160 mm bottom diameter and 180 mm deep (inside) with chained lid and RCC top slab 1:2:4 mix (1 cement :2 coarse sand : 4 graded stone aggregate 20 mm nominal size) i/c necessary excavation foundation concrete 1:5:10 (1 cement :5 fine sand: 10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement :3 coarse sand) 12 mm thick finished with a floating coat of neat cement complete as per standard design.													
A 18.34.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	22436.00	20694.60	22436.00	26575.50	30208.60	29369.80	23536.40	31582.20	25182.80	26606.00	39026.20	34888.80
A 18.35.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	30671.80	28395.40	30671.80	36133.50	40894.10	39794.90	32146.10	42697.30	34307.50	36169.60	52465.20	47036.60
A 18.36		Constructing masonry Chamber 60x60x75 cm inside, in brick work in cement mortar 1:4 (1 cement :4 coarse sand) for fire hydrants. with C.I. surface box 350x350 mm. top and 165 mm deep (inside) with chained lid and RCC top slab 1:2:4 mix (1 cement :2 coarse sand : 4 graded stone aggregate 20 mm nominal size) i/c necessary excavation foundation concrete 1:5:10 (1 cement :5 fine sand: 10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement :3 coarse sand) 12 mm thick finished with a floating coat of neat cement complete as per standard design.													
A 18.36.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	12320.70	11349.50	12320.70	14604.70	16624.10	16157.90	12933.70	17375.40	13833.80	14636.80	21461.50	19189.00
A 18.37.1		With commom burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	11086.00	10376.20	11086.00	12806.30	14296.20	13952.10	11579.90	14846.00	12238.10	12836.00	17841.30	16175.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.38		Painting G.I. pipes and fittings with synthetic enamel white paint with two coats over a ready mixed priming coat, both of approved quality for new work.													
A 18.38.1		15 mm diameter pipe.	Metre	36.00	34.10	36.00	40.20	44.30	43.40	37.10	45.60	38.70	40.50	53.10	48.90
A 18.38.2		20 mm diameter pipe.	Metre	44.10	41.80	44.10	49.30	54.30	53.10	45.50	55.90	47.50	49.60	65.20	60.00
A 18.38.3		25 mm diameter pipe.	Metre	56.50	53.50	56.50	63.10	69.40	68.00	58.20	71.50	60.70	63.50	83.30	76.70
A 18.38.4		32 mm diameter pipe.	Metre	69.30	65.60	69.30	77.50	85.20	83.50	71.40	87.90	74.60	77.90	102.50	94.40
A 18.38.5		40 mm diameter pipe.	Metre	80.20	76.00	80.20	89.60	98.60	96.50	82.60	101.60	86.20	90.20	118.50	109.10
A 18.38.6		50 mm diameter pipe.	Metre	97.80	92.60	97.80	109.30	120.30	117.80	100.80	124.00	105.20	109.90	144.80	133.20
A 18.39		Repainting G.I. pipes and fittings with synthetic enamel white paint with one coat of approved quality													
A 18.39.1		15 mm diameter pipe.	Metre	7.70	7.40	7.70	8.00	8.50	8.40	7.80	8.60	7.90	8.20	9.00	8.70
A 18.39.2		20 mm diameter pipe.	Metre	9.00	8.70	9.00	9.30	9.90	9.80	9.10	10.00	9.20	9.60	10.40	10.10
A 18.39.3		25 mm diameter pipe.	Metre	11.60	11.20	11.60	12.00	12.70	12.50	11.70	12.80	11.70	12.30	13.40	13.00
A 18.39.4		32 mm diameter pipe.	Metre	13.70	13.20	13.70	14.10	15.00	14.80	13.80	15.00	13.90	14.40	15.70	15.30
A 18.39.5		40 mm diameter pipe.	Metre	15.90	15.40	15.90	16.50	17.50	17.20	16.10	17.50	16.20	16.90	18.30	17.80
A 18.39.6		50 mm diameter pipe.	Metre	18.80	18.10	18.80	19.30	20.50	20.20	18.90	20.60	19.00	19.80	21.40	20.90
A 18.40		Painting G.I. pipes and fittings with two coats of anti-corrosive bitumastic paint of approved quality.													
A 18.40.1		15 mm diameter pipes	Metre	9.10	8.80	9.10	9.40	9.90	9.70	9.20	9.90	9.20	9.60	10.30	10.00
A 18.40.2		20 mm diameter pipes	Metre	10.80	10.50	10.80	11.00	11.60	11.40	10.80	11.60	10.90	11.20	12.00	11.80
A 18.40.3		25 mm diameter pipes	Metre	13.70	13.40	13.70	14.10	14.80	14.60	13.80	14.80	13.90	14.40	15.40	15.10
A 18.40.4		32 mm diameter pipes	Metre	16.30	15.90	16.30	16.80	17.50	17.30	16.50	17.60	16.50	17.10	18.10	17.80
A 18.40.5		40 mm diameter pipes	Metre	18.60	18.10	18.60	19.10	19.90	19.70	18.70	20.00	18.80	19.40	20.60	20.30
A 18.40.6		50 mm diameter pipes	Metre	22.20	21.70	22.20	22.70	23.70	23.40	22.30	23.70	22.40	23.10	24.50	24.00
A 18.40.7		65 mm diameter pipes	Metre	27.30	26.70	27.30	27.90	29.10	28.80	27.50	29.10	27.60	28.40	30.00	29.50
A 18.40.8		80 mm diameter pipes	Metre	31.70	31.00	31.70	32.40	33.70	33.40	31.90	33.70	32.00	32.90	34.70	34.10
A 18.41		Providing and filling sand of grading zone-V or coarser grade, all round the G.I pipes in external work:													
A 18.41.1		15mm diameter pipe	Metre	158.20	148.40	158.20	167.90	186.00	181.90	160.90	187.40	162.30	174.90	201.40	193.00
A 18.41.1A		Sub analysis item for sand filling component	Metre	2137.20	2005.20	2137.20	2269.10	2514.10	2457.60	2174.90	2533.00	2193.70	2363.30	2721.50	2608.40
A 18.41.2		20mm diameter pipe	Metre	160.30	150.40	160.30	170.20	188.60	184.30	163.10	190.00	164.50	177.20	204.10	195.60
A 18.41.3		25mm diameter pipe	Metre	164.60	154.40	164.60	174.70	193.60	189.20	167.50	195.00	168.90	182.00	209.60	200.80
A 18.41.4		32mm diameter pipe	Metre	168.80	158.40	168.80	179.30	198.60	194.20	171.80	200.10	173.30	186.70	215.00	206.10
A 18.41.5		40mm diameter pipe	Metre	171.00	160.40	171.00	181.50	201.10	196.60	174.00	202.60	175.50	189.10	217.70	208.70
A 18.41.6		50mm diameter pipe	Metre	177.40	166.40	177.40	188.30	208.70	204.00	180.50	210.20	182.10	196.20	225.90	216.50
A 18.41.7		65mm diameter pipe	Metre	280.00	262.70	280.00	297.30	329.30	321.90	284.90	331.80	287.40	309.60	356.50	341.70
A 18.41.8		80mm diameter pipe	Metre	288.50	270.70	288.50	306.30	339.40	331.80	293.60	342.00	296.10	319.00	367.40	352.10
A 18.41.9		100mm diameter pipe	Metre	305.60	286.70	305.60	324.50	359.50	351.40	311.00	362.20	313.70	338.00	389.20	373.00
A 18.41.10		150mm diameter pipe	Metre	455.20	427.10	455.20	483.30	535.50	523.50	463.30	539.50	467.30	503.40	579.70	555.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.42		Boring with 100mm diameter casing pipe for hand pump/tube well, in all soils except ordinary hard rocks requiring blasting, including removing the casing pipe after the hand pipe/tube well is lowered and tested:													
A 18.42.1		Upto 6 metres depth.	Metre	486.70	485.50	486.70	487.90	490.20	489.70	487.10	490.30	487.20	488.80	492.10	491.00
A 18.42.2		Beyond 6 m and upto 12 m depth	Metre	577.00	575.80	577.00	578.20	580.50	580.00	577.40	580.70	577.60	579.10	582.40	581.30
A 18.42.3		Beyond 12 m and upto 18 m depth	Metre	670.70	669.50	670.70	671.90	674.10	673.60	671.00	674.30	671.20	672.80	676.00	675.00
A 18.43		Providing and placing in position filters of 40 mm diameter G. I. pipe with brass strainer of approved quality.	Metre	878.30	832.20	878.30	924.30	1009.90	990.10	891.40	1016.40	898.00	957.20	1082.20	1042.70
A 18.44		Providing and fixing to filter and lowering to proper levels 40 mm G.I. pipe for tube well including cleaning and priming the tube well.	Metre	500.50	472.70	500.50	528.30	579.80	567.90	508.40	583.80	512.40	548.10	623.50	599.70
A 18.45		Providing and placing in position hand pump of approved quality for 40 mm diameter G.I. pipe complete with all accessories.	Each	1316.00	1239.90	1316.00	1392.00	1533.20	1500.60	1337.70	1544.10	1348.60	1446.30	1652.70	1587.50
A 18.46		Providing and fixing G.I. Union in G.I. pipe including cutting and threading the pipe and making long screws etc. complete (New work):													
A 18.46.1		15mm nominal bore	Each	224.60	221.00	224.60	228.30	235.00	233.40	225.70	235.50	226.20	230.80	240.70	237.60
A 18.46.2		20 mm nominal bore	Each	255.90	250.20	255.90	261.60	272.10	269.70	257.50	272.90	258.30	265.60	281.00	276.20
A 18.46.3		25 mm nominal bore	Each	353.00	341.00	353.00	365.10	387.40	382.20	356.50	389.10	358.20	373.70	406.30	396.00
A 18.46.4		32 mm nominal bore	Each	407.40	391.80	407.40	423.00	451.90	445.20	411.80	454.10	414.10	434.10	476.40	463.00
A 18.46.5		40 mm nominal bore	Each	491.30	470.30	491.30	512.40	551.50	542.50	497.40	554.60	500.40	527.50	584.70	566.60
A 18.46.6		50 mm nominal bore	Each	646.70	619.50	646.70	673.90	724.50	712.80	654.50	728.40	658.40	693.40	767.20	743.90
A 18.46.7		65 mm nominal bore	Each	1066.50	1011.90	1066.50	1121.20	1222.80	1199.30	1082.20	1230.60	1090.00	1160.30	1308.70	1261.80
A 18.46.8		80 mm nominal bore	Each	1163.70	1102.60	1163.70	1224.70	1338.00	1311.90	1181.10	1346.80	1189.80	1268.30	1433.90	1381.60
A 18.47		Providing and fixing G.I. Union in existing G.I. pipe line, cutting and threading the pipe and making long screws, including excavation, refilling the earth or cutting of wall and making good the same complete wherever required:													
A 18.47.1		15 mm nominal bore	Each	563.10	559.50	563.10	566.80	573.50	571.90	564.20	574.00	564.70	569.30	579.20	576.10
A 18.47.2		20 mm nominal bore	Each	594.40	594.40	594.40	594.40	594.40	594.40	594.40	594.40	594.40	594.40	594.40	594.40
A 18.47.3		25 mm nominal bore	Each	691.50	679.50	691.50	703.60	725.90	720.70	695.00	727.60	696.70	712.20	744.80	734.50
A 18.47.4		32 mm nominal bore	Each	745.90	730.30	745.90	761.50	790.40	783.70	750.30	792.60	752.50	772.60	814.90	801.50
A 18.47.5		40 mm nominal bore	Each	829.80	808.80	829.80	850.90	890.00	881.00	835.90	893.00	838.90	866.00	923.20	905.10
A 18.47.6		50 mm nominal bore	Each	1108.30	1081.10	1108.30	1135.50	1186.10	1174.40	1116.10	1189.90	1120.00	1155.00	1228.80	1205.50
A 18.47.7		65 mm nominal bore	Each	1528.10	1473.50	1528.10	1582.80	1684.30	1660.90	1543.70	1692.20	1551.60	1621.90	1770.30	1723.40
A 18.47.8		80 mm nominal bore	Each	1625.30	1564.20	1625.30	1686.30	1799.60	1773.50	1642.70	1808.30	1651.40	1729.90	1895.50	1843.20
A 18.48		Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank.	Litre	10.80	10.10	10.80	11.50	12.90	12.50	11.00	13.00	11.10	12.00	14.00	13.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.48A		Providing and fixing rectangular high density polyethylene water storage loft tank with cover, conforming to ISI: 12701, colour opaque white or as approved by Engineer-in-charge. The rates includes making necessary holes for inlet, outlet and overflow pipes. The base support i/c fittings & fixtures for tank shall be paid separately.	Litre	10.80	10.10	10.80	11.50	12.90	12.50	11.00	13.00	11.10	12.00	14.00	13.40
A 18.49		Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931													
A 18.49.1		15 mm nominal bore	Each	515.50	481.80	515.50	549.30	611.90	597.40	525.20	616.70	530.00	573.30	664.90	636.00
A 18.50		Providing and fixing C.P. brass long nose bib cock of approved quality conforming to IS standards and weighing not less than 810 gms.													
A 18.50.1		15 mm nominal bore	Each	761.40	711.60	761.40	811.20	903.80	882.40	775.70	910.90	782.80	846.80	982.00	939.30
A 18.51		Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms.													
A 18.51.1		15 mm nominal bore	Each	679.60	635.20	679.60	724.10	806.70	787.60	692.30	813.00	698.70	755.90	876.50	838.40
A 18.52		Providing and fixing C.P. brass stop cock (concealed) of standard design and of approved make conforming to IS:8931													
A 18.52.1		15 mm nominal bore	Each	746.00	697.20	746.00	794.80	885.50	864.50	760.00	892.40	766.90	829.70	962.20	920.30
A 18.53		Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931													
A 18.53.1		15 mm nominal bore	Each	654.60	611.80	654.60	697.40	777.00	758.60	666.90	783.10	673.00	728.00	844.30	807.60
A 18.53A		Providing and fixing C.P. Brass extension nipple (size 15mmx50mm) of approved make and quality as per direction of Engineer-in-charge.	Each	75.40	70.40	75.40	80.30	89.50	87.30	76.80	90.20	77.50	83.80	97.20	93.00
A 18.54		Providing and fixing PTMT bib cock of approved quality colour.													
A 18.54.1		15mm nominal bore, 86mm long, weighing not less than 88 gms.	Each	143.40	134.00	143.40	152.80	170.20	166.20	146.10	171.60	147.40	159.50	185.00	176.90
A 18.54.2		15mm nominal bore, 122mm long, weighing not less than 99 gms.	Each	199.40	186.40	199.40	212.40	236.70	231.10	203.10	238.50	205.00	221.80	257.20	246.00
A 18.54.3		15 mm nominal bore, 165 mm long, weighing not less than 110 gms.	Each	217.50	203.30	217.50	231.70	258.20	252.10	221.60	260.20	223.60	241.90	280.50	268.30
A 18.54.4		15mm nominal bore, 90 mm long, weighing not less than 93 gms	Each	280.90	262.50	280.90	299.30	333.40	325.50	286.10	336.00	288.80	312.40	362.30	346.50
A 18.55		Providing and fixing PTMT stop cock of approved quality colour.													
A 18.55.1		15 mm nominal bore, 86 mm long, weighing not less than 88 gms	Each	143.40	134.00	143.40	152.80	170.20	166.20	146.10	171.60	147.40	159.50	185.00	176.90
A 18.55.2		20 mm nominal bore, 89 mm long, weighing not less than 88 gms	Each	186.20	174.00	186.20	198.40	221.00	215.80	189.70	222.80	191.50	207.10	240.20	229.70
A 18.55.3		Concealed stop cock, 15 mm nominal bore, 108 mm long, weighing not less than 108 gms.	Each	246.30	230.20	246.30	262.40	292.40	285.50	250.90	294.70	253.20	273.90	317.70	303.90
A 18.56		Providing and fixing PTMT pillar cock of approved quality colour.													
A 18.56.1		15 mm nominal bore, 107 mm long, weighing not less than 110 gms.	Each	237.00	221.50	237.00	252.50	281.30	274.70	241.50	283.60	243.70	263.60	305.70	292.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.56.2		15 mm nominal bore, 125 mm long foam flow, weighing not less than 120 gms	Each	258.40	241.50	258.40	275.30	306.70	299.50	263.30	309.20	265.70	287.40	333.30	318.80
A 18.57		Providing and fixing PTMT, push cock of approved quality colour.													
A 18.57.1		15 mm nominal bore, 98 mm long, weighing not less than 75 gms.	Each	128.60	120.20	128.60	137.00	152.70	149.00	131.00	153.90	132.20	143.00	165.90	158.70
A 18.57.2		15 mm nominal size, 80 mm long, weighing not less than 46 gms	Each	120.40	112.50	120.40	128.30	142.90	139.50	122.60	144.00	123.80	133.90	155.30	148.50
A 18.58		Providing and fixing PTMT grating of approved quality, colour.													
A 18.58.1		Circular type													
A 18.58.1.1		100 mm nominal dia	Each	46.60	43.60	46.60	49.70	55.30	54.00	47.50	55.80	47.90	51.90	60.10	57.50
A 18.58.1.2		125 mm nominal dia with 25 mm waste hole	Each	63.10	59.00	63.10	67.20	74.90	73.10	64.30	75.50	64.90	70.20	81.40	77.80
A 18.58.2		Rectangular type with openable circular lid.	Each												
A 18.58.2.1		150 mm nominal size square 100 mm diametre of the inner hinged round grating	Each	208.00	194.40	208.00	221.60	246.80	241.00	211.90	248.80	213.80	231.30	268.20	256.60
A 18.59		providing and fixing C.I. double acting air valve of approved quality with bolts, nuts, rubber insertions etc. complete (The tail pieces, tapers etc if required will be paid separately) :													
A 18.59.1		50 mm dia	Each	6311.40	5903.40	6311.40	6719.50	7477.30	7302.40	6428.00	7535.60	6486.30	7010.90	8118.50	7768.70
A 18.59.2		80 mm dia	Each	7645.00	7149.70	7645.00	8140.30	9060.10	8847.80	7786.50	9130.80	7857.20	8494.00	9838.40	9413.80
A 18.59.3		100 mm dia	Each	9929.40	9284.70	9929.40	10574.20	11771.60	11495.20	10113.70	11863.60	10205.70	11034.70	12784.70	12232.00
A 18.60		Providing and fixing enclosed type water meter (bulk type) conforming to IS : 2373 and tested by municipal Board complete with bolts, nuts, rubber insertions etc. (The tail pieces if required will be paid separately) :													
A 18.60.1		80 mm dia nominal bore	Each	4331.90	4058.30	4331.90	4605.80	5114.00	4996.70	4410.20	5153.10	4449.20	4801.10	5544.00	5309.40
A 18.60.2		100 mm dia nominal bore	Each	6418.50	6012.20	6418.50	6824.80	7579.30	7405.20	6534.60	7637.50	6592.60	7115.00	8217.80	7869.70
A 18.60.3		150 mm dia nominal bore	Each	9401.50	8801.90	9401.50	10000.90	11114.40	10857.40	9572.70	11200.10	9658.40	10429.30	12056.50	11542.60
A 18.60.4		200 mm dia nominal bore	Each	10267.30	9611.10	10267.30	10923.60	12142.20	11861.10	10454.80	12235.90	10548.60	11392.30	13173.40	12611.00
A 18.61		Providing and fixing C.I. dirt box strainer for bulk type water meter with nuts, bolts, rubber insertions etc. complete conforming to IS : 2373 :													
A 18.61.1		80 mm dia	Each	4974.00	4658.30	4974.00	5289.80	5876.10	5740.80	5064.30	5921.10	5109.30	5515.20	6372.10	6101.50
A 18.61.2		100 mm dia	Each	8010.50	7500.00	8010.50	8521.00	9468.90	9250.20	8156.40	9541.90	8229.20	8885.60	10271.10	9833.70
A 18.61.3		150 mm dia	Each	10163.70	9514.20	10163.70	10813.00	12019.10	11740.80	10349.20	12112.00	10442.00	11277.00	13039.60	12482.90
A 18.61.4		200 mm dia	Each	15250.40	14252.70	15250.40	16248.00	18100.90	17673.30	15535.40	18243.40	15677.90	16960.70	19668.70	18813.50
A 18.62		Providing and fixing PTMT Ball cock of approved quality, colour and make complete with Epoxy coated aluminium rod with L.P./ H.P.H.D. plastic ball.													
A 18.62.1		15 mm nominal bore, 105 mm long, weighing not less than 138 gms	Each	235.70	220.30	235.70	251.10	279.70	273.10	240.10	281.90	242.30	262.10	304.00	290.80
A 18.62.2		20 mm nominal bore, 120 mm long, weighing not less than 198 gms,	Each	310.90	290.50	310.90	331.20	369.00	360.20	316.70	371.90	319.60	345.70	400.90	383.50
A 18.62.3		25 mm nominal bore, 152 mm long, weighing not less than 440 gms	Each	583.60	545.40	583.60	621.80	692.70	676.30	594.50	698.10	600.00	649.00	752.70	719.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.62.4		40 mm nominal bore, 206 mm long, weighing not less than 690gms.	Each	896.40	837.80	896.40	955.00	1063.90	1038.80	913.20	1072.30	921.50	996.90	1156.10	1105.80
A 18.62.5		50 mm nominal bore, 242 mm long, weighing not less than 1240gms.	Each	1538.50	1437.80	1538.50	1639.10	1826.00	1782.90	1567.20	1840.40	1581.60	1711.00	1984.20	1897.90
A 18.63		Providing and fixing PTMT angle stop cock 15 mm nominal bore, weighing not less than 85 gms.	Each	191.20	178.70	191.20	203.70	226.90	221.50	194.70	228.70	196.50	212.60	246.60	235.80
A 18.64		Providing and fixing PTMT swivelling shower, 15 mm nominal bore, weighing not less than 40gms	Each	137.50	128.50	137.50	146.50	163.20	159.30	140.10	164.50	141.40	152.90	177.30	169.60
A 18.65		Providing and fixing PTMT Soap Dish Holder having length of 138 mm, breadth 102 mm. height of 75 mm with concealed fitting arrangements, weighing not less than 106 gms.	Each	160.60	150.00	160.60	171.10	190.60	186.10	163.60	192.10	165.10	178.60	207.10	198.10
A 18.66		Providing and laying S&S C.I. Standard specials such as tees, bends, collars tapers and caps etc, suitable for flanged jointing as per IS : 1538 :													
A 18.66.1		Upto 300 mm dia	Quintal	8972.20	8412.00	8972.20	9532.40	10572.90	10332.70	9132.30	10652.80	9212.30	9932.50	11428.80	10949.60
A 18.66.2		Above 300 mm dia	Quintal	10635.00	9966.00	10635.00	11304.00	12546.50	12259.70	10826.20	12642.00	10921.70	11781.80	13573.30	13000.90
A 18.67		Providing and laying S&S C.I. Standard specials suitable for mechanical jointing as per IS : 13382 :													
A 18.67.1		Upto 300 mm dia	Quintal	14538.40	13614.10	14538.40	15462.80	17179.50	16783.30	14802.60	17311.50	14934.60	16123.00	18607.70	17816.40
A 18.67.2		Above 300 mm dia	Quintal	15323.70	14348.00	15323.70	16299.50	18111.60	17693.40	15602.50	18250.90	15742.00	16996.40	19620.50	18785.20
A 18.68		Providing and laying D.I. specials of class K-12 suitable for push-on jointing as per IS: 9523 :													
A 18.68.1		Upto 600 mm dia	Each	20842.20	19505.50	20842.20	22179.00	24661.60	24088.60	21224.20	24852.50	21415.20	23133.80	26737.80	25593.10
A 18.68.2		Above 600 mm dia	Each	28744.60	26890.90	28744.60	30598.40	34041.10	33246.60	29274.30	34305.80	29539.10	31922.40	36929.70	35341.80
A 18.69		Providing and laying D.I. specials of class K-12 suitable for mechanical jointing as per IS: 9523 :													
A 18.69.1		Upto 600 mm dia	Quintal	21912.30	20505.60	21912.30	23319.20	25931.80	25328.80	22314.30	26132.60	22515.30	24323.90	28118.00	26913.20
A 18.69.2		Above 600 mm dia	Quintal	31296.40	29275.80	31296.40	33317.20	37069.90	36203.80	31873.80	37358.50	32162.50	34760.40	40220.80	38489.90
A 18.70		Providing push-on-joints to centrifugally (Spun) Cast Iron Pipes or Ductile pipes including testing of joints and the cost of rubber gasket :													
A 18.70.1		100 mm dia pipies	Each	472.90	457.20	472.90	488.50	517.50	510.80	477.30	519.70	479.60	499.60	542.00	528.60
A 18.70.2		150 mm dia pipies	Each	737.90	718.50	737.90	757.20	793.20	784.90	743.40	796.00	746.20	771.10	823.70	807.10
A 18.70.3		200 mm dia pipies	Each	1107.30	1073.40	1107.30	1141.20	1204.20	1189.70	1117.00	1209.10	1121.80	1165.40	1257.50	1228.50
A 18.70.4		250 mm dia pipies	Each	1345.00	1305.20	1345.00	1384.90	1458.90	1441.80	1356.40	1464.60	1362.10	1413.30	1521.50	1487.30
A 18.70.5		300 mm dia pipies	Each	1788.50	1729.30	1788.50	1847.80	1957.80	1932.40	1805.40	1966.20	1813.90	1890.10	2050.90	2000.10
A 18.70.6		350 mm dia pipies	Each	1920.20	1852.40	1920.20	1988.10	2114.10	2085.00	1939.60	2123.80	1949.30	2036.50	2220.70	2162.60
A 18.70.7		400 mm dia pipies	Each	3070.70	2946.80	3070.70	3194.50	3424.60	3371.50	3106.10	3442.20	3123.70	3283.00	3619.20	3513.00
A 18.70.8		450 mm dia pipies	Each	3547.10	3401.70	3547.10	3692.50	3962.50	3900.20	3588.60	3983.30	3609.40	3796.40	4191.00	4066.40
A 18.70.9		500 mm dia pipies	Each	3785.30	3629.20	3785.30	3941.50	4231.50	4164.60	3829.90	4253.80	3852.30	4053.00	4476.90	4343.10
A 18.70.10		600 mm dia pipies	Each	4917.80	4721.20	4917.80	5114.40	5479.40	5395.20	4974.00	5507.50	5002.00	5254.80	5788.30	5619.80
A 18.70.11		650 mm dia pipies	Each	6793.90	6497.70	0.00	7090.10	7640.10	7513.20	6878.50	7682.40	6920.80	7301.60	8105.60	7851.70
A 18.70.12		700 mm dia pipies	Each	7699.40	7343.90	7699.40	8054.80	8714.90	8562.50	7800.90	8765.60	7851.70	8308.70	9273.40	8968.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.70.13		800 mm dia pipies	Each	8469.90	8079.50	8469.90	8860.30	9585.40	9418.10	8581.40	9641.20	8637.20	9139.20	10198.90	9864.30
A 18.70.14		900 mm dia pipies	Each	10845.90	10328.90	10845.90	11362.80	12322.90	12101.40	10993.60	12396.80	11067.40	11732.10	13135.30	12692.20
A 18.70.15		1000 mm dia pipies	Each	12663.10	12046.50	12663.10	13279.70	14424.80	14160.50	12839.20	14512.90	12927.30	13720.10	15393.70	14865.20
A 18.71		Providing and laying Double Flanged (screwed / welded) centrifugally (Spun) Cast Iron, Class B (IS : 1536) :													
A 18.71.1		100 mm dia C.I. Double Flanged Pipe	Metre	1108.60	1037.90	1108.60	1179.10	1310.40	1280.00	1128.70	1320.50	1138.80	1229.70	1421.40	1360.80
A 18.71.2		150 mm dia C.I. Double Flanged Pipe	Metre	1735.30	1624.80	1735.30	1845.60	2050.90	2003.40	1766.90	2066.70	1782.60	1924.60	2224.40	2129.70
A 18.71.3		200 mm dia C.I. Double Flanged Pipe	Metre	2736.60	2562.00	2736.60	2911.00	3235.50	3160.40	2786.50	3260.40	2811.40	3035.90	3509.80	3360.00
A 18.71.4		250 mm dia C.I. Double Flanged Pipe	Metre	3310.10	3099.40	3310.10	3520.40	3911.80	3821.20	3370.20	3941.80	3400.20	3671.00	4242.70	4062.00
A 18.71.5		300 mm dia C.I. Double Flanged Pipe	Metre	4230.80	3961.50	4230.80	4499.50	4999.70	4884.00	4307.60	5038.10	4346.00	4692.00	5422.50	5191.60
A 18.71.6		350 mm dia C.I. Double Flanged Pipe	Metre	5326.50	4987.30	5326.50	5665.00	6295.10	6149.30	5423.20	6343.40	5471.60	5907.50	6827.70	6536.90
A 18.71.7		400 mm dia C.I. Double Flanged Pipe	Metre	6889.90	6450.50	6889.90	7328.40	8144.40	7955.70	7015.10	8207.10	7077.80	7642.40	8834.40	8457.70
A 18.71.8		450 mm dia C.I. Double Flanged Pipe	Metre	8771.10	8211.00	8771.10	9330.10	10370.30	10129.80	8930.80	10450.20	9010.70	9730.40	11249.80	10769.70
A 18.71.9		500 mm dia C.I. Double Flanged Pipe	Metre	10893.30	10196.70	10893.30	11588.80	12882.70	12583.50	11092.00	12982.00	11191.40	12086.70	13976.70	13379.40
A 18.71.10		600 mm dia C.I. Double Flanged Pipe	Metre	15092.00	14126.20	15092.00	16056.30	17850.10	17435.30	15367.50	17987.90	15505.30	16746.60	19366.90	18538.80
A 18.72		Providing and laying S&S centrifugally Cast (Spun) / Ductile Iron pipes conforming to IS: 8329 :													
A 18.72.1		100 mm dia Ductile Iron Class K-7 pipes	Metre	1351.60	1265.20	1351.60	1437.70	1598.10	1561.00	1376.20	1610.40	1388.50	1499.40	1733.60	1659.60
A 18.72.2		150 mm dia Ductile Iron Class K-7 pipes	Metre	1927.90	1804.90	1927.90	2050.70	2279.20	2226.30	1963.00	2296.70	1980.50	2138.60	2472.30	2366.90
A 18.72.3		200 mm dia Ductile Iron Class K-7 pipes	Metre	2372.30	2221.20	2372.30	2523.10	2803.70	2738.80	2415.40	2825.20	2436.90	2631.10	3041.00	2911.40
A 18.72.4		250 mm dia Ductile Iron Class K-7 pipes	Metre	3051.40	2857.20	3051.40	3245.30	3606.10	3522.60	3106.80	3633.80	3134.50	3384.20	3911.20	3744.60
A 18.72.5		300 mm dia Ductile Iron Class K-7 pipes	Metre	3812.70	3569.80	3812.70	4055.00	4506.00	4401.70	3881.90	4540.60	3916.50	4228.60	4887.30	4679.10
A 18.72.6		350 mm dia Ductile Iron Class K-7 pipes	Metre	4510.60	4224.50	4510.60	4796.00	5327.40	5204.40	4592.20	5368.20	4632.90	5000.60	5776.60	5531.30
A 18.72.7		400 mm dia Ductile Iron Class K-7 pipes	Metre	5402.50	5059.80	5402.50	5744.50	6381.10	6233.80	5500.20	6429.90	5549.10	5989.50	6919.20	6625.30
A 18.72.8		450 mm dia Ductile Iron Class K-7 pipes	Metre	6546.40	6130.60	6546.40	6961.30	7733.60	7554.90	6664.90	7792.90	6724.20	7258.50	8386.50	8029.90
A 18.72.9		500 mm dia Ductile Iron Class K-7 pipes	Metre	7400.30	6930.80	7400.30	7868.80	8741.10	8539.20	7534.20	8808.00	7601.10	8204.60	9478.40	9075.70
A 18.72.10		600 mm dia Ductile Iron Class K-7 pipes	Metre	9529.90	8925.40	9529.90	10133.10	11256.00	10996.10	9702.30	11342.10	9788.40	10565.30	12205.10	11686.80
A 18.72.11		700 mm dia Ductile Iron Class K-7 pipes	Metre	12441.40	11653.20	12441.40	13227.60	14691.50	14352.70	12666.00	14803.90	12778.30	13791.10	15928.90	15253.10
A 18.72.12		800 mm dia Ductile Iron Class K-7 pipes	Metre	15527.10	14544.50	15527.10	16507.20	18332.20	17909.80	15807.10	18472.30	15947.10	17209.70	19874.80	19032.30
A 18.72.13		900 mm dia Ductile Iron Class K-7 pipes	Metre	20060.00	18786.20	20060.00	21330.90	23696.80	23149.30	20423.10	23878.30	20604.60	22241.50	25696.80	24604.60
A 18.72.14		1000 mm dia Ductile Iron Class K-7 pipes	Metre	21029.90	19701.60	21029.90	22354.60	24821.80	24250.60	21408.40	25011.10	21597.60	23304.40	26907.10	25768.10
A 18.72.15		100 mm dia Ductile Iron Class K-9 pipes	Metre	1299.20	1216.70	1299.20	1381.60	1535.00	1499.50	1322.80	1546.80	1334.50	1440.70	1664.60	1593.80
A 18.72.16		150 mm dia Ductile Iron Class K-9 pipes	Metre	1952.10	1828.00	1952.10	2076.00	2306.50	2253.20	1987.50	2324.20	2005.20	2164.70	2501.40	2395.00
A 18.72.17		200 mm dia Ductile Iron Class K-9 pipes	Metre	2673.90	2504.00	2673.90	2843.60	3159.30	3086.30	2722.40	3183.60	2746.60	2965.10	3426.30	3280.50
A 18.72.18		250 mm dia Ductile Iron Class K-9 pipes	Metre	3729.50	3492.00	3729.50	3966.40	4407.40	4305.40	3797.20	4441.30	3831.00	4136.10	4780.20	4576.70
A 18.72.19		300 mm dia Ductile Iron Class K-9 pipes	Metre	4662.90	4366.10	4662.90	4959.10	5510.40	5382.80	4747.50	5552.70	4789.80	5171.30	5976.40	5721.90
A 18.72.20		350 mm dia Ductile Iron Class K-9 pipes	Metre	5693.80	5332.20	5693.80	6054.60	6726.30	6570.90	5796.90	6777.80	5848.40	6313.10	7294.10	6984.00
A 18.72.21		400 mm dia Ductile Iron Class K-9 pipes	Metre	7291.60	6827.50	7291.60	7754.70	8616.70	8417.30	7423.90	8682.90	7490.10	8086.50	9345.40	8947.50
A 18.72.22		450 mm dia Ductile Iron Class K-9 pipes	Metre	8480.20	7940.60	8480.20	9018.80	10021.10	9789.20	8634.10	10098.00	8711.00	9404.50	10868.40	10405.70
A 18.72.23		500 mm dia Ductile Iron Class K-9 pipes	Metre	10612.50	9935.90	10612.50	11287.80	12544.60	12253.90	10805.50	12641.00	10902.00	11771.50	13607.10	13026.90
A 18.72.24		600 mm dia Ductile Iron Class K-9 pipes	Metre	12824.10	12008.20	12824.10	13638.40	15153.90	14803.20	13056.80	15270.20	13173.10	14221.60	16435.10	15735.50
A 18.72.25		700 mm dia Ductile Iron Class K-9 pipes	Metre	17773.80	16640.70	17773.80	18904.70	21009.20	20522.40	18096.90	21170.80	18258.40	19714.60	22788.50	21817.00
A 18.72.26		750 mm dia Ductile Iron Class K-9 pipes	Metre	19229.30	18004.40	19229.30	20451.70	22726.80	22200.50	19578.60	22901.50	19753.20	21327.30	24650.20	23600.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.72.27		800 mm dia Ductile Iron Class K-9 pipes	Metre	19448.80	18212.90	19448.80	20682.00	22977.60	22446.40	19801.20	23153.80	19977.30	21565.60	24918.20	23858.50
A 18.72.28		900 mm dia Ductile Iron Class K-9 pipes	Metre	23603.70	22103.40	23603.70	25100.80	27887.50	27242.70	24031.40	28101.40	24245.30	26173.40	30243.30	28956.90
A 18.72.29		1000 mm dia Ductile Iron Class K-9 pipes	Metre	26452.10	24773.50	26452.10	28126.90	31244.80	30523.30	26930.60	31484.10	27169.90	29327.00	33880.50	32441.10
A 18.73		Providing and laying Double Flanged (Screwed/ Welded) centrifugally (Spun) Ductile Iron pipes of class K-9 conforming to IS: 8329 :													
A 18.73.1		100 mm dia Ductile Iron Double Flanged	Metre	1859.80	1741.10	1859.80	1978.30	2198.70	2147.70	1893.60	2215.70	1910.60	2063.10	2385.10	2283.40
A 18.73.2		150 mm dia Ductile Iron Double Flanged	Metre	2789.50	2611.40	2789.50	2967.20	3297.90	3221.40	2840.20	3323.30	2865.60	3094.40	3577.50	3424.80
A 18.73.3		200 mm dia Ductile Iron Double Flanged	Metre	3515.10	3291.20	3515.10	3738.60	4154.60	4058.30	3579.00	4186.50	3610.90	3898.70	4506.20	4314.20
A 18.73.4		250 mm dia Ductile Iron Double Flanged	Metre	4989.70	4671.40	4989.70	5307.50	5898.70	5762.00	5080.50	5944.10	5125.90	5535.00	6398.60	6125.70
A 18.73.5		300 mm dia Ductile Iron Double Flanged	Metre	6410.70	6001.80	6410.70	6818.90	7578.50	7402.80	6527.40	7636.90	6585.70	7111.30	8220.80	7870.10
A 18.73.6		350 mm dia Ductile Iron Double Flanged	Metre	8074.20	7558.50	8074.20	8589.00	9547.00	9325.40	8221.30	9620.50	8294.80	8957.70	10356.90	9914.70
A 18.73.7		400 mm dia Ductile Iron Double Flanged	Metre	10366.90	9703.40	10366.90	11029.20	12261.50	11976.60	10556.10	12356.20	10650.70	11503.50	13303.50	12734.70
A 18.73.8		450 mm dia Ductile Iron Double Flanged	Metre	10910.10	10213.80	10910.10	11605.10	12898.40	12599.20	11108.60	12997.70	11207.90	12102.80	13991.80	13394.80
A 18.73.9		500 mm dia Ductile Iron Double Flanged	Metre	15444.90	14454.60	15444.90	16433.60	18272.70	17847.50	15727.30	18414.00	15868.60	17141.30	19827.90	18979.00
A 18.73.10		600 mm dia Ductile Iron Double Flanged	Metre	20448.70	19138.10	20448.70	21757.30	24191.50	23628.70	20822.60	24378.50	21009.50	22694.00	26249.90	25126.30
A 18.73.11		700 mm dia Ductile Iron Double Flanged	Metre	24229.00	22678.70	24229.00	25776.70	28656.10	27990.30	24671.20	28877.20	24892.30	26884.80	31090.80	29761.60
A 18.74		Providing and fixing unplasticised P.V.C. connection pipe with PTMT Nuts, collar and bush of approved quality and colour.													
A 18.74.1		15 mm nominal bore with 30cm length.	Each	116.80	109.20	116.80	124.40	138.60	135.30	119.00	139.70	120.10	129.90	150.60	144.10
A 18.74.2		15 mm nominal bore with 45cm length.	Each	138.40	129.30	138.40	147.40	164.20	160.30	140.90	165.50	142.20	153.90	178.40	170.70
A 18.75		Providing and fixing PTMT extension nipple for water tank pipe, fittings of approved quality and colour.													
A 18.75.1		15 mm nominal bore, weighing not less than 32 gms.	Each	60.50	56.60	60.50	64.50	71.80	70.10	61.70	72.40	62.20	67.30	78.10	74.70
A 18.75.2		20 mm nominal bore, weighing not less than 40 gms.	Each	100.00	93.50	100.00	106.60	118.70	115.90	101.90	119.70	102.80	111.20	129.00	123.40
A 18.75.3		25 mm nominal bore, weighing not less than 62 gms.	Each	139.50	130.40	139.50	148.70	165.60	161.70	142.20	166.90	143.50	155.20	180.00	172.10
A 18.76		Cutting holes up to 30x30 cm in walls including making good the same:													
A 18.76.1		With common burnt clay F.P.S. (non modular) bricks	Each	401.40	371.40	401.40	468.70	530.70	516.30	416.90	554.10	445.00	469.20	681.00	610.40
A 18.77		Cutting holes up to 15x15 cm in R.C.C. floors and roofs for passing drain pipe etc. and repairing the hole after insertion of drain pipe etc. with cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size), including finishing complete so as to make it leak proof.	Each	325.10	320.10	325.10	332.10	341.70	339.50	327.30	343.10	328.90	334.90	353.60	347.50
A 18.78		Making chases up to 7.5x7.5 cm in walls including making good and finishing with matching surface after housing G.I. pipe etc.	Metre	140.70	138.70	140.70	147.70	152.10	151.10	144.10	153.70	146.00	147.80	162.60	157.70
A 18.79		Making hole upto 20x20 cm and embedding pipes up to 150 mm diameter in masonry and filling with cement concrete 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) including disposal of malba.	Metre	208.10	196.70	208.10	246.80	271.60	265.90	226.70	280.60	237.40	247.50	329.80	302.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.80		Disinfecting C.I. water mains by flushing with water containing bleaching powder @ 0.5 gms per litre of water and cleaning the same with fresh water, operation to be repeated three times including getting the sample of water from the disinfected main tested in the municipal laboratory.													
A 18.80.1		80 mm diameter C.I. pipe	100m	1154.00	1150.30	1154.00	1157.70	1164.50	1163.00	1155.10	1165.10	1155.60	1160.30	1170.30	1167.20
A 18.80.2		100 mm diameter C.I. pipe	100m	1526.40	1521.10	1526.40	1531.60	1541.40	1539.10	1527.90	1542.10	1528.60	1535.40	1549.60	1545.10
A 18.80.3		125 mm diameter C.I. pipe	100m	1916.60	1909.30	1916.60	1924.00	1937.60	1934.50	1918.70	0.00	1919.80	1929.20	1949.20	1942.90
A 18.80.4		150 mm diameter C.I. pipe	100m	2308.10	2297.90	2308.10	2318.30	2337.10	2332.80	2311.00	2338.60	2312.40	2325.50	2353.10	2344.40
A 18.80.5		200 mm diameter C.I. pipe	100m	3096.00	3080.10	3096.00	3111.90	3141.40	3134.60	3100.60	3143.70	3102.80	3123.30	3166.40	3152.80
A 18.80.6		250 mm diameter C.I. pipe	100m	3911.60	3888.50	3911.60	3934.60	3977.40	3967.50	3918.10	3980.70	3921.40	3951.00	4013.50	3993.80
A 18.80.7		300 mm diameter C.I. pipe	100m	4368.60	4338.50	4368.60	4398.80	4454.70	4441.80	4377.20	4459.00	4381.50	4420.30	4502.00	4476.20
A 18.80.8		350 mm diameter C.I. pipe	100m	4842.60	4804.30	4842.60	4880.90	4952.10	4935.70	4853.60	4957.60	4859.00	4908.30	5012.40	4979.50
A 18.80.9		400 mm diameter C.I. pipe	100m	5345.80	5297.60	5345.80	5394.10	5483.60	5463.00	5359.60	5490.50	5366.50	5428.50	5559.40	5518.10
A 18.80.10		450 mm diameter C.I. pipe	100m	5857.10	5798.20	5857.10	5916.00	6025.30	6000.10	5873.90	6033.70	5882.30	5958.00	6117.80	6067.40
A 18.80.11		500 mm diameter C.I. pipe	100m	6398.90	6328.00	6398.90	6469.80	6601.50	6571.10	6419.20	6611.60	6429.30	6520.50	6712.90	6652.20
A 18.80.12		600 mm diameter C.I. pipe	100m	7503.50	7405.90	7503.50	7601.10	7782.30	7740.50	7531.40	7796.20	7545.30	7670.80	7935.60	7852.00
A 18.81		Extra for every operation of disinfecting the C.I. main by flushing with water containing bleaching powder @ 0.5 gms per litre of water and cleaning the same with fresh water, including getting the samples of water tested in the municipal laboratory:													
A 18.81.1		80 mm diameter C.I. pipe	100m	421.50	419.90	421.50	423.00	425.90	425.20	421.90	426.10	422.10	424.10	428.30	427.00
A 18.81.2		100 mm diameter C.I. pipe	100m	519.40	517.70	519.40	521.20	524.40	523.60	519.90	524.60	520.20	522.40	527.10	525.60
A 18.81.3		125 mm diameter C.I. pipe	100m	639.20	636.80	639.20	641.50	645.90	644.80	639.80	646.20	640.20	643.20	649.50	647.50
A 18.81.4		150 mm diameter C.I. pipe	100m	748.60	745.30	748.60	751.90	758.00	756.60	749.60	758.50	750.00	754.20	763.20	760.30
A 18.81.5		200 mm diameter C.I. pipe	100m	1165.00	1159.80	1165.00	1170.20	1180.00	1177.70	1166.50	1180.70	1167.30	1174.00	1188.20	1183.70
A 18.81.6		250 mm diameter C.I. pipe	100m	1333.80	1326.70	1333.80	1341.00	1354.30	1351.20	1335.90	1355.30	1336.90	1346.10	1365.60	1359.40
A 18.81.7		300 mm diameter C.I. pipe	100m	1492.90	1483.20	1492.90	1502.60	1520.60	1516.40	1495.60	1522.00	1497.00	1509.50	1535.80	1527.50
A 18.81.8		350 mm diameter C.I. pipe	100m	1754.00	1741.20	1754.00	1766.80	1790.50	1785.10	1757.70	1792.40	1759.50	1775.90	1810.60	1799.70
A 18.81.9		400 mm diameter C.I. pipe	100m	2018.50	2002.50	2018.50	2034.60	2064.50	2057.60	2023.10	2066.80	2025.40	2046.10	2089.70	2076.00
A 18.81.10		450 mm diameter C.I. pipe	100m	2292.00	2272.00	2292.00	2311.90	2349.00	2340.40	2297.70	2351.90	2300.50	2326.20	2380.40	2363.30
A 18.81.11		500 mm diameter C.I. pipe	100m	2567.90	2543.90	2567.90	2592.00	2636.50	2626.30	2574.80	2640.00	2578.20	2609.10	2674.30	2653.70
A 18.81.12		600 mm diameter C.I. pipe	100m	3132.50	3099.60	3132.50	3165.40	3226.60	3212.50	3141.90	3231.30	3146.60	3189.00	3278.40	3250.10
A 18.82		Dismantling old C.I. pipes including excavation and refilling trenches after taking out the pipes, breaking lead caulked joints, melting of lead and making into blocks, including stacking of pipes at site lead up to 50 metre:													
A 18.82.1		80 mm diameter C.I. pipe	Metre	267.10	266.30	267.10	268.00	269.50	269.20	267.40	269.60	267.50	268.60	270.80	270.10
A 18.82.2		100 mm diameter C.I. pipe	Metre	277.50	276.50	277.50	278.50	280.30	279.80	277.80	280.40	277.90	279.20	281.80	280.90
A 18.82.3		125 mm diameter C.I. pipe	Metre	287.30	286.20	287.30	288.40	290.50	290.00	287.60	290.60	287.80	289.20	292.20	291.30
A 18.82.4		150 mm diameter C.I. pipe	Metre	297.40	296.10	297.40	298.70	301.20	300.60	297.80	301.40	298.00	299.70	303.20	302.10
A 18.82.5		200 mm diameter C.I. pipe	Metre	330.70	329.10	330.70	332.30	335.20	334.60	331.20	335.50	331.40	333.40	337.70	336.40
A 18.82.6		250 mm diameter C.I. pipe	Metre	363.30	361.30	363.30	365.20	368.90	368.00	363.80	369.10	364.10	366.60	371.90	370.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.82.7		300 mm diameter C.I. pipe	Metre	392.00	389.80	392.00	394.20	398.30	397.30	392.60	398.60	392.90	395.80	401.80	399.90
A 18.82.8		350 mm diameter C.I. pipe	Metre	418.90	416.50	418.90	421.30	425.80	424.70	419.60	426.10	419.90	423.00	429.50	427.50
A 18.82.9		400 mm diameter C.I. pipe	Metre	443.60	441.00	443.60	446.30	451.20	450.10	444.40	451.60	444.80	448.20	455.40	453.10
A 18.82.10		450 mm diameter C.I. pipe	Metre	469.10	466.20	469.10	472.00	477.30	476.10	469.90	477.80	470.30	474.00	481.90	479.40
A 18.82.11		500 mm diameter C.I. pipe	Metre	489.90	486.80	489.90	492.90	498.60	497.30	490.80	499.10	491.20	495.10	503.40	500.80
A 18.82.12		600 mm diameter C.I. pipe	Metre	529.60	526.00	529.60	533.20	540.00	538.40	530.60	540.50	531.20	535.80	545.70	542.60
A 18.83		Labour for cutting C.I. pipes with steel saw													
A 18.83.1		80 mm diameter C.I. pipe	Each	98.30	97.90	98.30	98.70	99.40	99.30	98.40	99.50	98.50	99.00	100.00	99.70
A 18.83.2		100 mm diameter C.I. pipe	Each	197.40	131.50	132.10	132.70	133.80	133.50	132.20	133.80	132.30	133.10	134.70	134.20
A 18.83.3		125 mm diameter C.I. pipe	Each	183.80	182.90	183.80	184.80	186.50	186.10	184.10	186.70	184.20	185.40	188.00	187.20
A 18.83.4		150 mm diameter C.I. pipe	Each	248.30	247.20	248.30	249.50	251.60	251.10	248.70	251.80	248.80	250.30	253.40	252.40
A 18.83.5		200 mm diameter C.I. pipe	Each	331.30	329.70	331.30	332.80	335.70	335.00	331.70	335.90	331.90	333.90	338.10	336.80
A 18.83.6		250 mm diameter C.I. pipe	Each	411.20	409.50	411.20	412.90	416.20	415.40	411.70	416.40	411.90	414.20	418.90	417.40
A 18.83.7		300 mm diameter C.I. pipe	Each	494.10	492.00	494.10	496.20	500.20	499.30	494.70	500.50	495.00	497.80	503.50	501.70
A 18.83.8		350 mm diameter C.I. pipe	Each	574.00	571.70	574.00	576.40	0.00	579.70	574.70	581.00	575.00	578.00	584.30	582.30
A 18.83.9		400 mm diameter C.I. pipe	Each	656.50	653.90	656.50	659.20	664.20	663.10	657.30	664.60	657.70	661.20	668.40	666.10
A 18.83.10		450 mm diameter C.I. pipe	Each	736.90	734.00	736.90	739.80	745.20	744.00	737.70	745.60	738.10	741.90	749.80	747.30
A 18.83.11		500 mm diameter C.I. pipe	Each	819.40	816.10	819.40	822.70	828.80	827.40	820.30	829.20	820.80	825.00	833.90	831.10
A 18.83.12		600 mm diameter C.I. pipe	Each	976.30	972.80	976.30	979.70	986.20	984.70	977.20	986.70	977.70	982.20	991.60	988.70
A 18.84		Providing and fixing chrome plated Brass battery based infra red sensor operated pillar cock, having foam flow technology.													
A 18.84.1		15 mm nominal bore	Each	9575.30	8948.80	9575.30	10201.70	11365.00	11096.60	9754.20	11454.50	9843.70	10649.10	12349.40	11812.50
A 18.85		Providing and fixing stainless steel pipe and fitting of grade AISI 304 as per JIS standard 3448 complete with pressed type fitting (fitting shall be paid for seperately) i/c fixing of the pipe with clamps at 1.00 m spacing including cutting and making good the wall including testing of joints complete as per direction of Engineer-in-charge. (The pipe length inserted in the fitting shall not be measured for payment); Internal Work-exposed on wall													
A 18.85.1		15.88 mm outer dia pipe	Metre	338.50	324.50	338.50	352.60	378.70	372.70	342.60	380.70	344.60	362.70	400.80	388.80
A 18.85.2		22.22 mm outer dia pipe	Metre	524.60	498.40	524.60	550.80	599.50	588.30	532.10	603.30	535.80	569.60	640.70	618.30
A 18.85.3		28.58 mm outer dia pipe	Metre	614.00	581.90	614.00	646.00	705.60	691.90	623.10	710.20	627.70	668.90	756.00	728.50
A 18.85.4		34.00 mm outer dia pipe	Metre	821.40	821.40	821.40	821.40	821.40	821.40	821.40	821.40	821.40	821.40	821.40	821.40
A 18.85.5		42.70 mm outer dia pipe	Metre	851.40	803.80	851.40	899.00	987.40	967.00	865.00	994.20	871.80	933.00	1062.30	1021.50
A 18.85.6		48.60 mm outer dia pipe	Metre	1129.60	1063.80	1129.60	1195.50	1317.70	1289.50	1148.40	1327.10	1157.80	1242.50	1421.10	1364.70
A 18.86		Providing and fixing stainless steel pipe and fitting of grade AISI 304 as per JIS standard 3448 complete with pressed type fitting (fitting shall be paid for seperately) i/c fixing of the pipe with clamps at 1.00 m spacing including cutting of chases and making good the wall including testing of joints complete as per direction of Engineer-in-charge. (The pipe length inserted in the fitting shall not be measured for payment); Internal Work-Concealed pipe													
A 18.86.1		15.88 mm outer dia pipe	Metre	478.30	462.30	478.30	499.40	529.80	522.80	485.70	533.40	489.60	509.50	562.30	545.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.86.2		22.22 mm outer dia pipe	Metre	664.40	636.20	664.40	697.60	750.60	738.30	675.30	755.90	680.90	716.40	802.20	774.90
A 18.87		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Coupling / Socket)													
A 18.87.1		For 15.88 mm outer dia pipe	Each	97.10	90.80	97.10	103.50	115.30	112.60	98.90	116.20	99.90	108.00	125.30	119.80
A 18.87.2		For 22.22 mm outer dia pipe	Each	103.70	96.90	103.70	110.50	123.10	120.20	105.70	124.10	106.60	115.40	133.80	128.00
A 18.87.3		For 28.58 mm outer dia pipe	Each	146.50	136.90	146.50	156.10	173.90	169.80	149.30	175.30	150.60	163.00	189.00	180.80
A 18.87.4		For 34.00 mm outer dia pipe	Each	215.70	201.60	215.70	229.80	256.00	249.90	219.70	258.00	221.70	239.90	278.20	266.10
A 18.87.5		For 42.20 mm outer dia pipe	Each	260.10	243.10	260.10	277.10	308.70	301.40	265.00	311.20	267.40	289.30	335.50	320.90
A 18.87.6		For 48.60 mm outer dia pipe	Each	296.30	277.00	296.30	315.70	351.70	343.40	301.90	354.50	304.60	329.60	382.20	365.60
A 18.88		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G 116 standard with V-profile or M-profile or O-ring sealing gasket of EPDM material of required as per direction of Engineer-in-charge; (Reducer)													
A 18.88.1		For 22.22 mm x 15.88 mm outer dia pipe	Each	169.60	158.50	169.60	180.70	201.30	196.50	172.70	202.90	174.30	188.60	218.70	209.20
A 18.88.2		For 28.58 mm x 15.88 mm outer dia pipe	Each	232.10	216.90	232.10	247.30	275.50	269.00	236.50	277.70	238.60	258.20	299.40	286.40
A 18.88.3		For 28.58 mm x 22.22 mm outer dia pipe	Each	238.70	223.10	238.70	254.30	283.30	276.60	243.20	285.60	245.40	265.50	307.90	294.50
A 18.88.4		For 34.00 mm x 15.88 mm outer dia pipe	Each	452.80	283.10	302.90	322.70	359.50	351.10	308.60	362.40	311.40	336.90	390.70	373.70
A 18.88.5		For 34.00 mm x 22.22 mm outer dia pipe	Each	307.90	287.70	307.90	328.00	365.40	356.80	313.60	368.30	316.50	342.40	397.10	379.80
A 18.88.6		For 34.00 mm x 28.58 mm outer dia pipe	Each	312.80	292.30	312.80	333.30	371.30	362.50	318.60	374.20	321.60	347.90	403.40	385.90
A 18.88.7		For 42.70 mm x 15.88 mm outer dia pipe	Each	591.00	552.40	591.00	629.70	701.50	684.90	602.10	707.00	607.60	657.30	762.30	729.10
A 18.88.8		For 42.70 mm x 22.22 mm outer dia pipe	Each	596.00	557.00	596.00	635.00	707.40	690.70	607.10	712.90	612.70	662.80	768.60	735.20
A 18.88.9		For 42.70 mm x 28.58 mm outer dia pipe	Each	596.00	557.00	596.00	635.00	707.40	690.70	607.10	712.90	612.70	662.80	768.60	735.20
A 18.88.10		For 42.70 mm x 34.00 mm outer dia pipe	Each	637.10	595.40	637.10	678.80	756.20	738.40	649.00	762.20	655.00	708.60	821.70	786.00
A 18.88.11		For 48.60 mm x 15.88 mm outer dia pipe	Each	675.00	630.80	675.00	719.20	801.20	782.20	687.60	807.50	693.90	750.70	870.60	832.70
A 18.88.12		For 48.60 mm x 22.22 mm outer dia pipe	Each	1009.00	630.80	675.00	719.20	801.20	782.20	687.60	807.50	693.90	750.70	870.60	832.70
A 18.88.13		For 48.60 mm x 28.58 mm outer dia pipe	Each	675.00	630.80	675.00	719.20	801.20	782.20	687.60	807.50	693.90	750.70	870.60	832.70
A 18.88.14		For 48.60 mm x 34.00 mm outer dia pipe	Each	675.00	630.80	675.00	719.20	801.20	782.20	687.60	807.50	693.90	750.70	870.60	832.70
A 18.88.15		For 48.60 mm x 42.70 mm outer dia pipe	Each	675.00	630.80	675.00	719.20	801.20	782.20	687.60	807.50	693.90	750.70	870.60	832.70
A 18.89		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Slip Coupling/Socket)													
A 18.89.1		For 15.88 mm outer dia pipe	Each	77.40	72.30	77.40	82.40	91.80	89.70	78.80	92.60	79.50	86.10	99.80	95.50
A 18.89.2		For 22.22 mm outer dia pipe	Each	103.70	96.90	103.70	110.50	123.10	120.20	105.70	124.10	106.60	115.40	133.80	128.00
A 18.89.3		For 28.58 mm outer dia pipe	Each	146.50	136.90	146.50	156.10	173.90	169.80	149.30	175.30	150.60	163.00	189.00	180.80
A 18.89.4		For 34.00 mm outer dia pipe	Each	322.40	201.60	215.70	229.80	256.00	249.90	219.70	258.00	221.70	239.90	278.20	266.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.89.5		For 42.70 mm outer dia pipe	Each	260.10	243.10	260.10	277.10	308.70	301.40	265.00	311.20	267.40	289.30	335.50	320.90
A 18.89.6		For 48.60 mm outer dia pipe	Each	279.90	261.60	279.90	298.20	332.20	324.30	285.10	334.80	287.70	311.30	361.00	345.30
A 18.90		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Elbow 90 degree)													
A 18.90.1		For 15.88 mm outer dia pipe	Each	95.50	89.20	95.50	101.70	113.30	110.70	97.30	114.20	98.20	106.20	123.20	117.80
A 18.90.2		For 22.22 mm outer dia pipe	Each	103.70	96.90	103.70	110.50	123.10	120.20	105.70	124.10	106.60	115.40	133.80	128.00
A 18.90.3		For 28.58 mm outer dia pipe	Each	158.00	147.70	158.00	168.40	187.60	183.20	161.00	189.10	162.50	175.80	203.80	195.00
A 18.90.4		For 34.00 mm outer dia pipe	Each	179.50	167.70	179.50	191.20	213.00	208.00	182.80	214.70	184.50	199.60	231.40	221.40
A 18.90.5		For 42.70 mm outer dia pipe	Each	191.00	178.50	191.00	203.50	226.70	221.30	194.50	228.50	196.30	212.40	246.30	235.60
A 18.90.6		For 48.60 mm outer dia pipe	Each	246.90	230.80	246.90	263.10	293.10	286.20	251.60	295.40	253.90	274.60	318.50	304.60
A 18.91		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Reducing Elbow 90 degree)													
A 18.91.1		For 22.22 mmx15.88 mm outer dia pipe	Each	243.70	227.70	243.70	259.60	289.20	282.40	248.20	291.50	250.50	271.00	314.20	300.60
A 18.91.2		For 28.58 mmx15.88 mm outer dia pipe	Each	314.40	293.90	314.40	335.00	373.20	364.40	320.30	376.20	323.30	349.70	405.60	387.90
A 18.91.3		For 28.58 mmx22.22 mm outer dia pipe	Each	363.80	340.00	363.80	387.60	431.80	421.60	370.60	435.20	374.00	404.60	469.30	448.80
A 18.91.4		For 34.00 mmx22.22 mm outer dia pipe	Each	472.50	441.60	472.50	503.40	560.80	547.60	481.30	565.20	485.70	525.50	609.40	582.90
A 18.91.5		For 34.00 mmx28.58 mm outer dia pipe	Each	568.00	530.80	568.00	605.10	674.10	658.20	578.60	679.50	583.90	631.70	732.50	700.70
A 18.91.6		For 42.70 mmx34.00 mm outer dia pipe	Each	294.70	275.40	294.70	314.00	349.80	341.50	300.20	352.50	303.00	327.70	380.10	363.50
A 18.92		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Equall Tee)													
A 18.92.1		For 15.88 mm outer dia pipe	Each	261.80	244.60	261.80	278.90	310.70	303.40	266.70	313.10	269.10	291.10	337.60	322.90
A 18.92.2		For 22.22 mm outer dia pipe	Each	380.30	355.40	380.30	405.20	451.40	440.70	387.40	454.90	391.00	423.00	490.50	469.20
A 18.92.3		For 28.58 mm outer dia pipe	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.92.4		For 34.00 mm outer dia pipe	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.92.5		For 42.70 mm outer dia pipe	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.92.6		For 48.60 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.93		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Recucing Tee)													
A 18.93.1		For 22.22 x 15.88 mm outer dia pipe	Each	294.70	275.40	294.70	314.00	349.80	341.50	300.20	352.50	303.00	327.70	380.10	363.50
A 18.93.2		For 28.58 x 15.88 mm outer dia pipe	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.93.3		For 28.58 x 22.22 mm outer dia pipe	Each	671.90	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.93.4		For 34.00 x 15.88 mm outer dia pipe	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.93.5		For 34.00 x 22.22 mm outer dia pipe	Each	1075.50	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.93.6		For 34.00 x 28.58 mm outer dia pipe	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.93.7		For 42.70 x 15.88 mm outer dia pipe	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.93.8		For 42.70 x 22.22 mm outer dia pipe	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.93.9		For 42.70 x 28.58 mm outer dia pipe	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.93.10		For 42.70 x 34.00 mm outer dia pipe	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.93.11		For 48.60 x 15.88 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.93.12		For 48.60 x 22.22 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.93.13		For 48.60 x 28.58 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.93.14		For 48.60 x 34.00 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.93.15		For 48.60 x 42.70 mm outer dia pipe	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Male Thread Tee)													
A 18.94.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	294.70	275.40	294.70	314.00	349.80	341.50	300.20	352.50	303.00	327.70	380.10	363.50
A 18.94.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	329.30	307.70	329.30	350.80	390.80	381.60	335.40	393.90	338.50	366.20	424.70	406.20
A 18.94.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	337.50	315.40	337.50	359.60	400.60	391.10	343.80	403.70	347.00	375.30	435.30	416.40
A 18.94.4		For 28.58 mm outer dia x 15 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.94.5		For 28.58 mm outer dia x 20 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.94.6		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.94.7		For 34.00 mm outer dia x 15 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.94.8		For 34.00 mm outer dia x 20 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.94.9		For 34.00 mm outer dia x 25 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.94.10		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	1075.50	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.94.11		For 42.70 mm outer dia x 15 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.94.12		For 42.70 mm outer dia x 20 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.94.13		For 42.70 mm outer dia x 25 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.94.14		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.94.15		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.94.16		For 48.60 mm outer dia x 15 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94.17		For 48.60 mm outer dia x 20 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94.18		For 48.60 mm outer dia x 25 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94.19		For 48.60 mm outer dia x 32 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94.20		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.94.21		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.95		Providing and fixing required stainless steel fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Female Thread Tee)													
A 18.95.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	294.70	275.40	294.70	314.00	349.80	341.50	300.20	352.50	303.00	327.70	380.10	363.50
A 18.95.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	329.30	307.70	329.30	350.80	390.80	381.60	335.40	393.90	338.50	366.20	424.70	406.20
A 18.95.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	329.30	307.70	329.30	350.80	390.80	381.60	335.40	393.90	338.50	366.20	424.70	406.20
A 18.95.4		For 28.58 mm outer dia x 15 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.95.5		For 28.58 mm outer dia x 20 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.95.6		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	449.40	420.00	449.40	478.90	533.50	520.90	457.80	537.70	462.10	499.90	579.70	554.50
A 18.95.7		For 34.00 mm outer dia x 15 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.95.8		For 34.00 mm outer dia x 20 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.95.9		For 34.00 mm outer dia x 25 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.95.10		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	719.40	672.40	719.40	766.50	853.90	833.80	732.90	860.60	739.60	800.10	927.90	887.50
A 18.95.11		For 42.70 mm outer dia x 15 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.95.12		For 42.70 mm outer dia x 20 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.95.13		For 42.70 mm outer dia x 25 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.95.14		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.95.15		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.95.16		For 48.60 mm outer dia x 15 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.95.17		For 48.60 mm outer dia x 20 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.95.18		For 48.60 mm outer dia x 25 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.95.19		For 48.60 mm outer dia x 32 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.95.20		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.95.21		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1460.30	1364.80	1460.30	1555.80	1733.20	1692.30	1487.60	1746.90	1501.20	1624.10	1883.40	1801.50
A 18.96		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Female Thread Connector/ Adapter)													
A 18.96.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	312.80	292.30	312.80	333.30	371.30	362.50	318.60	374.20	321.60	347.90	403.40	385.90
A 18.96.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	379.00	354.00	379.00	403.00	449.00	439.00	386.00	453.00	389.00	421.00	488.00	467.00
A 18.96.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	390.20	364.70	390.20	415.70	463.10	452.20	397.50	466.80	401.10	433.90	503.20	481.30
A 18.96.4		For 28.58 mm outer dia x 15 mm nominal dia threaded	Each	456.00	426.20	456.00	485.90	541.30	528.50	464.60	545.50	468.80	507.20	588.20	562.60
A 18.96.5		For 28.58 mm outer dia x 20 mm nominal dia threaded	Each	470.90	440.00	470.90	501.70	558.90	545.70	479.70	563.30	484.10	523.70	607.30	580.90
A 18.96.6		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	554.80	518.50	554.80	591.10	658.50	643.00	565.20	663.70	570.40	617.00	715.60	684.40
A 18.96.7		For 34.00 mm outer dia x 25 mm nominal dia threaded	Each	673.30	629.30	673.30	717.40	799.20	780.30	685.90	805.50	692.20	748.90	868.40	830.70
A 18.96.8		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	885.70	827.80	885.70	943.70	1051.30	1026.40	902.30	1059.60	910.60	985.10	1142.30	1092.70
A 18.96.9		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	948.30	886.20	948.30	1010.30	1125.50	1098.90	966.00	1134.40	974.90	1054.60	1223.00	1169.80
A 18.96.10		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	1121.20	1047.80	1121.20	1194.50	1330.70	1299.30	1142.10	1341.20	1152.60	1246.90	1446.00	1383.10
A 18.96.11		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1379.60	1289.40	1379.60	1469.90	1637.50	1598.80	1405.40	1650.40	1418.30	1534.40	1779.30	1702.00
A 18.96.12		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1588.70	1484.80	1588.70	1692.60	1885.70	1841.10	1618.40	1900.50	1633.30	1766.90	2049.00	1959.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.97		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Male Thread Connector/ Adapter)													
A 18.97.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	317.70	297.00	317.70	338.50	377.10	368.20	323.70	380.10	326.70	353.40	409.80	392.00
A 18.97.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	373.70	349.30	373.70	398.20	443.60	433.10	380.70	447.10	384.20	415.60	482.00	461.00
A 18.97.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	408.30	381.60	408.30	435.00	484.60	473.20	415.90	488.40	419.70	454.10	526.60	503.70
A 18.97.4		For 28.58 mm outer dia x 20 mm nominal dia threaded	Each	515.30	481.60	515.30	549.00	611.60	597.20	524.90	616.40	529.70	573.10	664.60	635.70
A 18.97.5		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	526.80	492.40	526.80	561.30	625.30	610.50	536.70	630.20	541.60	585.90	679.50	649.90
A 18.97.6		For 34.00 mm outer dia x 25 mm nominal dia threaded	Each	759.00	709.30	759.00	808.60	900.80	879.50	773.10	907.90	780.20	844.10	978.80	936.30
A 18.97.7		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	930.20	869.30	930.20	991.00	1104.00	1078.00	947.60	1112.70	956.30	1034.50	1199.70	1147.50
A 18.97.8		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	1068.50	998.60	1068.50	1138.40	1268.20	1238.20	1088.40	1278.20	1098.40	1188.30	1378.00	1318.10
A 18.97.9		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	1195.20	1117.00	1195.20	1273.40	1418.60	1385.10	1217.60	1429.80	1228.70	1329.30	1541.50	1474.50
A 18.97.10		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1382.90	1292.40	1382.90	1473.40	1641.40	1602.60	1408.80	1654.30	1421.70	1538.00	1783.60	1706.00
A 18.97.11		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1873.50	1751.00	1873.50	1996.10	2223.70	2171.20	1908.50	2241.20	1926.10	2083.60	2416.30	2311.30
A 18.98		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Valve Connector)													
A 18.98.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	385.20	360.00	385.20	410.40	457.20	446.40	392.40	460.80	396.00	428.40	496.90	475.30
A 18.98.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	454.40	424.70	454.40	484.10	539.30	526.60	462.90	543.60	467.10	505.30	586.00	560.60
A 18.98.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	485.70	453.90	485.70	517.40	576.40	562.80	494.70	581.00	499.30	540.10	626.40	599.10
A 18.98.4		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	698.00	652.40	698.00	743.70	828.50	808.90	711.10	835.00	717.60	776.30	900.30	861.10
A 18.98.5		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	1548.00	1446.70	1548.00	1649.20	1837.30	1793.90	1576.90	1851.80	1591.40	1721.60	1996.40	1909.60
A 18.98.6		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	1440.50	1346.30	1440.50	1534.80	1709.80	1669.40	1467.50	1723.30	1480.90	1602.10	1857.90	1777.10
A 18.98.7		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1936.10	1809.40	1936.10	2062.70	2298.00	2243.70	1972.30	2316.10	1990.40	2153.20	2497.00	2388.40
A 18.99		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Female Threaded Elbow 90°)													
A 18.99.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	246.90	230.80	246.90	263.10	293.10	286.20	251.60	295.40	253.90	274.60	318.50	304.60
A 18.99.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	314.40	293.90	314.40	335.00	373.20	364.40	320.30	376.20	323.30	349.70	405.60	387.90
A 18.99.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	470.10	293.90	314.40	335.00	373.20	364.40	320.30	376.20	323.30	349.70	405.60	387.90
A 18.99.4		For 25.58 mm outer dia x 25 mm nominal dia threaded	Each	337.50	315.40	337.50	359.60	400.60	391.10	343.80	403.70	347.00	375.30	435.30	416.40
A 18.99.5		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	472.50	441.60	472.50	503.40	560.80	547.60	481.30	565.20	485.70	525.50	609.40	582.90
A 18.99.6		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	786.90	735.50	786.90	838.40	934.00	912.00	801.70	941.40	809.00	875.20	1014.90	970.80
A 18.99.7		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	786.90	735.50	786.90	838.40	934.00	912.00	801.70	941.40	809.00	875.20	1014.90	970.80
A 18.99.8		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.99.9		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 18.100		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge; (Male Threaded Elbow 90°)													
A 18.100.1		For 15.88 mm outer dia x 15 mm nominal dia threaded	Each	314.40	293.90	314.40	335.00	373.20	364.40	320.30	376.20	323.30	349.70	405.60	387.90
A 18.100.2		For 22.22 mm outer dia x 15 mm nominal dia threaded	Each	337.50	315.40	337.50	359.60	400.60	391.10	343.80	403.70	347.00	375.30	435.30	416.40
A 18.100.3		For 22.22 mm outer dia x 20 mm nominal dia threaded	Each	337.50	315.40	337.50	359.60	400.60	391.10	343.80	403.70	347.00	375.30	435.30	416.40
A 18.100.4		For 28.58 mm outer dia x 25 mm nominal dia threaded	Each	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20	3388.20
A 18.100.5		For 34.00 mm outer dia x 25 mm nominal dia threaded	Each	472.50	441.60	472.50	503.40	560.80	547.60	481.30	565.20	485.70	525.50	609.40	582.90
A 18.100.6		For 34.00 mm outer dia x 32 mm nominal dia threaded	Each	472.50	441.60	472.50	503.40	560.80	547.60	481.30	565.20	485.70	525.50	609.40	582.90
A 18.100.7		For 42.70 mm outer dia x 32 mm nominal dia threaded	Each	786.90	735.50	786.90	838.40	934.00	912.00	801.70	941.40	809.00	875.20	1014.90	970.80
A 18.100.8		For 42.70 mm outer dia x 40 mm nominal dia threaded	Each	786.90	735.50	786.90	838.40	934.00	912.00	801.70	941.40	809.00	875.20	1014.90	970.80
A 18.100.9		For 48.60 mm outer dia x 40 mm nominal dia threaded	Each	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40	1124.40
A 18.100.10		For 48.60 mm outer dia x 50 mm nominal dia threaded	Each	1124.40	1050.90	1124.40	1198.00	1334.60	1303.10	1145.50	1345.10	1156.00	1250.60	1450.20	1387.20
A 18.101		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge: (Cap)													
A 18.101.1		For 15.88 mm outer dia pipe	Each	74.10	69.20	74.10	78.90	87.90	85.90	75.50	88.60	76.20	82.40	95.50	91.40
A 18.101.2		For 22.22 mm outer dia pipe	Each	105.40	98.50	105.40	112.30	125.10	122.10	107.30	126.00	108.30	117.20	135.90	130.00
A 18.101.3		For 28.58 mm outer dia pipe	Each	138.30	129.20	138.30	147.30	164.10	160.30	140.90	165.40	142.20	153.80	178.40	170.60
A 18.101.4		For 34.00 mm outer dia pipe	Each	268.40	250.80	268.40	285.90	318.50	311.00	273.40	321.00	275.90	298.40	346.10	331.10
A 18.101.5		For 42.70 mm outer dia pipe	Each	388.50	363.10	388.50	414.00	461.20	450.30	395.80	464.80	399.40	432.10	501.10	479.30
A 18.101.6		For 48.60 mm outer dia pipe	Each	492.30	460.00	492.30	524.50	584.30	570.50	501.50	588.90	506.10	547.50	634.90	607.30
A 18.102		Providing and fixing required Stainless Steel Fitting of press fit design of grade AISI 304 conforming to JWWA G116 standard with V-profile or M-profile and O-ring sealing gasket of EPDM material of required dia as per direction of Engineer-in-charge: (Pipe Bridge)													
A 18.102.1		For 15.88 mm outer dia pipe	Each	352.30	329.30	352.30	375.40	418.20	408.30	358.90	421.50	362.20	391.80	454.40	434.60
A 18.102.2		For 22.22 mm outer dia pipe	Each	446.20	417.00	446.20	475.30	529.50	517.00	454.50	533.70	458.70	496.20	575.40	550.40
A 18.102.3		For 28.58 mm outer dia pipe	Each	670.10	626.20	670.10	713.90	795.30	776.50	682.60	801.60	688.80	745.20	864.20	826.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		19.0 DRAINAGE													
A 19.1		Providing, laying and jointing glazed stoneware pipes class SP-1 with stiff mixture of cement mortar in the proportion of 1:1 (1 cement : 1 fine sand) including testing of joints etc. complete:													
A 19.1.1		100 mm diameter	Metre	326.00	313.70	326.00	339.40	362.40	357.10	329.80	364.70	332.20	347.70	384.30	372.60
A 19.1.2		150 mm diameter	Metre	529.60	484.10	529.60	554.20	596.60	586.80	536.70	600.70	541.00	569.50	636.70	615.30
A 19.1.3		200 mm diameter	Metre	876.20	832.90	876.20	922.60	1003.90	985.10	889.50	1011.40	897.30	952.40	1079.00	1038.80
A 19.1.4		250 mm diameter	Metre	1316.80	1247.90	1316.80	1391.10	1520.40	1490.60	1338.10	1532.50	1350.80	1438.20	1641.20	1576.60
A 19.1.5		300 mm diameter	Metre	1838.80	1737.00	1838.80	1948.10	2139.20	2095.10	1870.20	2156.90	1888.60	2017.90	2316.60	2221.70
A 19.2		Providing and laying cement concrete 1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size) all-round S.W. pipes including bed concrete as per standard design :													
A 19.2.1		100 mm diameter S.W. pipe	Metre	1154.20	1090.30	1154.20	1380.30	1517.90	1486.20	1264.30	1570.60	1327.50	1380.60	1855.20	1697.00
A 19.2.2		150 mm diameter S.W. pipe	Metre	1411.60	1333.40	1411.60	1688.10	1856.40	1817.50	1546.20	1920.80	1623.50	1688.50	2268.90	2075.40
A 19.2.3		200 mm diameter S.W. pipe	Metre	1645.60	1554.50	1645.60	1967.90	2164.00	2118.80	1802.50	2239.10	1892.60	1968.40	2644.90	2419.40
A 19.2.5		250 mm diameter S.W. pipe	Metre	1902.90	1797.60	1902.90	2275.70	2502.50	2450.20	2084.40	2589.30	2188.60	2276.20	3058.60	2797.80
A 19.3		Providing and laying cement concrete 1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size) upto haunches of S.W. pipes including bed concrete as per standard design :													
A 19.3.1		100 mm diameter S.W. pipe	Metre	548.60	518.20	548.60	656.00	721.40	706.30	600.90	746.40	630.90	656.20	881.70	806.60
A 19.3.2		150 mm diameter S.W. pipe	Metre	889.10	839.80	889.10	1063.20	1169.20	1144.70	973.90	1209.80	1022.50	1063.50	1429.00	1307.20
A 19.3.3		200 mm diameter S.W. pipe	Metre	1045.10	987.20	1045.10	1249.80	1374.30	1345.60	1144.70	1422.00	1201.90	1250.00	1679.70	1536.50
A 19.3.4		250 mm diameter S.W. pipe	Metre	1216.60	1149.30	1216.60	1454.90	1600.00	1566.50	1332.60	1655.50	1399.20	1455.30	1955.50	1788.80
A 19.3.5		300 mm diameter S.W. pipe	Metre	1403.80	1326.10	1403.80	1678.80	1846.10	1807.50	1537.70	1910.10	1614.50	1679.20	2256.30	2064.00
A 19.4		Providing and fixing square-mouth S.W. gully trap class SP-1 complete with C.I. grating brick masonry chamber with water tight C. I. cover with frame of 300 x300 mm size (inside) the weight of cover to be not less than 4.50 kg and frame to be not less than 2.70 kg as per standard design:													
A 19.4.1		100 x 100 mm size P type													
A 19.4.1.1	MF	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	3250.60	3640.10	4000.80	4804.50	5540.30	5370.50	4240.80	5784.10	4531.30	4853.60	7145.40	6384.70
A 19.4.1.2	MF	With Sewer bricks conforming to IS 4885	Each	2763.90	2582.00	2763.90	3105.80	3467.80	3384.20	2889.60	3546.90	2981.60	3180.90	4043.40	3760.90
A 19.4.2		150 x 100 mm size P type													
A 19.4.2.1	MF	With common burnt clay (non modular) F.P.S. bricks of class designation 7.5	Each	3259.40	2972.10	3259.40	3867.10	4448.60	4314.40	3437.70	4630.50	3653.80	3919.30	5660.70	5083.70
A 19.4.2.2	MF	With Sewer bricks conforming to IS:4885	Each	2772.60	2590.10	2772.60	3104.40	3466.30	3382.80	2892.40	3542.80	2980.90	3182.90	4027.60	3751.30
A 19.4.3		180 x 150 mm size P type													
A 19.4.3.1	MF	With common burnt clay F.P.S. (non-modular)bricks of class designation 7.5	Each	3380.30	3084.10	3380.30	3993.20	4590.50	4452.70	3560.20	4772.00	3775.60	4053.50	5807.50	5226.80
A 19.4.3.2	MF	With Sewer bricks conforming to IS : 4885	Each	2893.60	2702.10	2893.60	3230.60	3608.30	3521.10	3014.90	3684.30	3102.60	3317.10	#NAME?	3894.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.5		Dismantling of old S.W. pipes including breaking of joints and bed concrete stacking of useful materials near the site within 50 m lead and disposal of unserviceable materials into municipal dumps:													
A 19.5.1		100 mm diameter	Metre	51.20	51.20	51.20	51.20	51.20	51.20	51.20	51.20	51.20	51.20	51.20	51.20
A 19.5.2		150 mm diameter	Metre	56.60	56.60	56.60	56.60	56.60	56.60	56.60	56.60	56.60	56.60	56.60	56.60
A 19.5.3		200 mm diameter	Metre	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20	60.20
A 19.5.5		250 mm diameter	Metre	63.80	63.80	63.80	63.80	63.80	63.80	63.80	63.80	63.80	63.80	63.80	63.80
A 19.5.6		300 mm diameter	Metre	67.40	67.40	67.40	67.40	67.40	67.40	67.40	67.40	67.40	67.40	67.40	67.40
A 19.5.7		350 mm diameter	Metre	77.70	77.70	77.70	77.70	77.70	77.70	77.70	77.70	77.70	77.70	77.70	77.70
A 19.5.8		400 mm diameter	Metre	84.90	84.90	84.90	84.90	84.90	84.90	84.90	84.90	84.90	84.90	84.90	84.90
A 19.5.9		450 mm diameter	Metre	88.50	88.50	88.50	88.50	88.50	88.50	88.50	88.50	88.50	88.50	88.50	88.50
A 19.6		Providing and laying non-pressure NP2 class (light duty) R.C.C. pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete:													
A 19.6.1		100 mm dia. R.C.C. pipe	Metre	464.70	440.80	464.70	489.80	534.40	524.10	471.90	538.40	475.90	506.30	574.90	553.10
A 19.6.2		150 mm dia. R.C.C. pipe	Metre	511.30	485.60	511.30	538.40	586.40	575.40	519.00	590.80	523.50	556.10	630.50	606.80
A 19.6.3		250 mm dia. R.C.C. pipe	Metre	828.90	787.10	828.90	873.00	951.10	933.10	841.50	958.10	848.70	901.80	1022.30	984.10
A 19.6.4		300 mm dia. R.C.C. pipe	Metre	969.30	917.30	969.30	1024.20	1121.50	1099.00	984.90	1130.20	993.90	1060.10	1210.10	1162.50
A 19.6.5		450 mm dia. R.C.C. pipe	Metre	1575.40	1486.50	1575.40	1670.50	1837.10	1798.60	1602.50	1852.50	1618.60	1731.30	1991.80	1909.00
A 19.6.6		500 mm dia. R.C.C. pipe	Metre	1893.80	1785.10	1893.80	2009.20	2212.80	2165.80	1926.70	2231.30	1945.90	2083.90	2400.00	2299.60
A 19.6.7		600 mm dia. R.C.C. pipe	Metre	2237.90	2108.30	2237.90	2375.50	2618.00	2562.00	2277.00	2640.10	2300.00	2464.40	2841.30	2721.60
A 19.6.8		700 mm dia. R.C.C. pipe	Metre	2924.00	2751.80	2924.00	3105.60	3427.70	3353.40	2975.70	3456.50	3005.50	3224.50	3721.30	3563.60
A 19.6.9		800 mm dia. R.C.C. pipe	Metre	3514.60	3305.50	3514.60	3734.40	4125.30	4035.10	3577.20	4159.90	3613.00	3879.00	4480.00	4289.30
A 19.6.10		900 mm dia. R.C.C. pipe	Metre	4767.10	4480.00	4767.10	5066.60	5602.70	5479.00	4852.40	5649.20	4900.30	5266.10	6084.20	5824.80
A 19.6.11		1000 mm dia. R.C.C. pipe	Metre	5562.40	5229.40	5562.40	5909.40	6531.20	6387.70	5661.30	6585.00	5716.50	6141.10	7088.60	6788.20
A 19.6.12		1100 mm dia. R.C.C. pipe	Metre	6221.80	5854.70	6221.80	6604.40	7289.90	7131.70	6330.90	7349.30	6391.80	6859.80	7904.70	7573.40
A 19.6.13		1200 mm dia. R.C.C. pipe	Metre	6942.80	6539.00	6942.80	7363.90	8118.00	7944.00	7062.80	8183.40	7130.00	7644.70	8794.80	8430.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.7		Constructing brick masonry manhole in cement mortar 1:4 (1 cement: 4 coarse sand) R.C.C. top slab with 1:1.5:3 mix (1 cement :1.5 coarse sand (zone III) : 3 graded stone aggregate 20mm nominal size), foundation concrete 1:4:8 mix (1 cement : 4 coarse sand: 8 graded stone aggregate 40mm nominal size) inside plastering 12mm thick with cement mortar 1:3 (1 cement : 3 coarse sand) finished with floating coat of neat cement and making channels in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) finished with a floating coat of neat cement complete as per standard design:													
A 19.7.1		Inside size 90x80cm and 45cm deep including C.I. cover with frame (light duty) 455x610mm internal diamensions, total weight of cover and frame to be not less than 38kg (weight of cover 23kg and weight of frame 15 kg)													
A 19.7.1.1	MF	With common burnt clay F.P.S. (non modular)bricks of class designation 7.5	Each	15263.80	14248.30	15263.80	17744.20	19867.60	19377.50	16086.80	20591.10	16950.10	17861.00	24605.10	22365.10
A 19.7.1.2	MF	With Sewer bricks conforming to IS : 4885	Each	13990.80	13249.10	13990.80	15749.50	17298.70	16941.10	14660.60	17746.30	15190.10	15935.10	20333.80	18880.30
A 19.7.2		Inside size 120x90cm and 90cm deep including C.I. cover with frame (medium duty) 500mm internal diameter, total weight of cover and frame to be not less than 116 kg (weight of cover 58 kg and weight of frame 58 kg)													
A 19.7.2.1	MF	With common burnt clay F.P.S. (non modular)bricks of class designation 7.5	Each	31993.80	29681.60	31993.80	37134.80	41893.80	40795.30	33530.40	43442.00	35373.50	37488.50	52126.30	47271.30
A 19.7.2.2	MF	With Sewer bricks conforming to IS : 4885	Each	28512.00	26948.60	28512.00	31679.00	34867.00	34131.00	29629.30	35660.60	30559.40	32220.60	40443.20	37739.20
A 19.7.3		Inside size 120x90cm and 90cm deep including C.I. cover with frame (heavy duty) 560mm internal diameter, total weight of cover and frame to be not less than 208 kg (weight of cover 108 kg and weight of frame 100 kg)													
A 19.7.3.1	MF	With common burnt clay F.P.S. (non modular)bricks of class designation 7.5	Each	38618.20	35963.70	38618.20	43916.20	49282.70	48044.00	40224.00	50780.40	41992.20	44625.20	59518.50	54602.10
A 19.7.3.2	MF	With Sewer bricks conforming to IS : 4885	Each	35623.10	33612.80	35623.10	39223.00	43238.20	42311.30	36868.30	44086.70	37851.00	40093.70	49468.50	46402.40
A 19.8		Extra for depth for manholes													
A 19.8.1		Size 90x80cm													
A 19.8.1.1	MF	With common burnt clay F.P.S.(non modular) bricks of class designation 7.5	Metre	12093.70	10732.40	12093.70	15177.40	17989.30	17340.30	12802.20	19068.30	14096.50	15180.80	24897.00	21658.40
A 19.8.1.2	MF	With Sewer bricks conforming to IS : 4885	Metre	8387.20	7823.10	8387.20	9369.60	10509.10	10246.00	8649.50	10784.90	8971.90	9573.00	12460.10	11511.30
A 19.8.2		Size 120x90cm	Metre												
A 19.8.2.1	MF	With common burnt clay F.P.S.(non modular) bricks of class designation 7.5	Metre	14470.40	12845.30	14470.40	18152.40	21509.60	20734.70	15316.70	22797.80	16862.00	18156.50	29756.70	25890.20
A 19.8.2.2	MF	With Sewer bricks conforming to IS : 4885	Metre	10052.60	9377.70	10052.60	11230.00	12593.90	12279.00	10366.90	12924.70	10753.80	11472.50	14933.00	13795.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.9		Constructing brick masonry circular type manhole 0.91m internal dia at bottom and 0.56m dia at top in cement mortar 1:4 (1 cement :4 coarse sand), inside cement plaster 12 mm thick with cement mortar 1:3 (1 cement : 3 coarse sand) finished with a floating coat of neat cement, foundation concrete 1:3:6 mix (1 cement : 3 coarse sand 6 graded stone aggregate 40mm nominal size), and making necessary channel in cment concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) finished with a floating coat of neat cement, all complete as per standard design :													
A 19.9.1		0.91 m deep with S.F.R.C. cover and frame (heavy duty, HD-20 grade designation) 560mm internal diameter conforming to I.S. 12592, total weight of cover and frame to be not less than 182kg., fixed in cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20mm nominal size) including centering, shuttering all complete. (Excavation, foot rests and 12mm thick cement plaster at the external surface shall be paid for separately):													
A 19.9.1.1	MF	With common burnt clay F.P.S.(non modular) bricks of class designation 7.5	Each	10504.00	9539.20	10504.00	12660.30	14651.00	14191.60	11066.50	15356.30	11909.70	12735.80	19234.10	17073.00
A 19.9.1.2	MF	With Sewer bricks conforming to IS : 4885	Each	13914.60	13101.30	13914.60	15948.30	17652.30	17259.00	14726.90	18160.90	15329.70	16131.90	21075.70	19440.00
A 19.10		Extra depth for circular type manhole 0.91m internal dia (at bottom) beyond 0.91m to 1.67m													
A 19.10.1		With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	Metre	10340.10	9189.80	10340.10	12951.60	15329.70	14780.80	10943.00	16242.10	12037.50	12954.50	21171.20	18432.50
A 19.10.2		With Sewer bricks conforming IS : 4885	Metre	7236.70	6753.70	7236.70	8088.60	9066.40	8840.60	7465.80	9306.20	7746.60	8259.00	10757.50	9936.10
A 19.11		Constructing brick masonry circular manhole 1.22m internal dia at bottom and 0.56m dia at top in cement mortar 1:4 (1 cement :4 coarse sand) inside cement plaster 12mm thick with cement mortar 1:3 (1 cement :3 coarse sand) finished with a floating coat of neat cement foundation concrete 1:3:6 (1 cement : 3 coarse sand: 6 graded stone aggregate 40mm nominal size) and making necessary channel in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) finished with a floating coat of neat cement, all complete as per standard design :													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.11.1		1.68 m deep with SFRC Cover and frame (heavy duty HD-20 grade designation) 560mm internal diameter conforming to I.S. 12592, total weight of cover and frame to be not less than 182kg. fixed in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) including centering, shuttering all complete. (Excavation, foot rests and 12 mm thick cement plaster at the external surface shall be paid for separately) :													
A 19.11.1.1	MF	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	Each	31569.50	28919.20	31569.50	38300.60	43860.70	42577.40	33693.10	45934.70	36178.20	38381.50	57207.50	50937.50
A 19.11.1.2	MF	With Sewer bricks conforming IS : 4885	Each	26651.10	25055.00	26651.10	30603.00	33951.50	33178.60	28184.50	34963.10	29384.20	30948.60	40742.50	37501.00
A 19.12		Extra depth for circular type manhole 1.22m internal dia (at bottom) beyond 1.68 m to 2.29 m													
A 19.12.1	MF	With common burnt clay F.P.S (non-modular) bricks of class designation 7.5	Metre	13398.80	11902.70	13398.80	16790.10	19881.60	19168.00	14178.80	21067.80	15601.70	16793.90	27475.70	23915.30
A 19.12.2	MF	With Sewer bricks conforming to IS : 4885	Metre	9348.00	8723.20	9348.00	10442.70	11706.60	11414.80	9640.30	12014.90	10001.00	10665.20	13883.50	12825.60
A 19.13		Constructing brick masonry circular manhole 1.52m internal dia at bottom and 0.56m dia at top in cement mortar 1:4 (1 cement :4 coarse sand) inside cement plaster 12mm thick with cement mortar 1:3 (1 cement :3 coarse sand) finished with a floating coat of neat cement foundation concrete 1:3:6 (1 cement : 3 coarse sand: 6 graded stone aggregate 40mm nominal size) and making necessary channel in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) finished with a floating coat of neat cement all complete as per standard design													
A 19.13.1		2.30 m deep with SFRC Cover and frame (heavy duty HD- 20 grade designation) 560 mm internal diameter conforming to I.S. 12592, total weight of cover and frame to be not less than 182 kg., fixed in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20mm nominal size) including centering, shuttering all complete. (Excavation, foot rests and 12 mm thick cement plaster at the external surface shall be paid for separately)													
A 19.13.1.1	MF	With common burnt clay F.P.S (non-modular) bricks of class designation 7.5	Each	43879.80	38852.90	43879.80	54859.10	65206.70	62818.60	46203.90	69120.00	50895.80	54942.70	90326.80	78537.60
A 19.13.1.2	MF	With Sewer bricks conforming to IS : 4885	Each	56127.50	52649.90	56127.50	64294.50	71535.70	69864.30	59177.40	73647.80	61677.60	65136.20	85825.80	78985.50
A 19.14		Extra depth for circular type manhole 1.52m internal dia(at bottom) beyond 2.30m													
A 19.14.1	MF	With common burnt clay F.P.S (non-modular) bricks of class designation 7.5	Metre	32355.30	28591.70	32355.30	40858.40	48619.70	46828.50	34300.20	51599.10	37874.60	40865.90	67693.30	58751.30
A 19.14.2	MF	With Sewer bricks conforming IS : 4885	Metre	21880.30	20369.50	21880.30	24444.60	27479.90	26779.20	22563.90	28189.10	23391.70	25017.60	32545.10	30074.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.15		Providing M.S. foot rests including fixing in manholes with 20x20x10 cm cement concrete blocks 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) as per standard design.													
A 19.15.1		With 20x20 mm square bar	Each	449.80	445.50	449.80	461.60	470.50	468.40	454.60	473.60	458.30	462.00	490.80	481.20
A 19.15.2		With 20 mm diameter round bar	Each	391.60	387.90	391.60	402.10	409.80	408.00	396.00	412.50	399.20	402.40	427.40	419.10
A 19.16		Providing orange colour safety foot rest of minimum 6mm thick plastic encapsulated as per IS : 10910 on 12mm dia steel bar conforming to IS : 1786 having minimum cross section as 23 mmx25mm and over all minimum length 263mm and width as 165mm with minimum 112mm space between protruded legs having 2 mm tread on top surface by ribbing or chequering besides necessary and adequate anchoring projections on tail length on 138 mm as per standard drawing and suitable to withstand the bend test and chemical resistance test as per specifications and having manufacture's permanent identification mark to be visible, even after fixing, including fixing in manholes with 30x20x15 cm cement concrete block 1:3:6 (1 cement :3 coarse sand :6 graded stone aggregate 20 mm nominal size) complete as per design.	Each	479.80	463.00	479.80	507.80	540.40	532.90	490.80	545.80	497.00	516.70	583.30	561.70
A 19.17		Replacement of M.S. foot rests in manholes including dismantling concrete blocks and fixing with 20x20x10cm cement concrete blocks 1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size).													
A 19.17.1		With 20x20 mm square bar.	Each	532.10	527.80	532.10	543.90	552.80	550.70	536.90	555.90	540.60	544.30	573.10	563.50
A 19.17.2		With 20 mm diameter round bar.	Each	473.90	470.20	473.90	484.40	492.10	490.30	478.20	494.80	481.40	484.70	509.60	501.40
A 19.18		Supplying and fixing C.I. cover without frame for manholes:													
A 19.18.1		455x610 mm rectangular C.I. cover (light duty) the weight of the cover to be not less than 23 kg.	Each	1594.00	1494.40	1594.00	1693.50	1878.40	1835.70	1622.40	1892.60	1636.60	1764.60	2034.80	1949.50
A 19.18.2		500 mm diameter C. I. cover (medium duty) the weight of the cover to be not less than 58 kg.	Each	3903.20	3652.50	3903.20	4153.80	4619.20	4511.80	3974.80	4655.00	4010.60	4332.80	5013.10	4798.20
A 19.18.3		560 mm diameter C.I. cover (heavy duty) the weight of the cover to be not less than 108 kg.	Each	8357.00	7815.00	8357.00	8899.00	9905.50	9673.30	8511.80	9983.00	8589.30	9286.10	10757.20	10292.70
A 19.19		Providing and fixing in position precast R.C.C. manhole cover and frame of required shape and approved quality.													
A 19.19.1		L D- 2.5													
A 19.19.1.1		Rectangular shape 600x450mm internal dimensions	Each	1576.80	1479.20	1576.80	1714.00	1903.40	1859.70	1620.00	1932.10	1652.30	1769.20	2137.80	2018.60
A 19.19.1.2		Square shape 450mm internal dimensions	Each	1413.50	1326.60	1413.50	1540.20	1709.70	1670.60	1453.80	1736.90	1484.50	1587.70	1927.60	1817.40
A 19.19.1.3		Circular shape 450mm internal diameter	Each	1312.50	1230.80	1312.50	1423.90	1581.70	1545.30	1347.30	1604.40	1372.70	1471.30	1770.80	1674.20
A 19.19.2		MD-10													
A 19.19.2.1		Square shape 450mm internal dimension	Each	1578.80	1481.10	1578.80	1716.20	1905.80	1862.00	1622.10	1934.50	1654.40	1771.50	2140.40	2021.10
A 19.19.2.2		Circular shape 500mm internal diameter	Each	1322.80	1240.40	1322.80	1434.90	1593.90	1557.20	1357.80	1616.70	1383.30	1482.80	1784.10	1686.80
A 19.19.3		H D-20													
A 19.19.3.1		Circular shape 560mm internal diameter	Each	1859.10	1741.60	1859.10	2006.30	2230.50	2178.80	1904.20	2258.30	1934.70	2079.30	2475.90	2348.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.19.4		EHD - 35													
A 19.19.4.1		Circular shape 560mm internal diameter	Each	2336.60	2187.80	2336.60	2515.00	2797.20	2732.10	2390.50	2829.50	2425.50	2610.30	3091.60	2937.50
A 19.20		Supplying and fixing C.I. cover 300x300mm without frame for gully trap (standard pattern) the weight of cover to be not less than 4.5kg.	Each	812.30	760.30	812.30	864.20	960.70	938.40	827.10	968.10	834.50	901.30	1042.30	997.80
A 19.21		Making connection of drain or sewer line with existing manhole including breaking into and making good the walls, floors with cement concrete 1:2:4 mix (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size) cement plastered on both sides with cement mortar 1:3 (1 cement: 3 coarse sand) finished with a floating coat of neat cement and making necessary channels for the drain etc. complete:													
A 19.21.1		For pipes 100 to 250 mm diameter	Each	619.70	605.90	619.70	650.10	679.30	672.50	629.20	687.90	639.50	653.30	737.60	709.70
A 19.21.2		For pipes 250 to 300 mm diameter	Each	747.50	727.30	747.50	796.10	839.80	829.70	763.20	853.90	780.00	799.50	933.20	888.80
A 19.21.3		For pipes 350 to 450 mm diameter	Each	1091.30	1059.70	1091.30	1168.50	1237.00	1221.20	1116.00	1259.80	1143.10	1173.00	1386.80	1315.80
A 19.22		Providing sand cast iron drop connection externally for 60 cm drop frm branch sewer line to main sewer manhole including inspection and cleaning eye with chain and lid, sand cast iron drop pipe and bench encased all-round with cement concreete 1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size) with all centering and shuttering required, cutting holes in walls and making good with brick work in cement mortar 1:4 (1 cement : 4 coarse sand) plastered with cement mortar 1:3 (1 cement : 3 coarse sand) on inside of the manhole wall, lead caulked joints between sand cast iron pipes and fittings, stiff cement mortar 1:1 (1 cement : 1 fine sand) joints between sand cast iron tee and S.W. pipe, making required channels complete as per standard design and specifications :													
A 19.22.1		100 mm dia sand cast iron drop connection	Each	9778.70	9250.20	9582.80	10158.90	10805.90	10656.80	9810.50	10921.80	9943.10	10325.30	11701.20	11253.40
A 19.22.2		150 mm dia sand cast iron drop connection	Each	13275.50	12796.10	13275.50	14072.50	15001.00	14786.40	13588.50	15157.00	13765.10	14323.90	16229.90	15611.30
A 19.23		Extra for depth beyond 60 cm of sand cast iron drop connection complete													
A 19.23.1		For 100 mm dia sand cast iron drop connection	Metre	3001.90	2850.90	3001.90	3328.40	3629.40	3560.00	3144.40	3698.00	3224.30	3387.30	4122.90	3881.60
A 19.23.2		For 150 mm dia sand cast iron drop connection	Metre	16156.20	15174.40	16156.20	19330.00	21408.70	20929.00	17677.70	22137.20	18548.10	19418.70	26153.00	23914.10
A 19.24		Dismantling of manhole including R.C.C. top slab, C.I. cover with frame including stacking of useful materials near the site and disposal of unserviceable materials within 50 m lead as per direction of Engineer-in-Charge													
A 19.24.1		Rectangular manhole 90x80 cm and 45 cm deep	Each	1477.00	1474.70	1477.00	1479.40	1483.90	1482.90	1477.70	1484.20	1478.10	1481.10	1487.70	1485.60
A 19.24.2		Rectangular manhole 120x90 cm and 90 cm deep	Each	2593.40	2590.50	2593.40	2596.40	2602.00	2600.70	2594.20	2602.40	2594.70	2598.60	2606.70	2604.10
A 19.24.3		Rectangular arch type manhole 140x90cm and 2.45m deep	Each	4906.30	4900.70	4906.30	4911.90	4922.60	4920.20	4907.80	4923.40	4908.70	4916.10	4931.70	4926.70
A 19.24.4		Circular manhole 122 cm diameter and 1.68 m deep	Each	3758.70	3753.30	3758.70	3764.30	3774.60	3772.20	3760.20	3775.40	3761.20	3768.30	3783.40	3778.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.25		Extra for depth of manholes dismantled:													
A 19.25.1		Rectangular manhole 90x80 cm and beyond 45 cm deep	Metre	1182.30	1181.40	1182.30	1183.20	1184.90	1184.50	1182.50	1185.10	1182.70	1183.90	1186.40	1185.60
A 19.25.2		Rectangular manhole 120x90 cm and beyond 90 cm deep	Metre	1408.10	1407.10	1408.10	1409.10	1411.00	1410.60	1408.30	1411.10	1408.50	1409.80	1412.60	1411.70
A 19.25.3		Rectangular arch type manhole 140x90 cm and beyond 2.45m deep (upto 4.25 m depth)	Metre	1139.90	1139.30	1139.90	1140.40	1141.40	1141.20	1140.00	1141.50	1140.10	1140.80	1142.40	1141.80
A 19.25.4		Circular manhole 122 cm diameter and beyond 1.68 m deep (upto 2.29 m depth)	Metre	-268.90	1246.20	1246.80	1247.40	1248.50	1248.20	1247.00	1248.50	1246.90	1247.70	1249.40	1248.80
A 19.26		Raising manhole cover and frame slab to required level including dismantling existing slab and making good the damage as required (Raising depth of manhole to be paid separately).													
A 19.26.1		Rectangular manhole 90x80 cm with rectangular cover 600x450 mm of grade LID - 2.5	Each	2850.90	2751.70	2850.90	3131.10	3354.10	3302.60	2948.70	3435.70	3046.40	3136.30	3881.00	3633.10
A 19.26.2		Rectangular manhole 120x90 cm with circular cover 500 mm dia of grade MD - 10	Each	4453.00	4302.00	4453.00	4881.00	5220.80	5142.30	4602.40	5345.50	4751.80	4888.40	6025.90	5647.30
A 19.26.3		Rectangular manhole 120x90 cm with circular cover 560 mm dia of grade HD - 20.	Each	4139.40	5321.50	5507.70	6036.10	6455.20	6358.40	5692.20	6609.10	5876.70	6045.00	7449.10	6981.70
A 19.26.4		Circular manhole 140 cm dia with circular cover 600 mm dia of grade EHD - 35.	Each	334.70	317.80	334.70	378.00	413.40	405.30	353.80	423.20	365.40	382.80	480.50	448.30
A 19.27		Constructing brick masonry road gully chamber 50x45x60 cm with bricks in cement mortar 1:4 (1 cement :4 coarse sand) including 500x450 mm precast R.C.C. horizontal grating with frame complete as per standard design:													
A 19.27.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	7151.60	6546.50	7151.60	8592.60	9842.90	9554.40	7601.50	10279.30	8122.80	8648.30	12686.80	11344.30
A 19.28		Constructing brick masonry road gully chamber 45x45x77.5 cm with bricks in cement mortar 1:4 (1 cement :4 coarse sand) with precast R.C.C. vertical gratingcomplete as per standard design:													
A 19.28.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	8374.60	7637.90	8374.60	10118.70	11647.20	11294.40	8856.90	12214.10	9535.80	10145.30	15298.80	13582.90
A 19.29		Constructing brick masonry road gully chamber 110x50x77.5 cm with bricks in cement mortar 1:4 (1 cement :4 coarse sand) including 500x450 mm precast R.C.C. horizontal grating with frame and vertical grating complete as per standard design :													
A 19.29.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	13447.90	12367.00	13447.90	16005.10	18245.00	17728.00	14207.20	19041.50	15159.30	16086.80	23416.70	20887.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.30		Constructing brick masonry chamber for underground C.I. inspection chamber and bends with bricks in cement mortar 1:4 (1 cement : 4 coarse sand) C.I. cover with frame (light duty) 455 x 610 mm internal dimensions, total weight of cover with frame to be not less than 38 kg (weight of cover 23 kg and weight of frame 15 kg) R.C.C. top slab with 1:1.5:3 mix (1 cement :1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size) foundation concrete 1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size), inside plastering 12 mm thick with cement mortar 1:3 (1 cement : 3 coarse sand) finished smooth with a floating coat of neat cement on walls and bed concrete etc. complete as per standard design:													
A 19.30.1		Inside dimensions 455x610 mm and 45 cm deep for single pipe line.													
A 19.30.1.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	9108.50	8414.50	9108.50	10447.30	11790.90	11419.30	9505.30	12116.20	9932.10	10609.70	14354.50	#####
A 19.30.2		Inside dimensions 500x700 mm and 45 cm deep for pipe line with one or two inlets.													
A 19.30.2.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	10184.20	9449.20	10184.20	11635.20	13067.10	12675.00	10619.70	13425.40	11085.90	11799.00	15843.00	#####
A 19.30.3		Inside dimensions 600x 850 mm and 45 cm deep for pipe line with three or more inletes.													
A 19.30.3.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	11779.00	10944.10	11779.00	13492.20	15136.60	14695.50	12298.80	15575.30	12861.40	13657.80	18428.50	#####
A 19.31		Extra for depth beyond 45 cm of brick masonry chamber.													
A 19.31.1		For 455x610 mm size.													
A 19.31.1.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Metre	8447.60	7489.80	8447.60	10616.00	12593.60	12137.20	8945.30	13352.60	9855.70	10618.20	17452.40	15174.50
A 19.31.2		For 500x700 mm size.													
A 19.31.2.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Metre	9204.70	8163.30	9204.70	11562.80	13713.30	13217.00	9746.10	14538.60	10736.10	11565.20	18996.70	16519.70
A 19.31.3		For 600x850 mm size.													
A 19.31.3.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Metre	10703.80	9495.90	10703.80	13439.50	15934.30	15358.40	11332.10	16891.60	12480.50	13442.40	22063.10	19189.70
A 19.32		Making soak pit 2.5 m diameter 3.0 metre deep with 45 x 45 cm dry brick honey comb shaft with bricks and S.W. drain pipe 100 mm diameter, 1.8 m long complete as per standard design.													
A 19.32.1	MF	With common burnt clay F.P.S. (non-modular) bricks of class designation 7.5	Each	27202.40	25855.80	27202.40	28945.70	31505.60	30914.80	27657.60	31904.80	28107.40	29677.40	34733.80	33097.10
A 19.33		Constructing soak pit 1.20x1.20x1.20m filled with brickbats including S.W. drain pipe 100 mm diameter and 1.20 m long complete as per standard design.	Each	3647.10	3459.70	3647.10	3834.50	4182.60	4102.20	3700.60	4209.30	3727.40	3968.40	4477.10	4316.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 19.34		Providing and fixing S.W. intercepting trap in manholes with stiff mixture of cement mortar 1:1 (1 cement : 1 fine sand) including testing of joints etc. complete.													
A 19.34.1		100 mm dia.	Each	415.10	393.10	415.10	439.80	481.50	471.90	422.20	485.80	426.70	454.60	522.30	500.70
A 9.34.2		150 mm dia.	Each	559.60	530.30	559.60	592.70	648.20	635.40	569.10	654.00	575.30	612.20	703.00	674.00
A 19.35		Providing and laying Non Pressure NP-3 class (Medium duty) R.C.C. pipes including collars/spigot jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete.													
A 19.35.1		450 mm dia. RCC pipes	Metre	95602.10	89582.40	95602.10	101673.10	112864.80	110282.10	97335.60	113747.70	98224.00	105950.10	122450.10	117235.20
A 19.35.2		600 mm dia. RCC pipes	Metre												
A 19.35.3		900 mm dia. RCC pipes	Metre	158379.20	148336.20	158379.20	168525.40	187201.70	182891.70	161276.40	188682.20	162767.80	175653.70	203235.00	194516.40
A 19.35.4		1000 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	183382.60	171796.60	183382.60	195084.10	216629.00	211657.10	186723.90	218335.40	188442.70	203309.20	235117.30	225063.00
A 19.35.5		1200 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	223517.60	209612.10	223517.60	237565.20	263424.10	257456.70	227528.70	265473.80	229593.50	247435.30	285622.60	273551.50
A 19.35.6		1800 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	273275.80	256478.60	273275.80	290259.90	321501.20	314291.70	278126.60	323982.70	280627.60	302178.00	348347.00	333751.90
A 19.36		Providing and laying Non Pressure NP-4 class (Heavy duty) R.C.C. pipes including collars/spigot jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete.													
A 19.36.1		450 mm dia. RCC pipes	Metre	50846.00	47754.40	50846.00	53989.10	59743.10	58415.20	51743.00	60207.70	52213.10	56174.70	64727.30	62022.10
A 19.36.2		600 mm dia. RCC pipes	Metre	137601.20	128808.20	137601.20	146461.70	162807.80	159035.60	140131.50	164094.00	141424.90	152712.70	176790.30	169181.20
A 19.36.3		900 mm dia. RCC pipes	Metre	181847.90	170269.60	181847.90	193529.40	215057.10	210089.20	185183.80	216756.90	186894.60	201754.50	233503.10	223468.50
A 19.36.4		1000 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	209784.90	196471.70	209784.90	223213.70	247966.30	242254.20	213619.70	249919.50	215585.20	232672.50	269169.00	257634.10
A 19.36.5		1200 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	305658.20	286379.00	305658.20	325079.50	360918.10	352647.70	311204.60	363735.50	314037.10	338787.90	391560.90	374883.80
A 19.36.6		1800 mm dia. RCC pipes. (Laying by manual/mechanical means)	Metre	396383.10	371705.70	396383.10	421247.30	467123.10	456536.40	403485.40	470730.30	407112.10	438794.00	506352.00	485002.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		20.0 PILE WORK													
A 20.1		Providing, driving with hydraulic piling rigs with power units and installing driven cast-in-situ reinforced cement concrete piles of grade M-25 of specified diameter and length below the pile cap, to carry safe working load not less than specified, excluding the cost of steel reinforcement but including the cost of shoe and the length of pile to embedded in the pile cap etc. all complete. (Length of pile for payment shall be measured from top of shoe to the bottom of pile cap) :													
A 20.1.1		400 mm dia piles	Metre	3364.10	3252.60	3364.10	3622.90	3860.20	3805.50	3452.80	3931.00	3536.80	3648.50	4336.90	4109.20
A 20.1.2		450 mm dia piles	Metre	3542.50	3428.30	3542.50	3811.80	4055.70	3999.40	3635.00	4129.80	3723.00	3836.50	4552.60	4315.60
A 20.1.3		500 mm dia piles	Metre	4260.60	4125.90	4260.60	4586.80	4876.20	4809.40	4373.00	4966.80	4480.70	4612.70	5479.70	5192.40
A 20.1.4		550 mm dia piles	Metre	4933.70	4779.60	4933.70	5319.40	5653.00	5576.00	5067.10	5761.40	5196.10	5344.40	6369.30	6029.30
A 20.1.5		750 mm dia piles	Metre	8870.50	8598.50	8870.50	9573.00	10166.40	10029.50	9114.40	10365.70	9352.10	9609.20	11474.90	10855.40
A 20.1.6		1000 mm dia piles	Metre	15507.60	15029.70	15507.60	16751.20	17795.40	17554.40	15939.70	18149.00	16361.60	16811.30	20113.40	19016.70
A 20.1.7		1200 mm dia piles	Metre	21562.70	20904.00	21562.70	23323.60	24772.60	24438.20	22176.40	25277.40	22779.50	23389.30	28063.40	26509.80
A 20.1.8		1500 mm dia piles	Metre	32679.10	31686.10	32679.10	35395.30	37592.30	37085.30	33628.10	38376.20	34565.70	35471.70	42679.40	40281.90
A 20.2		Boring, providing and installing bored cast-in-situ reinforced cement concrete piles of grade M-25 of specified diameter and length below the pile cap, to carry a safe working load not less than the specified, excluding the cost of steel reinforcement but including the cost of boring with bentonite solution and temporary casing of appropriate length for setting out and removal of same and the length of the pile to be embeddeed in the pile cap etc. by percussion drilling using Direct mud circulation (DMC) or Bailer and chisel technique by tripod and mechanical Winch machine all complete, including removal of excavated earth with all its lifts and leads (Length of pile for payment shall be measured upto bottom of pile cap).													
A 20.2.1		450 mm dia piles	Metre	3550.70	3463.00	3550.70	3793.40	3988.00	3943.10	3635.60	4058.40	3719.70	3799.10	4443.20	4228.90
A 20.2.2		500 mm dia piles	Metre	4209.20	4103.60	4209.20	4506.30	4741.70	4687.40	4313.30	4828.10	4416.80	4511.50	5299.50	5037.20
A 20.2.3		600 mm dia piles	Metre	5786.10	5633.10	5786.10	6214.60	6555.20	6476.60	5936.20	6679.70	6085.30	6222.70	7359.50	6981.10
A 20.2.4		750 mm dia piles	Metre	8891.20	8657.50	8891.20	9555.40	10077.50	9957.00	9124.20	10271.30	9356.30	9564.20	11325.70	10739.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 20.2A		Boring, providing and installing bored cast-in-situ reinforced cement concrete piles of grade M-25 of specified diameter and length below the pile cap, to carry a safe working load not less than the specified, excluding the cost of steel reinforcement but including the cost of boring with bentonite solution and temporary casing of appropriate length for setting out and removal of same and the length of the pile to be embeddeed in the pile cap etc. by Crawler mounted, telescopic boom hydraulic pilling Rig all complete, including removal of excavated earth with all its lifts and leads (Length of pile for payment shall be measured upto bottom of pile cap). NOTE: Truck Mounted rotary/TMR/Tube well boring machines shall not be used.													
A 20.2A.1		600 mm dia piles	Metre	5936.60	5783.60	5936.60	6365.20	6705.70	6627.10	6086.70	6830.20	6235.80	6373.20	7510.00	7131.60
A 20.2A.2		750 mm dia piles	Metre	9088.30	8853.90	9088.30	9753.10	10276.40	10155.60	9321.40	10470.30	9553.70	9762.30	11525.60	10938.50
A 20.2A.3		1000 mm dia piles	Metre	16025.80	15609.90	16025.80	17207.40	18136.60	17922.10	16440.20	18481.30	16853.20	17223.30	20357.20	19313.60
A 20.2A.4		1200 mm dia piles	Metre	22540.30	21942.50	22540.30	24240.30	25576.10	25267.80	23136.60	26072.20	23731.00	24262.50	28771.20	27269.80
A 20.2A.5		1500 mm dia piles	Metre	34525.00	33592.50	34525.00	37180.80	39265.50	38784.40	35456.70	40040.70	36385.70	37214.00	44257.60	41911.90
A 20.3		Boring with hydraulic piling rigs with power units, providing and installing cast-in-situ single under reamed piles of specified diameter and length below the pile cap in M-25 cement concrete, to carry a safe working load not less than specified, excluding the cost of steel reinforcement but including the cost of boring with bentonite solution and the length of the pile to be embedded in the pile cap etc. all complete. (Length of pile for payment shall be measured upto the bottom of pile cap) :													
A 20.3.1		300 mm dia piles	Metre	2039.20	1988.00	2039.20	2166.20	2276.70	2251.20	2083.10	2312.30	2125.40	2174.90	2512.40	2400.50
A 20.3.2		400 mm dia piles	Metre	3237.90	3151.70	3237.90	3468.30	3658.00	3614.20	3318.20	3724.00	3397.10	3477.00	4088.50	3885.30
A 20.3.3		450 mm dia piles	Metre	3955.70	3848.10	3955.70	4249.20	4487.20	4432.30	4058.20	4571.80	4159.50	4257.80	5036.70	4777.70
A 20.3.4		550 mm dia piles	Metre	4802.20	4668.70	4802.20	5169.70	5465.50	5397.20	4930.70	5571.80	5057.80	5179.10	6154.30	5829.80
A 20.4		Extra over single under ream for providing additional bulbs in under reamed piles, under specified diameter (only the nos. of extra bulbs are to be paid)													
A 20.4.1		300 mm dia pipes	Each	1537.20	1702.70	1726.20	1792.80	1845.20	1833.10	1749.50	1864.60	1772.80	1793.70	1970.30	1911.50
A 20.4.2		400 mm dia pipes	Each	2060.20	2376.00	2421.00	2548.20	2648.50	2625.40	2465.60	2685.60	2510.00	2550.10	2887.50	2775.10
A 20.4.3		450 mm dia pipes	Each	2375.00	2781.00	2838.90	3002.50	3131.70	3101.90	2896.30	3179.40	2953.30	3005.00	3439.00	3294.50
A 20.4.4		550 mm dia pipes	Each	2794.20	3305.40	3378.30	3584.30	3747.00	3709.40	3450.50	3807.00	3522.40	3587.50	4133.90	3952.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 20.5		Providing, driving (with vibrating pile driving hammer complete with power units & accessories) and installing driven Pre-cast reinforced cement concrete piles of specified diameter and length below the pile cap M 25 cement concrete to carry safe working load not less than specified with a central through preformed hole with M.S. black pipe of dia 40 mm for grouting with cement sand grouting of mix 1:2 (1 cement: 2 coarse sand) under sufficient positive pressure to ensure complete filling including centring, shuttering, driving and removing the steel casing pipe and lifting casing etc. complete but excluding the cost of steel reinforcement (Length of pile for payment shall be measured from top of shoe to the bottom of pile cap)													
A 20.5.1		400 mm dia pipe	Metre	4185.20	4075.30	4185.20	4429.40	4662.80	4609.00	4267.80	4728.80	4345.70	4459.30	5112.00	4896.50
A 20.5.2		450 mm dia pipe	Metre	5215.00	5085.00	5215.00	5514.70	5793.20	5728.90	5316.90	5875.20	5414.10	5546.20	6346.70	6082.00
A 20.5.3		500 mm dia pipe	Metre	5770.50	5618.10	5770.50	6132.00	6460.50	6384.70	5893.80	6560.40	6012.40	6165.20	7130.10	6810.70
A 20.5.4		550 mm dia pipe	Metre	6698.40	6521.00	6698.40	7129.20	7514.00	7425.20	6845.80	7634.00	6988.40	7164.40	8313.90	7933.10
A 20.5.5		750 mm dia pipe	Metre	13562.30	13201.20	13562.30	14500.20	15296.40	15112.70	13886.00	15563.30	14204.30	14549.90	17049.00	16219.40
A 20.5.6		1000 mm dia pipe	Metre	18881.00	18375.20	18881.00	20218.40	21338.70	21080.10	19343.60	21721.30	19800.20	20279.50	23841.90	22658.60
A 20.6		Vertical load testing of piles in accordance with IS 2911 (Part IV) including installation of loading platform and preparation by Kentledge / Anchor piles method and preparation of pile head or construction of test cap and dismantling of test cap after test etc. complete as per specification & direction of Engineer-in-charge													
A 20.6.1		Single pile upto 50 tonne Safe capacity													
A 20.6.1.1		Initial test (Test load 2.5 times the Safety capacity)	Each	65853.30	61545.10	65853.30	70161.50	78162.30	76316.00	67084.20	78777.80	67699.60	73238.70	84932.30	81239.60
A 20.6.1.2		Routine test (Test load 1.5 times the Safety capacity)	Each	24695.00	23079.40	24695.00	26310.50	29310.90	28618.50	25156.60	29541.70	25387.40	27464.50	31849.60	30464.80
A 20.6.2		Single pile above 50 tonne and upto 100 tonne Safe capacity													
A 20.6.2.1		Initial test (Test load 2.5 times the safety capacity)	Each	74085.00	69238.30	74085.00	78931.60	87932.60	85855.50	75469.70	88625.00	76162.10	82393.50	95548.80	91394.50
A 20.6.2.2		Routine test (Test load 1.5 times the Safe capacity)	Each	37865.60	35388.50	37865.60	40342.80	44943.30	43881.70	38573.40	45297.20	38927.30	42112.30	48836.10	46712.80
A 20.6.3		Group of two or more piles upto 50 tonne Safe capacity													
A 20.6.3.1		Initial test (Test load 2.5 times the Safe Capacity)	Each	82316.60	76931.40	82316.60	87701.80	97702.90	95395.00	83855.20	98472.20	84624.60	91548.40	106165.40	101549.50
A 20.6.3.2		Routine test (Test load 1.5 times the Safe Capacity)	Each	48566.80	45389.50	48566.80	51744.10	57644.70	56283.00	49474.60	58098.60	49928.50	54013.50	62637.60	59914.20
A 20.7		Cyclic Vertical load testing of piles in accordance with IS: 2911 (Par IV) by Kentledge method including preparation of pile head etc. for													
A 20.7.1		Single pile													
A 20.7.1.1		Upto 50 tonne Safe capacity pile	Each	24695.00	23079.40	24695.00	26310.50	29310.90	28618.50	25156.60	29541.70	25387.40	27464.50	31849.60	30464.80
A 20.7.1.2		Above 50 tonne and upto 100 tonne Safe capacity pile	Each	37865.60	35388.50	37865.60	40342.80	44943.30	43881.70	38573.40	45297.20	38927.30	42112.30	48836.10	46712.80
A 20.7.2		Group of two pile													
A 20.7.2.1		Upto 50 tonne capacity each	Each	48566.80	45389.50	48566.80	51744.10	57644.70	56283.00	49474.60	58098.60	49928.50	54013.50	62637.60	59914.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 20.8		Lateral load testing of single pile in accordance with IS Code of practise IS: 2911 (Part IV) for determining safe allowable lateral load on pile:													
A 20.8.1		Upto 50 tonne capacity each	Each	24695.00	23079.40	24695.00	26310.50	29310.90	28618.50	25156.60	29541.70	25387.40	27464.50	31849.60	30464.80
A 20.8.2		Above 50 tonne and upto 100 tonne capacity pile	Each	38853.40	36311.60	38853.40	41395.30	46115.80	45026.40	39579.70	46478.90	39942.80	43210.80	50110.00	47931.30
A 20.9		Integrity testing of Pile using Low Strain/Sonic Integrity Test/Sonic Echo Test method in accordance with IS 14893 including surface preparation of pile top by removing soil, mud, dust & chipping lean concrete lumps etc. and use of computerised equipment and high skill trained personal for conducting the test & submission of results, all complete as per direction of Engineer-in-Charge.	Each	863.40	834.50	863.40	892.30	946.00	933.60	871.70	950.20	875.80	913.00	991.50	966.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		21.0 ALUMINIUM WORK													
A 21.1		Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z-sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia in size, including necessary filling up the gaps at junctions i.e at top, bottom and sides with required EPDM rubber/neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing/ panelling, C.P. brass/ satinless steel screws, all complete as per architectural drawing and the direction of Engineer-in-charge. (Glazing, panelling and dash fasteners to be paid for seperately)													
A 21.1.1		For Fixed portion													
A 21.1.1.1		Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	Kg	493.10	463.90	490.80	517.70	567.70	556.10	498.50	571.50	502.30	536.90	609.90	586.90
A 21.1.1.2		Powder coated aluminium (minimum thickness of powder coating 50 microns)	Kg	532.80	501.00	530.50	560.00	614.80	602.20	539.00	619.10	543.20	581.10	661.20	635.90
A 21.1.1.3		Polyester powder coated aluminium (minimum thickness of polyester powder coating 50 mocrons)	Kg	543.20	510.70	540.90	571.10	627.20	614.20	549.50	631.50	553.80	592.70	674.60	648.70
A 21.1.2		For shutters of doors, windows, ventilators including providing and fixing hinges/pivots and making provision for fixing of fitting wherever required including the cost of EPDM rubber/ neoprene gasket required (Fitting shall be paid for seperately)													
A 21.1.2.1		Anodised aliminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15):	Kg	580.10	546.50	575.50	604.50	658.50	646.00	583.80	662.60	588.00	625.30	704.10	679.20
A 21.1.2.2		Powder coated aluminium (minimum thickness of powder costing 50 microns)	Kg	620.60	584.40	616.10	647.80	706.60	693.00	625.10	711.10	629.70	670.40	756.40	729.20
A 21.1.2.3		Polyester powder coated aluminium (minimum thickness of polyester powder coating 50 microns)	Kg	565.90	534.30	565.90	597.40	656.00	642.50	574.90	660.50	579.40	619.90	705.50	678.50
A 21.2		Providing and fixing 12 mm thick prelaminated particle board flat pressed three layer or graded wood particle board conforming to IS: 12823 Grade 1 Type II in panelling fixed in aluminium doors, windows shutters and partition frames with C.P. brass/ stainless steel screws etc. complete as per architectural drawings and direction of Engineer-in-charge.													
A 21.2.1		Pre-laminated particle board with decorative lamination on one side and balancing lamination on other side	Sqm	1142.00	1079.60	1142.00	1204.30	1320.00	1293.30	1159.80	1328.90	1168.70	1248.80	1418.00	1364.60
A 21.2.2		Pre-laminated particle board with decorative lamination on both sides.	Sqm	1202.50	1136.20	1202.50	1268.70	1391.80	1363.40	1221.40	1401.30	1230.90	1316.10	1496.00	1439.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 21.3		Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber/ neoprene gasket etc. complete as per the architectural drawings and the direction of Engineer-in-Charge. (Cost of alimunium snap beading shall be paid in basic item)													
A 21.3.1		With float glass panes of 4.0 mm thickness (weight not less than 10kg/sqm)	Sqm	1084.70	1034.90	1084.70	1134.60	1227.10	1205.70	1099.00	1234.20	1106.10	1170.20	1305.40	1262.70
A 21.3.2		With float glass panes of 5.50 mm thickness (weight not less than 12.50 kg/sqm)	Sqm	1449.90	1376.20	1449.90	1523.60	1660.50	1629.00	1471.00	1671.10	1481.50	1576.30	1776.40	1713.20
A 21.3.3		With float glass panes of 8 mm thickness (weight not less than 20 kg/sqm)	Sqm	1654.10	1567.00	1654.10	1741.20	1902.90	1865.60	1679.00	1915.30	1691.40	1803.40	2039.70	1965.10
A 21.4		Providing and fixing double action hydraulic floor spring of approved brand and manufacture conforming to IS: 6315, having brand logo embossed on the body/plate with double spring mechanism and door weight upto 125kg, for doors, including cost of cutting floors, embedding in floors as required and making good the same matching to the existing floor finishing and cover plates with brass pivot and single piece M.S. sheet outer box with slide plate etc. complete as per the direction of Engineer-in-charge.													
A 21.4.1		With stainless steel cover plate (minimum 1.25mm thickness)	Each	2856.70	2685.70	2856.70	3029.60	3347.60	3274.20	2906.30	3372.70	2931.60	3151.00	3620.30	3472.00
A 21.4.2		With brass cover plate (minimum 1.25 mm thickness)	Each	387.20	377.70	387.20	398.60	416.50	412.40	390.60	418.60	392.90	404.60	435.40	425.50
A 21.5		Providing and fixing powder coated aluminium work (minimum thickness of powder coating 50 microns) consisting of tee/ angle sections, of approved make conforming to IS: 733 in frames of false ceiling including aluminium angle cleats with necessary C.P. brass/ stainless steel sunk screws, aluminium perimeter angles fixed to wall with stainless steel rawl plugs @ 450 mm centre to centre and fixing the frame work to G.I. level adjusting hangers 6 mm dia with necessary cadmium plated machine screws all complete as per approved architectural drawing and direction of Engineer-in-charge (level adjusting hangers, ceiling cleats and expansion hold fasteners to be paid for seperately)	Kg	765.50	725.60	765.50	805.40	879.60	862.50	776.90	885.30	782.60	833.90	942.30	908.10
A 21.6		Providing and fixing 6mm dia G.I. level adjusting hangers (upto 1200 mm length) fixed to roof slabs by means of ceiling cleats made out of G.I. flat 40x3 mm size 60mm long and stainless steel expandable dash fasteners of 12.5 mm dia and 40 mm long, complete as per direction of Engineer-in-charge.	Each	80.90	77.00	80.90	84.80	92.10	90.40	82.10	92.60	82.60	87.60	98.20	94.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 21.7		Providing and fixing machine moulded aluminium covering of approved pattern & design, made out of machine cut aluminium sheet and machine holed for receiving dash fasteners, over expansion joints on vertical surfaces/ ceilings floor, the fixing on plate in one row in one side of joint only shall be done with stainless steel dash fasteners of 8 mm dia and 75 mm long bolts including providing aluminium washers 2mm thick and 15 mm dia, at a staggered pitch of 200mm center to centre including drilling holes in the receiving surface and providing expandable plastic sleeves in holes etc. complete as per direction of Engineer-in-charge													
A 21.7.1		Anodised aluminium sheet 2.5 mm thick (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	Kg	677.80	638.60	677.80	717.00	789.80	773.00	689.00	795.40	694.60	745.00	851.30	817.70
A 21.7.2		Powder coated aluminium sheet 2.5 mm thick (minimum thickness of powder coating 50 microns)	Kg	717.50	675.70	717.50	759.30	836.90	819.00	729.50	842.90	735.40	789.20	902.60	866.80
A 21.8		Filling the gap in between aluminium frame & adjacent RCC/ Brick/ Stone work by providing weather silicon sealant over backer rod of approved quality as per architectural drawings and direction of Engineer-in-charge.													
A 21.8.1		Upto 5mm depth and 5mm width	Metre	97.80	91.40	97.80	104.20	116.10	113.30	99.60	117.00	100.50	108.80	126.10	120.60
A 21.9		Extra for applying additional anodic coating AC 25 instead of AC 15 to Aluminium extruded sections													
A 21.9.1		For fixed portion	Kg	16.50	15.40	16.50	17.50	19.50	19.10	16.80	19.70	16.90	18.30	21.20	20.30
A 21.9.2		For shutters of doors, windows & ventilators	Kg	16.50	15.40	16.50	17.50	19.50	19.10	16.80	19.70	16.90	18.30	21.20	20.30
A 21.10		Providing and fixing double glazed hermetically sealed glazing in aluminium windows, ventilators and partition etc. with 6mm thick clear float glass both side having 12 mm air gap including providing EPDM gasket, perforated aluminium spacers, desiccants, sealant (Both primary and secondary sealant) etc. as per specifications, drawings and direction of Engineer-in-charge complete	Sqm	4565.50	4297.10	4565.50	4834.00	5332.60	5217.60	4642.20	5371.00	4680.60	5025.80	5754.50	5524.40
A 21.11		Providing and fixing stainless steel (SS-304 grade) adjustable friction wndows stays of approved quality with necessary stainless steel screws etc. to the side hung windows as per direction of Engineer-in-charge complete													
A 21.11.1		205x19 mm	Each	304.90	286.30	304.90	323.60	358.30	350.30	310.30	360.90	312.90	336.90	387.60	371.60
A 21.11.2		255x19 mm	Each	387.30	363.20	387.30	411.30	456.00	445.70	394.10	459.40	397.60	428.50	493.80	473.10
A 21.11.3		355x19 mm	Each	342.80	321.70	342.80	363.90	403.20	394.20	348.80	406.20	351.90	379.10	436.40	418.30
A 21.11.4		510x19 mm	Each	886.10	829.40	886.10	942.80	1048.00	1023.80	902.30	1056.10	910.40	983.30	1137.10	1088.50
A 21.11.5		710x19 mm	Each	1503.50	1406.40	1503.50	1600.50	1780.80	1739.20	1531.20	1794.70	1545.10	1669.90	1933.40	1850.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 21.12		Providing and fixing aluminium tubular handle bar 32 mm outer dia. 3.0 mm thick & 2100 mm long with SS screws etc. complete as per direction of Engineer-in-charge.													
A 21.12.1		Anodized (AC 15) aluminium tubular handle bar	Each	625.50	585.30	625.50	665.60	740.20	723.00	636.90	745.90	642.70	694.30	803.30	768.90
A 21.12.2		Powder coated minimum thickness 50 microns aluminium tubular handle bar	Each	687.30	643.10	687.30	731.50	813.60	794.70	700.00	819.90	706.30	763.10	883.10	845.20
A 21.12.3		Polyester powder coated minimum thickness 50 micron aluminium tubular handle bar	Each	703.50	658.20	703.50	748.70	832.80	813.40	716.40	839.30	722.90	781.10	903.90	865.10
A 21.13		Providing and fixing 100 mm mortice latch and lock with 6 lever without pairs of handles (best make of approved quality) for aluminium doors including necessary cutting and making good etc. complete	Metre	516.90	493.50	516.90	540.30	583.80	573.80	523.60	587.10	527.00	557.00	620.60	600.50
A 21.14		Providing and fixing anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868. Minimum anodic coating of grade AC 15 sub frame work for windows and ventilators with extruded built up standard tubular sections of approved make conforming to IS: 733 and IS: 1285 fixed withdash fastener of required dia and size (Dash fastener to be paid for seperately)	Kg	25.40	24.20	24.50	24.80	25.30	25.20	24.60	25.30	24.60	25.00	25.70	25.50
A 21.15		Providing and fixing aluminium casement window fastener of required length for aluminium windows with necessary screws etc. complete													
A 21.15.1		Anodized (AC 15) aluminium	Each	80.60	75.70	80.60	85.50	94.60	92.50	82.00	95.30	82.70	89.00	102.30	98.10
A 21.15.2		Powder coated minimum thickness 50 micron aluminium	Each	85.50	80.30	85.50	90.70	100.40	98.20	87.00	101.20	87.70	94.50	108.60	104.20
A 21.15.3		Polyester Powder coated minimum thickness 50 micron aluminium	Each	83.90	78.70	83.90	89.00	98.50	96.30	85.30	99.20	86.00	92.60	106.50	102.10
A 21.16		Providing and fixing aluminium round shape handle of outer dia 100 mm with SS screw etc. complete as per direction of Engineer-in-charge													
A 21.16.1		Anodized (AC 15) aluminium	Each	95.40	89.50	95.40	101.20	112.20	109.60	97.10	113.00	97.90	105.40	121.40	116.30
A 21.16.2		Powder coated minimum thickness 50 micron aluminium	Each	100.30	94.10	100.30	106.50	118.00	115.40	102.10	118.90	103.00	110.90	127.80	122.40
A 21.16.3		Polyester Powder coated minimum thickness 50 micron aluminium	Each	106.90	100.30	106.90	113.50	125.80	123.00	108.80	126.80	109.70	118.30	136.20	130.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 21.17		Providing and fixing anodised aluminium grill (anodised transparent or dyed to required shade according to IS: 1868 with minimum anodic coating of grade AC 15) of approved design/pattern, with approved standard section and fixed to the existing window frame with C.P brass/stainless steel screws @ 200mm center to center, including cutting the grill to proper opening size for fixing and operation of handles and fixing approved anodised aluminium standard section around the opening, all complete as per requirement and direction of Engineer-in-charge. (Only weight of grill to be measured for payment)	Kg	606.10	569.70	603.80	638.00	701.40	686.80	613.60	706.30	618.50	662.40	755.00	725.80
A 21.18		Providing and fixing 12mm thick frameless toughened glass door shutter of approved brand and manufacture, including providing and fixing top and bottom pivot and double acting hydraulic floor spring type fixing arrangement and making necessary holes etc for fixing required door fittings, all complete as per direction of Engineer-in-charge. (Door handle, lock and stopper etc to be paid for seperately)	Sqm	5149.10	4859.20	5149.10	5439.90	5978.50	5854.20	5232.30	6020.30	5274.10	5646.70	6436.00	6186.70
A 21.19		Filling the gap in between aluminium/stone/wood frame and adjacent RCC/Brick/Stone/Wood/Ceramic/Gypsum work by providing weather/Structural non sag elastomeric PU sealant over backer rod of approved quality as per architectural drawings and direction of Engineer-in-charge complete, complying to ASTM-C 920, DIN 1854-F and ISO-11600.													
A 21.19.1		Upto 5mm depth and 5mm width	Metre	140.00	133.30	140.00	146.70	159.20	156.30	141.90	160.20	142.90	151.50	169.70	164.00
A 21.19.2		Upto 10mm depth and 10mm width	Metre	193.20	183.60	193.20	202.80	220.50	216.40	195.90	221.90	197.30	209.60	235.60	227.40
A 21.19.3		Upto 20mm depth and 20mm width	Metre	356.20	337.50	356.20	374.90	409.70	401.60	361.60	412.30	364.20	388.30	439.10	423.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		22.0 WATER PROOFING													
A 22.1		Providing and laying integral cement based treatment for water proofing on horizontal surface at all depth below ground level for under ground structures as directed by Engineer-in-Chief and consisting of : (i) 1st layer of 22mm to 25mm thick approved and specified rough stone slab over a 25mm thick base of cement mortar 1:3 (1 cement: 3 coarse sand) mixed with water proofing compound conforming to IS: 2645 in the recommended proportion over the levelling course (levelling course is to be paid separately). Joints sealed and grouted with cement slurry mixed with water proofing compound. (ii) 2nd layer of 25mm thick cement mortar 1:3 (1 cement: 3 coarse sand) mixed with water proofing compound in recommended proportions. (iii) Finishing top with stone aggregate of 10mm to 12 mm nominal size spreading @ 8 cudm/ sqm thoroughly embedded in the 2nd layer.													
A 22.1.1		Using rough kota stone.	Sqm	1501.00	1415.00	1501.00	1663.00	1840.00	1800.00	1547.00	1886.00	1601.00	1691.00	2160.00	2006.00
A 22.2		Providing and laying integral cement based treatment for water proofing on the vertical surface by fixing specified stone slab 22mm to 25 mm thick with cement slurry mixed with water proofing compound conforming to IS: 2645 in recommended proportions with a gap of 20mm (minimum) between stone slabs and the receiving surfaces and filling the gaps with neat cement slurry mixed with water proofing compound and finishing the exterior of stone slab with cement mortar 1:3 (1 cement: 3 coarse sand) 20 mm thick with neat cement punning mixed with water proofing compound in recommended proportion complete at all levels and as directed by Engineer-in-charge													
A 22.2.1		Using rough Kota stone	Sqm	1908.00	1826.00	1908.00	2069.00	2243.00	2203.00	1956.00	2287.00	2008.00	2097.00	2551.00	2402.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.3		Providing and laying water proofing treatment to vertical and horizontal surfaces of depressed portions of W.C., kitchen and the like consisting of:													
		(i) 1st course of applying cement slurry @ 4.4 kg/sqm mixed with water proofing compound conforming to IS 2645 in recommended proportions including rounding off junction of vertical and horizontal surface.	Sqm	726.00	693.00	726.00	793.00	863.00	847.00	745.00	883.00	768.00	802.00	997.00	933.00
		(ii) 2nd course of 20 mm cement plaster 1:3 (1 cement: 3 coarse sand) mixed with water proofing compound in recommended proportion including rounding off junction of vertical and horizontal surface.													
		(iii) 3rd course of applying blown or residual bitumen applied hot at 1.7 kg. per sqm of area.													
		(iv) 4th course of 400 micron thick PVC sheet. (Overlaps at joints of PVC sheet should be 100 mm wide and pasted to each other with bitumen @ 1.7 kg/sqm)													
A 22.4		Providing and placing in position suitable PVC water stops conforming to IS: 12200 for construction/ expansion joints between two RCC members and fixed to the reinforcement with binding wire before pouring concrete etc. complete.													
A 22.4.1		Serrated with central bulb (225 mm wide, 8-11 mm thick)	Metre	342.00	321.00	342.00	364.00	404.00	395.00	348.00	407.00	351.00	379.00	438.00	419.00
A 22.4.2		Dumb bell with central bulb (180 mm wide, 8 mm thick)	Metre	276.00	259.00	276.00	294.00	326.00	318.00	281.00	328.00	284.00	306.00	353.00	338.00
A 22.4.3		Kickers (320mm wide, 5 mm thick)	Metre	317.00	297.00	317.00	337.00	375.00	366.00	323.00	377.00	326.00	352.00	406.00	389.00
A 22.5		Providing and laying water proofing treatment in sunken portion of WCs, bathroom etc., by applying cement slurry mixed with water proofing compound consisiting of applying:													
		(a) First layer of slurry of cement @ 0.488 kg/sqm mixed with water proofing cement compound @ 0.253 kg/sqm. This layer will be allowed to air cure for 4 hours.	Sqm	430.00	422.00	430.00	440.00	456.00	453.00	433.00	458.00	435.00	446.00	473.00	464.00
		(b) Second layer of slurry of cement @ 0.242 kg/sqm mixed with water proofing cement compound @ 0.126 kg/sqm													
		This layer will be allowed to air cure for 4 hours followed with water curing for 48 hours													
		The rate includes preparation of surface, treatment and sealing of all joints, corners, junction of pipes and masonry with polymer mixed slurry													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.6		Providing and laying water proofing treatment on roofs of slabs by applying cement slurry mixed with water proofing cement compound consisting of applying:													
		(a) after surface preparation, first layer of slurry of cement @ 0.488 kg/sqm mixed with water proofin cement compound @ 0.253 kg/sqm	Sqm	534.00	515.00	534.00	556.00	592.00	584.00	540.00	596.00	544.00	568.00	627.00	608.00
		(b) laying second layer of fibre glass cloth when the first layer is still green. Overlaps of joints of fibre cloth should not be less than 10 cm													
		(c) third layer of 1.5 mm thickness consisting of slurry of cement @ 1.289 kg/sqm mixed with water proofing cement compound @ 0.670 kg/sqm and coarse sand @ 1.289 kg/sqm. This will be allowed to air cure for 4 hours followed by water curing for 48 hours. The entire treatment will be taken upto 30 cm on parapet wall and tucked into groove in parapet all around.													
		(d) fourth and final layer of brick tiling with cement mortar (which will be paid for separately). For the purpose of measurement the entire treated surface will be measured.													
A 22.7		Providing and laying integral cement based water proofing treatment including preparation of surface as required for treatment of roofs, balconies. Terrace etc consisting of following operations:													
		(a) Applying a slurry coat of neat cement using 2.75 kg/sqm of cement admixed with water proofing compound conforming to IS: 2645 and approved by Engineer-in Chief over the RCC slab including adjoining walls upto 300mm height including cleaning the surface before treatment.													
		(b) Laying brick bats with mortar using broken bricks/ brick bats 25mm to 115mm size with 50% of cement mortar 1:5 (1 cement: 5mortar) admixed with water proofing compound conforming to IS: 2645 and approved by Engineer-in-Charge over 20mm thick layer of cement mortar of mix 1:5 (1 cement:5 coarse sand) admixed with water proofing compound conforming to IS: 2645 and approved by Engineer-in-charge to required slope and treating similrsly the adjoining walls upto 300mm height including rounding of junctions of walls and slabs													
		(c) After two days of proper curing applying a second coat of cement slury using 2.75kg/sqm of cement admixed with water proofing compound conforming to IS: 2645 and approved by Engineer-in-charge.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		(d) Finishing the surface with 20mm thick jointless cement moratr of mix 1:4 (1 cement: 4 coarse sand) admixed with water proofing compound conforming to IS: 2645 and approved by Engineer-inCharge including laying glass fibre cloth of approved quality in top l;ayer of plaster and finally the surface wiyh trowel with neat cement slurry and making pattern of 300x300 square 3mm deep													
		(e) The whole terrace so finished shall be floded with water for a minimum period of two weeks for curing and for final test. All abve operations to be done in order and as directed and specified by the Engineer-in-Charge													
A 22.7.1		With average thickness of 120 mm and minimum thickness at khurra as 65 mm.	Sqm	1540.80	1442.40	1540.80	1756.30	1964.40	1916.50	1596.80	2033.40	1679.10	1770.20	2418.80	2203.50
A 22.8		Providing and laying four course water proofing treatment with bitumen felt over roofs consisting of first and third courses of blown bitumen 85/25 or 90/15 conforming to IS: 702 applied hot @ 1.45 kg/sqm of area for each coursse, second course of roofing felt type 3 grade-I (hessian based self finished bitumen felt) and fourth and final course of stone grit 6 mm and down size or pea-sized gravel spresd at 6 cubic diameter per square metre, including preparation of surface but excluding grading complete with:													
A 22.8.1		Bitumen felt (Hessian base) type 3 grade I conforming to IS : 1322	Sqm	445.20	424.40	445.20	465.90	504.30	495.50	451.10	507.30	454.00	480.70	536.90	519.10
A 22.9		Providing and laying six courses waterproofing treatment with bitument felt over roofs consisiting of first, third and fifth course of blown bitumen 85/25 or 90/15 conforming to IS: 702 applied hot @ 1.45, 1.20 and 1.45 kg per square metre of area respectively, second and fourth courses of roofing felt type 3 grade I conforming to IS: 1322 (Hessian based self finished bitumen felt) conforming to IS: 1322 and sixth and final course of stone grit 6 mm and down size or pea sized gravel spread at 6 cubic decimetre per sqm including preparation of surface but excluding grading, complete.	Sqm	702.90	669.30	702.90	736.40	798.60	784.30	712.40	803.40	717.20	760.30	851.30	822.60
A 22.10		Providing and laying six courses waterproofing treatment with bitument felt over roofs consisiting of first, third and fifth course of blown or/ and residual bitumen applied hot at 1.45, 1.20 and 1.70 kg/sqm of area respectively, second and fourth courses of roofing felt type 3 grade I (fibre based self finished bitumen felt) sixth and final course of stone grit 6 mm and down size or pea sized gravel spread at 6 cubic dm per sqm including preparation of surface but excluding grading, complete.	Sqm	783.60	749.20	783.60	818.10	882.10	867.30	793.50	887.00	798.40	842.70	936.20	906.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.11		Providing and laying six courses waterproofing treatment with bitument felt over roofs consisting of first, third and fifth course of blown or / and residual applied hot @ 1.45, 1.20 and 1.70kg per square metre of area respectively, second and fourth courses of roofing felt type 2 grade II (glass fibre base self finished bitumen felt) and sixth and final course of stone grit 6 mm and down size or pea sized gravel spread at 6 cudm per sqm including preparation of surface but excluding grading, complete.	Sqm	783.60	749.20	783.60	818.10	882.10	867.30	793.50	887.00	798.40	842.70	936.20	906.70
A 22.12		Supplying and applying bituminous solution primer on roof and or wall surface at 0.24 litre per sqm	Sqm	46.10	44.70	46.10	47.60	50.30	49.60	46.50	50.50	46.70	48.60	52.60	51.30
A 22.13		Deduct for omitting in water proofing treatment final course of spreading stone grit 6 mm or down size or pea sized gravel													
A 22.13.1		At 6 cudm per sqm	Sqm	17.20	16.10	17.20	18.40	20.50	20.00	17.60	20.60	17.70	19.20	22.20	21.30
A 22.13.2		At 8 cudm per sqm	Sqm	21.60	20.20	21.60	23.00	25.70	25.10	22.00	25.90	22.20	24.00	27.90	26.70
A 22.14		Grading roof for water proofing treatment with:													
A 22.14.1		Cement Concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20mm nominal size)	Cum	10155.50	9627.30	10155.50	11678.20	12859.10	12586.60	10690.20	13305.80	11225.90	11687.50	15726.90	14381.10
A 22.14.2		Cement Mortar 1:3 (1 cement: 3 coarse sand)	Cum	13309.00	12484.10	13309.00	15379.60	17192.30	16774.00	13853.90	17884.10	14683.80	15386.40	21625.80	19546.40
A 22.14.3		Cement Mortar 1:4 (1 cement: 4 coarse sand)	Cum	14663.10	13630.50	14663.10	17200.10	19441.30	18924.20	15313.30	20297.00	16339.80	17208.10	24924.80	22353.10
A 22.22		Providing and mixing integral crystalline admixtures for water proofing treatment to RCC structures like basement raft, retaining walls, reservoir, sewage & water treatment plants, tunnels/ subway and bridge deck etc. at the time of transporting of concrete into the drum of the ready mix truck, using integral crystalline admixture @ 0.80% (minimum) to the weight of the cement content per cubic meter of concrete or higher as recommended by the manufacturer's specification in RCC at site of work. The material shall meet the requirements as specified in ACI-212-3R-2010 i.e by reducing the permeability of concrete by more than 90%,compared with controlled concrete as per DIN-1048 and resistant to 16 bar hydrostatic pressure. The crystalline admixture shall be capable of self-healing of cracks upto a width of 0.50 mm.The work shall be carried out all complete as per specifications and the direction of the Engineer-in-Charge.The product performance shall carry guarantee for 10 Years against any leakage.	Kg	476.40	445.30	476.40	507.60	565.50	552.10	485.40	570.00	489.80	529.90	614.50	587.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.22A		Providing and applying fibre reinforced elastomeric liquid water proofing membrane with resilient acrylic polymers having Sun Reflectivity Index (SRI) of 105 on top of concrete roof in Three coats @ 10.76 litre/10 sqm. One coat of self-priming of elastomeric water proofing liquid (dilution with water in the ratio 3:1) and two coats of undiluted elastomeric water proofing liquid (dry film thickness of complete application/system not less than 500 microns). The operation shall be carried out after scrapping and properly cleaning the surface to remove loose particles with wire brushes, complete in all respect as per the direction of Engineer-in-charge.	Sqm	469.10	444.60	469.10	493.60	539.20	528.70	476.10	542.70	479.60	511.20	577.70	556.70
A 22.23		Providing and applying integral crystalline slurry of hydrophilic in nature for waterproofing treatment to the RCC structures like retaining walls of the basement, water tanks, roof slabs, podiums, reservoir, sewage and water treatment plant, tunnels / subway and bridge deck etc., prepared by mixing in the ratio of 5:2 (5 parts integral crystalline slurry : 2 parts water) for vertical surfaces and 3:1 (3 parts integral crystalline slurry : 1 part water) for horizontal surfaces and applying the same from negative (internal) side with the help of synthetic fiber brush. The material shall meet the requirements as specified in ACI-212-3R-2010 i.e by reducing permeability of concrete by more than 90 % compared with control concrete as per DIN 1048 and resistant to 16 bar hydrostatic pressure on negative side. The crystalline slurry shall be capable of self-healing of cracks up to a width of 0.50 mm. The work shall be carried out all complete as per specification and the direction of the Engineer-in-charge. The product performance shall carry guarantee for 10 years against any leakage.													
A 22.23.1		For vertical surface two coats @ 0.70 kg per sqm	Sqm	596.10	557.10	596.10	635.10	707.60	690.90	607.30	713.10	612.90	663.00	768.80	735.40
A 22.23.2		For horizontal surface one coats @ 1.10 kg per sqm	Sqm	459.50	429.40	459.50	489.60	545.40	532.50	468.10	549.70	472.40	511.00	592.60	566.80
A 22.23A		Providing and applying polymer modified, flexible cementitious negative side waterproofing coating with elastic waterproofing polymers on interior wall plaster surface in three coats @14.35 Kg /10sqm. One coat of self priming of cementitious waterproofing polymer (dilution with water in the ratio of 1:1) and two coats of cementitious waterproofing polymer (dilution with water in the ratio of 3:1) after scrapping and properly cleaning the surface to remove pre-existing paint film & loose particles till plaster is visible, complete in all respect as per the direction of Engineer-in-charge.	Sqm	525.50	494.50	525.50	556.60	614.30	601.00	534.40	618.70	538.80	578.80	663.10	636.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.24		Providing and applying integral crystalline (dry shake) of hydrophilic in nature for waterproofing treatment to the RCC structures like basement raft, foundation slab, sewage and water treatment plant slab, warehouses floor, parking structures and water tank base slab etc. sprinkled @0.60 kg per sqm or higher as recommended by the manufacturer`s specification over the lean concrete of above cited structures. The material shall meet the requirements as specified in ACI-212-3R-2010 i.e. by reducing permeability of concrete by more than 85%, compared control concrete as per DIN 1048 and resistsnt to 16 bar hydrostatic pressure on negative side. The crystalline dry-shake shall be capable of self-healing of cracks up to a width of 0.50 mm. The work shall be carried out all complete as per specification and the direction of the Engineer-in-charge. The product performance shall carry guarantee for 10 years against any leakage.	Sqm	403.20	376.80	403.20	429.60	478.50	467.20	410.70	482.30	414.50	448.40	520.00	497.40
A 22.24A		Providing and applying high quality acrylic modified resin based texture of Dholpur/Red sand stone pattern with anti algae and UV resistance properties to be applied as intermediate finish in desired pattern @ 43.04 Kgs/10 sqm to form film of 1 - 1.5 mm thickness after scrapping and properly cleaning the surface to remove loose particles from the plaster surface, followed by top coating with premium Acrylic Smooth exterior paint with Silicone additives of required shade by two or more coats @ 1.43 litres/10 sqm, complete as the direction of the Engineer-in-charge.	Sqm	466.60	445.10	466.60	488.20	528.20	519.00	472.70	531.40	475.90	503.60	562.10	543.60
A 22.25		Providing and applying crystalline mortar by mixing in the ratio of 4.5 : 1 (4.5 parts crystalline mortar : 1 part water) for the treatment of faulty construction joints, cracks, tie rod holes and spalled & honeycombed surface of RCC underground structures like basement, water tanks, bridge deck etc. to ensure water tightness. The crystallie mortar shall conform to the EN 1504-3 having compressive strength Class R4 ≥ 45 MPa and adhesive bond strength Class R3 ≥ 1.5 MPa. The work shall be carried out all complete as per specification and the direction of the Engineer-in-charge. The product performance shall carry guarantee for 10 years against any leakage.													
A 22.25.1		For sealing cracks and faulty construction joints, routed out/making U shape grooves size 25x25 mm and then primed the area with integral crystalline slurry @ 0.05 Kg/running metre and while the syface is tacky filled the grooves up to surface with crystalline mortar @ 1.50 Kg/ running metre. Once crystalline mortar is touch dry then finally applied two coats of integral crystalline slurry @ 0.05 Kg/ running metre per coat.	Metre	646.80	604.50	646.80	689.20	767.70	749.60	658.90	773.80	665.00	719.40	834.20	798.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 22.25.2		For patching of tie rod holes, prepared tie rod hole surface and then primed the area with integral crystalline slurry @ 0.070kg/sqm and while the surface is tacky repair and then filled the tie rod holes with crystalline mortar @ 0.04kg/hole.The crystalline mortar should be tightly rodded into tie rod holes or packed tightly (For 25x25x25mm tie rod hole,use 0.04kg to fill the hole).	Each	25.50	23.80	25.50	27.20	30.30	29.60	26.00	30.50	26.20	28.40	32.90	31.50
A 22.26		Providing and applying of swellable type water stop tape (19mmx25mm thick) in linear meter (expansive nature) for construction joints treatment of RCC structure such as raft slab, retaining walls, water storage tanks and at the junction of raft slab with a retaining walls etc. After cleaning the surface, one coat of required primer for swellable water stop tape shall be applied throughout the length of the joint @ 3.78 litre per 240 running meter. Over the prime surface swellable type water stop tape shall be placed.The work shall be carried out all complete as per specification and the direction of the Engineer-in-charge. The product performance shall carry guarantee for 10 years against any leakage.	Metre	679.50	635.10	679.50	724.00	806.50	787.50	692.20	812.90	698.60	755.70	876.40	838.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		23.0 RAIN WATER HARVESTING													
A 23.1		Boring/drilling bore well of required dia for casing/ strainer pipe, by suitable method prescribed in IS: 2800 (part I), including collection samples from different strata, preparing and submitting strata chart/bore log, including hire & running charges of all equipments, tools, plants & machineries required for the job, all complete as per direction of Engineer-in-charge, upto 90 metre depth below ground level.													
A 23.1.1		All types of soil													
A 23.1.1.1		300 mm dia	Metre	730.10	727.40	730.10	732.90	738.10	736.90	730.90	738.50	731.30	734.90	742.40	740.00
A 23.1.1.2		350 mm dia	Metre	798.60	795.60	798.60	801.60	807.30	806.00	799.50	807.70	799.90	803.80	812.00	809.40
A 23.1.1.3		400 mm dia	Metre	1022.20	1018.30	1022.20	1026.10	1033.30	1031.60	1023.30	1033.80	1023.90	1028.90	1039.40	1036.10
A 23.1.2		Rock strata including Boulders													
A 23.1.2.1		300 mm dia	Metre	1645.60	1639.60	1645.60	1651.70	1662.90	1660.30	1647.30	1663.80	1648.20	1656.00	1672.40	1667.30
A 23.1.2.2		350 mm dia	Metre	1706.70	1700.60	1706.70	1712.80	1724.00	1721.40	1708.40	1724.90	1709.30	1717.10	1733.50	1728.30
23.1.2.3		400 mm dia	Metre	1920.90	1914.90	1920.90	1927.00	1938.20	1935.70	1922.70	1939.10	1923.50	1931.30	1947.80	1942.60
A 23.2		Boring/drilling bore well of required dia for casing/ strainer pipe, by suitable method prescribed in IS: 2800 (part I), including collection samples from different strata, preparing and submitting strata chart/bore log, including hire & running charges of all equipments, tools, plants & machineries required for the job, all complete as per direction of Engineer-in-charge, beyond 150 metre depth below ground level.													
A 23.2.1		All types of soil													
A 23.2.1.1		300 mm dia	Metre	851.80	848.60	851.80	855.10	861.10	859.70	852.80	861.50	853.20	857.40	866.10	863.40
A 23.2.1.2		350 mm dia	Metre	946.50	942.90	946.50	950.10	956.70	955.20	947.50	957.30	948.00	952.60	962.40	959.30
A 23.2.1.3		400 mm dia	Metre	1277.80	1272.90	1277.80	1282.60	1291.60	1289.50	1279.10	1292.30	1279.80	1286.10	1299.20	1295.10
A 23.2.2		Rock strata including Boulders													
A 23.2.2.1		300 mm dia	Metre	1755.70	1749.60	1755.70	1761.70	1773.00	1770.40	1757.40	1773.80	1758.30	1766.00	1782.50	1777.30
A 23.2.2.2		350 mm dia	Metre	1810.10	1804.00	1810.10	1816.10	1827.40	1824.80	1811.80	1828.20	1812.70	1820.40	1836.90	1831.70
A 23.2.2.3		400 mm dia	Metre	2259.60	2252.70	2259.60	2266.60	2279.40	2276.40	2261.60	2280.40	2262.60	2271.50	2290.30	2284.40
A 23.3		Supplying, assembling, lowering and fixing in vertical position in bore well unplasticized PVC medium well casing (CM) pipe of required dia, conforming to IS: 12818 including required hire and labour charges, fittings and accessories etc. all complete, for all depths, as per direction of Engineer-in-charge													
A 23.3.1		100 mm nominal size dia	Metre	733.70	686.10	733.70	781.30	869.70	849.30	747.30	876.50	754.10	815.30	944.50	903.70
A 23.3.2		150 mm nominal size dia	Metre	843.70	788.90	843.70	898.50	1000.30	976.80	859.40	1008.10	867.20	937.70	1086.40	1039.40
A 23.3.3		200 mm nominal size dia	Metre	1303.50	1218.60	1303.50	1388.40	1546.10	1509.70	1327.80	1558.20	1339.90	1449.00	1679.40	1606.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 23.4		Supplying, assembling, lowering and fixing in vertical position in bore well unplasticized PVC medium well screen (RMS) pipes with ribs, conforming to IS: 12818 including required hire and labour charges, fittings and accessories etc. all complete, for all depths, as per direction of Engineer-in-charge													
A 23.4.1		100 mm nominal size dia	Metre	796.60	744.90	796.60	848.30	944.40	922.20	811.40	951.80	818.80	885.30	1025.60	981.30
A 23.4.2		150 mm nominal size dia	Metre	911.80	852.60	911.80	971.10	1081.10	1055.70	928.80	1089.60	937.20	1013.40	1174.30	1123.50
A 23.4.3		200 mm nominal size dia		1389.40	1298.90	1389.40	1479.90	1648.00	1609.20	1415.20	1660.90	1428.20	1544.50	1790.20	1712.60
A 23.5		Supplying, filling, spreading and leveling stone boulders of size range 5 cm to 20 cm, in recharge pit, in the required thickness, for all leads & lifts, all complete as per direction of Engineer-in-charge.	Cum	1553.20	1461.40	1553.20	1645.00	1815.40	1776.00	1579.40	1828.50	1592.50	1710.50	1959.60	1880.90
A 23.6		Supplying, filling, spreading and leveling gravels of size range 5 mm to 10 mm, in the recharge pit, over the existing layer of boulders, in required thickness, for all leads & lifts, all complete as per direction of Engineer-in-charge.	Cum	1553.20	1461.40	1553.20	1645.00	1815.40	1776.00	1579.40	1828.50	1592.50	1710.50	1959.60	1880.90
A 23.7		Supplying, filling, spreading and leveling coarse sand of size range 1.5 mm to 2 mm in the recharge pit, in required thickness over gravel layer, for all leads & lifts, all complete as per direction of Engineer-in-charge.	Cum	1553.20	1461.40	1553.20	1645.00	1815.40	1776.00	1579.40	1828.50	1592.50	1710.50	1959.60	1880.90
A 23.8		Gravel packing in tubewell construction in accordance with IS: 4097, including providing gravel fine/ medium/ coarse, in required grading & sizes as per actual requirement, all complete as per direction of Engineer-in-charge.	Cum	1747.90	1645.40	1747.90	1850.50	2040.90	1996.90	1777.20	2055.50	1791.90	1923.70	2202.00	2114.10
A 23.9		Providing and fixing factory made precast RCC perforated drain covers, having concrete of strength not less than M-25, of size 1000x50 mm, reinforced with 8 mm dia four nos longitudinal & 9 nos cross sectional T.M.T. hoop bars, including providing 50 mm dia perforations @ 100 to 125 mm c/c, including providing edge binding with M.S. flats of size 50 mm x 1.6 mm complete, all as per direction of Engineer-in-charge.	Cum	1489.90	1392.50	1489.90	1587.40	1768.40	1726.60	1517.80	1782.30	1531.70	1657.00	1921.60	1838.00
A 23.10		Supplying, assembling, lowering and fixing in vertical position in bore wall, ERW (Electric Resistance Welded) FE 410 mild steel screwed and socketed/plain ended casing pipes of required dia, conforming to IS: 4270, of reputed & approved make, including painted with outside surface with two coats of anticorrosive paint of approved brand and manufacture, including required hire & labour charges, fittings & accessories, all complete, for all depths, as per direction of Engineer-in-charge.													
A 23.10.1		100 mm nominal size dia having minimum wall thickness 5.00 mm	Metre	1427.20	1338.30	1427.20	1516.00	1681.10	1643.00	1452.60	1693.80	1465.30	1579.50	1820.70	1744.50
A 23.10.2		150 mm nominal size dia having minimum wall thickness 5.00 mm	Metre	2001.90	1876.30	2001.90	2127.50	2360.80	2307.00	2037.80	2378.70	2055.80	2217.30	2558.20	2450.50
A 23.10.3		200 mm nominal size dia having minimum wall thickness 5.40 mm	Metre	2485.00	2328.60	2485.00	2641.40	2932.00	2864.90	2529.70	2954.30	2552.10	2753.20	3177.80	3043.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 23.11		Supplying, assembling, lowering and fixing in vertical position in bore wall, ERW (Electric Resistance Welded) FE 410 plain slotted (having slot of size 1.6/3.2 mm) mild steel threaded and socketed/plain bevel ended pipe (type A) of required dia, conforming to IS: 8110, of reputed & approved make, having wall thickness not less than 5.40 mm, including painted with outside surface with two coats of anticorrosive bitumestic paint of approved brand and manufacture, including hire & labour charges, fittings & accessories, all complete, for all depths, as per direction of Engineer-in-charge.													
A 23.11.1		100 mm nominal size dia	Metre	1526.60	1431.30	1526.60	1622.00	1799.10	1758.20	1553.90	1812.70	1567.50	1690.10	1949.00	1867.20
A 23.11.2		150 mm nominal size dia	Metre	2134.50	2000.20	2134.50	2268.80	2518.20	2460.60	2172.90	2537.30	2192.10	2364.70	2729.20	2614.10
A 23.11.3		200 mm nominal size dia	Metre	2618.60	2453.50	2618.60	2783.70	3090.40	3019.60	2665.80	3113.90	2689.40	2901.70	3349.80	3208.30
A 23.12		Development of tube well in accordance with IS: 2800 (part I) and IS: 11189, to establish maximum rate of usable water yields without sand content (beyond permissible limit), with required capacity air compressor, running the compressor for required time till well is fully developed, measuring yields of well by "V" notch method or any other approved method, measuring static level & draw down etc. by step draw down method, collecting water samples & getting tested in approved laboratory, i/c disinfection of tubewell, all complete, including hire & labour charges of air compressor, tools & accessories etc., all as per requirement and direction of Engineer-in-charge.	Hour	941.90	941.90	941.90	941.90	941.90	941.90	941.90	941.90	941.90	941.90	941.90	941.90
A 23.13		Providing and fixing suitable size threaded mild steel cap or spot welded plate to the top of bore well housing/casing pipe, removable as per requirement, all complete for borewell of:													
A 23.13.1		100 mm dia	Each	222.00	208.00	222.00	237.00	264.00	258.00	226.00	266.00	228.00	247.00	287.00	274.00
A 23.13.2		150 mm dia	Each	246.90	230.80	246.90	263.10	293.10	286.20	251.60	295.40	253.90	274.60	318.50	304.60
A 23.13.3		200 mm dia	Each	329.30	307.70	329.30	350.80	390.80	381.60	335.40	393.90	338.50	366.20	424.70	99965.30
A 23.14		Providing and fixing M.S. clamp of required dia to the top of casing/housing pipe of tubewell as per IS: 2800 (part I), including necessary bolts & nuts of required size complete.													
A 23.14.1		100 mm clamp	Each	1725.00	1705.60	1725.00	1761.60	1799.70	1791.10	1735.90	1811.40	1749.10	1767.00	1873.60	1837.80
A 23.14.2		150 mm clamp	Each	2406.50	2380.30	2406.50	2456.80	2508.20	2496.70	2421.50	2524.50	2439.90	2463.60	2610.40	2561.00
A 23.14.3		200 mm clamp	Each	2736.10	2707.10	2736.10	2792.70	2849.80	2837.00	2753.00	2868.20	2774.00	2799.80	2965.10	2909.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 23.15		Providing and fixing Bail plug/Bottom plug of required dia to the bottomof pipe assembly of tubewell as per IS: 2800 (part I).													
A 23.15.1		100 mm dia	Each	279.90	261.60	279.90	298.20	332.20	324.30	285.10	334.80	287.70	311.30	361.00	345.30
A 23.15.2		150 mm dia	Each	345.70	323.10	345.70	368.30	410.40	400.70	352.20	413.60	355.40	384.50	445.90	426.50
A 23.15.3		200 mm dia	Each	378.70	353.90	378.70	403.40	449.40	438.80	385.70	453.00	389.30	421.10	488.40	467.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		24.0 CONSERVATION OF HERITAGE BUILDINGS													
A 24.1		Raking out joints of stone masonry surface to the required width and depth, with due care and precaution, by mechanical / manual means, including preparing and cleaning the surface for re-pointing/ refilling of joints, including disposal of rubbish to the dumping ground within 50 meter lead :	Sqm	41.90	41.80	41.90	41.90	42.00	42.00	41.90	42.00	41.90	41.90	42.00	42.00
A 24.2		Providing and fixing double scaffolding system (cup lock type) on the exterior side of building/ structure, upto 25 meter height, above ground level, including additional rows of scaffolding in stepped manner as per requirement of site, made with 40mm dia M.S tube, placed 1.5 meter center to center, horizontal 7 vertical tubes joint with cup & lock system with M.S Tubes, M.S tube challis, M.S clamps and staircase system in the scaffolding for working platform etc. and maintaining it in a serviceable condition for execution of work of cleaning and/ or pointing and/ or applying chemical and removing it thereafter. The scaffolding system shall be stiffened with with bracings, runners, connecting with the building etc, wherever required, if feasible, for inspection of work at required locations with essential safety features for the workmen etc., complete as per directions and approval of the Engineer-in-charge. NOTE: (1) The elevational area of the scaffolding shall be measured for payment purpose. (2) The payment will be made once only for execution of all items for such works.	Sqm	242.80	237.60	242.80	247.90	257.50	255.30	244.20	258.30	245.00	251.60	265.60	261.20
A 24.3		Cleaning the sand stone surface and removing dirt, dust, bird dropping, grease, oil, algae, fungus, monkey beats, vegetable growth etc., including providing, applying and washing the surface with liquid Ammonia Chemical of 5% solution and other chemical cleaning agent as approved by the Archaeological Survey of India/ Engineer-in-charge, of approved brand and manufacturer, with the help of required scrubbers and also cleaning eith machine operated water jet mixed with desired quantity of fine silica wherever required, without causing any scratching/ damage to the stone surface and finally washing the suraface with clean water with the help of pressure jet machine, complete in all respect, including taking all precautions to safeguard ventillators, windows, doors etc. by suitable covering so as to avoid any damage to the building/ structure, all as per direction of Engineer-in-charge (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	141.10	140.10	141.10	142.10	144.00	143.60	141.40	144.20	141.60	142.90	145.60	144.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
24.4		Providing and applying antifungal wash treatment using 3% solution of sodium pentachlorophenate, of reputed brand and manufacturer, on cleaned sand stone surface at desired locations as per direction of Engineer-in-charge (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	54.00	536.18	542.10	548.03	559.03	556.49	543.79	559.87	544.64	552.26	568.34	563.26
A 24.5		Ruled / Flush pointing on Red sand stone masonry surface with lime, surkhi and marble dust mortar in the ratio of 1:1.5:0.5 (50% red and 50% light yellow surkhi) : 1/2 arble dust). (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	226.20	222.60	222.80	223.00	223.40	223.30	222.90	223.40	222.90	223.10	223.60	223.50
A 24.6		Ruled / Flush pointing on White sand stone masonry surface with lime, surkhi and marble dust mortar in the ratio of 1:1.5:0.5 (15% dark red and 85% light yellow surkhi) : 1/2 arble dust). (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	226.20	222.60	222.80	223.00	223.40	223.30	222.90	223.40	222.90	223.10	223.60	223.50
A 24.7		Appying two or more coat of Ethyl Silicate chemical as approved by ASI / Engineer-in-charge, of approved brand and manufacturer, with brush or spray on the existing stone masonry surface till there is no further absorption of chemical by stone surface, including protecting the applied surface from direct sunlight by suitable means during application, all complete as per direction of the Engineer-in-charge. (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	342.40	322.80	342.40	362.10	398.60	390.10	348.00	401.40	350.90	376.10	429.40	412.60
A 24.8		Applying breathable, non-reactive, antifungal, and water repellant Silane/Siloxane chemical as approved by ASI /Engineer-in-Charge, of approved brand and manufacturer, diluted with solvent mineral Turpentine oil in the ratio 1:12 (1 part of approved chemical : 12 part of Turpentine oil) on existing sand stone masonry surface with two or more coats to give uniform application of chemical on the surface, all complete as per direction of the Engineer-in-charge. (The rate is inclusive of all materials & labours involved except scaffolding)	Sqm	99.70	95.20	99.70	104.20	112.50	110.60	101.00	113.10	101.60	107.40	119.50	115.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		25.0 STRUCTURAL GLAZING													
A 25.1		Providing and supplying aluminium extruded tubular and other aluminium sections as per the architectural drawings and approved shop drawings, the aluminium quality as per grade 6063 T5 or T6 as per BS 1474, including super durable powder coating of 60-80 microns conforming to AAMA 2604 of required colour and shade as approved by the Engineer-in-charge. (The item includes cost of material such as cleats, sleeves, screws etc. necessary for fabrication of extruded aluminium frame work. Nothing extra shall be paid on this account) The weight of aluminium extruded section shall be taken for purpose of payment.	Kg	455.80	426.00	455.80	485.60	541.00	528.20	464.30	545.30	468.60	506.90	587.90	562.30
A 25.2		Designing, fabrication, testing, protection, installing and fixing in position semi (grid) unitized system of structural glazing (with open joints) for linear as well as curvilinear portions of the building for all heights and all levels, including:													
		(a) Structural analysis & design and preparation of shop drawings for the specified design loads conforming to IS 875 part III (the system must passed the proof test at 1.5 times design wind pressure without any failure), including functional design of the aluminium sections for fixing glazing panels of various thickness, aluminium cleats, sleeves and splice plates etc. gaskets, screws, toggles, nuts, bolts, clamp etc., structural and weather silicone sealants, flashings, fire stop (barrier)-cum-smoke seals, microwave cured EPDM gaskets for water tightness, pressure equalisation & drainage and protection against fire hazard including:													
		(b) Fabricating and supplying serrated M.S. hot dip galvanised/ Aluminium alloy of 6005 T5 brackets of required sizes, sections and profiles etc. to accommodate 3 Dimensional movement for achieving perfect verticality and fixing structural glazing system rigidly to the RCC/masonry/structural steel framework of building structure using stainless steel anchor fasteners/bolts, nylon seperator to prevent bimetallic contacts with nuts and washers etc. of Stainless steel grade 316, of the required capacity and in required numbers.													
		(c) Providing and filling, two part pump filled, structural silicone sealant and one part weather silicone sealant compatible with the structural silicone sealant of required bite size in a clean and controlled factory / work shop environment, including double sided spacer tape, setting blocks and backer rod, all of approved grade, brand and manufacture, as per the approved sealant design, within and all around the perimeter for holding glass.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		(d) Providing and fixing in position flashings of solid aluminium sheet 1 mm thick and of sizes, shape and profiles, as required as per the site conditions, to seal the gap between the building structure and all its interfaces with curtain glazing to make it watertight.													
		(e) making provision for drainage of moisture/ water that enters the curtain glazing system to make it watertight, by incorporating principles of pressure equalization, providing suitable gutter profiles at bottom (if required), making necessary holes of required sizes and of required numbers etc. complete. This item includes cost of all inputs of designing, labour for fabricating and installation of aluminium grid, installation of glazed units, T&P, scaffolding and other incidental charges including wastages etc., enabling temporary structures and services, cranes or cradles etc. as described above and as specified. The item includes the cost of getting all the structural and functional design including shop drawings checked by a structural designer, dully approved by Engineer-in-charge. The item also includes the cost of all mock ups at site, cost of all samples of the individual components for testing in an approved laboratory, field tests on the assembled working structural glazing as specified, cleaning and protection till the handing over of the building for occupation. In the end, the contractor shall provide a water tight structural glazing having all the performance characteristics etc. all complete as required, as per the Architectural drawings, as per item description, as specified, as per the approved shop drwaings and as directed by th Engineer-in-charge.	Sqm	3629.10	3391.70	3629.10	3866.50	4307.40	4205.70	3696.90	4341.30	3730.80	4036.10	4680.50	4477.00
		Note:- 1. The cost of providing extruded aluminium frames, shadow boxes, extruded aluminium section capping for fixing in the grooves of the curtain glazing and vermin proof stainless steel wire mesh shall be paid for seperately under relevant items under this sub- head. However, for the purpose of payment, only the actual area of structural glazing (including width of grooves) on the external face shall be measured in sqm. up to two decimal places.													
		Note:- 2. The following performance test are to be conducted on structural glazing system if area of structural glazing exceeds 2500 Sqm from the certified laboratories accredited by NABL (national Accreditation board for Testing and Calibration laboratories), Department of science & technologies, India. Cost of testing is payable separately.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		The NIT approving authority will decide the necessity of testing on the basis of cost of the work, cost of the test and importance of the work. Performance Testing of Structural glazing system Tests to be conducted in the NABL accredited lab or by any other accreditation body which operates in accordance with ISO/IEC 17011 and accredits labs as per ISO/IEC 17025.													
		1. Performance laboratory Test for Air leakage Test (-50pa to -300pa) & (+50pa to +300pa) as per ASTM E-283-04 testing method for a range of testing limit 1 to 200mVhr													
		2. Static water Penetration Test. (50pa to 1500pa) as per ASTM E-331-09 testing method for a range up to 2000 ml.													
		3. Dynamic water Penetration. (50pa to 1500pa) as per AAMA 501.01- 05 testing method for a range up to 2000 ml.													
		4. Structural Performance Deflection and deformation by static air pressure test (1.5 times design wind pressure without any failure) as per ASTM E-330-10 testing method for a range upto 50 mm													
		5. Seismic movement Test (upto 30 mm) as per AAMA 501.4-09 testing method for Qualitative test, test to be conducted on site.													
		6. Onsite Test for water leakage for a pressure range 50kpa to 240 kpa (35psi) upto 2000 ml													
A 25.3		Providing and supplying vision glass panels (IGUs) comprising of hermetically-sealed 6-12-6 mm insulated glass (double glazed) vision panel units of size and shape as required and specified, comprising of an outer heat strengthened float glass 6mm thick, of approved colour and shade with reflective soft coating on surface # 2 of approved colour and shade, an inner heat strengthened clear float glass 6mm thick, spacer tube 12 mm wide, dessicants, including primary seal and secondary seal (structural silicone sealant) etc. all complete for the required performances, as per the Architectural drawings, as per the approved shop drawings, as specified and as directed by the Engineer-in-charge. The IGUs shall be assembled in the factory/workshop of the glass processor.													
		Payment for fixing of IGU Panels in the curtain glazing is included in cost of item No. 25.2)													
		For Payment, only the actual area of glass on face # 1 of the glass panels (excluding the areas of the grooves and weather silicone sealant) provided and fixed in position, shall be measured in sqm.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		(i) Coloured tinted float glass 6 mm thick substrate with reflective soft coating on face # 2, + 12 mm Airgap +6 mm Heat Strengthened clear Glass of approved make having properties as visible light transmittance (VLT) of 25 to 35 %, Light reflection internal 10 to 15 %, light reflection external 10 to 20 %, shading coefficient (0.25-0.28) and U value of 3.0 to 3.3 W/m2 degree K etc. The properties of performance glass shall be decided by technical sanctioning authority as per the site requirement.	Sqm	4000.80	3739.00	4000.80	4262.50	4748.60	4636.40	4075.50	4786.00	4112.90	4449.50	5159.90	4935.50
A 25.4		Extra for openable side / top hung vision glass panels (IGUs) including providing and supplying at site all accessories and hardwares for the openable panels as specified and of the approved make such as heavy duty stainless steel friction hinges, min 4 -point cremone locking sets with stainless steel plates, handles, buffers etc. including necessary stainless steel screws/fasteners, nuts, bolts, washers etc. all complete as per the Architectural drawings, as per the approved shop drawings, as specified and as directed by the Engineer-in-charge.	Sqm	3892.20	3637.60	3892.20	4146.80	4619.70	4510.60	3964.90	4656.10	4001.30	4328.70	5019.80	4801.60
A 25.5		Providing, fabrication and supplying shadow box of required size and shape, for fixing in the spandrel portion of the structural glazing, in linear as well as curvilinear portions of the building by providing semi-rigid, inorganic, non-combustible fibre glass wool insulation 50 mm thick, conforming to IS:8183 and BS: 3958 Part 5. The insulation layer shall have fencing (factory bonded on surface # 1 of the fibre glass insulation layer), of black non-woven fibre glass tissue of nominal thickness 0.5 mm and nominal mass not less than 60 gm/sqm, made of randomly oriented glass fibres distributed in a binder by a wet-lay process including fixing 1.5 mm thick solid aluminium sheet backing using, 6 mm thick cement board including SS rivets, nuts, bolts, washers etc	Sqm	2317.70	2166.10	2317.70	2469.30	2750.90	2685.90	2361.00	2772.60	2382.70	2577.60	2989.20	2859.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 25.6		Providing and supplying Spandrel Glass Panels comprising of 6 mm thick heat strengthened monolithic float glass of approved colour and shade with reflective soft coating on surface # 2 of approved colour and shade so as to match the colour and shade of the IGUs in the vision panels etc., all complete for the required performances as specified, as per the Architectural drawings, as per the approved shop drawings, as specified, and as directed by the Engineer-in-charge. For payment, only the actual area of glass on face 3 1 of the glass panels (but excluding the areas of grooves and weather silicone sealant) provided and fixed in position, shall be measured in sqm. (Payment for fixing of Spandrel Glass Panels in the curtain glazing is included in cost of relevent item). "(i) Coloured tinted float glass 6 mm thick substrate with reflective soft coating on face # 2, having properties as visible Light transmittance (VLT) of 25 to 35 %, Light reflection internal 10 to 15 %, light reflection external 10 to 20 %, shading coefficient (0.25-0.28) and U value of 3.0 to 3.3 W/m2 K etc. The properties of performance glass shall be decided by tachtical sanctioning authority as per the site requirement.	Sqm	2618.40	2447.10	2618.40	2789.70	3107.90	3034.40	2667.40	3132.30	2691.80	2912.10	3377.00	3230.20
A 25.8		Design supply & installation of suspended Spider Glazing system designed to withstand the wind pressure as per IS 875 (Part III). The Suspended System held with Spider Fittings of SS-316 Grade Steel of approved manufacturer with glass panel having 12 mm thick clear toughened glass held together with SS- 316 Grade Stainless steel Spider & bolt assembly with laminated glass fins 21 mm thick. The Glass fins and glass panel assembly shall be connected to Slab/beams by means of SS- 316 Grade stainless steel brackets & Anchor bolts, and at the bottom using SS channel of 50x25x2 mm using fastener & anchor bolts, non staining weather sealants of approved make, Teflon/ nylon bushes and separators to prevent bi-metallic contacts, all complete to perform as per specification and approved drawings. The complete system to be designed to accommodate thermal expansion & seismic movement etc. The joints between glass panels (6 to 8 mm) and gaps at the perimeter & in U channel of the assembly to be filled with non staining weather sealant, so as to make the entire system fully water proof & dust proof.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		The rate shall include all design, Engineering and shop drawing including approval from structural designer, labour, T&P, scaffolding, other incidental charges including wastage, enabling temporary services all fitting fixers nut bolts, washer, Buffer plates, fastener, anchors, SS channel laminated glass etc. all complete. For the purpose of payment, actual elevation area of Glazing including thickness of joints and the portion of Glass panel inside the SS channel shall be measured.	Sqm	10469.00	9784.10	10469.00	11153.90	12425.80	12132.30	10664.70	12523.70	10762.50	11643.10	13502.10	12915.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		26.0 NEW TECHNOLOGIES AND MATERIALS													
A 26.1		Providing and fixing in position Phenol bonded Bamboowood flooring with planks of sizes 14 mm thick, 180 mm length (minimum) and 130 mm wide (minimum), in approved colour, texture and finish, having Performance Appraisal Certificate (PAC) issued by Building Materials & Technology Promotion Council (BMTPC). The flooring shall be fixed with tongue and groove interlocking system, with underlayment of 4 mm thick expanded polyethylene foam sheets having density 40 Kg/cum, over prepared surface with necessary quarters round planks of size 1900 mm x 18 mm and door reducer of size 1900 mm x 44 mm, wherever required. The bamboowood planks shall have minimum density of 1000 Kg/cum & minimum Hardness 1000 Kgf. with Eco friendly UV coating, all complete as per direction of the Engineer-in-charge.	Sqm	6478.10	6057.30	6478.10	6898.90	7680.30	7500.00	6598.30	7740.50	6658.40	7199.50	8341.60	7980.90
A 26.2		Providing and fixing in position Phenol bonded Bamboowood in wall skirting with planks of sizes 14 mm thick, 1900 mm length (minimum) and 85 mm wide (minimum), in approved colour, texture and finish, having Performance Appraisal Certificate (PAC) issued by Building Materials & Technology Promotion Council (BMTPC). The skirting shall be fixed with SS screws & rawl plugs, over underlayment of 4 mm thick expanded polyethylene foam sheets having 40 Kg/cum density over prepared surface. The bamboowood planks shall have minimum density of 1000 Kg/cum & minimum Hardness 1000 Kgf. with Eco friendly UV coating, all complete as per direction of the Engineer-in-charge.	Sqm	6293.20	5891.60	6293.20	6694.90	7440.80	7268.60	6408.00	7498.20	6465.40	6981.80	8071.90	7727.70
A 26.3		Providing and fixing in position Phenol bonded Bamboowood wall cladding at all height with planks of sizes 10 mm thick, 1800 mm length (minimum) and 130 mm wide (minimum), in approved colour, texture and finish, having Performance Appraisal Certificate (PAC) issued by Building Materials & Technology Promotion Council (BMTPC), with necessary profiled edges fixed with 40 mm screws 5 nos in each tile to frame work made of second class teak wood of size 20x15 mm in centre of each tile and bottom and top of work height, 40x15 mm placed at ends of each tiles. The cladding shall be laid over backlayment of 1.00 mm thick expanded polyethylene foam of density 40 Kg/cum in two layers, first layer on wall surface before fixing wooden frame and second layer on frame under cladding. The bamboowood planks shall have minimum density of 1000 Kg/cum & minimum Hardness 1000 Kgf. with Eco friendly UV coating, all complete as per direction of the Engineer-in-charge.	Sqm	6744.70	6313.10	6744.70	7176.30	7977.80	7792.80	6868.00	8039.40	6929.60	7484.50	8656.00	8286.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26.4		Providing and fixing in position Phenol bonded Bamboowood panelled or panelled and glazed shutters for doors windows, clerestory windows with pre-moulded 30 mm thick planks, in approved colours, texture & finish. It shall have 10 mm wide, 25 mm deep grive to fit in panels.The bamboowood shall have minimum density of 1000 Kg/cum, minimum Hardness 1000 Kgf. All styles and rails shall have profiled interlocking system locked in place by Bamboo pins, all complete as per direction of the Engineer-in-charge. (The panelling will be paid for separately).	Sqm	6614.80	6196.10	6614.80	7033.50	7811.10	7631.60	6734.40	7870.90	6794.20	7332.50	8469.00	8110.10
A 26.5		Providing and fixing in position Phenol bonded Bamboowood panelling of 10 mm thick, in 25 to 40 mm thick panelled or panelled and glazed shutters for doors, windows, clerestory windows, in approved colour, texture & finish.The bamboowood planks shall have minimum density of 1000 Kg/cum & minimum Hardness 1000 Kgf. The panels shall profiled interlocking system locked in place with Bamboo pins, all complete as per direction of the Engineer-in-charge. (area of opening for panel inserts excluding portion inside grooves or rebates to be measured)	Sqm	4067.90	3847.10	4067.90	4288.60	4698.60	4604.00	4131.00	4730.20	4162.50	4446.30	5045.60	4856.30
A 26.6		Providing and fixing in position 65 mm thick factory made door frame of Phenol bonded Bamboowood (superior class, interior use), in approved colour, texture & finish.The bamboowood shall have minimum density of 1000 Kg/cum & minimum Hardness 1000 Kgf. The door frame shall have tenon & mortise interlocking system, to be fixed to the wall with 100 mm size G.I. screws all complete as per direction of the Engineer-in-charge.	Cum	305.80	287.20	305.80	324.40	358.90	351.00	311.10	361.60	313.80	337.70	388.10	372.20
A 26.6A		Providing, erecting, laying and fixing in position in 3.5 to 4 mm thick bamboo mat corrugated sheet (BMCS) as per IS: 15476-2004 in roofing with self drilling screws along with EPDM washers complete or with galvanized iron J or L hooks 8 mm dia G.I. plain and bitumen washers etc, all complete as per direction of the Engineer-in-charge.	Sqm	6166.50	5779.50	6166.50	6566.10	7308.20	7136.90	6280.70	7365.20	6337.70	6851.50	7936.10	7593.60
A 26.6B		Providing and fixing in position ridges of 3.5 to 4 mm thick bamboo mat ridge cap (BMRC) as per IS: 15476-2004 in roofing with self drilling screws along with EPDM washers complete or with galvanized iron J or L hooks 8 mm dia G.I. plain and bitumen washers etc, all complete as per direction of the Engineer-in-charge.	Metre	5086.50	4756.20	5086.50	5416.80	6030.10	5888.50	5180.90	6077.30	5228.00	5652.60	6549.10	6266.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26.6C		Providing and fixing at all height false ceiling of 4 mm thick phenol bonded Bamboo Mat board (595x595 mm) conforming to IS: 13958-1994 including providing and fixing of frame work made of GI angle 25x25x0.4 mm thick all around suitably fixed to wall with the help of dash fastener and hanger frame (600x600 c/c) made GI slotted Tee having powder coating on bottom side (30x25x0.3 mm thick for main member & 25x25x0.3 mm for cross member) connected to ceiling with 2.64 mm GI wire and anchor fastener at every junction and also including cost of making openings for light fittings, grills, diffusers, cut outs made with frame of perimeter channels suitably fixed all complete as per direction of the Engineer-in-charge.	Sqm	3792.10	3575.60	3792.10	4016.40	4433.00	4336.80	3856.20	4465.00	3888.20	4176.60	4785.50	4593.20
A 26.6D		Providing and fixing at bamboo Mat board conforming to IS: 13958-1994 for partition to frame by bucking or studding with screws etc. complete (Frames, backing or studding to be paid separately)													
A 26.6D.1		3 mm thickness	Sqm	2808.70	2643.10	2808.70	2980.00	3298.30	3224.90	2857.60	3322.80	2882.10	3102.50	3567.60	3420.70
A 26.6D.2		4 mm thickness	Sqm	3206.30	3017.50	3206.30	3403.60	3770.20	3685.60	3262.70	3798.40	3290.90	3544.60	4080.40	3911.20
A 26.6D.3		6 mm thickness	Sqm	3828.60	3602.00	3828.60	4066.70	4508.80	4406.80	3896.60	4542.90	3930.60	4236.70	4883.00	4678.90
A 26.6D.4		9 mm thickness	Sqm	4848.50	4560.90	4848.50	5153.30	5719.40	5588.70	4935.60	5762.90	4979.10	5371.00	6198.40	5937.10
A 26.6D.5		12 mm thickness	Sqm	5586.60	5253.60	5586.60	5939.70	6595.50	6444.20	5687.50	6645.90	5738.00	6191.90	7150.40	6847.70
A 26.6E		Providing and fixing at all height wall panelling with phenol bonded Bamboo Mat board conforming to IS: 13958-1994 including providing and fixing to frame work made of 50mm x 50mm hardwood plugs including cutting bricks work and fixing in cement mortar and making good the wall etc. and also providing and fixing wooden moulded corner beading of triangular shape to thr junction of panelling etc. with iron screws all complete as per direction of Engineer-in-charge.													
A 26.6E.1		9 mm thickness	Sqm	5126.70	4822.00	5126.70	5449.30	6048.60	5910.30	5218.80	6094.70	5264.90	5679.80	6555.60	6279.10
A 26.6E.2		12 mm thickness	Sqm	5864.80	5514.90	5864.80	6235.70	6924.70	6765.70	5970.80	6977.70	6023.80	6500.70	7507.60	7189.70
A 26.7		Providing and fixing 50 mm thick extruded polystyrene rigid insulation board of required size between cavity wall, complying with ISO 4898:2008 & ASTM C 578-08b - type VI, having thermal conductivity of 0.0289 W/m K as per ASTM C 578 (measured as per IS 3346), compressive strength of > 350 KPa listed as per ASTM D 1621, density of 34-36 Kg/m3 as per ASTM D 1622, water absorptions ≤ 1 % by volume as per ASTM D 2842, oxygen index of 24.1 to 28.1 listed as per ASTM D 2863, cell size 0.4 mm of dia (max) as per ASTM D 3576. Fire retardent property as per DIN 4102, Part 1 of class B2 and as per ASTM E84 class A, fixed with suitable water based adhesive and fastener, complete in all respect as per direction of Engineer-in-charge.	Sqm	969.70	909.90	969.70	1029.60	1140.70	1115.00	986.80	1149.20	995.40	1072.30	1234.70	1183.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26.8		Providing and fixing 50 mm thick extruded polystyrene rigid insulation board of required size underdeck on ceiling surface, complying with ISO 4898:2008 & ASTM C 578-08b - type VI, having thermal conductivity of 0.0289 W/m K as per ASTM C 578 (measured as per IS 3346), compressive strength of > 350 KPa listed as per ASTM D 1621, density of 34-36 Kg/cum as per ASTM D 1622, water absorptions ≤ 1 % by volume as per ASTM D 2842, oxygen index of 24.1 to 28.1 listed as per ASTM D 2863, cell size 0.4 mm of dia (max) as per ASTM D 3576. Fire retardent property as per DIN 4102, Part 1 of class B2 and as per ASTM E84 class A, fixed with suitable water based adhesive and fastener, complete in all respect as per direction of Engineer-in-charge.	Sqm	1024.90	965.10	1024.90	1084.70	1195.90	1170.20	1042.00	1204.40	1050.60	1127.50	1289.90	1238.60
A 26.9		Providing and fixing factory made solid Foam uPVC profile for kitchen cabinet frame (45 x 20 mm) of approved shade, quality and make. The profile shall be laminated on both sides, made from rigrid foam sheets (Single extruded) having density 600 Kg/cum and the exposed edges sealed with PVC edge beading of same shade and colour. The frame shall be fire retardant with necessary screw holding capacity. Frame shall be fixed to wall using Expendable fastner with necessary stainless steel screws, all complete as per direction of Engineer-in-charge.	Metre	435.90	412.20	435.90	459.70	503.90	493.70	442.70	507.30	446.10	476.70	541.30	520.90
A 26. 10		Providing and fixing factory made kitchen Cabinet Shutter/Partition 20 mm nominal thickness of approved shade, quality and make, made from rigid foam sheets (Single extruded) having density 600 Kg/cum and laminated on both side by laminate Sheet/PVC foil lamination.The exposed edges shall be sealed with PVC edge beading of same shade and colour. The shutter shall be fire retardent having necessary screw holding capacity. Shutter shall be fixed to frame using approved hinges with necessary stainless steel screws, all complete as per direction of Engineer-in-charge.	Sqm	5157.20	4891.40	5157.20	5422.90	5916.40	5802.50	5233.10	5954.40	5271.00	5612.70	6334.00	6106.20
A 26. 11		Providing and fixing conceled hinge of approved quality for 19-20 mm thick door with stainless steel screws complete :	Each	122.30	115.40	122.30	129.20	142.00	139.00	124.20	143.00	125.20	134.10	152.90	146.90
A 26. 12		Supplying & laying of bi-axial extruded high modulus polypropylene geogrid conforming to MORTH SPECIFICATION for base/sub-base reinforcement having minimum tensile strength 15 KN/m in the longitudinal and tranverse direction, with 5 KN/m and 7 KN/m tensile strength at 2% and 5% strain respectively in the longitudinal and transverse direction, junction efficiency not less than 95% and with 38mm x 38mm mesh opening.	Sqm	185.10	173.40	184.20	194.90	214.90	210.30	187.20	216.50	188.80	202.60	231.90	222.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 13		Supplying & laying of bi-axial extruded high modulus polypropylene geogrid conforming to MORTH SPECIFICATION for base/sub-base reinforcement having minimum tensile strength 20 KN/m in the longitudinal and tranverse direction, with 7 KN/m and 14 KN/m tensile strength at 2% and 5% strain respectively in the longitudinal and transverse direction, junction efficiency not less than 95% and with 38mm x 38mm mesh opening.	Sqm	209.80	196.50	208.90	221.20	244.30	238.90	212.40	246.00	214.20	230.10	263.70	253.10
A 26. 14		Supplying & laying of bi-axial extruded high modulus polypropylene geogrid conforming to MORTH SPECIFICATION for base/sub-base reinforcement having minimum tensile strength 30 KN/m in the longitudinal and tranverse direction, with 10.5 KN/m and 21 KN/m tensile strength at 2% and 5% strain respectively in the longitudinal and transverse direction, junction efficiency not less than 95% and with 38mm x 38mm mesh opening.	Sqm	325.00	304.20	324.10	344.00	381.00	372.50	329.80	383.90	332.60	358.30	412.30	395.30
A 26. 15		Supplying & laying of bi-axial extruded high modulus polypropylene geogrid conforming to MORTH SPECIFICATION for base/sub-base reinforcement having minimum tensile strength 40 KN/m in the longitudinal and tranverse direction, with 14 KN/m and 28 KN/m tensile strength at 2% and 5% strain respectively in the longitudinal and transverse direction, junction efficiency not less than 95% and with 38mm x 38mm mesh opening.	Sqm	473.20	442.70	472.30	501.90	556.90	544.20	480.70	561.10	485.00	523.10	603.40	578.10
A 26. 16		Supplying & laying of drainage composite for use behind walls, between two different fills, alongside drains of road, below concrete lining of canals etc. Geocomposite for planar drainage, realized by thermobonding a drainage core in extruded monofilaments with two filtering nonwoven geotextiles that may also be working as separation or protecting layers. The draining three dimensional core will have a "W" configuration as longitudinal parallel channels. Minimum thickness to be 7.2 mm, with two filtering UV stabilized polypropylene nonwoven geotextile of minimum thickness of 0.75 mm characteristic opening size (O90) of 110 micron and tensile strength of 8.0 KN/m that will be working as separation or protecting layer, geocomposite having in plane flow capacity of 2.1 L / (m.s) at hydraulic gradient of 1.0 & 20 KPa pressure and tensile strength of 18 KN/m, with mass per units area of 740 gsm, supplied in the form of roll for easy transportation to site of work as per detailed specification all complete as per direction of Engineer-in-charge.	Sqm	893.00	835.00	892.10	949.20	1055.20	1030.70	908.40	1063.30	916.60	989.90	1144.90	1096.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 17		Supplying & laying of drainage composite for use behind walls, between two different fills, alongside drains of road, below concrete lining of canals etc. having thermobonding a drainage core - HDPE geonet comprises of two sets of parallel overlaid ribs integrally connected to have a rhomboidal shape with a polyethylene film and a nonwoven geotextile having mass per unit area 130gsm and tensile strength of 8.0 KN/m that will be working as separation or protecting gradient of 1.0 & 20 KPa pressure and tensile strength of 13.5 KN/m, with mass per unit area of 830 gsm, at easily accessible location including top and bottom, with all leads and lifts, manpower and machinery, materials, labour etc. complete and as directed by Engineer-in-charge.	Sqm	1057.60	988.90	1056.70	1124.60	1250.60	1221.50	1076.10	1260.30	1085.80	1173.00	1357.20	1299.10
A 26. 18		Supplying & laying high strength flexible geogrids (HSFG) as soil reinforcement / basal reinforcement as per MORTH 3100 and IRC 113, made of high tenacity polyester core with polyethylene coating with Minimum Long Term Design Strength (LTDS) of more than 50 % of ultimate tensile strength at 30 degree Celcius corresponding to 12 % strain.													
A 26. 18.1		Ultimate tensile strength - 100 KN/m	Sqm	382.70	358.00	381.70	405.40	449.40	439.30	388.50	452.80	391.90	422.30	486.70	466.40
A 26. 18.2		Ultimate tensile strength - 150 KN/m	Sqm	399.10	373.40	398.20	423.00	469.00	458.40	405.30	472.50	408.80	440.70	507.90	486.70
A 26. 18.3		Ultimate tensile strength - 200 KN/m	Sqm	547.30	511.90	546.40	580.80	644.80	630.10	556.20	649.80	561.10	605.40	699.00	669.50
A 26. 18.4		Ultimate tensile strength - 250 KN/m	Sqm	604.90	565.70	604.00	642.20	713.20	696.80	614.90	718.70	620.40	669.50	773.30	740.50
A 26. 18.5		Ultimate tensile strength - 300 KN/m	Sqm	621.40	581.10	620.40	659.80	732.80	715.90	631.70	738.40	637.30	687.80	794.50	760.80
A 26. 18.6		Ultimate tensile strength - 350 KN/m	Sqm	629.60	588.80	628.70	668.50	742.50	725.50	640.10	748.20	645.80	697.00	805.20	771.00
A 26. 18.7		Ultimate tensile strength - 400 KN/m	Sqm	802.50	750.40	801.50	852.70	947.70	925.80	816.20	955.00	823.50	889.20	1028.10	984.30
A 26. 18.8		Ultimate tensile strength - 500 KN/m	Sqm	901.20	842.70	900.30	957.90	1065.00	1040.30	916.80	1073.20	925.00	999.10	1155.50	1106.10
A 26. 18.9		Ultimate tensile strength - 600 KN/m	Sqm	925.90	865.80	925.00	984.30	1094.30	1068.90	941.90	1102.70	950.40	1026.60	1187.40	1136.60
A 26. 18.10		Ultimate tensile strength - 700 KN/m	Sqm	1148.20	1073.50	1147.30	1221.00	1358.10	1326.40	1168.40	1368.60	1178.90	1273.70	1474.00	1410.80
A 26. 18.11		Ultimate tensile strength - 800 KN/m	Sqm	1255.20	1173.50	1254.30	1335.10	1485.10	1450.50	1277.40	1496.60	1288.90	1392.80	1612.00	1542.80
A 26. 18.12		Ultimate tensile strength - 900 KN/m	Sqm	1502.20	1404.30	1501.20	1598.20	1778.20	1736.60	1528.90	1792.00	1542.80	1667.40	1930.50	1847.40
A 26. 18.13		Ultimate tensile strength - 1000 KN/m	Sqm	1707.90	1596.60	1707.00	1817.40	2022.40	1975.10	1738.60	2038.20	1754.30	1896.30	2195.90	2101.30
A 26. 18.14		Ultimate tensile strength - 1100 KN/m	Sqm	1666.80	1558.20	1665.90	1773.60	1973.60	1927.40	1696.60	1989.00	1712.00	1850.50	2142.80	2050.50
A 26. 18.15		Ultimate tensile strength - 1200 KN/m	Sqm	1811.70	1693.60	1810.70	1927.90	2145.50	2095.30	1844.20	2162.30	1861.00	2011.60	2329.70	2229.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 19		Providing at all heights, levels and locations aluminium profile industrial troughed sheet of alloy 31500/31000/40800, conforming to IS 1254, IS 737, IS 2676. The sheet shall be fixed using self drilling/self tapping SS screws of size 5.5x65 mm with EPDM seal complete upto required pitch in horizontal, vertical or curved surfaces i/c cutting to size and shape where required as per specifications, detail drawings and direction of Engineer-in-charge. The rate shall be inclusive of all screws, seal, ridge, labour, scaffolding, machinery for fixing and approved sealant where required etc. but excluding the cost of purlins, rafters and trusses.													
A 26. 19.1		0.71 mm thick, the profile detail width 1044/920 mm, cover width 1000/875 mm.	Sqm	1170.70	1098.80	1170.70	1242.70	1376.30	1345.50	1191.30	1386.60	1201.50	1294.10	1489.40	1427.70
A 26. 19.2		0.91 mm thick, the profile detail width 1044/920 mm, cover width 1000/875 mm.	Sqm	1495.00	1401.80	1495.00	1588.10	1761.20	1721.20	1521.60	1774.50	1534.90	1654.70	1907.60	1827.70
A 26. 22		Providing and fixing false ceiling at all heights with integral densified calcium silicate reinforced with fibre and natural filler false ceiling tiles of Size 595x595mm of approved texture, design and patterns having NRC (Noise Reduction Coefficient) of 0.50 (minimum) as per IS 8225: 1987, Light reflectance of 85% (minimum). Non combustible as per BS:476 (part-4), fire performance as per BS:476 (part 6 & 7), humidity resistance of 100 %, thermal conductivity < 0.043 W/m K as per ASTM 518:1991, in true horizontal level suspended on inter-locking metal T-Grid of hot dipped galvanised iron section of 0.33 mm thick (galvanized @ 120 grams per sqm including both side) comprising of main-T runners of size 24x38 mm of length 3000 mm, cross - T of size 24x32 mm of length 1200 mm and secondary intermediate cross-T of size 24x32 mm of length 600mm to form grid module of size 600x600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 grams per sqm) i.e. 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod upto 1000 mm length and L-shape level adjuster of size 85x25x25x2 mm. Galvanised iron perimeter wall angle of size 24x24x0.40 mm of length 3000 mm to be fixed on periphery wall / partition with the help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall S.S screws. The work shall be carried out as per specifications, drawing and as per directions of the Engineer-in-charge.													
A 26. 22.1		With 15 mm thick tegular edged light weight calcium silicate false ceiling tiles.	Sqm	1927.30	1827.40	1927.30	2027.20	2212.70	2169.90	1955.80	2226.90	1970.10	2098.50	2369.60	2284.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 23		Providing and fixing false ceiling at all heights with integral densified calcium silicate reinforced with fibre and natural filler false ceiling tiles of Size 595x595mm of approved texture, design and patterns having NRC (Noise Reduction Coefficient) of 0.50 (minimum) as per IS 8225: 1987, Light reflectance of 85% (minimum). Non combustible as per BS:476 (part-4), fire performance as per BS:476 (part 6 & 7), humidity resistance of 100 %, thermal conductivity < 0.043 W/m K as per ASTM 518:1991, in true horizontal level suspended on inter-locking metal powder coated T-Grid of hot dipped galvanised iron section of 0.40 mm thick on Silhouette profile, rotary stiched double webbed white with 6mm reveal profile (white/black), comprising of main-T runners of size 15x42 mm of length 3000 mm, cross - T of size 15x42 mm of length 1200 mm and secondary intermediate cross-T of size 15x42 mm of length 600mm to form grid module of size 600x600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 grams per sqm) i.e. 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod upto 1000 mm length and L-shape level adjuster of size 85x25x2 mm. Galvanised iron perimeter wall angle of size 24x19x0.40 mm of length 3000 mm to be fixed on periphery wall / partition with the help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall S.S screws. The work shall be carried out as per specifications, drawing and as per directions of the Engineer-in-charge.													
A 26. 23.1		With 15 mm thick integral densified micro edge light weight calcium silicate false ceiling tiles.	Sqm	2252.00	2130.90	2252.00	2373.20	2598.10	2546.20	2286.60	2615.40	2303.90	2459.70	2788.40	2684.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 24		Providing and fixing in position wall panelling at all heights with integral densified calcium silicate panels/tiles of Size 595x595mm, having NRC (Noise Reduction Coefficient) of 0.50 (minimum) as per IS 8225:1987, Light reflectance of 85% (minimum). Non combustible as per BS:476 (part-4), fire performance as per BS:476 (part 6 & 7), humidity resistance of 100 %, thermal conductivity < 0.043 W/m K as per ASTM 518:1991, comprising of frame made from especially fabricated galvanised mild steel sheet 0.50 mm thick pressed section (galvanizing @120 grams per sqm including both sides) i.e. vertical studs of size 48x34x36 mm are placed at 600mm center to center in a floor and ceiling channel section of size 50x32mm fixed to the floor and soffits at 600mm centers using 12mm dia, 50mm long wedge type expanded zinc alloy dash fastner with 10 mm bolt. This same channel is then to be fixed in horizontal direction at 600mm center to center so as to form a grid of 600mmx600mm. Glasswool of 50mm thickness is then to be inserted in the slots and finally Calcium silicate non combustible panels/tiles are to be screw fixed with self tapping pan head nickel coated mild steel screws of size 13x3.2mm on to this grid leaving an even groove of 1mm between the panels. The joints between the panels are to be duly jointed and finished using recommended jointing Calcium silicate based compound and fiber joint tape roll 50mm wide (90 metre) roll and two coats of primer suitable for panelling as per manufacturer's specifications as per directions of the Engineer-in-charge allcomplete													
A 26. 24.1		With 15 mm thick fully perforated square/butt edge light weight calcium silicate panels/tiles	Sqm	3116.60	2954.30	3116.60	3278.80	3580.20	3510.60	3162.90	3603.40	3186.10	3394.70	3835.20	3696.10
A 26. 24		Providing and fixing 15 mm thick false ceiling tiles at all heights with integral densified calcium silicate reinforced with fibre and natural filler false ceiling tiles of Size 595x595 mm of approved texture,design and patterns having NRC (Noise Reduction Coefficient) of 050 (minimum) as per IS 8225:1987, Light reflectance of 85% (minimum). Non combustible as per BS:476 (part-4), fire performance as per BS:476 (part 6&7), humidity resistance of 100%, thermal conductivity <0.043 W/m K as per ASTM 518:1991, in true horizontal level on the existing frame work consisting of T-sections and L-sections suitably fixed according to tile size as per directions of the Engineer-in-charge.	Sqm	1564.10	1484.90	1564.10	1643.20	1790.10	1756.20	1586.70	1801.40	1598.00	1699.70	1914.50	1846.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 26		Providing and fixing false ceiling at all heights with GRG (Glass Fibre Reinforced Gypsum) false ceiling tiles of Size 595x595 mm of approved texture,design and patterns having moisture content less than 2%, humidity resistance of 99%, NRC 0.50 to 0.75 as per IS 8225:1987, Non combustible as per BS:476 (part-4)-1970 and light reflectance of 85% (minimum) to be laid in true horizontal level suspended on interlocking metal T-Grid of hot dipped galvanised iron section of 0.33mm thick (galvanized @ 120 grams per sqm including both sides) comprising of main-T runners of size 15x32 mm of length 3000 mm,cross-T of size 15x32 mm of length 1200mm and secondary intermediate cross-T of size 15x32 mm of length 600 mm to form grid module of size 600x600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 grams per sqm) i.e 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod upto 100 mm length and L-shape level adjuster of size 85x25x2 mm. Galvanised iron perimeter wall angle of size 24x24x0.40 mm of length 3000 mm to be fixed on periphery wall/ partition with the help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall wood screws. The work shall be carried out as per specifications, drawing and as per directions of the Engineer-in-charge.													
A 26. 26.1		With semi perforated 12 mm thick micro tegular edged GRG false ceiling tiles.	Sqm	1880.10	1783.30	1880.10	1976.90	2156.60	2115.10	1907.70	2170.40	1921.60	2046.00	2308.70	2225.70
A 26. 26.2		With fully perforated 12 mm thick micro tegular edged or 10 mm thick square edged GRG false ceiling tiles	Sqm	2030.40	1923.80	2030.40	2137.00	2335.00	2289.30	2060.90	2350.20	2076.10	2213.20	2502.60	2411.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 27		Providing and fixing mineral fibre false ceiling at all heights of size 595x595 mm of approved texture,design and patterns. The tiles should have Humidity Resistance (RH) of 99%, Light reflectance ≥ 85%, Thermal conductivity K = 0.052 - 0.057 w/m K, Fire Performance as per (BS 476 pt - 6&7) in true horizontal level suspended on interlocking metal T-Grid of hot dipped all round galvanised iron section of 0.33mm thick (galvanized @ 120 grams per sqm) comprising of main-T runners of size 15x32 mm of length 3000 mm, cross-T of size 15x32 mm of length 1200mm and secondary intermediate cross-T of size 15x32 mm of length 600 mm to form grid module of size 600x600 mm, suspended from ceiling using galvanised mild steel items (galvanizing @ 80 gsm) i.e 50 mm long, 8 mm outer diameter M-6 dash fasteners, 6 mm dia fully threaded hanger rod upto 1000 mm length and L-shape level adjuster of size 85x25x2 mm, spaced at 1200 mm crmtre to centre along main 'T'. The system should rest on periphery wall/ partition with the help of GI perimeter wall angle of size 24x24x3000 mm made of 0.40 mm thick sheet, to be fixed to the wall with help of plastic rawl plugs at 450 mm center to center and 40 mm long dry wall S.S. screws. The exposed bottom portion of all T-sections used in false ceiling support system shall be pre-painted with polyester baked paint, for all heights. The work shall be carried out as per specifications, drawing and as per directions of the Engineer-in-charge.													
A 26. 27.1		With 16 mm thick beveled tegular mineral fibre false ceiling tile (NRC 0.55 to 0.6)	Sqm	2311.30	2186.30	2311.30	2436.30	2668.40	2614.80	2347.00	2686.20	2364.80	2525.50	2864.80	2757.70
A 26. 27.2		With 20 mm thick beveled tegular mineral fibre false ceiling tile (NRC 0.7)	Sqm	2675.50	2526.70	2675.50	2824.30	3100.70	3036.90	2718.00	3121.90	2739.30	2930.60	3334.50	3207.00
A 26. 27.3		With 16 mm thick beveled tegular mineral fibre Anti-microbial false ceiling tile conforming to ISO 5 (class 100) specifications	Sqm	2468.00	2332.80	2468.00	2603.30	2854.50	2796.50	2506.70	2873.80	2526.00	2699.90	3067.00	2951.10
A 26. 28		Chipping of unsound/weak concrete material from slabs, beams, columns etc. with manual Chisel and/ or by standard power driven percussion type or of approved make including tapering of all edges, making square shoulders of cavities including cleaning the exposed concrete surface and reinforcement with wire brushes etc. and disposal of debris for all lead and lifts all complete as per direction of Engineer-in-charge													
A 26. 28.1		75 mm average thickness	Sqm	266.00	264.80	266.00	267.20	269.40	268.90	266.30	269.60	266.50	268.00	271.30	270.30
A 26. 28.2		50 mm average thickness	Sqm	180.00	179.20	180.00	180.80	182.30	181.90	180.20	182.40	180.30	181.30	183.50	182.80
A 26. 28.3		25 mm average thickness	Sqm	89.80	89.40	89.80	90.20	90.90	90.80	89.90	91.00	90.00	90.50	91.60	91.20

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 29		Cleaning of reinforcement from rust from the reinforcing bars to give it a total rust free steel surface by using alkaline chemical rust remover of approved make with paint brush and removing loose particles after 24 hours of its application with wire brush and thoroughly washing with water and allowing it to dry, all complete as per direction of Engineer-in-charge													
A 26. 29.1		Bars upto 12 mm diameter	Metre	6.20	5.90	6.20	6.40	6.90	6.80	6.20	6.90	6.30	6.60	7.30	7.10
A 26. 29.2		Bars above 12 mm diameter	Metre	12.40	11.90	12.40	12.80	13.80	13.60	12.50	13.80	12.60	13.20	14.60	14.10
A 26. 30		Drilling suitable holes in reinforced or plain cement concrete with power driven drill machine to a minimum depth of 100mm upto 200mm in RCC beams, linthels, columns and slabs to introduce steel bars for sunshades/balconies including fixing the steel bars in position using epoxy resin anchor grout of approved make but excluding the cost of reinforcement, all complete as per direction of Engineer-in-charge.													
A 26. 30.1		Upto and including 12 mm diameter	Each	129.60	128.40	129.60	130.90	133.20	132.70	130.00	133.40	130.20	131.80	135.20	134.10
A 26. 31		Providing, mixing and applying bonding coat of approved adhesive on chipped portion of RCC as per specifications and direction of Engineer-in-charge complete in all respect.													
A 26. 31.1		SBR Polymer (@10% of cement weight) modified cementitious bond coat @ 2.2 Kg cement per sqm of surface area mixed with specified proportion of approved polymer	Sqm	130.20	124.40	130.20	138.70	150.30	147.60	132.80	152.10	134.90	142.00	165.00	157.60
A 26. 31.2		Epoxy bonding adhesive having coverage 2.20 sqm/Kg of approved make	Sqm	478.00	446.80	478.00	509.30	567.40	554.00	487.00	571.90	491.40	531.60	616.50	589.70
A 26. 32		Providing, mixing and applying SBR polymer (of approved make) modified Cement mortar in proportion of 1:4 (1 cement: 4 graded coarse sand with polymer minimum 2% by wt. of cement used) as per specifications and directions of Engineer-in-charge. Note: Measurement and payment: The pre-measurement of thickness shall be done just after the surface preparation is completed and payment under this item shall be made only after proper wet curing has been done and surface has been satisfactorily evaluated by sounding / tapping with a blunt metal instrument and/or the 75mm size cube crushing strength at the end of 28 days to be not less than 30 N/Sqmm2).													
A 26. 32.1		12 mm average thickness	Sqm	298.90	285.30	298.90	328.70	357.40	350.80	306.60	367.00	318.00	330.60	420.40	390.60
A 26. 32.2		25 mm average thickness in 2 layers.	Sqm	487.90	459.90	487.90	549.70	609.00	595.30	503.90	628.90	527.60	553.30	739.60	677.80
A 26. 32.3		50 mm average thickness in 3 layers.	Sqm	975.80	919.70	975.80	1099.30	1218.00	1190.60	1007.70	1257.80	1055.20	1106.70	1479.20	1355.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 33		Providing, mixing and applying SBR polymer (of approved make @ minimum 2% by wt. of cement used) modified plain/reinforced cement concrete for structural members having minimum characteristic compressive strength [with ordinary portland cement, coarse sand and graded stone aggregate of 10 mm maximum size in proportion as per design criteria] with specified average thickness. Note:Rates shall be for finished surface area of concrete and shall include the cost of labour, concrete and appropriate approved Super-Plasticer for rendering concrete as flowable and SBR polymer but shall exclude cost of reinforcement, bond coat, shear keys, centering and shuttering, strutting, propping etc (Payment under this item shall be made only after proper wet curing has been done and surface has been satisfactorily evaluated by sounding/tapping with a blunt metal instrument)													
A 26. 33.1		50 mm thick in Grade M 25 with cement content not less than 330 Kg per cum	Sqm	940.30	908.00	940.30	1021.30	1091.30	1075.10	968.30	1114.10	995.50	1026.50	1241.80	1170.40
A 26. 33.2		75 mm thick in Grade M 25 with cement content not less than 330 Kg per cum	Sqm	940.30	908.00	940.30	1021.30	1091.30	1075.10	968.30	1114.10	995.50	1026.50	1241.80	1170.40
A 26. 34		Providing and laying SBR polymer modified (of approved make @ minimum 2% by wt. of cement used) plain/reinforced concrete jacket for the structural members e.g. columns, pillars, piers, beams etc with concrete having the specified minimum characteristic compressive strength [with ordinary portland cement, coarse sand and graded stone aggregate of 10 mm maximum size in proportion as per design criteria] with specified average thickness all-round existing core of RCC member. Note:Rates shall be for finished surface area of concrete and shall include the cost of making holes in existing RCC slab, if required, for pouring concrete in shuttering mould of jacket and appropriate approved Super-Plasticer for rendering concrete as flowable self compacting and SBR polymer but shall exclude cost of reinforcement, bond coat, shear keys, centering and shuttering, strutting, propping etc (Payment under this item shall be made only after proper wet curing has been done and surface has been satisfactorily evaluated by sounding/tapping with a blunt metal instrument)													
A 26. 34.1		50 mm thick in Grade M 25 with cement content not less than 330 Kg per cum	Sqm	940.30	908.00	940.30	1021.30	1091.30	1075.10	968.30	1114.10	995.50	1026.50	1241.80	1170.40
A 26. 34.2		75 mm thick in Grade M 25 with cement content not less than 330 Kg per cum	Sqm	1410.40	1362.00	1410.40	1532.00	1636.90	1612.70	1452.50	1671.10	1493.20	1539.70	1862.80	1755.60
A 26. 34.3		100 mm thick in Grade M 25 with cement content not less than 330 Kg per cum	Sqm	2014.30	1949.80	2014.30	2176.50	2316.40	2284.10	2070.40	2361.90	2124.70	2186.80	2617.50	2474.60

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 35		Providing and injecting approved grout in proportion recommended by the manufacturer into cracks/honey-comb area of concrete/masonry by suitable gun/pump at required pressure including cutting of nipples after curing etc. complete as per directions of Engineer-in-charge. (The payment shall be made on the basis of actual weight of approved grout injected.)													
A 26. 35.1		Stirrer mixed Acrylic Polymer of approved make @ 2% of weight of cement used) modified cement slurry made with non shrink compound in concrete/RCC work	Kg	113.30	107.80	113.30	120.00	130.50	128.10	115.30	131.70	116.60	123.50	141.70	135.80
A 26. 35.2		Stirrer mixedSBR Polymer (of approved make) modified cement slurry made with Shrinkage Compensating Cement in concrete/RCC work.	Kg	118.50	112.70	118.50	125.60	136.70	134.10	120.60	138.00	122.00	129.30	148.40	142.30
A 26. 35.3		Epoxy injection grout in concrete/RCC work of approved make	Kg	973.20	910.10	973.20	1036.30	1153.50	1126.50	991.20	1162.50	1000.20	1081.40	1252.70	1198.60
A 26. 36		Providing, erecting, maintaining and removing temporary protective screens made out of specified fabric with all necessary fixing arrangement to ensure that it remains in position for the work duration as required by the Engineer-in-charge.													
A 26. 36.1		Wooven PVC cloth	Sqm	44.80	41.90	44.80	47.70	53.20	51.90	45.60	53.60	46.00	49.80	57.80	55.20
A 26. 37		Cleaning of exposed concrete surface of sticking material including loose and foreign material by sand blasting with coarse sand followed by and including cleaning with oil free air blast as per direction of Engineer-in-charge.	Sqm	636.60	559.90	636.60	809.70	968.20	931.60	675.70	1029.00	748.70	809.80	1357.80	1175.10
A 26. 38		Shotcreting R.C.C. columns, beams and slabs etc. in layers with approved design mix concrete having the specified minimum characteristic compressive strength [with ordinary portland cement, coarse sand and graded stone aggregate of 10 mm maximum size in proportion as per design criteria] including the cost of centering and shuttering at edges and corners etc. as directed by Engineer-in-charge. Note: rates shall include the providing necessary ground wires etc. The levelling gauges, if used, shall be paid for separately. Payment under this item shall be made only after proper wet curing has been done and surface has been satisfactorily evaluated by sounding/tapping with a blunt metal instrument.													
A 26. 38.1		25 mm thick in grade M 25 with cement content not less than 330 Kg per cum	Sqm	947.60	931.70	947.60	994.10	1029.90	1021.70	963.90	1043.60	980.30	994.30	1117.40	1076.40
A 26. 38.2		50 mm thick in grade M 25 with cement content not less than 330 Kg per cum	Sqm	1633.00	1601.10	1633.00	1725.90	1797.70	1781.10	1665.70	1824.90	1698.40	1726.30	1972.60	1890.50
A 26. 38.3		75 mm thick in grade M 25 with cement content not less than 330 Kg per cum	Sqm	2410.70	2362.80	2410.70	2550.00	2657.70	2632.80	2459.70	2698.60	2508.70	2550.60	2920.10	2797.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 39		Providing and inserting 12 mm dia galvanised steel injection nipple in honey comb area and along crack line including drilling of holes of required diameter (20 mm to 30 mm) up to depth from 30 mm to 80 mm at required spacing and making the hole 7 crack dust free by blowing compressed air, sealing the distance between injection nipple with adhesive chemical of approved make and allow it to cure complete as per direction of Engineer-in-charge.	Each	209.60	199.20	209.60	219.90	239.00	234.60	212.50	240.50	214.00	227.30	255.30	246.40
A 26. 40		Providing and fixing hard drawn steel wire fabric of size 75x25 mm mesh or other suitable size wire mesh to be fixed & firmly anchored to the concrete surface by means of "L" shaped mild steel shear key welded with existing reinforcement including the cost of materials, labour, tool & plants as approved by Engineer-in-charge.	Sqm	942.90	893.00	942.90	992.80	1085.40	1064.00	957.10	1092.50	964.30	1028.40	1163.70	1121.00
A 26. 41		Designing, providing, installing and fixing factory finished custom designed cold form Light gauge Steel Framed super structure comprising of steel wall panel, trusses, purlins etc manufactured out of minimum 0.75 mm thick steel sheet as per design requirements. The steel sheet shall be galvanised (AZ-150 gms Aluminium Zinc Alloy coated steel having minimum yield strength 300-550 MPa) conforming to AISI specifications and IBC 2009 for cold formed steel framing and construction and also as per IS: 875-1987, ISO 800-1984 and IS:801- 1975. The wind load shall be as per provisions of IS 875 (part -III). LGSFS frame shall be designed as per IS: 801 using commercially available software such as Frame CAD Pro-11.7/ STAAD PRO-V8i/ArchiteKV2.5.16/ Revit architecture-2011 or equivalent. Proper usage of connection Accessories like Heavy Duty Tension Ties, light Duty Hold-ons, Twiist Straps (to connect truss with wall frames), Strong Tie, Tie Rod, H-brackets, Boxing sections, L-Shaped Angles for better structural atability. The framing section shall be cold form C-type having minimum web depth 89 mm x 39 mm flange x 11 mm lip in required length as per structural design requirement duly punched with dimple/slot at required locations as per approved drawings.The slots will be along centre line of webs and shall be spaced minimum 250 mm away from both ends of the member.The frame can be supplied in panelized or knock down condition in specific dimensions and fastened with screws extending through the steel beyond by minimum of three exposed threads.	Kg	255.60	240.70	255.60	270.60	298.40	292.00	259.90	300.60	262.00	281.30	321.90	309.10

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		All self drilling tapping screws for joining the members shall have a Type II coating in accordance with ASTM B633(13) or equivalent corrosion protection of gauge 10 & 12, TPI 16 & 8 of length 20 mm. The frames shall be fixed to RCC slab or Tie beam over Neoprene rubber using self expanding carbon steel anchor bolt of dia as per approved drawings. Design subject to minimum 12 mm diameter and 121 mm length conforming to AISI 304 and 316 at 500 mm c/c with minimum embedment of 100 mm in RCC (RCC to be paid separately) and located not more than 300 mm from corners or termination of bottom tracks complete in all respects. The item also includes the submission of stability reports duly examined and issued by any NIT/IIT. The rate includes the concept design, detailed design, fabrication of sections, transportations, installation and all required fixing arrangement at site as described above.													
A 26. 42		Providing and fixing of external wall system on light gauge steel frame work with. Outer face having 6 mm thick heavy duty fiber cement board fixed on 9 mm thick heavy duty fiber cement board conforming to IS 14862:2000, category IV type A (High pressure steam cured) as per standard sizes fixed with self-drilling /tapping screws/fasteners @ 60 cm c/c of approved make. A groove of 2 mm to 3 mm shall be maintained and grooves shall be sealed with silicon based sealant. the board shall be fixed in a staggered pattern. Screws shall be of counter sunk rib head of 1.60 mm to 4 mm thick of 8 to 10 gauge of length varying from 25 to 45 mm and internal face 12.5 mm thick gypsum plaster board fixed on 8 mm thick fiber cement board conforming to IS 14862: 2000 of category III type B (High pressure steam cured) as per standard sizes fixed with self-drilling/tapping screws /fasteners @ 60 cm c/c of approved make, proper taping and jointing to be done using fiber mesh tape and epoxy and acrylic based jointing compound for seamless finish. (Cost of frame work to be paid separately).	Sqm	4042.30	3815.60	4042.30	4269.00	4690.10	4592.80	4107.10	4722.50	4139.40	4430.90	5046.30	28903.60
Sub A/R-1		Filling the groove (i.e. 2-3 mm gap between boards), tapping and jointing of the first layer 6 mm and 9 mm thick fiber cement boards with epoxy based sealing compound or with silicon sealant. Second layer id fixed over it in a staggered pattern.	Sqm	141.90	133.80	141.90	149.90	164.90	161.40	144.20	166.10	145.30	155.70	177.60	170.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A Sub A/R-2		Filling the groove (i.e. 2-3 mm gap between boards), tapping and jointing 8 mm thick fiber cement boards and 12.5 mm thick gypsum plaster boards with epoxy based sealing compound, Acrylic based sealing compound, non woven reinforcement tape as per direction of Engineer-in-charge. (Use a flexible knife so that no air bubble is entrapped. Allow 1-2 hours gap. Once hard tacky or set, apply a coat of Acrylic based sealing compound paste to flash fill the beveled area. Ater 2-4 hours go on to repeat a skin coat with Acrylic based sealing compound to securely embed the 40 mm width (non woven reinforcement Tape). Use only flexible steel knife, such as provided with packs, to avoid air entrapment within compound. After overnight drying shrinkage apply a coat of acrylic based sealing compound to compensate shrinkage. Finally cover the bevel portion with any suitable overall skin coat with a desired full surface-leveler materials);	Sqm	379.60	357.20	379.60	402.10	443.80	434.10	386.00	447.00	389.20	418.10	479.00	459.80
A 26. 43		Providing and fixing internal wall panels on Light gauge steel frame work with 12.5 mm thick gypsum plaster board conforming to IS 2095:2011 fixed on 8 mm thick fiber cement board conforming to IS 14862: 2000 of category III type B (High pressure stem cured) as per standard sizes fixed with self-drilling /tapping screws/fasteners @ 60 cm c/c of approved make, Screws shall be of counter sunk rib head of 1.60 mm to 4 mm thick of 8 to 10 gauge of length varying from 25 to 45 mm. Proper taping and jointing to be done using fiber mesh tape and epoxy and acrylic based jointing compound for seamless finish. (Cost of frame work to be paid separately).	Sqm	2527.70	2383.70	2527.70	2671.80	2939.30	2877.50	2568.80	2959.80	2589.40	2774.60	3165.50	3042.10
A 26. 44		Providing and fixing l all exterior face panels breathable vapour barrier underneath the cement fiber board as per National Building Code 2009 complete as per direction of Engineer-in-charge.	Sqm	347.80	327.10	347.80	368.60	407.10	398.20	353.70	410.00	356.70	383.40	439.60	421.90
A 26. 45		Supplying and installation of moisture resistant/fire resistant 6 mm thick Heavy duty fiber cement board (High pressure steam cured) conforming to IS 14862: 2000 of category III type B as per standard sizes fixed with self-drilling/tapping screws. Screws shall be of counter sunk rib head of 1.60 mm to 4 mm thick of 8 to 10 gauge of length varying from 25 to 45 mm.	Sqm	1302.40	1237.30	1302.40	1367.40	1488.20	1460.30	1321.00	1497.50	1330.20	1413.90	1590.40	1534.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 46		Providing and fixing in position, 200 mm thick factory made Expanded Polystyrene core (EPS Core) wall panels consisting of EPS core sandwiched between two Engineered sheets of welded wire fabric mesh duly finished with shortcrete materials on outer faces. The fabric mesh shall be made of 3 mm dia G.I. wire mesh with 50 mm pitch in both the directions and on both faces of the wall, kept at 120-135 mm gap and connected by the zig zag G.I. wire of 3 mm dia at alternate row by welding (at an angle ranging from 50-70 degree). the EPS core shall consist of 100 mm thick EPS of density not less than 20 Kg/per cum. Both the outer faces of the panel shall be finished by applying the layer of 50 mm thick cement mortar 1:3 {1 cemnt : 3 coarse sand (not having more than 40% stone chips of size upto 6 mm)} A with the help of shotcreting/guniting equipment etc at a pressure not less than 1 bar (100Kn/m2) and both surfaces finished with trowel. Fixing operations of wall panels shall be completed in all respect as per drawings and specifications and under the overall direction of the Engineer-in-charge.	Sqm	4766.10	4423.90	4766.10	5232.90	5896.60	5743.40	4894.80	6002.90	5014.90	5419.20	6748.10	6317.50
A 26. 47		Providing and fixing in position, 230 mm thick factory made Expanded Polystyrene core (EPS Core) roof/floor panels made of 3 mm dia G.I. wire mesh with 50 mm pitch in both the directions and on both faces of panel, kept at 120-135 mm gap and connected by the zig zag G.I. wire of 3 mm dia at alternate row by welding (at an angle ranging from 50-70 degree). The EPS core shall consist of 100 mm thick EPS of density not less than 20 Kg/per cum. The bottom side of the panel shall be finished by applying the layer of 60-65 mm thick cement mortar 1:3 {1 cemnt : 3 coarse sand (not having more than 40% stone chips of size upto 6 mm)} A with the help of shotcreting equipment etc at a pressure of not less than 1 bar (100Kn/m2) and surfaces finished with trowel. The top face of the panel shall be provided and finished by applying 70-75 mm thick layer of cement concrete 1:1.5:3 (1 cement: 1.5 coarse sand: 3 graded stone aggregate 20 mm nominal size). Fixing operations of roof/floor panels shall be completed in all respect as per drawings and specifications and under the overall direction of the Engineer-in-charge.	Sqm	5160.90	4825.20	5160.90	5645.80	6302.20	6150.70	5304.00	6412.20	5429.00	5823.80	7170.40	6733.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 48		Providing and fixing of costumized Aluminium formwork for monolithic construction RCC members with a repetitive usage of 100 times using grade 5052 aluminium for panel sheets of minimum 4 mm thick and grade 6061 (Type-6) aluminium for extruded sections. The form work includes of beam components i.e. beam side panel, prop head for soffit beam, beams soffit panel, beam soffit bulk head and deck componets i.e. deck panel, deck prop, prop length,deck mild, soffit length, deck beam bar and wall components i.e. wall panel, rocker, kiker and internal soffit corner, external soffit corner, external corner, internal corner etc., the panels are held in position by a simple pin and wedge system that passes through holes in the out side rib of each panel. The tolerance of finished panels to be (-1 mm), and shall conform to IS 14687-1999. Pins and wedges to be made of high grade mild steel, all complete as per direction of Engineer-in-charge. (Cost of RCC work shall be paid separately)	Sqm	194.10	185.50	194.10	202.80	218.90	215.20	196.60	220.10	197.80	209.00	232.50	225.10
A 26. 49		Providing and fixing in position factory made EPS sandwich wall/roof/floor light weight solid core panels made of core material of EPS granule balls/beads (conforming to IS 4671:1984 and shall have density not less than 15 Kg per cum) adhesive, cement, sand, flyash and other bonding material in mortar state processed to form in a preset mould. The outer face on both sides of the panels will be non asbestos fiber cement board conforming to IS 14862:2000 or calcium silicate board conforming to EN 14306:2009 of 5 mm thick each. Panel shall be laid on 6 mm thick cement mortar (1 cement: 2 fine sand) mixed with chemical adhesive of 0.5 Kg per 50 Kg of cement or shall be preferably fixed into 'C' channel made of 1.2 mm thick MS plate screwed/fastened to the slab/column/beam etc. The panel shall fixed vertically with tongue and groove joint and horizontally locked with steel bar between each other and floors and filled with cement mortar and adhesive. Panels should be used as floor & roofing with additional structural support, steel or RCC depending upon the design. All the operation shall be completed in all respect as per drawings, Manufacturers specifications and under the overall direction of Engineer-in-charge (Cost of all the material is included except "C channel" which will be paid separately).													
A 26. 49.1		Non load bearing panels 50 mm thick of required size	Sqm	1389.80	1305.90	1389.80	1473.70	1629.50	1593.60	1413.80	1641.50	1425.70	1533.60	1761.40	1689.50
A 26. 49.2		Non load bearing panels 60 mm thick of required size	Sqm	1579.90	1483.60	1579.90	1676.30	1855.20	1813.90	1607.50	1869.00	1621.20	1745.10	2006.70	1924.10
A 26. 49.3		Non load bearing panels 75 mm thick of required size	Sqm	1929.90	1810.70	1929.90	2049.20	2270.60	2219.50	1964.00	2287.70	1981.00	2134.30	2458.00	2355.80
A 26. 49.4		Non load bearing panels 90 mm thick of required size	Sqm	2311.10	2167.00	2311.10	2455.30	2723.10	2661.30	2352.30	2743.70	2372.90	2558.30	2949.70	2826.10
A 26. 49.5		Non load bearing panels 100 mm thick of required size	Sqm	2733.60	2561.70	2733.60	2905.40	3224.50	3150.90	2782.70	3249.10	2807.20	3028.10	3494.50	3347.30

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 50		Providing and fixing in position factory made non asbestos fibre reinforced aerated cement sandwich wall/roof/floor light weight solid core panels made of light weight cement concrete composed of OPC cement, pulverized flyash, quick lime, cotton pulp & Gypsum in mortar state mixed with aeration agent preset mould. The outer face on both sides of the panels will be non asbestos fiber cement board conforming to IS 14862:2000. These solid wall panels are installed using Galvanized iron steel tracks/C channel of 1 mm thick of required sizes as recommended by manufacturer`s and fixed to floor and RCC soffit in plump to each other with steel screws/fasteners. The panel shall be fixed vertically with tongue and groove joint with cement based polymer modified jointing compound. The exposed surface finished with fibre mesh/glass fibre tape with polymer based jointing compound having superior flexibility. Panels should be used as floor & roofing with additional structural support, steel or RCC depending upon the design. All the operation shall be completed in all respect as per drawings, Manufacturers specifications and under the overall direction of Engineer-in-charge (Cost of all the material is included except "tracks/c channel" which will be paid separately).													
A 26. 50.1		Non load bearing panels 50 mm thick of required size (minimum 4 mm thick fibre cement board)	Sqm	418.80	408.10	418.80	429.60	449.60	445.00	421.90	451.20	423.50	437.30	466.50	457.30
A 26. 50.2		Non load bearing panels 75 mm thick of required size (minimum 5 mm thick fibre cement board)	Sqm	1782.70	1682.70	1782.70	1882.70	2068.50	2025.60	1811.30	2082.70	1825.60	1954.20	2225.60	2139.90
A 26. 51		Supplying of standard quality GFRG panel of 124 mm thickness with modular cavities purchased from GFRG panel manufacturing plant in the country, cut to required wall sizes and flor/roof slab sizes in correct length and height, including cutting of door, window and ventilator opening as per the cutting drawing prepared by architects/design engineers for the construction of GFRG building and loaded in stallages for transportation to the construction site. Cost of panel includes security deposits, hire charges of stillages & jaws, cost of transportation in trucks/lorries without any damages upto 300 Kms including all leads and lifts from GFRG manufacturing plant to construction site and unloading at site using suitable fork lift/crane. (Payment shall be made on the basis of area of one side of panel without reduction of opening of door/window/ventilator). For transportation above 300 Kms, additional charges to be paid.	Sqm	1606.50	1501.40	1606.50	1711.60	1906.80	1861.80	1636.60	1921.80	1651.60	1786.70	2072.00	1981.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 52		Erection of GFRG panels in walls in all floors using suitable crane as per instructions of Engineer-in-charge, as per cutting drawings and structural drawings, in perfect line and plumb, above RCC plinth beam/GFRG panel below and provide necessary lateral/slanting support to keep the wall panel in safe position, providing & tying of Reinforcement as per structural drawings and applying a coat of water repellant coating Zycosil/equivalent or equivalent product (1 Zycosil/equivalent compound : 10 water) to saturation level over RCC plinth beam to provide water proofing treatment to joints between wall panel & plinth beams as per the guide lines/instruction by the Engineer in charge. (Cost of reinforcement, water proofing of walls and plinth beam/GFRG panel below joints and installation of door/window frames before filling of concrete shall be paid separately). The rate quoted shall include making provision for laying of lintels, beams, sunshades, staircase beams, lofts, plumbing work, electrical conduits and any structural insertion etc., as per the drawing and direction of the Engineer-in-charge. The payment shall be made based on the actual exposed area (one side only) of the panel. The work shall be carried out as per the Special Conditions For Glass Fibre Reinforced Gypsum (GFRG) structures mentioned in NIT.	Sqm	268.30	254.40	255.30	256.20	257.90	257.50	255.50	258.00	255.70	256.80	259.30	258.50
		Note: (i) When cutting panel, "A" side is to be for outside or external surface of respective external wall and B side is to be for internal surface of wall													
		(ii) Erection of panel is to be with reference to both building plan & cutting drawing by following notational mark indicated in the cutting drawing as well as notional mark written on each panel cut as per cutting drawing													
A 26. 53		Filling of empty cavities (as shown in the structural design drawing) with quarry dust mixed with 5% cement (by volume). After initial infill of 50 mm thick with M25 concrete at base/bottom of cavities to seal off, infill wall panel cavities in 3 stages as detailed below	Sqm	94.20	93.30	94.20	101.50	103.90	103.40	99.60	104.80	100.60	101.50	109.70	107.00
		(i) 1st pour / infill to be limited to 0.3 to 0.50 m height from bottom of the panel.													
		(ii) 2nd pour / infill: Infilling shall be done only after 90 minutes interval between successive pours. The maximum height of infill shall be restricted to 1.5 m height or up to the top level of door/window.													

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
		(iii) 3rd pour / infill: After an interval of 90 minutes of second pour, infill or pour the balance height upto the bottom of embedded RCC tie beam. Pour enough water just required to dampen the dry mix enough to form cake form after each stage. (Cost of laying M25 concrete shall be paid separately)													
		(If any rain falls in between any stages of concrete pour, make sure to cover the panel top to prevent ingress of water or water falling into the cavities. In case of water collection over the concrete inside the panel, drill 10 mm hole in GFRG panel immediately above concrete filled level to drain out water before pour/in-fill of balance concreting)													
A 26. 54		Laying of GFRG panel as roof / floor slab panel and staircase panel using suitable crane as per instruction of Engineer-in-charge, including providing support system with 25 mm x 300 mm-400 mm wide plywood, as runner with proper prop below proposed micro beams including													
		(a) Cutting of top flange of panel to 180 mm wide (leaving 25 mm projection on either side) to provide RCC embedded micro beam as per cutting drawings and structural drawings.													
		(b) Reinforcement for micro beams and tie beams to be provided in position with proper anchorage as per structural drawings.	Sqm	289.30	288.70	289.30	290.00	291.30	291.00	289.50	291.40	289.60	290.50	292.40	291.80
		(c) Provision for Electrical cabling, fan hooks and laying of pipes for plumbing work.													
		(d) Concreting of Tie beam, micro beam and top of GFRG panels (50 mm thick) with M-25 cement concrete mix using coarse aggregate of size less than 20 mm including laying of 10 gauge 100x100 size weld mesh with 25 mm effective cover from the panel top.													
A 26. 55		Supplying and fixing 10 gauge weld mesh of size 100 mm x 100 mm for floor/roof slab concrete screed over the micro beams as reinforcement. The weld mesh shall be fixed as per drawing.	Sqm	279.70	262.80	279.70	296.70	328.20	320.90	284.60	330.60	287.00	308.80	354.90	340.30
A 26. 56		Application of ZMB 60/equivalent solution (100 Kg ZMB 60/equivalent, 1 litre ZMB Nano Thinner, 20 litre water & 1 Litre Zycoprime/equivalent = 122 litre/Kg) over already applied coat of Zycosil/equivalent & Zycoprime/equivalent solution on the top of all the RCC plinth beams by brush/spray coat before erection of GFRG over RCC plinth beams in GF. In the case of upper floors 150 mm wide on floor slab for all the external walls, bath/toilet/wet areas (3 hrs drying time) before erection of wall panel on upper floors including erection of parapet wall.	Sqm	305.50	295.70	305.50	315.30	333.40	329.20	308.30	334.80	309.70	322.20	348.80	340.40

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 57		After erection of GFRG wall panels, seal all GFRG wall joints with paper tape temporarily. Water proofing treatment of vertical joints with Zycosil/equivalent water proofing solution (1 litre of Zycosil/equivalent & 20 litres of water stirred first & 2 litres of Zycoprime/equivalent added and stirred (total 23 litres)) with 50 ml syringe till the gap and in filled concrete is completely saturated. After removing the paper seal, seal off the vertical joints with water proofing material "grout RW/equivalent" (Sealing cost excluded.)	Metre	88.40	85.10	88.40	91.60	97.60	96.20	89.30	98.10	89.80	93.90	102.70	99.90
A 26. 58		Filling of joints between RCC plinth beam/floor slab and wall panel of external walls, toilet/bath room/wet areas walls on all floor and parapet wall over roof slab, stair case head room at the time of erection of GFRG panels with Grout RW/equivalent sealant compound after the erection of panel before the infill of concrete in panel cavities and fine finish. This applies for all horizontal and vertical joints between GFRG wall and slab panels.	Metre	40.10	39.40	40.10	40.80	42.10	41.80	40.30	42.30	40.40	41.30	43.30	42.70
A 26. 59		Water proofing treatment of vertical joints (of external side and internal side) between door frame, window & ventilator frames (on all four sides) of outer wall over the Zycosil/equivalent & Zycoprime/equivalent solution already applied (before the installation of door/ window/ window/ ventilator frames in position) and fine finish with Grout RW/equivalent.	Metre	41.10	40.30	41.10	41.90	43.30	43.00	41.30	43.40	41.40	42.40	44.60	43.90
A 26. 60		Water proofing treatment of RCC sunshade with Zycosil/equivalent water proofing Solution (1 litre of Zycosil/equivalent & 20 litres of water stirred first & 2 litres of Zycoprime/equivalent added and stirred (total 32 litres)) till it meets the saturation level and testing as per RILEM or by water drops test in which water drops do not absorb but drops remain or rolls.	Sqm	142.10	136.10	142.10	148.10	159.30	156.70	143.80	160.20	144.70	152.40	168.80	163.60
A 26. 61		In-filling / sealing of joint between RCC lintel cum sunshade and wall (on external side) in all floors by pushing in grout RW/equivalent in paste form and coving 20 mm x 20 mm after applying a coat of Zycosil/equivalent & Zycoprime/equivalent solution before cement plastering of top, bottom and sides of RCC sunshade.	Metre	41.10	40.30	41.10	41.90	43.30	43.00	41.30	43.40	41.40	42.40	44.60	43.90
A 26. 62		Designing, Providing, installing and fixing factory finished customized design pregalvanized high tensile steel joists manufactured from G350 Z275 conforming to IS:277-1992, minimum coating of galvanizing 275 gm/sqm, minimum yield stress 34 Mpa & minimum tensile strength of 380 MPa placed 1.23 metre apart to support the load of slab etc as per the design & directions of Engineer-in-charge.	Kg	165.40	155.70	165.40	175.10	193.10	188.90	168.20	194.50	169.50	182.00	208.30	200.00

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 63		Providing and fixing special adjustable lockbars of mold steel E-250 to support the temporary plywood for work between joists during construction as per design & direction of Engineer-in-charge.	Kg	18.80	18.70	18.80	18.90	19.10	19.10	18.90	19.20	18.90	19.00	19.30	19.20
A 26. 64		Centering and shuttering with 12 mm thick shuttering plywood conforming to IS 4990:2011 and removal of form at all heights. Plywood will be supported on lock bars.													
A 26. 64.1		Suspended floors, roofs, landings, balconies and access platform.	Sqm	102.40	96.50	102.40	108.20	119.10	116.60	104.00	119.90	104.90	112.40	128.30	123.30
A 26. 65		Providing and fixing roofing consist of 0.8 mm thick galvanized steel deck sheet conforming to IS 277:1992 used as permanent shuttering over which MS wire mesh 3 mm laid at 100x100 mm grid including edge trim covered with concrete. This metal deck will be supported on structural steel beam with shear studs. (Structural stell like beam, column, joists etc. & concrete of different grade as per design will be paid separately).	Sqm	1747.50	1639.00	1747.50	1856.00	2057.40	2010.90	1778.50	2072.90	1794.00	1933.50	2227.90	2134.90
A 26. 66		Providing and fixing in position, 130 mm thick factory made Expanded Polystyrene core (EPS) wall panels consisting of EPS core sandwiched between two Engineered sheets of welded wire fabric mesh duly finished with shortcrete materials on outer faces. The fabric mesh shall be made of 3 mm dia zinc coated G.I. wire mesh with 50 mm pitch in both the directions and on both faces of the wall and connected by GI wire of 3 mm dia at alternate row by welding. The EPS core shall consist of 60 mm thick EPS of density not less than 16 Kg/per cum. both the outer faces of the panel shall be finished by applying the layer of 35 mm thick cement mortar 1:3 {1 cement: 3 coarse sand (not having more than 40% stone chips of size upto 6 mm)} with the help of shotcreting/guniting equipment etc at a pressure not less than 1 bar (100 KN/ m2) and both surfaces finished with trowel. Fixing operations of wall panels shall be completed in all respect as per drawings and specifications and under the overall direction of the Engineer-in-charge.	Sqm	2859.90	2655.70	2859.90	3152.20	3551.20	3459.20	2940.10	3621.00	3019.70	3256.90	4093.80	3821.80

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 67		Providing and fixing of extenal thermal insulation and composite system with First layer of self-extinguishing type Expanded polystyrene (EPS) insulation boards of 120 mm thick (max 1mx0.5m section), conforming to IS 4671:1984, having thermal conductivity of 0.034 W/mK, (measured as per IS 3346-1980), density of 20-24 Kg/m ³ measured as per IS 5688-1982, Fire retardant property self-extinguishing type as per EN 13501-1, bonded with special polymer modified cementitious adhesive conforming to EOTA ETAG 004 (European Technical Approval) formulated to bond polystyrene insulation boards to typical mineral substrate (according to ETAG 004) and polypropylene mechanical fasteners with plastic pin conforming to EOTA ETAG 014 (European Technical Approval) having dia 10 mm & L=200 mm on finished level wall and the junction between two adjacent EPS boards to be sealed with low expansion moisture cure Polyurethane foam. Second layer consists of Fiberglass mesh covered with alkali-resistant coating, mass per unit area≥ 145 gm/m ² , mesh size: 3.9x4.0 mm ±10% embedded in special polymer modified cementitious base Coat with hydrophobes and the corners will be protected with corner-beads with alkali-resistant mesh wings at least 10 cm wide, mesh mass per unit area min 145 gm/m ² . The surface will be levelled, finished, made smooth complete in all respect as per manufactures specifications and as per direction of the Engineer-in-charge.	Sqm	3889.90	3672.20	3889.90	4107.70	4512.00	4418.70	3952.10	4543.10	3983.30	4263.20	4854.10	4667.50
A 26. 68		Providing and laying factory made Precast concrete solid blocks of 200 mm thickness of grade M 10 made of C&D waste from approved manufacturee in foundation and plinth in:													
A 26. 68.1		Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	6570.30	6188.20	6570.30	7065.80	7798.40	7629.40	6704.50	7907.80	6827.10	7281.30	8696.60	8239.20
A 26. 69		Providing and laying factory made Precast concrete solid blocks of 200 mm thickness of grade M10 made of C&D waste from approved manufacturer in superstructure above plinth level up to floor V level													
A 26. 69.1		Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	8062.80	7675.80	8062.80	8563.10	9304.70	9133.60	8198.40	9414.70	8321.70	8782.10	10210.50	9748.90
A 26. 70		Providing and laying half block masonry with factory made Precast concrete solid blocks of 100 mm thickness of grade M10 made of C&D waste from approved manufacturer in foundation and plinth in:													
A 26. 70.1		Cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	752.70	715.50	752.70	797.80	868.60	852.30	765.20	877.70	775.10	820.50	947.50	906.70
A 26. 71		Providing and laying half block masonry with factory made Precast concrete solid blocks of 100 mm thickness of grade M10 made of C&D waste from approved manufacturer in superstructure above plinth level up to floor V level:													
A 26. 71.1		Cement mortar 1:4 (1 cement : 4 coarse sand)	Sqm	805.90	768.70	805.90	851.00	921.80	905.50	818.40	930.80	828.30	873.70	1000.70	959.90

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 72		Providing and laying 60 mm thick factory made cement concrete paver block of approved shape and colour of M-30 grade made of C&D waste by block making machine with vibratory compaction laid in required pattern and including over 50 mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge.	Sqm	960.50	876.70	960.50	1107.10	1273.30	1234.90	995.70	1317.70	1048.00	1131.50	1580.00	1432.10
A 26. 73		Fabrication & manufacturing of Pre stressed Hollow Core slab (Hollow area 25 to 30%) of different thickness & modular width 1200 mm in controlled factory Environment with approved methodology conforming to IS 10297:1982 by using long line casting method having arrangement of proper steel bed. Concreting should be done by batch mixing plant capable of producing zero slump concrete, transported through automatic shuttels of standard make & layed on bed with the help of extruded/slipformer, finishing, curing ans also provision of steam curing. Cutting, making necessary cutout/holes of required sizes for services in slab element after achieving required strength, yard handling & stacking all complete as per approved shop drawings & design mix as per the direction of the Engineer-in-charge. (Cost of strands should be paid separately); Note:Excess/less cement over the specified cement content used as per design mix is payable/recoverable separately													
A 26.73.1		Concrete Grade M-40 (cement content 400 Kg)													
A 26.73.1.1		100 mm thick hollow core slab	Metre	2211.00	2141.70	2211.00	2376.00	2525.00	2490.80	2267.70	2570.70	2321.60	2390.70	2829.80	2684.60
A 26.73.1.2		120 mm thick hollow core slab	Metre	2618.80	3319.00	3427.00	3688.50	3921.60	3868.10	3516.90	3994.50	3603.10	3709.80	4405.90	4175.50
A 26.73.1.3		150 mm thick hollow core slab	Metre	3230.40	3129.20	3230.40	3475.00	3693.50	3643.30	3314.50	3761.50	3395.00	3495.20	4146.40	3930.80
A 26.73.1.4		200 mm thick hollow core slab	Metre	3979.20	3854.60	3979.20	4282.30	4551.80	4489.80	4083.50	4636.20	4183.50	4306.50	5113.30	4846.10
A 26.73.1.5		250 mm thick hollow core slab	Metre	4930.90	4776.50	4930.90	5308.40	5642.70	5565.70	5060.80	5748.00	5185.70	5337.70	6342.40	6009.60
A 26.73.1.6		300 mm thick hollow core slab	Metre	5882.60	5698.50	5882.60	6334.50	6733.60	6641.70	6038.20	6859.80	6187.90	6368.90	7571.60	7173.10
A 26.73.1.7		350 mm thick hollow core slab	Metre	6834.30	6620.40	6834.30	7360.60	7824.50	7717.70	7015.50	7971.60	7190.10	7400.10	8800.70	8336.60
A 26.73.1.8		400 mm thick hollow core slab	Metre	7786.00	7542.30	7786.00	8386.70	8915.40	8793.60	7992.90	9083.40	8192.20	8431.20	10029.80	9500.10
A 26.73.2		Extra for using M-50 (Cement content 425 Kg) instead of M-40													
A 26.73.2.1		100 mm thick hollow core slab	Metre	25.30	23.90	25.30	29.50	32.90	32.10	26.70	34.20	28.20	29.60	40.90	37.20
A 26.73.2.2		120 mm thick hollow core slab	Metre	30.40	28.70	30.40	35.40	39.50	38.60	32.00	41.00	33.80	35.50	49.10	44.60
A 26.73.2.3		150 mm thick hollow core slab	Metre	37.90	35.90	37.90	44.20	49.40	48.20	40.10	51.20	42.30	44.40	61.40	55.70
A 26.73.2.4		200 mm thick hollow core slab	Metre	47.20	44.70	47.20	55.00	61.50	60.00	49.80	63.80	52.60	55.30	76.40	69.30
A 26.73.2.5		250 mm thick hollow core slab	Metre	59.00	55.80	59.00	68.80	76.80	75.00	62.30	79.70	65.70	69.10	95.50	86.70
A 26.73.2.6		300 mm thick hollow core slab	Metre	70.80	67.00	70.80	82.50	92.20	90.00	74.80	95.70	78.90	82.90	114.60	104.00
A 26.73.2.7		350 mm thick hollow core slab	Metre	82.60	78.10	82.60	96.30	107.60	105.00	87.20	111.60	92.00	96.70	133.60	121.40
A 26.73.2.8		400 mm thick hollow core slab	Metre	94.40	89.30	94.40	110.00	122.90	120.00	99.70	127.50	105.20	110.50	152.70	138.70

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26.73.3		Extra for using M-60 (Cement content 440 Kg) instead of M-40													
A 26.73.3.1		100 mm thick hollow core slab	Metre	40.50	38.30	40.50	47.20	52.70	51.40	42.70	54.70	45.10	47.40	65.50	59.40
A 26.73.3.2		120 mm thick hollow core slab	Metre	48.50	45.90	48.50	56.60	63.20	61.70	51.20	65.50	54.10	56.80	78.50	71.30
A 26.73.3.3		150 mm thick hollow core slab	Metre	60.70	57.40	60.70	70.70	79.00	77.10	64.10	82.00	67.60	71.00	98.20	89.20
A 26.73.3.4		200 mm thick hollow core slab	Metre	75.50	71.40	75.50	88.00	98.30	95.90	79.70	102.00	84.10	88.40	122.10	110.90
A 26.73.3.5		250 mm thick hollow core slab	Metre	94.40	89.30	94.40	110.00	122.90	120.00	99.70	127.50	105.20	110.50	152.70	138.70
A 26.73.3.6		300 mm thick hollow core slab	Metre	113.40	107.20	113.40	132.10	147.60	144.00	119.70	153.10	126.30	132.70	183.30	166.50
A 26.73.3.7		350 mm thick hollow core slab	Metre	132.20	125.00	132.20	154.00	172.10	167.90	139.60	178.50	147.20	154.70	213.80	194.10
A 26.73.3.8		400 mm thick hollow core slab	Metre	151.10	142.90	151.10	176.10	196.70	192.00	159.50	204.10	168.30	176.80	244.40	221.90
A 26. 74		Fabrication & manufacturing of Solid precast concrete element with provisions of shear keys, connecting loops, dowel tubes and proper lifting accessories for walls, beams, slabs, stairs, column etc, of various thickness, shape and size of different concrete grades manufactured in controlled factory Environment with approved methodology including moulds (Pallet system, column moulds, staircase mould, Facade moulds, etc), mixing, transportating and placing of concrete, vibrating, curing, finishing, making necessary cutouts/holes of required sizes for services, yard handling & stacking all complete as per IS 11447:1985 and as per approved shop drawings and design mix as per the direction of the Engineer-in-charge. (Cost of reinforcement, mechanical, Electrical and Plumbing inserts will be paid separately); Note: Excess/less cement over the specified cement content used as per design mix is payable/recoverable separately													
A 26.74.1		Concrete grade M-35 (cement content 370 Kgs)	Cum	37267.50	35884.60	37267.50	40022.00	42877.10	42219.70	38191.40	43587.00	39021.30	40509.10	47859.00	45442.50
A 26.74.2		Extra for using M-40 (Cement content 400 Kg) instead of M-35	Cum	337.30	318.90	337.30	393.00	439.10	428.50	356.00	455.50	375.60	394.70	545.50	495.30
A 26.74.3		Extra for using M-50 (Cement content 425 Kg) instead of M-35	Cum	618.40	584.70	618.40	720.60	805.00	785.50	652.80	835.00	688.70	723.60	1000.10	908.10
A 26.74.4		Extra for using M-60 (Cement content 440 Kg) instead of M-35	Cum	787.10	744.20	787.10	917.10	1024.60	999.70	830.80	1062.80	876.50	920.90	1272.80	1155.80
A 26. 75		Providing & laying in position prestressing steel strands (low relaxation) on hollow core bed by using mechanical pulling arrangement like Rabbit/bed master including all accessories for Stressing & destressing operation as per approved make conforming to IS 1343 & grade FY-1860 etc, complete as per drawings and direction of Engineer-in-charge.	Kg	192.20	185.30	192.20	199.10	211.90	209.00	194.20	212.90	195.20	204.00	222.80	216.80
A 26. 76		Transportation of Precast Elements by flat bed Trailor (Double / Tripleaxle 40 ft Length with proper accessories like A frame etc) from factory, including the cost of loading, unloading & stacking at site with the help of required capacity cranes.													
A 26. 76.1		Lead within 15 km	MT	571.20	550.90	571.20	591.50	629.20	620.50	577.00	632.10	579.90	606.00	661.10	643.70
A 26. 76.2		Add/Deduct over item 26.76.1 for every additional lead of 5 Km	MT	119.60	111.80	119.60	127.40	141.90	138.60	121.80	143.10	122.90	133.00	154.20	147.50

Code No.	MF	Description	Unit	Kohima	Dimapur	Peren	Wokha	Phek	Zunheboto	Mokokchung	Tuensang	Mon	Longleng	Kiphire	Noklak
A 26. 77		Erection & Installation of Precast/Prestressed Concrete elements in correct & final position with proper line level and plumb at site making all arrangement (i.e. cranes, push-pull jacks & all another T & P for lifting Placing & Alignment of elements, within erection tolerance as per IS 15916 as per approved shop drawings and all complete as per the direction of Engineer-in-charge but excluding the cost of sim pads, non shrink grout and steel works i.e. hangers. All work up to fifth floor.													
A 26. 77.1		Prestressed hollow core slab up to 200 mm thickness	Sqm	213.20	211.80	213.20	214.50	217.00	216.40	213.50	217.20	213.70	215.50	219.10	218.00
A 26. 77.2		Prestressed hollow core slab above 200 mm up to 400 mm thickness	Sqm	161.30	160.10	161.30	162.50	164.80	164.30	161.70	165.00	161.80	163.40	166.70	165.60
A 26. 77.3		Solid concrete wall elements	Cum	2073.40	2037.90	2073.40	2108.90	2174.70	2159.50	2083.50	2179.80	2088.60	2134.20	2230.50	2200.10
A 26. 78		Providing & Applying weather proof sealant on outer joints of approved make conforming to IS & directed by Engineer-in-charge.													
A 26. 78.1		Sealant 25 mm x 10 mm at joints	Metre	168.60	157.50	168.60	179.60	200.10	195.30	171.70	201.60	173.30	187.50	217.40	207.90
A 26. 79		Providing & laying of levelling sim pads required sizes (5x5cm to 10x10cm) of PVC/Rubber to adjust level of bearing surface of supporting members as per the direction of Engineer-in-charge.													
A 26. 79.1		2 mm thick	Each	26.30	25.20	26.30	27.40	29.50	29.00	26.60	29.70	26.80	28.20	31.20	30.30
A 26. 79.2		5 mm thick	Each	34.60	32.90	34.60	36.20	39.30	38.60	35.00	39.50	35.30	37.40	41.90	40.40
A 26. 79.3		10 mm thick	Each	51.00	48.30	51.00	53.70	58.80	57.60	51.80	59.20	52.20	55.70	63.10	60.70
A 26. 80		Providing & Grouting of dowel tubes / shear keys / Joints of precast members with M-60 grade cementitious grout (Non Shrink) of approved make by suitable means (Free flowing /pump), curing etc. Complete as per the directions of Engineer-in-charge. (The payment shall be made on the basis of actual weight of approved grout injected.)													
A 26. 80.1		Stirrer mixed cementitioius grout (non shrink) of approved make in dowel tubes / Shear keys / Joints of precast members.	Kg	218.50	205.70	218.50	231.30	255.00	249.50	222.20	256.80	224.00	240.40	275.00	264.10
A 26. 81		Providing & fixing Scaffolding net of required width made of high density polyethylene UV stabilized knitted on warp knitting machine having density 100 gm/sqm and shading coefficient minimum 75% around the construction site/ for vertical extension as per requirement including fastening/tying with building / scaffolding pipes or with any oter fixtures etc. Complete as per the directions of Engineer-in-charge. (One time payment shall be made for providing Scaffolding net from start of work till completion of work including shifting if any. The Scaffolding net shall be the property of the contractor on completion of the work)	Sqm	36.70	34.50	36.70	39.00	43.20	42.20	37.40	43.50	37.70	40.60	46.80	44.80

APPENDIX		
Sl. No	DESCRIPTION	PAGE NO
1.0	Plinth Area Rates under Nagaland PWD 2021	1
2.0	Schedule of Rates for Material testing	5
3.0	Weight of Materials and Works	6
4.0	Roof Load and Safe Load	7
5.0	Cement Consumption	9
6.0	Quantity of Cement, Sand and Aggregates	10
7.0	Quantity of Paint and Distemper, etc	14
8.0	Practical Data and Information	15
9.0	Specification of Works	17
10.0	Conversion from one system to another	20
11.0	Aluminium Section Profiles	26
12.0	Requirement of Materials in Bituminous Works	31
13.0	Requirement of Materials in WBM Works	33

PLINTH AREA RATES UNDER NAGALAND PWD 2021

Sl.no	District	Unit	Brick Walling	RCC	First Floor
1	KOHIMA	sq ft	2300	2380	2140
		sq m	24755	25616	23033
2	DIMAPUR	sq ft	2050	2100	1850
		sq m	22064	22602	19912
3	PEREN	sq ft	2300	2380	2140
		sq m	24755	25616	23033
4	WOKHA	sq ft	2450	2725	2250
		sq m	26369	29329	24217
5	PHEK	sq ft	2520	2850	2400
		sq m	27123	30675	25831
6	ZUNHEBOTO	sq ft	2580	2800	2350
		sq m	27769	30136	25293
7	MOKOKCHUNG	sq ft	2320	2500	2050
		sq m	24970	26908	22064
8	TUENSANG	sq ft	2650	3020	2530
		sq m	28522	32504	27230
9	MON	sq ft	2400	2625	2100
		sq m	25831	28253	22602
10	LONGLENG	sq ft	2510	2750	2300
		sq m	27015	29598	24755
11	KIPHIRE	sq ft	2880	3415	2670
		sq m	30997	36756	28737
12	NOKLAK	sq ft	2750	3250	2560
		sq m	29598	34980	27553

PLINTH AREA RATES UNDER NAGALAND NPWD

Sl.No	Administrative Block	Unit	Brick Wall with CGI Roof	Ground Floor	First Floor	Sl.No	Administrative Block	Unit	Brick Wall with CGI Roof	Ground Floor	First Floor
1-a	KOHIMA	Sq ft	2300.00	2380.00	2140.00	4-a	WOKHA	Sq ft	2450.00	2725.00	2250.00
		Sq m	24754.90	25615.94	23032.82			Sq m	26369.35	29329.18	24216.75
b	Tseminyu	Sq ft	2392.00	2475.20	2225.60	b	Bhandari	Sq ft	2254.00	2507.00	2070.00
		Sq m	25745.10	26640.58	23954.13			Sq m	24259.80	26982.84	22279.41
c	Sechu	Sq ft	2277.00	2356.20	2118.60	c	DHEP	Sq ft	2278.50	2534.25	2092.50
		Sq m	24507.35	25359.78	22802.49			Sq m	24523.50	27276.13	22521.58
d	Chiephobozu	Sq ft	2346.00	2427.60	2182.80	d	Ralan	Sq ft	2205.00	2452.50	2025.00
		Sq m	25250.00	26128.26	23493.48			Sq m	23732.42	26396.26	21795.08
e	Jakhama	Sq ft	2323.00	2403.80	2161.40	e	Sanis	Sq ft	2278.50	2534.25	2092.50
		Sq m	25002.45	25872.10	23263.15			Sq m	24523.50	27276.13	22521.58
2-a	DIMAPUR	Sq ft	2050.00	2100.00	1850.00	5-a	PHEK	Sq ft	2520.00	2850.00	2400.00
		Sq m	22064.15	22602.30	19911.55			Sq m	27122.76	30674.55	25831.20
b	ADC, Niuland	Sq ft	2091.00	2142.00	1887.00	b	Pfutsero	Sq ft	2343.60	2650.50	2232.00
		Sq m	22505.43	23054.35	20309.78			Sq m	25224.17	28527.33	24023.02
c	Medziphema	Sq ft	2091.00	2142.00	1887.00	c	Chozuba	Sq ft	2343.60	2650.50	2232.00
		Sq m	22505.43	23054.35	20309.78			Sq m	25224.17	28527.33	24023.02
d	Dhansiripar	Sq ft	2091.00	2142.00	1887.00	d	Meluri	Sq ft	2545.20	2878.50	2424.00
		Sq m	22505.43	23054.35	20309.78			Sq m	27393.99	30981.30	26089.51
e	Kuhuboto	Sq ft	2070.50	2121.00	1868.50	e	Chizami	Sq ft	2368.80	2679.00	2256.00
		Sq m	22284.79	22828.32	20110.67			Sq m	25495.39	28834.08	24281.33
3-a	PEREN	Sq ft	2300.00	2380.00	2140.00	6-a	KIPHIRE	Sq ft	2880.00	3415.00	2670.00
		Sq m	24754.90	25615.94	23032.82			Sq m	30997.44	36755.65	28737.21
b	Jalukie	Sq ft	2277.00	2356.20	2118.60	b	Seyochung	Sq ft	2908.80	3449.15	2696.70
		Sq m	24507.35	25359.78	22802.49			Sq m	31307.41	37123.20	29024.58
c	Tening	Sq ft	2392.00	2475.20	2225.60	c	Pungro	Sq ft	2937.60	3483.30	2723.40
		Sq m	25745.10	26640.58	23954.13			Sq m	31617.39	37490.76	29311.95

Sl.No	Administrative Block	Unit	Brick Wall with CGI Roof	Ground Floor	First Floor	Sl.No	Administrative Block	Unit	Brick Wall with CGI Roof	Ground Floor	First Floor
7-a	ZUNHEBOTO	Sq ft	2580.00	2800.00	2350.00	10-a	MON	Sq ft	2400.00	2625.00	2100.00
		Sq m	27768.54	30136.40	25293.05			Sq m	25831.20	28252.88	22602.30
b	Aghunato	Sq ft	2734.80	2968.00	2491.00	b	Aboi	Sq ft	2448.00	2677.50	2142.00
		Sq m	29434.65	31944.58	26810.63			Sq m	26347.82	28817.93	23054.35
c	Phughoboto	Sq ft	2322.00	2520.00	2115.00	c	Naganimora	Sq ft	2280.00	2493.75	1995.00
		Sq m	24991.69	27122.76	22763.75			Sq m	24539.64	26840.23	21472.19
d	Suruhoto	Sq ft	2528.40	2744.00	2303.00	d	Tizit	Sq ft	2328.00	2546.25	2037.00
		Sq m	27213.17	29533.67	24787.19			Sq m	25056.26	27405.29	21924.23
e	Akuluto	Sq ft	2451.00	2660.00	2232.50	e	Wakching	Sq ft	2496.00	2730.00	2184.00
		Sq m	26380.11	28629.58	24028.40			Sq m	26864.45	29382.99	23506.39
f	Atoizu	Sq ft	2528.40	2744.00	2303.00	f	Phomching	Sq ft	2448.00	2677.50	2142.00
		Sq m	27213.17	29533.67	24787.19			Sq m	26347.82	28817.93	23054.35
g	Satakha	Sq ft	2528.40	2744.00	2303.00	g	Chen	Sq ft	2688.00	2940.00	2352.00
		Sq m	27213.17	29533.67	24787.19			Sq m	28930.94	31643.22	25314.58
8-a	MOKOKCHUNG	Sq ft	2320.00	2500.00	2050.00	h	Angjangyang	Sq ft	2688.00	2940.00	2352.00
		Sq m	24970.16	26907.50	22064.15			Sq m	28930.94	31643.22	25314.58
b	Mangkolemba	Sq ft	2250.40	2425.00	1988.50	i	Manyakshu	Sq ft	3000.00	3281.25	2625.00
		Sq m	24221.06	26100.28	21402.23			Sq m	32289.00	35316.09	28252.88
c	Tuli	Sq ft	2227.20	2400.00	1968.00	11-a	TUENSANG	Sq ft	2650.00	3020.00	2530.00
		Sq m	23971.35	25831.20	21181.58			Sq m	28521.95	32504.26	27230.39
d	Changtongya	Sq ft	2273.60	2450.00	2009.00	b	Shamatore	Sq ft	2809.00	3201.20	2681.80
		Sq m	24470.76	26369.35	21622.87			Sq m	30233.27	34454.52	28864.21
9-a	LONGLENG	Sq ft	2510.00	2750.00	2300.00	c	Longkhim	Sq ft	2544.00	2899.20	2428.80
		Sq m	27015.13	29598.25	24754.90			Sq m	27381.07	31204.09	26141.17
b	Tamlu	Sq ft	2434.70	2667.50	2231.00	12-a	NOKLAK	Sq ft	2750.00	3250.00	2560.00
		Sq m	26204.68	28710.30	24012.25			Sq m	29598.25	34979.75	27553.28
						b	Thonoknyu	Sq ft	2915.00	3445.00	2713.60
								Sq m	31374.15	37078.54	29206.48

Multiplication factor (MF) of Administrative Blocks with respect to the Districts

ANNEXURE - I

Sl.No	Name of Block	M.F	Sl.No	Name of Block	M.F
1	KOHIMA	1.00	8	MOKOKCHUNG	1.00
	ADC, Tseminyu	1.04		ADC, Mangkolemba	0.97
	SDO (C), Sechu	0.99		ADC, Tuli	0.96
	SDO (C), Chiephobozu	1.02		SDO (C), Changtongya	0.98
	SDO (C),Jakhama	1.01	9	TUENSANG	1.00
2	PEREN	1.00		ADC, Shamatore	1.06
	SDO (C), Jalukie	0.99		ADC, Longkhim	0.96
	SDO (C), Tening	1.04	10	ZUNHEBOTO	1.00
3	PHEK	1.00		ADC, Aghunato	1.06
	ADC, Pfutsero	0.93		ADC, Phughoboto	0.90
	ADC, Chozouba	0.93		SDO (C), Suruhoto	0.98
	ADC,Meluri	1.01		SDO (C), Akuluto	0.95
	SDO (C),Chizami	0.94		SDO (C), Atoizu	0.98
4	KIPHIRE	1.00		SDO (C), Satakha	0.98
	SDO (C), Seyochung	1.01	11	MON	1.00
	SDO (C), Pungro	1.02		ADC, Aboi	1.02
5	LONGLENG	1.00		ADC, Naginimora	0.95
	SDO (C), Tamlu	0.97		ADC, Tizit	0.97
6	DIMAPUR	1.00		ADC, Tobu	1.25
	ADC, Niuland	1.02		SDO (C), Wakching	1.04
	ADC, Medziphema	1.02		SDO (C), Phomching	1.02
	SDO (C), Dhansiripar	1.02		SDO (C), Chen	1.12
	SDO (C), Kuhuboto	1.01		SDO (C), Angjangyang	1.12
7	WOKHA	1.00		SDO (C), Manyakshu	1.25
	ADC, Bhandari	0.92	12	NOKLAK	1.06
	ADC,DHEP	0.93		SDO (C), Thonoknyu	
	SDO (C), Ralan	0.90			
	SDO (C), Sanis	0.93			

SCHEDULE OF RATES FOR MATERIAL TESTING

Sl.No	Name of test	Rates (Rs)		Sl.No	Name of test	Rates (Rs)
	TEST FOR SOIL					
1.	Sieve Analysis of soil	946.00		15.	Triaxial shear test of soil (Without measurement of pure pressure and volumetric change)	2794.00
2.	Grain size analysis of soil by hydrometer	826.00		16.	Triaxial shear test (with measurement of pure pressure and volumetric change)	3232.00
3.	Determination of Atterberg's limits	930.00		17.	Standard penetration test (SPT) (By Dynamic cone penetration)	3274.00
4.	Lab. Compaction (Std. proctor)	783.00			TEST FOR BITUMEN	
5.	Specific gravity (Pygonometer)	500.00		1.	Specific gravity	500.00
6.	Lab. CBR	2244.00		2.	Penetration (By penetrometer)	500.00
7.	Field CBR (Necessary arrangement like fixing of girder at the rear of the chassis of the truck to be made by the party.	7702.00		3.	Softening point (Ring and ball)	762.00
8.	Bearing capacity of soil in site by plate load (Necessary arrangement as above)	6886.00			TEST FOR STONE AGGREGATE	
9.	Compaction control test in site (by sand replacement method) for field density of soil.	2944.00		1.	Fineness modulus of fine and coarse aggregate (by sieving)	654.00
10.	Permeability of soil by constant variable head method.	1002.00		2.	Abrasion test (By devol abrasion machine)	918.00
11.	PH value of soil / water by indicator paper	500.00		3.	Crushing strength	682.00
12.	Shear strength of soil. (By direct shear machine)	1662.00		4.	Toughness (by impact machine)	762.00
13.	Moisture content of soil (by oven dry method)	500.00		5.	Water absorption	500.00
14.	Consolidation properties of soil (by consolidometer)	3706.00		6.	Flakiness and elongation index	500.00

Sl.No	Name of test	Rates (Rs)		Sl.No	Name of test	Rates (Rs)
	TEST FOR CEMENT CONCRETE				TEST FOR CEMENT	
1.	Consistency (by flow table)	798.00		1.	Fineness (By dry sieving)	500.00
2.	Compressive strength of cement concrete (Supplied by party)	500.00		2.	Soundness (by le-chatelier)	852.00
3.	Mix design (materials supplied by party)	5596.00		3.	Setting time (by vicat needle)	858.00
4.	Flexural strength of cement concrete beam (materials supplied by the party and casting at lab())	1174.00		4.	Compressive strength of cement cube (By high frequency cube vibrator)	1374.00
5.	Flexural strength of cement concrete beam (casted at site by the party)	756.00			TEST FOR SAND	
	TEST FOR BRICKS			1.	Bulking	200.00
1.	Water absorption	500.00				
2.	Efflorescence	500.00				
3.	Compressive strength	500.00				
4.	Dimension	200.00				

<u>WEIGHTS OF MATERIALS AND WORKS</u>					
Material			Works		
Particulars	Kg/cu m	lbs. cu ft	Particulars	kg cu m	lbs, cu ft
Earth (ordinary)	1600	100	Brick masonry	1920	120
Sand dry	1600	100	Sundried brickwork	1760	110
Cinder (burnt coal)	800	50	Reinforced brickwork (R.B.)	2000	125
Surkbi	1120	70	Lime concrete with brick ballast	1920	120
Cement	1440	90	Lime concrete with stone ballast	2240	140
White lime slaked	640	40	Cement concrete	2240	140
Brick ballast	1200	75	R. C. C.	2400	150
Stone ballast (Hard)	1600	100	Asphalt concrete	2240	140
Lime stone	2400	150	stone masonry	2560	160
Sand stone	2240	140	Lime mortar	1760	Ito
Hard stone	2720	170	Cement mortar	1920	120
Marble	2560	160	Stone masonry dry	2080	130
Coal dust	960	60	Stone ballast consolidated as in roads	2080	130
Teak wood	640	40	Granite ashlar masonry	2560	160
Shisham wood	800	50	Rubble stone masonry	2320	145
Sal wood	800	50			
Deodar wood	640	40			
Cast iron	7200	450			
Wrought iron	7680	480			
Mild steel	7850	490			

<u>ROOFLOAD</u>					
Weight of Roofing Materials			Live Load in Floor		
Particular	kg/sq m	Ibs per sq ft	Type of Building	kg sq m	Ibs /cu ft
G.C.I. Sheet 24 gauge	7.0	1.42	Dwelling Houses, Hostel, Hospital Wards	200	40
G.C.I. Sheet 22 gauge	8.4	1.72			
A.C. Sheet 1/4" gauge	17.0	3.5	Offices, Schools, Entrance floor	390	80
Single Allahabad tiles with battens	83.00	17			
Double Allahabad tiles with battens	166.00	34	Assembly Halls, Cinemas, Theatres. Staircase	490	100
Mangalore tiles	68.40	14	Ware houses, Drill Halls. Workshops	730	150
Boarding 2.5 cm (1") thick	29.30	6			
Slates	34.20	7			
Country tiles Single with battens ...	68.40	14			
Thatch with frame 15 cm (6") ...	31.70	6.5	Note: If there is no stair-case leading to roof, live load on roof may be taken as 145 kg, sq m (30 Ibs sq ft).		

SAFE LOAD

Safe Permissible Load on Masonry			Safe Permissible Load on Different Soils		
Particulars	Tons per sq m	Tons per sq ft	Particulars	Tons per sq m	Tons per sq ft
Sundried brick work	10	1			
Brick work in mud	20.0	2	Soft wet clay	2.5	0.25
Brick work in Lime mortar	30.0	3	Black Cotton Soil	5.0	0.5
Brick work in 1:3 Cement mortar	100.0	10	Moist clay	15.0	1.5
Brick work in 1:4	80.0	8	Alluvial earth loams	10.0	1.0
Brick work in 1:6	60.0	6	Compact clay nearly dry	20.0	2.0
Lime concrete with brick ballast	30.0	3	Dry compact clay of considerable thickness	30.0	3.0
Lime concrete with stone ballast	40.0	4	Loose sand in shifting riverbed	15.0	1.5
Cement concrete 1:1½:3	300.0	30	Compact sand	20.0	2.0
Cement concrete 1:2:4	250.0	25	Sandy gravel	25.0	2.5
Cement concrete 1:3:4	150.0	15	Compact gravel	80.0	8.0
Cement concrete 1:4:8	100.0	10	Moorum	30.0	3.0
Random rubble in Lime mortar	40.0	4	Granite Rock	150.0	15.0
Random rubble in Cement mortar 1:4	80.0	8			
Coursed rubble in Cement mortar 1:4	100.0	10			

Cement Consumption

Description of Items	Quantity of cement in bags (of 50 Kg each)		Description of Items	Quantity of cement in bags (of 50 Kg each)
Cement concrete			Flooring	
C.C (1:5:10)	2.6 / cum		C.C. Flooring in 1:2:4, 40 mm thick	0.34 / Sqm
C.C (1:4:8)	3.4 / cum		C.C. Flooring in 1:2:4, 25 mm thick	0.25 / Sqm
C.C (1:3:6)	4.4 / cum		Kota stone flooring (25 to 30 mm thick)	0.14 / Sqm
C.C (1:2:4)	6.4 / cum		Pre-cased marble/mosiac/cement tiled flooring on lime mortar bedding	0.17 / Sqm
C.C (1:1.5:3)	8 / cum		Pre-cased marble/mosiac/cement tiled in skirting and dado on cement mortar base	0.28 / Sqm
C.C (1:1:2)	12.2 / cum		Terrazzo or mosiac in-situ flooring 40mm thick with ordinary cement	0.38 / Sqm
Cement Mortar			Cement Plaster	
1:1	20.4 / cum		20 mm thick (1:3) in single coat	0.25 / Sqm
1:2	13.6 / cum		20 mm thick (1:4) in single coat	0.18 / Sqm
1:3	10.2 / cum		20 mm thick (1:5) in single coat	0.14 / Sqm
1:4	7.6 / cum		20 mm thick (1:6) in single coat	0.112 / Sqm
1:5	6.2 / cum		12 mm thick (1:3) in single coat	0.15 / Sqm
1:6	5 / cum		12 mm thick (1:4) in single coat	0.11 / Sqm
Brick Masonry in cement sand mortar			12 mm thick (1:5) in single coat	0.10 / Sqm
1:3	2.6 / cum		12 mm thick (1:6) in single coat	0.072 / Sqm
1:4	1.9 / cum		6 mm thick (1:3) in single coat	0.25 / Sqm
1:5	1.6 / cum		6 mm thick (1:4) in single coat	0.055 /Sqm
1:6	1.3 / cum		20 mm thick (1:4) in two coats (15mm+5mm)	0.19 / Sqm
Half brick masonry (115mm thick) in cement mortar			Pointing (in C.M. 1:3)	
1:3	0.30 / Sqm		Ruled pointing on brick work	3.06 bags per 100 Sqm
1:4	0.22 / Sqm		Raised pointing on brickwork	4.08 bags per 100 Sqm
Rubble Masonry			Ruled pointing on tiled brickwork	4.7 bags per 100 Sqm
Random Rubble in C.M. (1:6)	1.7 / cum			
Coarse Rubble in C.M. (1:6)	1.5 / cum			

STATEMENT SHOWING QUANTITIES OF CEMENT, SAND AND AGGREGATE ETC.TO BE USED IN DIFFERENT ITEMS OF WORKS PROVIDED IN THE

SCHEDULE.

Sl. No	Description of item	Unit	Cement Bags of 50 Kg	Sand (cum)	Broken stonechips (Cum)	Boulder (Cum)
	MORTAR					
1	Cement mortar prop. 1:2	Cum	13.6	0.95		
2	Cement mortar prop. 1:3	Cum	10.2	1.07		
3	Cement mortar prop. 1:4	Cum	7.6	1.07		
4	Cement mortar prop. 1:6	Cum	5.0	1.07		
	CEMENT CONCRETE WORK					
5	Cement mortar prop. 1:5:10	Cum	23.6	0.47	0.89	
6	Cement mortar prop. 1:4:8	Cum	3.4	0.47	0.89	
7	Cement mortar prop. 1:3:6	Cum	4.4	0.47	0.89	
8	Cement mortar prop. 1:2:4	Cum	6.4	0.445	0.89	
9	Cement mortar prop. 1:1.5:3	Cum	8.0	0.425	0.85	
	DAMP PROOF COURSE					
10	25MM THICK c.c. 1:2:4	10 Sqm	1.6	0.111	0.22	
	BRICK WORK					
11	Brick work in cement mortar 1:4	Cum	1.90	0.275		
12	Brick work in cement mortar 1:6	Cum	1.25	0.275		
13	125mm thick brick work in cement mortar 1:3	10Sqm	2.13	0.34		
14	75mm thick brick work in cement mortar 1:3	10Sqm	1.85	0.20		
	STONE MASONRY WORK					
15	Random rubble masonry in cement mortar 1:6	Cum	1.65	0.33	1.16	
16	Course rubble masonry in cement mortar 1:6	Cum	1.50	0.30	1.37	
17	Dry Stone masonry	Cum			1.37	
18	Stone work in plain ashlar Cyclopean in cement mortar 1:6	Cum	1.50			
	FLOORING					
19	62mm thick C.C. 1:3:6	10 Sqm	2.54	0.275	0.52	
20	62mm thick C.C. 1:4:8	10 Sqm	2.00	0.275	0.52	
21	(a) 20mm thick C.C. topping 1:1:2	10 Sqm	2.40	0.075	0.16	
	(b) 25mm thick C.C. topping 1:1:4	10 Sqm	3.20	0.100	0.21	
22	25mm thick C.C. topping 1:2:4	10 Sqm	2.00	0.111	0.22	
23	Cement plaster skirting upto 30cm with cement mortar 1:3	10 Sqm	2.90	0.28		
24	Cement concrete pavement 1:2:4	Cum	6.40	0.445	0.89	
25	Tarrazo tiles on 12mm thick cement mortar prop 1:3	10 Sqm	2.224	0.13		
26	White glazed tiles on 12mm cement mortar 1:3	10 Sqm	0.21	0.01		

Sl. No	Description of item	Unit	Cement Bags of 50 Kg	Sand (cum)	Broken stonechips (Cum)	Boulder (Cum)
	WALLING					
27	Creat walling with cement mortar 1:6 Prop :20 mm thick each side	10 Sqm	2.24	0.48		
	FINISHING					
28	12mm cement plaster 1:3	10 Sqm	1.47	0.154		
29	12mm cement plaster 1:4	10 Sqm	1.10	0.154		
30	12mm cement plaster 1:6	10 Sqm	0.72	0.154		
31	20mm cement plaster 1:6	10 Sqm	1.12	0.24		
32	6mm cement plaster 1:3	10 Sqm	0.734	0.08		
33	Neat cement punning	10 Sqm	0.44			
	POINTING					
34	Pointing on brick work with cement mortar 1:3	10 Sqm	0.306	0.032		
35	Pointing on stone work with cement morar 1:3	10 Sqm	0.235	0.025		
	DRAINAGE					
36	100mm open surface drain with C.C. 1:3:6	Metre	0.29	0.028	0.04	
37	150mm open surface drain with C.C. 1:3:6	Metre	0.33	0.033	0.045	
38	225mm open surface drain with C.C. 1:3:6	Metre	0.435	0.435	0.059	
	SANITARY INSTALLATION					
39	Fixing water closet flusing cistern & brackets, etc. including cutting and making good the walls and floors	each	0.1			
40	Fixing lipped front urinal basin, flusing cistern, brackets etc. cutting and making good the walls and floors.					
	(a) One urinal basin with 5 litres					
	C.I. Automatic flusing cistern.	each	0.05			
	(b) Range of two urinal basin with 10 litres					
	C.I. Automatic flusing cistern.	each	0.08			
	(c) Range of three urinal basin with 10 litres					
	C.I. Automatic flusing cistern.	each	0.13			
	(d) Range of four uringl basin with 15 litres					
	C.I. Automatic flusing cistern.	each	0.19			

Sl. No	Description of item	Unit	Cement Bags of 50 Kg	Sand (cum)	Broken stonechips (Cum)	Boulder (Cum)
41	Fixing one piece construction white squatting plate urinal etc Range of two squanting plate with 10 litres C.I. Automatic flushing cistern	each	0.20			
42	Fixing wash basin (Lavatory -basin) with brackets etc. including cutting & making good the walls.	each	0.05			
43	Fixing pedestal for wash basin recessed at the back for reception of pipes and fittings.	each	0.03			
44	Fixing asbestors cement soils waste and vent pipe in cement mortar 1:2					
	(a) 100mm or 80mm	100 mtr	0.30			
	(b) 50mm dia	100 mtr	0.15			
45	Fixing wooden plugs & standard holder bat clamps comprising of two semi -circular halves of flat iron & cast iron based screwed on wooden plugs 100mm,80mm or 50mm dia	each	0.0004			
46	Fixing A.C. bend with Cement mortar 1:2					
	(a) 100mm or 80mm dia	each	0.002			
	(b) 500mm dia	each	0.001			
47	Fixing double equal or unqual A.C and junction in cement mortar 1:2					
	(a) 100x100x100x100mm	each	0.004			
	(b) 80x80x80x80mm	each	0.004			
	(c) 50x50x50x50mm	each	0.002			
48	Fixing single equal or unqual junction with cement mortar 1:2					
	(a) 100x100x100mm					
	(b) 100x100x50x50mm					
	(c) 80x80x80mm	each	0.003			
	(e) 80x80x50x50mm					
	(f) 80x80x50mm					
	(g) 50x50x50mm	each	0.002			
49	Fixing plain A.C. plain invert bend with Cement mortar 1:2	each	0.002			
50	Fixing A.C. offset with Cement mortar 1:2					
	(a) 100mm dia with any projection	each	0.002			
	(b) 50mm dia with any projection	each	0.001			
51	Fixing A.C. loose socket with cement mortar 1:2					
	(a) 100mm or 80mm dia	each	0.002			
	(b) 50mm dia	each	0.001			
52	Fixing A.C. terminal guard with cement mortar 1:2					
	(a) 100mm or 80mm dia	each	0.002			
	(b) 50mm dia	each	0.001			

Sl. No	Description of item	Unit	Cement Bags of 50 Kg	Sand (cum)	Broken stonechips (Cum)	Boulder (Cum)
	WATER SUPPLY					
53	Fixing G.I. Pipe including cutting and making good the walls					
	(a) 15mm dia	100 mtr	0.10			
	(b) 20mm dia	100 mtr	0.12			
	(c) 25mm dia	100 mtr	0.14			
	(d) 32mm dia	100 mtr	0.15			
	(e) 40mm dia	100 mtr	0.16			

STATEMENT SHOWING QUANTITIES OF PAINT AND DISTEMPER ETC. TO BE USED IN DIFFERENT ITEMS OF WORKS
PROVIDED IN THE SCHEDULE

Sl.No	Description	Unit	Quantity (Kg)
1	Distempering with dry distemper (two or more coats)with whiting 1 Kg	10 Sqm	1.5 Kg
2	Distempering with dry distemper (one or more coats)	10 Sqm	1.0 Kg
3	Distempering with oil bound distemper (two or more coats) with distemper primer 0.71 ltrs	10 Sqm	1.5 Kg
4	Distempering with oil bound distemper (onle or more coats)	10 Sqm	1.0 Kg
5	Applying one coat of distemper Primer	10 Sqm	0.7 Litre
6	Applying one coat of distemper Primer	10 Sqm	0.81 Litre
7	Applying one coat of primer on wood work.	10 Sqm	0.75 Litre
8	Applying one coat of primer on steel work	10 Sqm	0.54 Litre
9	Painting two o more coats with ready mixed paint	10 Sqm	1.25 Litre
10	Painting one more coats with ready mixed paint	10 Sqm	0.75 Litre
11	Painting two cats on G.I. Sheets with ready mixed paint	10 Sqm	0.80 Litre
12	Painting one or more coats on G.I. Sheets with ready mixed paint	10 Sqm	0.46 Litre
13	Painting two or more coats with enamel paing	10 Sqm	1.16 Litre
14	Painting one or more coats with enamel paing	10 Sqm	0.70 Litre
15	Painting tow or more coats with Aluminiumum paint	10 Sqm	0.80 Litre
16	Painting one or more coats with Aluminiumum paing	10 Sqm	0.46 Litre
17	Painting two or more coats with plastic emulsion paint	10 Sqm	1.21 Litre
18	Painting more or more coats with plasti emulsion paints	10 Sqm	0.73 Litre
19	Vernishing two or more costs with copal varnish	10 Sqm	1.16 Litre
20	Under coat of flatting varnish	10 Sqm	0.70 Litre
21	Varnishing one or more coats with copal varnish	10 Sqm	0.70 Litre
22	Oilling two or more coats with wood preservative (indocoat)	10 Sqm	1.16 Litre
23	Oilling with more or coats with wood preservative (indocoat)	10 Sqm	0.70 Litre
24	French Spirit polishing two or more coats	10 Sqm	1.16 Litre
25	French Spirit polishing one or more coats	10 Sqm	0.70 Litre
26	Polishing on wood work with wax polish	10 Sqm	0.25 Kg
27	Finishing wall with water proofing cement paints (three or more coats)	10 Sqm	5.47 Kg
28	Finishing wall with water proofing cement paint (one or more coats)	10 Sqm	2.20 Kg

PRACTICAL DATA AND INFORMATIONS

The following data and informations are only approximate and vary according to the location nature of works, structure, specifications, methods of construction, etc. For general idea and for priliminary estimate these will be helpful.		
BUILDING WORKS		
1	Cost of labour and materials	
	(i) Cost on account of labour	30% to 35% of the whole cost.
	(ii) Cost on account of materials	70% to 65% of the whole cost.
2	Direct and overhead cost	
	Direct cost on actual work (job)	85% of the Whole cost.
	Overhead cost due to establishment, supervision, incidentals, etc.	15% of the whole cost.
3	(i) Cost of foundation and plinth	10% to 15% of the whole cost.
	(ii) Cost of superstructure	90% to 85% of the whole cost.
4	Cost of second storey	85% to 90% of the first storey.
5	Cost of different parts or percentage break up of building (excluding sanitary and electrical works)	
	Earthwork in excavation and filling	½ % of the whole cost.
	Concrete in foundation	5% of the wholecost.
	Damp proof course	1 % of the whole cost.
	Brickwork	34 % of the whole cost.
	Roofing	20 % of the whole cost.
	Flooring	6 % of the whole cost.
	Doors and windows	16 % of the whole cost.
	Plastering and pointing	10 %of the whole cost.
	White washing, colour washing, painting etc.	2 % of the w hole cost.
	Miscellaneous	5%of the whole cost.
	Total	100% of the whole cost.
6	Cost of sanitary and electrical works -	
	Sanitary and water supply installation	8% of the building cost.
	Electric installation excluding fan	8% of the building cost.

7	Cost of materials and labour required for building, percentage distribution -	
	(i) Cost of brick	22 % of the whole cost.
	(ii) Cost of cement	12% of the whole cost.
	(iii) Cost of steel bars	1 W/o of the whole cost.
	(iv) Cost of timber	10% of the whole cost.
	(v) Cost of other materials	14% of the whole cost.
	(vi) Wages of labour	30% of the whole cost.
	(vii) Workcharged establishment	2% of the whole cost.
	Total	100% of the whole cost.
	<i>Note- If the estimated cost of the building and rates of materials are known the approximate quantities of materials can be calculated. Cost can be calculated approximately on plinth area basis.</i>	
8	Materials required on plinth area basis for single storey building -	
	(i) Brick	500 nos. per sq m (500 nos. % sq ft) of plinth area
	(ii) Cement	1 .5 bags per sq m (15 bags per % sq ft) of plinth area
	(iii) Mild steel bars	1.25 kg per sq m (2 ½ cwt per % sq ft) of plinth area
	(iv) Coal (slack or dust) for [burning bricks]	1.5 q per sq m (1½ tons per % sq ft) of plinth area
9	Coal (slack or dust) for burning bricks	18 tonne per lakh of bricks (output 60% I-class brick)
10	G.I. sheet requirement for shed (24 gauge)	1 tonne per 1200 sq ft (0.85 q per sq m) of plinth area
11	Angle iron requirement for roof truss shed	4 ½ cwt% sq ft or 2½ ton % sq ft. (0.5 q/sq m or 2.5 tonne % sq m) of plinth area.

SPECIFICATION FOR WORKS
Materials of Reinforced Cement Concrete

1.1 Aggregate :-

When coarse aggregate brought to the site in ungraded single size coarse aggregates of different nominal sizes, conforming to the requirements vide Table I given below, shall be mixed at site with the other ingredients of concrete either directly in the mixture or on the platform in the proportion indicated in table II below.

TABLE NO. I

I.S.size Designation	Percentage passing for single size aggregate of nominal size					
	63mm	40mm	20mm	16mm	12.5mm	10mm
1	2	3	4	5	6	7
40mm	0 -30	85 -100	100			
20mm	0 -5	0 - 20	85 - 100	100		
10mm		0 - 5	0 - 20	0 - 30	0 - 45	85 - 100

TABLE NO. II

Cement concrete mix	Nominal size or aggregate	Parts of aggregate of size 40mm	Parts of aggregate of size 20mm	Parts of aggregate of size 10mm
1	2	3	4	5
C.C.1:5:10	40mm	71/2	2/1.5	
C.C.1:4:8	40mm	6	2	
C.C.1:3:6	40mm	4 /1.5	1/1.5	
C.C.1:2:4	40mm	2/1.5	1	1.5
C.C.1:2:4	20mm	-	3	1
C.C.1:1.5:3	20mm	-	2	1

Note :-

- 1 The proportions indicated in table II above are by volume. These proportions may be varied some what by Engineer -In -Charge after making seive analysis of the aggregates broght to ths site, when considering necessary for obtaining better density and strength of concrete. No adjustment in the rates shall be made, for any variation in proportions so ordered.*
- 2 The aggregate shall be measured in stacks and paid for after making a deduction of 7.5% of the gross measurement of stacks in respect of aggregate of nominal size 40mm and above. In respect of aggregate of size below 40mm no deduction shall be made from the gross measurements of stacks.*

1.2 SAND :-

- (a) The sand shall not contain more than 8% of silt as determind by field test with measuring cylinder.
- (b) -I) Fineness modulus of coarse sand shall not be less than 2.5.
- ii) Fineness modulus of fine sand shall not be less than 1.0.

1.3 WATER :-

The quantity of water to be used for each mix of 50kg cement, to be the required consistency shall not be more than :-

Grade of concrete	Mix	Max.quantity of water per 50kg of cement
M10	1.3.6	34 Litre
M15	1.2.4	32 Litre
M20	1.1.5.3	30 Litre
M25	1.1.2	27 Litre

In the case of vibrated concrete the limit specified may be suitably reduced to avoid Saggregation.

The quantity of water shall be regulated by carrying out regular slump test described below:-

Sl. No	Type of Work	Slump when vibrators are used	Slump when vibrators are not used
1	Mass concrete in foundation, footing retaining walls and pavements	100mm to 25mm	50mm to 75mm
2	Thin sections of flooring of less than 75mm thickness	25mm to 40mm	75mm to 100mm
3	Beams, Slabs and columns simply reinforced	25mm to 40mm	100mm to 125mm
4	Thin R.C.C. section or section with congested steel	40mm to 50mm	125mm to 150mm

Curing of concrete :- After the concrete has begun to harden i.e. about 1 to 2 hours after its laying, it shall be protected from quick drying with moist gunny bags, sand or any other materials approved by the Engineer -In - charge. After 24 hours of laying of concrete the surface shall be cured by flooding with water of minimum 25mm depth, or by covering with wet absorbent materials. The curing shall be done for a minimum period of 7 to 12 days in summer and 14 days in winter in Nagaland when normal (Portland)cement is used.

Bricks required for masonry, shall be thoroughly soaked in clean water for atleast an hour in brick lined tanks of sufficient size immersed in water is an indication of through soaking of bricks. The soaked bricks shall be kept on wooden planks or bricks platform to avoid earth being smeared on them.

Curing for cement plaster :- Curing shall be started as soon as the plaster has hardened sufficiently not to damaged when watered. The plaster shall be kept wet for a period of at least 7 days.

PROPERTIES OF BARS USED AS REINFORCEMENT M.S. ROUND BARS OR M.S. RIBBED TORSTEEL

Bar size (mm)	Area (Sq.cm)	Perimeter (cm)	Weight per metre (Kg)	Length per tonne (Metre)	Area im mm2
6	0.283	1.885	0.222	4505	28.26
8	0.503	2.513	0.395	2532	50.24
10	0.785	3.142	0.616	1623	78.50
12	1.131	3.77	0.888	1126	113.04
16	2.011	5.027	1.579	633	200.96
20	3.142	6.283	2.466	406	314.00
25	4.909	7.854	3.854	259	490.63
32	8.042	10.05	6.313	158	803.84
40	12.57	12.57	9.864	101	1256.00

Cross sectional areas of bars at specific spacings

Bar size (mm)	Bar spacing in mm									
	75	100	125	150	175	200	225	250	275	300
6	337	283	226	188	162	141	126	113	193	94
8	670	503	402	335	287	251	223	201	183	168
10	1047	785	628	524	449	393	349	314	286	262
12	1508	1131	905	754	646	565	503	452	411	377
16	2681	2011	1608	1340	1149	1105	894	804	731	670
20	4189	3142	2513	2094	1795	1571	1396	1257	1142	1047
25	6545	4909	3927	3272	2805	2454	2182	1963	1785	1636
32		8042	6434	5362	4596	4021	3574	3217	2925	2681
40	-	-	10053	8378	7181	6283	5585	5027	4570	4189

CONVERSION FROM ONE SYSTEM TO ANOTHER

From F.P. Unit to Metric Unit			From Metric to F.P. Unit		
To Convert Foot Pound unit	To Metric unit	Multiply by Conversion Factor	To Convert Metric unit	To Foot Pound unit	Multiply to Conversion Factor
Lengths					
Mile	km	1.609344	km	Mile	0.62137
Fg	km	0.201168	km	yd	1093.61
Yd	m	0.9144	Metre	yd	1.09361
Ft	m	0.3048	Metre	Ft	3.28084
In.	m	0.0254	Metre	In.	39.3701
In.	cm	2.54	cm	In.	0.394
Area					
sq mile	Hectare (ha)	258.999	Hectare (ha)	Acre	2.47105
sq mile	sq km	2.59	sq km	sq mile	0.39
Acre	Hectare	0.404687	Hectare	sq yd	11959.9
Acre	sq m	4046.869	sq m	sq yd	0.000247
sq yd	sq m	0.83613	sq m	sq yd	1.196
sq ft	sq m	0.0929	sq m	sq ft	10.7639
sq in.	sq cm	6.45137	sq cm	sq in.	0.155
Volume					
Cu yd	cu m	0.76455	cu m	cu yd	1.30795
Cu ft	cu m	0.028317	cu m	cu ft	35.3147
Cu in.	cu cm	16.3862	cu cm	cu in.	0.06103
Acre ft	Hectare m	0.1234	Hectare m	Acre ft	8.107
Capacity					
cu yd	Kilolitre (kl)	0.76453	Kilo litre (kl)	cu yd	1.308
cu ft	Litre (l)	28.316	Litre (l)	cu ft	0.035315
gallon (uk)	Litre (l)	4.546	Litre (l)	gallon (uk)	0.2198

From F.P. Unit to Metric Unit			From Metric to F.P. Unit		
Weight					
Ounce	gram	25.35	gram	ounce	0.035
Tola	gram	11.66	gram	tola	0.086
Seer (Ind)	kg	0.9331	kg	Seer (Ind)	1.0717
Maund (Ind)	kg	37.3242	kg	Maund (Ind)	0.27
Maund (Ind)	Quintal	0.373242	Quintal	Maund (Ind)	2.6792
Pound	kg	0.4536	kg	Pound	2.20462
cwt	Quintal	0.50802	Quintal	cwt	1.97
cwt	kg	50.802	kg	cwt	0.0197
Ton	Metric Tonne	1.016	Metric Tonne	Ton	0.9842
	<i>Note-Multiply the foot pound Figure by the conversion factor to get the Metric Unit figure</i>		<i>Note-Multiply the metric unit figure by the conversion factor to get the Foot Pound unit Figure</i>		
METRIC SYSTEM					
Area		Volume			
100 sq milli m = 1 sq centimetre		1000 cu mill metre = 1 cu metre			
100 sq centi m = 1 sq deci metre		1000 cu centi metre = 1 cu deci metre			
100 sq deci m = 1 sq metre					
100 sq metre					
= 1 acre or sq deka metre 100 acres					
= 1 hectare or sq hecto metre		1000 cu deci metre = 1 cu metre			
		1 cu metre(cu m) = 10,00,000 cu centi metre (cu cm)			
100 hectares					
= 1 sq kilo metre					
= 10,00,000 sq m					
1 hectare					
= 100 m x 100 m					
= 10000 sq m					
1 sq kilo metre					
=1000 m x 1000 m					
=10,00,000 sq m					
= 100 hectare.					

LENGTH CONVERSION TABLE

Inch	Milimetre (mm)	Foot	Metres (m)	Note
1/16	1.5875	1	0.3048	1 metre = 1000 mm.
1/8	3.1750	1½	0.4572	1 metre = 100 cm.
1/4	6.3500	2	0.6096	1 kilo m= 1000 metre.
3/8	9.5250	2 ½	0.7620	
1/2	12.7000	3	0.9144	
5/8	15.8750	3 ½	1.0668	
3/4	19.0500	4	1.2192	1 metre = 3.28084 ft.
7/8	22.2250	4 ½	1.3716	1 metre = 39.3701 in.
1	25.4000	5	1.5240	1 cm = 0.3937 in.
1¼	31.7500	6	1.8288	1 foot = 30.48 in.
1½	38.1000	7	2.1336	1 inch = 2.54 cm.
1¾	44.4500	8	2.4384	1 mile = 1.609344 kilo m
2	50.8000	9	2.7432	
2 ½	63.5000	10	3.0480	
3	76.2000	20	6.0960	1 kilo = 0.62137 m
4	101.6000	30	9.1440	
5	127.0000	40	12.1920	<i>Illustration</i>
6	152.4000	50	15.2400	(a) 4' = 1.2192 m
7	177.8000	60	18.2880	6" = 0.1524 m
8	203.2000	70	21.3360	
9	228.6000	80	24.3840	4'-6" = 1.3716 m
10	254.0000	90	27.4320	= 1.372 m
11	279.4000	100	30.4800	
12	304.8000			(b) 2' = 0.6096 m
				3" = 0.0762 m
				1/16"= 0.001587m
				2'-3 1/16"=0.667386 m.
				= 0.667 m.

For practical purpose, 1 litre = 1 kg = 1000 gram, 1000 cu m = 10 cu deci metre

1 cu m = 1000 litre = I kilo litre

1 Kilogram = 1000 gram

1 quintal = 100 kilogram

1 tonne = 1000 kilogram

1 tonne = 10 quintal

METRIC SCALES, SURVEY INSTRUMENTS, CONVERSION TABLES, ETC.	
METRIC SCALES	
1. Topographical Maps	2. Town Surveys
1 cm=2.5 km (R.F.-1/250000)	2 cm =1 km (R.F.-1/50000)
1 cm= 1 km (R. F.- 1/ 100000)	4 cm= 1 km (R.F.-1/25000)
1cm =0.5 km (R. F.-1/50000)	10 cm= 1 km (R.F.-1 / 10000)
	1 cm= 1 cm = 500 m (R.F.-1/5000)
3. Large Scale Surveys and Layouts	4. Preliminary Sketch Drawings
1 cm =20 m (R.F.-1/2000)	1 cm =5 m (R.F.-1/ 500)
1 cm= 10 m (R.F.-1/ 1000)	1 cm =2 m (R.F.-1 /200)
1 cm= 5 m (R.F.- 1/ 500)	1 cm= 1 m (R.F.-1/ 100)
5. Plans, Elevations and Sections of Buildings, etc.	6. Detailed Drawings, Large Scale Drawings
1 cm =2 m (R.F.-1/200)	1 cm =20 cm (R.F.-1/20)
1 cm = 1 m (R.F.-1/100)	1 cm= 10 cm (R.F.-1/ 10)
1 cm =0.5 m (R.F.-1/50)	1 cm= 5 cm (R.F.-1 /5)
	1 cm =2.5 cm (R.F.-1/2.5)
SURVEY INSTRUMENTS	
1. Measuring Tapes-	2. Measuring Chains
Metallic Tape	
(i) 30 metre length- 1 cm division.	(i) 30 metre length-100 links of 30 cm each with tag at every 10th link, i.e., 3 metre.
(ii) 20 metre length- 1 cm division.	(ii) 20 metre length-100 links of 20 cm each with tag at every 10th link, i.e. 2 metre.
<i>Steel Tape</i>	3. Levelling Staff-Metre is divided into 200 divisions of 5 mm (.5 cm) each
(i) 50 metre length-5 mm division.	<i>Telescopic type</i> , consists of three pieces-1.5 m + 1.25 m + 1.25 m =4 m.
(ii) 30 metre length-5 mm division.	<i>Folding Type</i> , detachable with locking devise at the back, consists of two pieces-2 m+2 m=4 m.
(iii) 20 metre length-5 mm division.	<i>Single piece type</i> - 4 m.

CONVERSION FACTOR

To convert one unit to another unit, multiply by the respective factor

Strength of Materials and Miscellaneous

		FPS units	Metric Units	Conversion Factor	
				<i>FPS to Metric</i>	<i>Metric to FPS</i>
1	Weight per unit length	lb/ ft	kg/ m	1.488	0.672
		ton/ft	tonne/ m	3.333	0.3
2	Stress (tensile, compressive, shear, bearing bond etc.)	lb/sq in	kg/sq cm	0.070	14.223
		lb/sq ft	kg/ sq m	4.882	0.205
		ton/ sq in	kg/ sq cm	1.575	0.635
3	Bearing Pressure	tons/sq ft	tonne/sq m	10.937	0.0914
		lb/sq ft	kg/ sq m	4.882	0.205
4	Bending Moment and Moments	m-lb	kg-cm	1.152	0.868
		ft-lb	kg-cm	13.853	0.0723
		ft-lb	kg-m	0.138	7.233
		in-ton	kg-m	25.803	0.0387
5	Section Modulus	in ³	cm ₃	16.387	0.061
6	Moment of Inertia	in ₄	cm ₄	41.623	0.024
7	Radius of Gyration	in	cm	2.540	0.3940
8	Speed and Velocity	mile/ h	km/h	1.609	0.6214
		ft /s	m/s	0.305	3.281
9	Acceleration	ft per sec.	metre	0.305	3.281
			per second		
10	Work and Energy	foot pound	kg-m	0.138	7.233
11	Power	hp	Metric hp	1.014	0.9862
		hp	kw	0.746	1.341
12	Density	lb/cu ft	kg/cu m	16.018	0.0624
		lb/cu in	g/cu m	27.680	0.0361
13	Discharges in rivers, channels,sec.etc.	cu ft/sec	cu m /sec.	0.0283	35.315
		gl. / sec.	l/ sec.	4.546	0.2198
14	Catchment Area	sq miles	sq-km	2.59	0.386
15	Land Area	acre	hectare	0.405	2.471
16	Storage in reservoir, Depth of water on area	acre feet	hectare m	0.1234	8.107
		{gl. / sq ft	l/sq m	48.934	0.2043
17	Reduced Levels	ft above mean sea level	metre above	0.305	3.281
18	Gradient	ft/ mile	m/km	0.1894	5.28

Rate Conversion Factor from one system to other system					
	<i>F.P. System</i>	<i>Metric System</i>		Conversion <i>FPS to Metric</i>	<i>Factor Metric to FPS</i>
	Rs. per % cu ft	Rs. per cu m		0.35315	2.8317
	Rs. per % cu ft	Rs. per % cu m		3.5315	0.2831
	Rs. per cu ft	Rs. per cu m		35.315	0.0283
	Rs. per sq ft	Rs. per sq m		10.764	0.0929
	Rs, per % sq ft	Rs. per % sq m		10.764	0.0929
	Rs. per % sq ft	Rs. per sq m		0.10764	9.29
	Rs. per acre	Ks. per hectare		2.471	0.4047
	Rs. per r ft	Rs. per m		3.281	0.3048
	Rs. per 100 r ft	Rs. per 100 m		3.281	0.3048
	Rs. per % r ft	Rs. per m		0.03281	30.48
	Rs. per mile	Rs. per km		0.62137	1.6093
	Rs. per gallon	Rs. per litre		0.220	4.546
	Rs. per cwt	Rs. per kg		0.01968	50.802
	Rs. per cwt	Rs. per quintal		1.968	0.508
	Rs. per lb	Rs. per kg		2.20462	0.4536
	Rs. per md	Rs. per quintal		2.6192	0.3732
	Rs. per ton	Rs, per metric tonne		0.9842	1.016
	Rs. per sr	Rs. per kg		1.07165	0.933
	Rs. per and per mile	Rs. per kg per km		0.0166479	60.067
	Rs. per % cu ft per mile	Rs. per cu m per km		0.220344	4.54


ALUMINIUM SECTION PROFILES

EQUAL ANGLE SECTION

Height (mm)	Width (mm)	Thickness (mm)	Radius "R" (mm)	Length (M)	Mass per length (Kg)
20	20	1.6	-	6	0.99
20	20	1.6	-	6.5	1.073
20	20	3	-	6	1.8
25	25	1.6	-	6.5	1.352
25	25	3	-	5.5	2.096
25	25	3	-	6	2.286
25	25	3	-	6.5	2.47
25.4	25.4	3.18	-	6	2.52
32	32	3	-	6	2.964
32	32	3	-	6.35	3.224
35	35	2	-	6	2.202
38.1	38.1	4.75	-	6	5.622
40	40	1.5	-	6.5	2.074
40	40	1.6	-	6.5	2.197
40	40	3	-	6	3.744
40	40	3	-	6.5	4.05
40	40	4	-	5.85	4.75
40	40	4	-	6.5	5.33
40	40	6	-	6	7.194
40	40	6	-	6.5	7.787
40	40	6	4	6	7.248
50	50	1.5	-	6.5	2.6
50	50	1.6	-	6.5	2.763
50	50	3	-	6	4.716
50	50	3	-	6.5	5.109
50	50	4	2.5	5.85	6.084
50	50	4	-	6.5	6.906
50	50	6	4	5.85	8.91
50	50	6	-	6	9.138
50	50	6	-	6.5	9.9
50	50	6	-	6.5	9.94
63.5	63.5	6.35	6.86	5.5	11.556
76	76	9.5	-	6	22.242
76.2	76.2	6.35	7.62	6	15.27
76.2	76.2	9.53	7.62	6	22.242
80	80	6	-	4	10.008
80	80	6	-	6	15.012
101.6	101.6	9.53	9.14	5.5	27.775

UNEQUAL ANGLE SECTION


Height (mm)	Width (mm)	Thickness (mm)	Radius "R" (mm)	Length (M)	Mass per length (Kg)
20	12	1.5	-	6.5	0.806
25	12	1.5	-	6.5	0.93
25	12	1.6	-	6.5	0.982
25	20	1.5	-	6.5	1.151
25	20	1.6	-	6.5	1.209
30	20	2	-	6	1.56
32	20	1.5	-	6.5	1.333
32	20	1.6	-	6	1.296
32	20	1.6	-	6.5	1.417
40	25	3	-	6	3.012
40	25	3	-	6.5	3.263
50	25	1.5	-	6.5	1.944
50	25	3	-	6	3.498
50	25	3	-	6.35	3.803
76	50	6	-	6	11.863
76	55	5	-	6.5	10.972
76.2	50.8	6.35	6.86	6	12.624
100	50	6	4	6	14.088
100	50	6	-	6.5	15.262
125	80	8	-	6	25.662



ALUMINIUM SECTION PROFILES

CHANNEL SECTION

Size		Thickness		Radius "R" mm	Length M	Mass per length (Kg)
Base "H" mm	Leg "W" mm	Base "T1" mm	Leg "T2" mm			
10	10	1.6	1.6	-	4.8	0.557
16	16	1.6	1.6	-	6.5	1.255
20	16	1.6	1.6	-	6	1.266
25	25	1.6	1.6	-	6.5	2.022
25	25	3	3	-	6	3.354
25	40	3	3	-	6	4.812
32	25	3	3	-	6	3.696
40	20	3	3	-	6.5	3.907
40	25	3	3	-	6	4.08
40	25	3	3	-	6.5	4.433
50	25	3	3	-	6	4.566
50	25	3	3	-	6.5	4.957
60	32	3	3	-	6.5	6.234
76	38	4	4	-	4	6.196
76	38	4	4	-	7.4	11.463
76.2	38.1	6.35	7.92	7.62	5.5	15.07
80	25	3	3	-	6	6.024
80	25	3	3	-	6	6.024
80	40	4	4	-	6.5	10.712
80	40	4	4	-	6.5	9.894
80	40	6	6	-	6	16.893
100	25	3	3	-	6	6.996
100	40	3	3	-	6	8.454
100	50	5	5	-	4.95	12.845
100	50	5	5	-	7.5	19.463
101.6	50.8	6.3	7.9	9.14	6	22.5
101.6	50.8	6.35	7.9	-	7.5	28.125
127	63.5	6.35	9.55	-	5.85	30.812
127	63.5	6.35	9.55	10.65	6	31.602
148	99.5	5	5	7	4.8	21.235
152.4	63.5	6.35	7.92	10.65	6	31.218
152.4	63.5	6.35	7.92	-	8.84	45.995
170	100	5	5	5	6	28.638
200	90	8	10	4	2.45	21.53



ALUMINIUM T- BAR

Height (mm)	Width (mm)	Thickness "T1" (mm)	Thickness "T2" (mm)	Radius "R" (mm)	Length (M)	Mass per length (kg)
25	25	1.6	1.6	-	5.5	1.15
25	25	3	3	-	5.85	2.299
38.1	38.1	3.18	3.18	-	5.5	3.454
40	40	1.6	1.6	-	5.5	1.865
40	40	4	4	4	5.85	4.908
50	35	2	2	3	6	2.748
50	35	3	3	3	6	4.05
50	50	4	4	-	5.85	6.27
50	50	6	6	6.1	5.85	9.184
54	32	4	4	4	6	5.424
60	50	4	6	4	6	8.472
70	50	4	8	4	6	10.614
76.2	76.2	6.35	6.35	-	5.85	15.029
100	45	5	8	4	6	13.398
125	50	4	6	4	5.85	12.414
133	80	6	8	10	6	23.214
139	80	5	8	10	6	21.654
156	50	6	6	4	6	19.53
163	80	5	8	10	6	23.598
180	100	6	10		5.85	30.567
208	80	6	8	6	6	30.06

Size		Thickness		Radius "R" mm	Length M	Mass per length (Kg)
Base "H" mm	Leg "W" mm	Base "T1" mm	Leg "T2" mm			
10	10	1.6	1.6	-	4.8	0.557
16	16	1.6	1.6	-	6.5	1.255
20	16	1.6	1.6	-	6	1.266
25	25	1.6	1.6	-	6.5	2.022
25	25	3	3	-	6	3.354
25	40	3	3	-	6	4.812
32	25	3	3	-	6	3.696
40	20	3	3	-	6.5	3.907
40	25	3	3	-	6	4.08
40	25	3	3	-	6.5	4.433
50	25	3	3	-	6	4.566
50	25	3	3	-	6.5	4.957
60	32	3	3	-	6.5	6.234
76	38	4	4	-	4	6.196
76	38	4	4	-	7.4	11.463
76.2	38.1	6.35	7.92	7.62	5.5	15.07
80	25	3	3	-	6	6.024
80	25	3	3	-	6	6.024
80	40	4	4	-	6.5	10.712
80	40	4	4	-	6.5	9.894
80	40	6	6	-	6	16.893
100	25	3	3	-	6	6.996
100	40	3	3	-	6	8.454
100	50	5	5	-	4.95	12.845
100	50	5	5	-	7.5	19.463
101.6	50.8	6.3	7.9	9.14	6	22.5
101.6	50.8	6.35	7.9	-	7.5	28.125
127	63.5	6.35	9.55	-	5.85	30.812

127	63.5	6.35	9.55	10.65	6	31.602
148	99.5	5	5	7	4.8	21.235
152.4	63.5	6.35	7.92	10.65	6	31.218
152.4	63.5	6.35	7.92	-	8.84	45.995
170	100	5	5	5	6	28.638
200	90	8	10	4	2.45	21.53
254	115	12.5	12.5	6	2.47	38.618

Height (mm)	Width (mm)	Thickness "T1" (mm)	Thickness "T2" (mm)	Radius "R" (mm)	Length (M)	Mass per length (kg)
25	25	1.6	1.6	-	5.5	1.15
25	25	3	3	-	5.85	2.299
38.1	38.1	3.18	3.18	-	5.5	3.454
40	40	1.6	1.6	-	5.5	1.865
40	40	4	4	4	5.85	4.908
50	35	2	2	3	6	2.748
50	35	3	3	3	6	4.05
50	50	4	4	-	5.85	6.27
50	50	6	6	6.1	5.85	9.184
54	32	4	4	4	6	5.424
60	50	4	6	4	6	8.472
70	50	4	8	4	6	10.614
76.2	76.2	6.35	6.35	-	5.85	15.029
100	45	5	8	4	6	13.398
125	50	4	6	4	5.85	12.414
133	80	6	8	10	6	23.214
139	80	5	8	10	6	21.654
156	50	6	6	4	6	19.53
163	80	5	8	10	6	23.598
180	100	6	10		5.85	30.567
208	80	6	8	6	6	30.06

Requirement of materials in Bituminous works

Sl. No.	Description of Item	Unit	Aggregate		Bitumen	Cement	Sand
			Size in mm	cum	Kg	Bags	Cum
1	Prime Coat with Emulsion	10sqm			6.00		
2	Tack Coat with emulsion	10sqm			2.00		
3	Bituminous Macadam	cum	25.0-10.0	0.57	72.44		
			10-05	0.57			
			5 and below	0.28			
4	Bituminous Penetration Macadam						
	Type-A 50mm thick	10sqm					
			45-2.86	0.60	50.00		
	Key aggregate		22.4 -2.8	0.15			
	Type-B 75mm thick	10sqm					
			63-2.86	0.90	50.00		
	Key aggregate		26.5 -2.8	0.18	68.00		
5	Built-up Spray Grout (BUSG)	10sqm	53-2.8	1.00	30.00		
	Key aggregate		22.4-2.8	0.13			
6	Dense Graded Bituminous Macadam	cum	25-10	0.44	98.10		
			10-05	0.41			
			5 and below	0.59			
7	Semi-Dense Graded Bituminous Concrete	cum	9.5-4.75	0.83	115.385		
			4.75 and below	0.60			
8	Bituminous Concrete	cum	13.2-10.0	0.45	117.80		
			10.0-5.0	0.37			
			5 and below	0.64			
9	Surface Dressing	10sqm	13.0-0.00	0.10	10.00		
10	Open-Graded Premix Surfacing	10sqm	13.2-5.60	0.27	14.60		
11	Close-Graded Premix Surfacing/Mixed Seal Surfacing						
	Type - A	10sqm	11.2-0.09	0.27	21.95		
	Type - B	10sqm	13.2-0.09	0.27	21.95		
12	Seal Coat						
	Type - A	10sqm	6.70-0.00	0.09	9.80		
	Type - B	10sqm	6.70-0.01	0.06	6.80		

13	Mastic Asphalt with 85/25 or 30/40	10sqm			57.14		
			2.36-0.075	0.111			
	Lime stone dust filler with calcium content			0.103			
			13.2-6.3	0.157			
	Pre-coated stone chips		13.2-0.00	0.006	0.143		
14	Slurry Seal	10sqm					
	Case-I 5mm thick						
	Residual Binder				12.10		
	Fine Aggregate		4.75-0.00	0.064			
	Filler		(Cement)	2.20 Kg.			
	Case-II 3mm thick						
	Residual Binder				8.58		
	Fine Aggregate		3.00 and below	0.037			
	Filler		(Cement)	1.32 Kg			


Conversional factor for other materials

	Description	Unit	Weight per Cum in M.tonne
	Boulder	Cum	2.40
	Stone Metal 90 mm size	Cum	2.40
	Stone metal 63 mm size	Cum	2.40
	Stone metal 53 mm size	Cum	2.40
	Stone metal 40 mm size	Cum	2.40
	Stone metal 22.4 mm size	Cum	2.20
	Stone metal 20 mm size	Cum	2.20
	Stone metal 13.2 mm size	Cum	2.10
	Stone metal 12 mm size	Cum	2.10
	Stone metal 10 mm size	Cum	2.10
	Sand	Cum	1.80
	Loose Earth	Cum	1.80

Requirement of materials in WBM works

Sl. No.	Description of Item	Unit	Aggregate		Bitumen Kg	Cement Bags	Sand Cum
			Size in mm	cum			
1	GSB (Plant mix method)						
	Grading No I	Cum	53 mm to 9.5 mm @ 50 %	0.64			
			9.5 mm to 2.36 mm @ 20 %	0.25			
			2.36 mm below @ 30 %	0.38			
	Grading No II	Cum	26.5 mm to 9.5 mm @ 35 %	0.44			
			9.5 mm to 2.36 mm @ 25 %	0.32			
			2.36 mm below @ 30 %	0.38			
	Grading No III	Cum	9.5 mm to 4.75 mm @ 35 %	0.44			
			4.75 mm to 2.36 mm @ 12.5 %	0.16			
			2.36 mm below @ 52.5 %	0.67			
	GSB (Mix in place method)						
	Grading No I	Cum	53 mm to 9.5 mm @ 50 %	0.64			
			9.5 mm to 2.36 mm @ 20 %	0.25			
			2.36 mm below @ 30 %	0.38			
	Grading No II	Cum	26.5 mm to 9.5 mm @ 35 %	0.44			
			9.5 mm to 2.36 mm @ 25 %	0.32			
			2.36 mm below @ 30 %	0.38			
	Grading No III	Cum	9.5 mm to 4.75 mm @ 35 %	0.44			
			4.75 mm to 2.36 mm @ 12.5 %	0.16			
			2.36 mm below @ 52.5 %	0.67			
2	GSB (with close graded material)						
	Grading No I	Cum	53 mm to 26.5 mm @ 35 %	0.44			
			26.5 mm to 4.75 mm @ 45 %	0.57			
			2.36 mm below @ 20 %	0.25			
	Grading No II	Cum	26.5 mm to 4.75 mm @ 75 %	0.96			
			2.36 mm below @ 25 %	0.32			
	Grading No III	Cum	9.5 mm to 4.75 mm @ 66 %	0.85			
			2.36 mm below @ 34 %	0.43			
3	Lime stabilization for improving sub grade	Cum	Lime	0.05 M.tonne			
4	Lime treated soil sub grade	Cum	Lime	0.05 M.tonne			
5	WBM						
	Grading No I	Cum	90 mm to 45 mm	1.21			
	Grading No II	Cum	63 mm to 45 mm	1.21			

Sl. No.	Description of Item	Unit	Aggregate		Bitumen Kg	Cement Bags	Sand Cum
			Size in mm	cum			
	WBM Grading No III	Cum	53 mm to 22.4 mm	1.21			
	Stone Screening						
	Type A for Gr. I	Cum	13.2 mm	0.27			
	Type A for Gr. II	Cum	13.2 mm	0.12			
	Type B for Gr. I	Cum	11.2 mm	0.20			
	Type A for Gr. II	Cum	11.2 mm	0.18			
	Moorum for Grading I	Cum		0.30			
	Moorum for Grading II & III	Cum		0.22			
	Binding material						
	Grading No I	Cum		0.08			
	Grading No II	Cum		0.06			
6	PCC 1:3:6	Cum	40 mm	0.90	0.00	4.60	0.45
7	Brick Masonry with Cement Mortar 1:3	Cum	Bricks in Nos	500.00	0.00	2.44	0.252
8	Coarse rubble stone Masonry	Cum	Stone	1.10			
			Size stone 0.24mx0.24mx0.39m	7 Nos	0.00	3.06	0.315
9	Random rubble stone masonry	Cum	Stone	1.257	0.00	3.16	0.325
10	PCC M-15	Cum	40 mm	0.54			
			20 mm	0.27			
			10 mm	0.09	0.00	5.506	0.45
11	PCC M-20	Cum	40 mm	0.36			
			20 mm	0.36			
			10 mm	0.18	0.00	6.880	0.45
12	RCC M- 20	Cum	20 mm	0.54			
			10 mm	0.36	0.00	6.946	0.45
13	PCC M -25	Cum	40 mm	0.36			
			20 mm	0.36			
			10 mm	0.18	0.00	7.986	0.45
14	RCC M- 25	Cum	20 mm	0.54			
			10 mm	0.36	0.00	8.066	0.45
15	Plastering with Cement Mortar 1 :3	10 Sqm				1.469	0.151

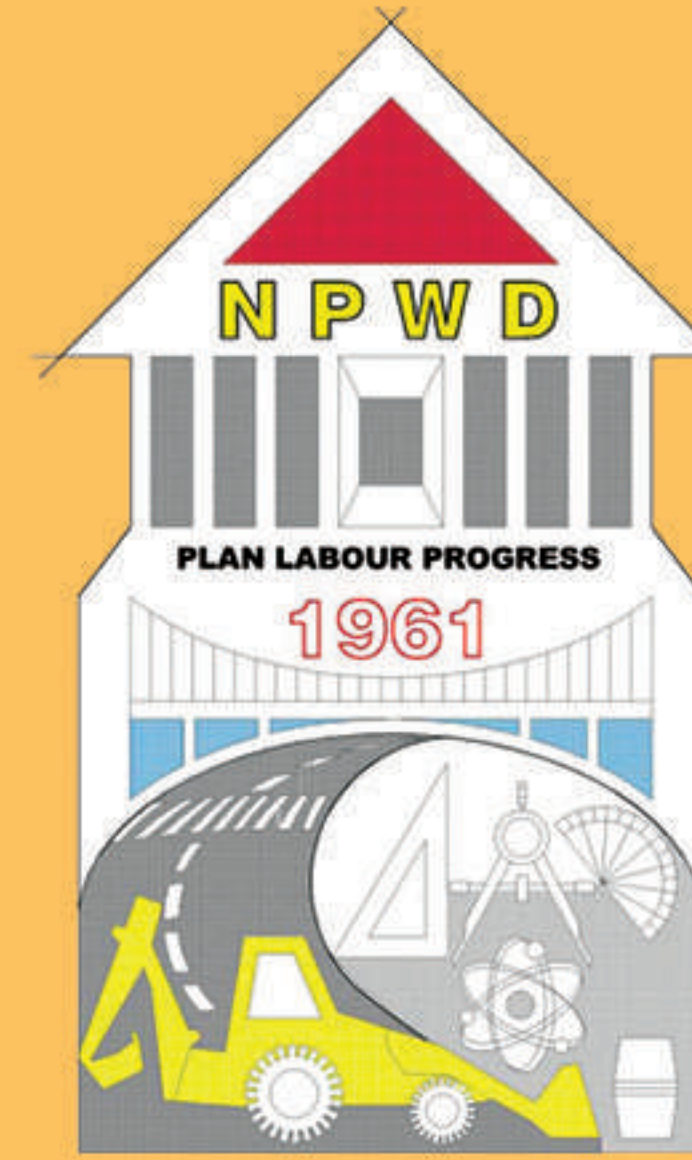

Government of Nagaland
NAGALAND PUBLIC WORKS DEPARTMENT
Works & Housing, Nagaland : Kohima