tenable® Nessus

IoT_target

Vulnerabilities by Host

Vulnerabilities by Host

192.168.14.24

0	0	0	0	7
CRITICAL	HIGH	MEDIUM	LOW	INFO
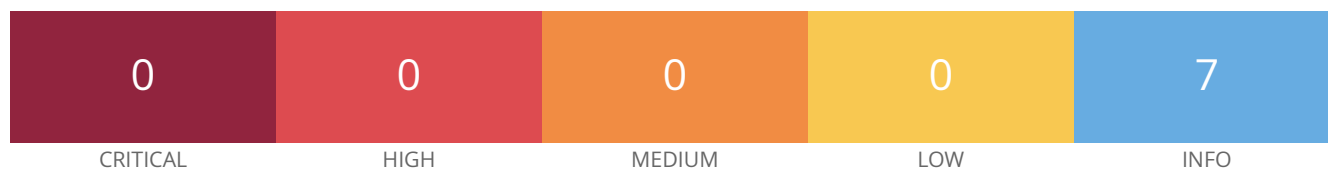
Scan Information

Start time: Tue Jun 18 23:58:39 2024
End time: Wed Jun 19 00:06:01 2024

Host Information

IP: 192.168.14.24
MAC Address: 34:94:54:23:13:58

Vulnerabilities

35716 - Ethernet Card Manufacturer Detection

Synopsis

The manufacturer can be identified from the Ethernet OUI.

Description

Each ethernet MAC address starts with a 24-bit Organizationally Unique Identifier (OUI). These OUIs are registered by IEEE.

See Also

https://standards.ieee.org/faqs/regauth.html

http://www.nessus.org/u?794673b4

Solution

n/a

Risk Factor

None

Plugin Information

Plugin Output

tcp/0

```
The following card manufacturers were identified :

34:94:54:23:13:58 : Espressif Inc.
```

86420 - Ethernet MAC Addresses

Synopsis

This plugin gathers MAC addresses from various sources and consolidates them into a list.

Description

This plugin gathers MAC addresses discovered from both remote probing of the host (e.g. SNMP and Netbios) and from running local checks (e.g. ifconfig). It then consolidates the MAC addresses into a single, unique, and uniform list.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/10/16, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following is a consolidated list of detected MAC addresses:
  - 34:94:54:23:13:58
```

12053 - Host Fully Qualified Domain Name (FQDN) Resolution

Synopsis

It was possible to resolve the name of the remote host.

Description

Nessus was able to resolve the fully qualified domain name (FQDN) of the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2004/02/11, Modified: 2017/04/14

Plugin Output

tcp/0

```
192.168.14.24 resolves as arduino-1358.
```

46215 - Inconsistent Hostname and IP Address

Synopsis

The remote host's hostname is not consistent with DNS information.

Description

The name of this machine either does not resolve or resolves to a different IP address.

This may come from a badly configured reverse DNS or from a host file in use on the Nessus scanning host.

As a result, URLs in plugin output may not be directly usable in a web browser and some web tests may be incomplete.

Solution

Fix the reverse DNS or host file.

Risk Factor

None

Plugin Information

Published: 2010/05/03, Modified: 2016/08/05

Plugin Output

tcp/0

```
The host name 'arduino-1358' resolves to 192.168.14.24, not to 192.168.14.24
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2024/06/04

Plugin Output

tcp/0

```
Information about this scan :

Nessus version : 10.7.4
Nessus build : 20055
Plugin feed version : 202406181646
Scanner edition used : Nessus Home
Scanner OS : LINUX
Scanner distribution : debian10-x86-64
Scan type : Normal
Scan name : IoT_target
```

```
Scan policy used : Basic Network Scan
Scanner IP : 192.168.14.30
Port scanner(s) : nessus_tcp_scanner
Port range : 22,55,123,1883
Ping RTT : 1099.786 ms
Thorough tests : no
Experimental tests : no
Scan for Unpatched Vulnerabilities : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : no
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin did not launch)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 30
Max checks : 4
Recv timeout : 5
Backports : None
Allow post-scan editing : Yes
Nessus Plugin Signature Checking : Enabled
Audit File Signature Checking : Disabled
Scan Start Date : 2024/6/18 23:58 CEST
Scan duration : 436 sec
Scan for malware : no
```

10287 - Traceroute Information

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2023/12/04

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.14.30 to 192.168.14.24 :
192.168.14.30
192.168.14.24

Hop Count: 1
```

135860 - WMI Not Available

Synopsis

WMI queries could not be made against the remote host.

Description

WMI (Windows Management Instrumentation) is not available on the remote host over DCOM. WMI queries are used to gather information about the remote host, such as its current state, network interface configuration, etc.

Without this information Nessus may not be able to identify installed software or security vunerabilities that exist on the remote host.

See Also

https://docs.microsoft.com/en-us/windows/win32/wmisdk/wmi-start-page

Solution
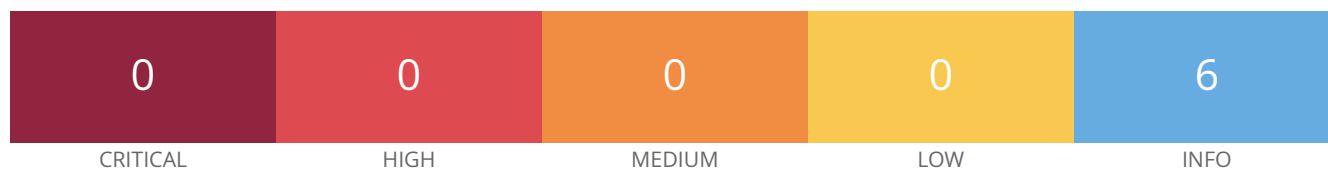
n/a

Risk Factor

None

Plugin Information

Published: 2020/04/21, Modified: 2024/06/12

Plugin Output

tcp/445

```
Can't connect to the 'root\CIMV2' WMI namespace.
```

192.168.14.26

0	0	0	0	6
CRITICAL	HIGH	MEDIUM	LOW	INFO

Scan Information

Start time: Tue Jun 18 23:58:39 2024
End time: Wed Jun 19 00:05:37 2024

Host Information

IP: 192.168.14.26
MAC Address: 78:21:84:89:02:E4

Vulnerabilities

35716 - Ethernet Card Manufacturer Detection

Synopsis

The manufacturer can be identified from the Ethernet OUI.

Description

Each ethernet MAC address starts with a 24-bit Organizationally Unique Identifier (OUI). These OUIs are registered by IEEE.

See Also

https://standards.ieee.org/faqs/regauth.html

http://www.nessus.org/u?794673b4

Solution

n/a

Risk Factor

None

Plugin Information

Plugin Output

tcp/0

```
The following card manufacturers were identified :

78:21:84:89:02:E4 : Espressif Inc.
```

86420 - Ethernet MAC Addresses

Synopsis

This plugin gathers MAC addresses from various sources and consolidates them into a list.

Description

This plugin gathers MAC addresses discovered from both remote probing of the host (e.g. SNMP and Netbios) and from running local checks (e.g. ifconfig). It then consolidates the MAC addresses into a single, unique, and uniform list.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/10/16, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following is a consolidated list of detected MAC addresses:
  - 78:21:84:89:02:E4
```

12053 - Host Fully Qualified Domain Name (FQDN) Resolution

Synopsis

It was possible to resolve the name of the remote host.

Description

Nessus was able to resolve the fully qualified domain name (FQDN) of the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2004/02/11, Modified: 2017/04/14

Plugin Output

tcp/0

```
192.168.14.26 resolves as esp32-8902E4.
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2024/06/04

Plugin Output

tcp/0

```
Information about this scan :

Nessus version : 10.7.4
Nessus build : 20055
Plugin feed version : 202406181646
Scanner edition used : Nessus Home
Scanner OS : LINUX
Scanner distribution : debian10-x86-64
Scan type : Normal
Scan name : IoT_target
```

```
Scan policy used : Basic Network Scan
Scanner IP : 192.168.14.30
Port scanner(s) : nessus_tcp_scanner
Port range : 22,55,123,1883
Ping RTT : 446.965 ms
Thorough tests : no
Experimental tests : no
Scan for Unpatched Vulnerabilities : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : no
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin did not launch)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 30
Max checks : 4
Recv timeout : 5
Backports : None
Allow post-scan editing : Yes
Nessus Plugin Signature Checking : Enabled
Audit File Signature Checking : Disabled
Scan Start Date : 2024/6/18 23:58 CEST
Scan duration : 413 sec
Scan for malware : no
```

10287 - Traceroute Information

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2023/12/04

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.14.30 to 192.168.14.26 :
192.168.14.30
192.168.14.26

Hop Count: 1
```

135860 - WMI Not Available

Synopsis

WMI queries could not be made against the remote host.

Description

WMI (Windows Management Instrumentation) is not available on the remote host over DCOM. WMI queries are used to gather information about the remote host, such as its current state, network interface configuration, etc.

Without this information Nessus may not be able to identify installed software or security vunerabilities that exist on the remote host.

See Also

https://docs.microsoft.com/en-us/windows/win32/wmisdk/wmi-start-page

Solution
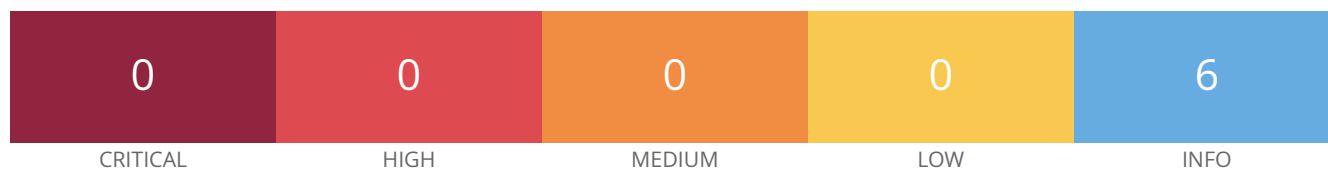
n/a

Risk Factor

None

Plugin Information

Published: 2020/04/21, Modified: 2024/06/12

Plugin Output

tcp/445

```
Can't connect to the 'root\CIMV2' WMI namespace.
```

192.168.14.27

CRITICAL	HIGH	MEDIUM	LOW	INFO
0	0	0	0	6

Scan Information

Start time: Tue Jun 18 23:58:39 2024

End time: Wed Jun 19 00:05:20 2024

Host Information

IP: 192.168.14.27

MAC Address: DC:4F:22:60:82:BF

Vulnerabilities

35716 - Ethernet Card Manufacturer Detection

Synopsis

The manufacturer can be identified from the Ethernet OUI.

Description

Each ethernet MAC address starts with a 24-bit Organizationally Unique Identifier (OUI). These OUIs are registered by IEEE.

See Also

https://standards.ieee.org/faqs/regauth.html

http://www.nessus.org/u?794673b4

Solution

n/a

Risk Factor

None

Plugin Information

Plugin Output

tcp/0

```
The following card manufacturers were identified :

DC:4F:22:60:82:BF : Espressif Inc.
```

86420 - Ethernet MAC Addresses

Synopsis

This plugin gathers MAC addresses from various sources and consolidates them into a list.

Description

This plugin gathers MAC addresses discovered from both remote probing of the host (e.g. SNMP and Netbios) and from running local checks (e.g. ifconfig). It then consolidates the MAC addresses into a single, unique, and uniform list.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/10/16, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following is a consolidated list of detected MAC addresses:
  - DC:4F:22:60:82:BF
```

12053 - Host Fully Qualified Domain Name (FQDN) Resolution

Synopsis

It was possible to resolve the name of the remote host.

Description

Nessus was able to resolve the fully qualified domain name (FQDN) of the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2004/02/11, Modified: 2017/04/14

Plugin Output

tcp/0

```
192.168.14.27 resolves as ESP-6082BF.
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2024/06/04

Plugin Output

tcp/0

```
Information about this scan :

Nessus version : 10.7.4
Nessus build : 20055
Plugin feed version : 202406181646
Scanner edition used : Nessus Home
Scanner OS : LINUX
Scanner distribution : debian10-x86-64
Scan type : Normal
Scan name : IoT_target
```

```
Scan policy used : Basic Network Scan
Scanner IP : 192.168.14.30
Port scanner(s) : nessus_tcp_scanner
Port range : 22,55,123,1883
Ping RTT : 428.190 ms
Thorough tests : no
Experimental tests : no
Scan for Unpatched Vulnerabilities : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : no
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin did not launch)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 30
Max checks : 4
Recv timeout : 5
Backports : None
Allow post-scan editing : Yes
Nessus Plugin Signature Checking : Enabled
Audit File Signature Checking : Disabled
Scan Start Date : 2024/6/18 23:58 CEST
Scan duration : 396 sec
Scan for malware : no
```

10287 - Traceroute Information

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2023/12/04

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.14.30 to 192.168.14.27 :
192.168.14.30
192.168.14.27

Hop Count: 1
```

135860 - WMI Not Available

Synopsis

WMI queries could not be made against the remote host.

Description

WMI (Windows Management Instrumentation) is not available on the remote host over DCOM. WMI queries are used to gather information about the remote host, such as its current state, network interface configuration, etc.

Without this information Nessus may not be able to identify installed software or security vunerabilities that exist on the remote host.

See Also

https://docs.microsoft.com/en-us/windows/win32/wmisdk/wmi-start-page

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2020/04/21, Modified: 2024/06/12

Plugin Output

tcp/445

```
Can't connect to the 'root\CIMV2' WMI namespace.
```

192.168.14.240

0	1	0	1	26
CRITICAL	HIGH	MEDIUM	LOW	INFO

Scan Information

Start time: Tue Jun 18 23:58:39 2024
End time: Wed Jun 19 00:07:52 2024

Host Information

IP: 192.168.14.240
MAC Address: B8:27:EB:D2:11:53
OS: Linux Kernel 2.6

Vulnerabilities

95389 - Network Time Protocol Daemon (ntpd) read_mru_list() Remote DoS

Synopsis

The remote NTP server is affected by a denial of service vulnerability.

Description

The remote NTP server is affected by a denial of service vulnerability due to improper validation of mrulist queries. An unauthenticated, remote attacker can exploit this, via a specially crafted NTP mrulist query packet, to terminate the ntpd process.

Note that the NTP server is reportedly affected by additional vulnerabilities as well; however, Nessus has not tested for these.

See Also

http://support.ntp.org/bin/view/Main/NtpBug3082

https://www.nwtime.org/ntp428p9_release/

Solution

Upgrade to NTP version 4.2.8p9 or later.

Risk Factor

Medium

CVSS v3.0 Base Score

7.5 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:N/I:N/A:H)

CVSS v3.0 Temporal Score

6.7 (CVSS:3.0/E:P/RL:O/RC:C)

VPR Score

4.4

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:N/I:N/A:P)

CVSS v2.0 Temporal Score

3.9 (CVSS2#E:POC/RL:OF/RC:C)

References

BID	94448
CVE	CVE-2016-7434
XREF	CERT:633847
XREF	EDB-ID:40806

Plugin Information

Published: 2016/11/29, Modified: 2020/06/12

Plugin Output

udp/123/ntp

10114 - ICMP Timestamp Request Remote Date Disclosure

Synopsis

It is possible to determine the exact time set on the remote host.

Description

The remote host answers to an ICMP timestamp request. This allows an attacker to know the date that is set on the targeted machine, which may assist an unauthenticated, remote attacker in defeating time-based authentication protocols.

Timestamps returned from machines running Windows Vista / 7 / 2008 / 2008 R2 are deliberately incorrect, but usually within 1000 seconds of the actual system time.

Solution

Filter out the ICMP timestamp requests (13), and the outgoing ICMP timestamp replies (14).

Risk Factor

Low

VPR Score

4.2

CVSS v2.0 Base Score

2.1 (CVSS2#AV:L/AC:L/Au:N/C:P/I:N/A:N)

References

CVE   CVE-1999-0524
XREF   CWE:200

Plugin Information

Published: 1999/08/01, Modified: 2024/05/03

Plugin Output

icmp/0

```
The remote clock is synchronized with the local clock.
```

39520 - Backported Security Patch Detection (SSH)

Synopsis

Security patches are backported.

Description

Security patches may have been 'backported' to the remote SSH server without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/06/25, Modified: 2015/07/07

Plugin Output

tcp/22/ssh

```
Give Nessus credentials to perform local checks.
```

Synopsis

It was possible to enumerate CPE names that matched on the remote system.

Description

By using information obtained from a Nessus scan, this plugin reports CPE (Common Platform Enumeration) matches for various hardware and software products found on a host.

Note that if an official CPE is not available for the product, this plugin computes the best possible CPE based on the information available from the scan.

See Also

http://cpe.mitre.org/

https://nvd.nist.gov/products/cpe

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2010/04/21, Modified: 2024/05/20

Plugin Output

tcp/0

```
The remote operating system matched the following CPE :

  cpe:/o:linux:linux_kernel -> Linux Kernel

Following application CPE's matched on the remote system :

  cpe:/a:openbsd:openssh:8.4 -> OpenBSD OpenSSH
  cpe:/a:openbsd:openssh:8.4p1 -> OpenBSD OpenSSH
```

11002 - DNS Server Detection

Synopsis

A DNS server is listening on the remote host.

Description

The remote service is a Domain Name System (DNS) server, which provides a mapping between hostnames and IP addresses.

See Also

https://en.wikipedia.org/wiki/Domain_Name_System

Solution

Disable this service if it is not needed or restrict access to internal hosts only if the service is available externally.

Risk Factor

None

Plugin Information

Published: 2003/02/13, Modified: 2017/05/16

Plugin Output

udp/53/dns

54615 - Device Type

Synopsis

It is possible to guess the remote device type.

Description

Based on the remote operating system, it is possible to determine what the remote system type is (eg: a printer, router, general-purpose computer, etc).

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/05/23, Modified: 2022/09/09

Plugin Output

tcp/0

```
Remote device type : general-purpose
Confidence level : 65
```

35716 - Ethernet Card Manufacturer Detection

Synopsis

The manufacturer can be identified from the Ethernet OUI.

Description

Each ethernet MAC address starts with a 24-bit Organizationally Unique Identifier (OUI). These OUIs are registered by IEEE.

See Also

https://standards.ieee.org/faqs/regauth.html

http://www.nessus.org/u?794673b4

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/02/19, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following card manufacturers were identified :

B8:27:EB:D2:11:53 : Raspberry Pi Foundation
```

86420 - Ethernet MAC Addresses

Synopsis

This plugin gathers MAC addresses from various sources and consolidates them into a list.

Description

This plugin gathers MAC addresses discovered from both remote probing of the host (e.g. SNMP and Netbios) and from running local checks (e.g. ifconfig). It then consolidates the MAC addresses into a single, unique, and uniform list.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/10/16, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following is a consolidated list of detected MAC addresses:
  - B8:27:EB:D2:11:53
```

12053 - Host Fully Qualified Domain Name (FQDN) Resolution

Synopsis

It was possible to resolve the name of the remote host.

Description

Nessus was able to resolve the fully qualified domain name (FQDN) of the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2004/02/11, Modified: 2017/04/14

Plugin Output

tcp/0

```
192.168.14.240 resolves as _gateway.
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2024/06/04

Plugin Output

tcp/0

```
 Information about this scan :

 Nessus version : 10.7.4
 Nessus build : 20055
 Plugin feed version : 202406181646
 Scanner edition used : Nessus Home
 Scanner OS : LINUX
 Scanner distribution : debian10-x86-64
 Scan type : Normal
 Scan name : IoT_target
```

```
Scan policy used : Basic Network Scan
Scanner IP : 192.168.14.30
Port scanner(s) : nessus_tcp_scanner
Port range : 22,55,123,1883
Ping RTT : 2054.443 ms
Thorough tests : no
Experimental tests : no
Scan for Unpatched Vulnerabilities : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : no
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin did not launch)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 30
Max checks : 4
Recv timeout : 5
Backports : Detected
Allow post-scan editing : Yes
Nessus Plugin Signature Checking : Enabled
Audit File Signature Checking : Disabled
Scan Start Date : 2024/6/18 23:58 CEST
Scan duration : 546 sec
Scan for malware : no
```

10335 - Nessus TCP scanner

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a classical TCP port scanner. It shall be reasonably quick even against a firewalled target.

Once a TCP connection is open, it grabs any available banner for the service identification plugins.

Note that TCP scanners are more intrusive than SYN (half open) scanners.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2024/05/20

Plugin Output

tcp/22/ssh

```
Port 22/tcp was found to be open
```

10335 - Nessus TCP scanner

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a classical TCP port scanner. It shall be reasonably quick even against a firewalled target.

Once a TCP connection is open, it grabs any available banner for the service identification plugins.

Note that TCP scanners are more intrusive than SYN (half open) scanners.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2024/05/20

Plugin Output

tcp/1883

```
Port 1883/tcp was found to be open
```

10884 - Network Time Protocol (NTP) Server Detection

Synopsis

An NTP server is listening on the remote host.

Description

An NTP server is listening on port 123. If not securely configured, it may provide information about its version, current date, current time, and possibly system information.

See Also

http://www.ntp.org

Solution

n/a

Risk Factor

None

References

XREF   IAVT:0001-T-0934

Plugin Information

Published: 2015/03/20, Modified: 2021/02/24

Plugin Output

udp/123/ntp

```
    An NTP service has been discovered, listening on port 123.

    Version : unknown
```

11936 - OS Identification

Synopsis

It is possible to guess the remote operating system.

Description

Using a combination of remote probes (e.g., TCP/IP, SMB, HTTP, NTP, SNMP, etc.), it is possible to guess the name of the remote operating system in use. It is also possible sometimes to guess the version of the operating system.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2003/12/09, Modified: 2024/06/14

Plugin Output

tcp/0

```
Remote operating system : Linux Kernel 2.6
Confidence level : 65
Method : SinFP

Not all fingerprints could give a match. If you think some or all of
the following could be used to identify the host's operating system,
please email them to os-signatures@nessus.org. Be sure to include a
brief description of the host itself, such as the actual operating
system or product / model names.

SSH:!:SSH-2.0-OpenSSH_8.4p1 Debian-5+deb11u3
NTP:!:unknown
SinFP:
    P1:B10113:F0x12:W64240:O0204ffff:M1460:
    P2:B10113:F0x12:W65160:O0204ffff0402080affffffff4445414401030307:M1460:
    P3:B00000:F0x00:W0:O0:M0
    P4:190804_7_p=22


The remote host is running Linux Kernel 2.6
```

117886 - OS Security Patch Assessment Not Available

Synopsis

OS Security Patch Assessment is not available.

Description

OS Security Patch Assessment is not available on the remote host.

This does not necessarily indicate a problem with the scan.

Credentials may not have been provided, OS security patch assessment may not be supported for the target, the target may not have been identified, or another issue may have occurred that prevented OS security patch assessment from being available. See plugin output for details.

This plugin reports non-failure information impacting the availability of OS Security Patch Assessment. Failure information is reported by plugin 21745 : 'OS Security Patch Assessment failed'. If a target host is not supported for OS Security Patch Assessment, plugin 110695 : 'OS Security Patch Assessment Checks Not Supported' will report concurrently with this plugin.

Solution

n/a

Risk Factor

None

References

XREF   IAVB:0001-B-0515

Plugin Information

Published: 2018/10/02, Modified: 2021/07/12

Plugin Output

tcp/0

```
  The following issues were reported :

   - Plugin      : no_local_checks_credentials.nasl
     Plugin ID   : 110723
     Plugin Name : Target Credential Status by Authentication Protocol - No Credentials Provided
     Message     :
 Credentials were not provided for detected SSH service.
```

181418 - OpenSSH Detection

Synopsis

An OpenSSH-based SSH server was detected on the remote host.

Description

An OpenSSH-based SSH server was detected on the remote host.

See Also

https://www.openssh.com/

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2023/09/14, Modified: 2024/06/14

Plugin Output

tcp/22/ssh

```
Service : ssh
Version : 8.4p1
Banner  : SSH-2.0-OpenSSH_8.4p1 Debian-5+deb11u3
```

Synopsis

The remote host is missing several patches.

Description

The remote host is missing one or more security patches. This plugin lists the newest version of each patch to install to make sure the remote host is up-to-date.

Note: Because the 'Show missing patches that have been superseded' setting in your scan policy depends on this plugin, it will always run and cannot be disabled.

Solution

Install the patches listed below.

Risk Factor

None

Plugin Information

Published: 2013/07/08, Modified: 2024/06/11

Plugin Output

tcp/0

```
. You need to take the following action :

[ Network Time Protocol Daemon (ntpd) read_mru_list() Remote DoS (95389) ]

+ Action to take : Upgrade to NTP version 4.2.8p9 or later.
```

70657 - SSH Algorithms and Languages Supported

Synopsis

An SSH server is listening on this port.

Description

This script detects which algorithms and languages are supported by the remote service for encrypting communications.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2013/10/28, Modified: 2017/08/28

Plugin Output

tcp/22/ssh

```
Nessus negotiated the following encryption algorithm with the server :

The server supports the following options for kex_algorithms :

  curve25519-sha256
  curve25519-sha256@libssh.org
  diffie-hellman-group-exchange-sha256
  diffie-hellman-group14-sha256
  diffie-hellman-group16-sha512
  diffie-hellman-group18-sha512
  ecdh-sha2-nistp256
  ecdh-sha2-nistp384
  ecdh-sha2-nistp521
  kex-strict-s-v00@openssh.com

The server supports the following options for server_host_key_algorithms :

  ecdsa-sha2-nistp256
  rsa-sha2-256
  rsa-sha2-512
  ssh-ed25519
  ssh-rsa

The server supports the following options for encryption_algorithms_client_to_server :

  aes128-ctr
  aes128-gcm@openssh.com
  aes192-ctr
  aes256-ctr
```

```
  aes256-gcm@openssh.com
  chacha20-poly1305@openssh.com

The server supports the following options for encryption_algorithms_server_to_client :

  aes128-ctr
  aes128-gcm@openssh.com
  aes192-ctr
  aes256-ctr
  aes256-gcm@openssh.com
  chacha20-poly1305@openssh.com

The server supports the following options for mac_algorithms_client_to_server :

  hmac-sha1
  hmac-sha1-etm@openssh.com
  hmac-sha2-256
  hmac-sha2-256-etm@openssh.com
  hmac-sha2-512
  hmac-sha2-512-etm@openssh.com
  umac-128-etm@openssh.com
  umac-128@openssh.com
  umac-64-etm@openssh.com
  umac-64@openssh.com

The server supports the following options for mac_algorithms_server_to_client :

  hmac-sha1
  hmac-sha1-etm@openssh.com
  hmac-sha2-256
  hmac-sha2-256-etm@openssh.com
  hmac-sha2-512
  hmac-sha2-512-etm@openssh.com
  umac-128-etm@openssh.com
  umac-128@openssh.com
  umac-64-etm@openssh.com
  umac-64@openssh.com

The server supports the following options for compression_algorithms_client_to_server :

  none
  zlib@openssh.com

The server supports the following options for compression_algorithms_server_to_client :

  none
  zlib@openssh.com
```

149334 - SSH Password Authentication Accepted

Synopsis

The SSH server on the remote host accepts password authentication.

Description

The SSH server on the remote host accepts password authentication.

See Also

https://tools.ietf.org/html/rfc4252#section-8

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/05/07, Modified: 2021/05/07

Plugin Output

tcp/22/ssh

10881 - SSH Protocol Versions Supported

Synopsis

A SSH server is running on the remote host.

Description

This plugin determines the versions of the SSH protocol supported by the remote SSH daemon.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2002/03/06, Modified: 2021/01/19

Plugin Output

tcp/22/ssh

```
The remote SSH daemon supports the following versions of the
SSH protocol :

  - 1.99
  - 2.0
```

153588 - SSH SHA-1 HMAC Algorithms Enabled

Synopsis

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Description

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Although NIST has formally deprecated use of SHA-1 for digital signatures, SHA-1 is still considered secure for HMAC as the security of HMAC does not rely on the underlying hash function being resistant to collisions.

Note that this plugin only checks for the options of the remote SSH server.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/09/23, Modified: 2022/04/05

Plugin Output

tcp/22/ssh

```
The following client-to-server SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are
 supported :

  hmac-sha1
  hmac-sha1-etm@openssh.com

The following server-to-client SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are
 supported :

  hmac-sha1
  hmac-sha1-etm@openssh.com
```

10267 - SSH Server Type and Version Information

Synopsis

An SSH server is listening on this port.

Description

It is possible to obtain information about the remote SSH server by sending an empty authentication request.

Solution

n/a

Risk Factor

None

References

XREF   IAVT:0001-T-0933

Plugin Information

Published: 1999/10/12, Modified: 2020/09/22

Plugin Output

tcp/22/ssh

```
SSH version : SSH-2.0-OpenSSH_8.4p1 Debian-5+deb11u3
SSH supported authentication : publickey,password
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2024/03/26

Plugin Output

tcp/22/ssh

```
An SSH server is running on this port.
```

25220 - TCP/IP Timestamps Supported

Synopsis

The remote service implements TCP timestamps.

Description

The remote host implements TCP timestamps, as defined by RFC1323. A side effect of this feature is that the uptime of the remote host can sometimes be computed.

See Also

http://www.ietf.org/rfc/rfc1323.txt

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/05/16, Modified: 2023/10/17

Plugin Output

tcp/0

110723 - Target Credential Status by Authentication Protocol - No Credentials Provided

Synopsis

Nessus was able to find common ports used for local checks, however, no credentials were provided in the scan policy.

Description

Nessus was not able to successfully authenticate directly to the remote target on an available authentication protocol. Nessus was able to connect to the remote port and identify that the service running on the port supports an authentication protocol, but Nessus failed to authenticate to the remote service using the provided credentials. There may have been a protocol failure that prevented authentication from being attempted or all of the provided credentials for the authentication protocol may be invalid. See plugin output for error details.

Please note the following :

- This plugin reports per protocol, so it is possible for valid credentials to be provided for one protocol and not another. For example, authentication may succeed via SSH but fail via SMB, while no credentials were provided for an available SNMP service.

- Providing valid credentials for all available authentication protocols may improve scan coverage, but the value of successful authentication for a given protocol may vary from target to target depending upon what data (if any) is gathered from the target via that protocol. For example, successful authentication via SSH is more valuable for Linux targets than for Windows targets, and likewise successful authentication via SMB is more valuable for Windows targets than for Linux targets.

Solution

n/a

Risk Factor

None

References

XREF   IAVB:0001-B-0504

Plugin Information

Published: 2018/06/27, Modified: 2024/04/19

Plugin Output

tcp/0

```
SSH was detected on port 22 but no credentials were provided.
SSH local checks were not enabled.
```

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2023/12/04

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.14.30 to 192.168.14.240 :
192.168.14.30
192.168.14.240

Hop Count: 1
```

135860 - WMI Not Available

Synopsis

WMI queries could not be made against the remote host.

Description

WMI (Windows Management Instrumentation) is not available on the remote host over DCOM. WMI queries are used to gather information about the remote host, such as its current state, network interface configuration, etc.

Without this information Nessus may not be able to identify installed software or security vunerabilities that exist on the remote host.

See Also

https://docs.microsoft.com/en-us/windows/win32/wmisdk/wmi-start-page

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2020/04/21, Modified: 2024/06/12

Plugin Output

tcp/445

```
Can't connect to the 'root\CIMV2' WMI namespace.
```

66717 - mDNS Detection (Local Network)

Synopsis

It is possible to obtain information about the remote host.

Description

The remote service understands the Bonjour (also known as ZeroConf or mDNS) protocol, which allows anyone to uncover information from the remote host such as its operating system type and exact version, its hostname, and the list of services it is running.

This plugin attempts to discover mDNS used by hosts residing on the same network segment as Nessus.

Solution

Filter incoming traffic to UDP port 5353, if desired.

Risk Factor

None

Plugin Information

Published: 2013/05/31, Modified: 2013/05/31

Plugin Output

udp/5353/mdns

```
Nessus was able to extract the following information :

  - mDNS hostname      : raspberrypi.local.
```