
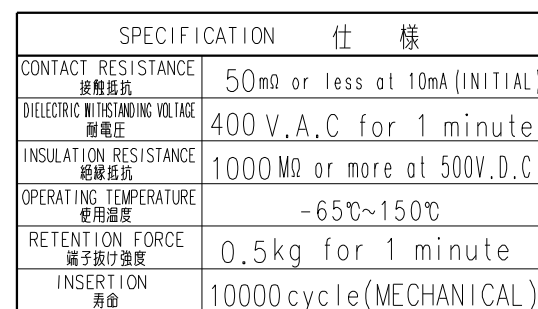


- 1) MARK PIN COUNT WITH LASER MARK.
- 2) Under the any humidity involved testing, the socket MUST be fixed on the BIB with provided screws.



**ESP CONFIDENTIAL**

20	COTS	55-113-131-01	HEX. THIN NUT M2	SUS	4	SHIP WITH SOCKETS
19	COTS	55-113-111-01	SPRING LOCK WASHER 2.0	SUS	4	SHIP WITH SOCKETS
18	COTS	55-113-009-01	PAN HEAD SCREW M2XL10	SUS	4	SHIP WITH SOCKETS
17	OQN-64-0.5-01-10	55-111-952-01	RIVET	SUS	1	
16	COTS	55-113-002-01	E-RING( $\phi$ 1.2)	SUS	2	
15	QFN-68-0.4-01-07	56-111-240-01	GROUND PIN	BRASS	1	Au PLATING
14	OQN-64-0.5-01-09	55-112-892-01	COIL SPRING	SUS	4	FOR FLOATING
13	FP-28-1.27-09-003	55-112-035-01	COIL SPRING	SUS	1	FOR COVER
12	FPQ-64-1.0-01-004	55-112-007-01	COIL SPRING	SUS	1	FOR STOPPER
11	QFN-68-0.5-01-11	55-112-808-01	COIL SPRING	SUS	1	FOR PUSHER
10	QFN-68-0.5-01-10	55-111-834-01	SHAFT	SUS	1	FOR COVER
9	QFN-68-0.5-01-09	55-111-833-01	SHAFT	SUS	1	FOR STOPPER
8	FPQ-64-1.0-01-003	55-299-043-01	STOPPER	PPS	1	
7	QFN-68-0.4-01-06	58-290-255-01	PUSHER	PES	1	
6	QFN-68-0.4-01-05	57-110-099-01	FVH0 CONTACT	BeCu	20	
5	QFN-68-0.4-01-04	57-110-098-01	FVG0 CONTACT	BeCu	24	
4	QFN-68-0.4-01-03	57-110-097-01	FVFO CONTACT	BeCu	24	
3	QFN-68-0.4-01-02	58-290-254-01	FLOATING	PES	1	
2	QFN-68-0.5-01-05	56-290-835-01	COVER	PES	1	
1	QFN-68-0.4-01-01	58-290-253-01	BODY	PES	1	

符 号 SYM.	顧 客 品 番 CUSTOMER'S PART NO.	図 番 DWG. NO.	品 名 NAME	材 質 MAT'L	個 数 Q'TY	備 考 REMARKS
機種 USED FOR		顧客品番 CUSTOMER'S PART NO.		一般公差 GENERAL TOLERANCES	±0.3 , ±10°	
承認者 APPROVED BY	N. TAKAYAMA	品 名 NAME QFN-68BT-0.4-01-00 IC SOCKET				尺 度 SCALE 3 : 1
検 図 者 CHECKED BY						REV. NO. [ a ]
設計者 DESIGNED BY	H. KISO					
製 図 者 DRAWN BY						
当 年 年 月 日 ISSUED ON	2007/06/22	図 番 DRAWING NO.	55037105011			

	訂正年月日 DATE	訂正箇所 REVISIONS	承認 APP 担 SUC