



MCU

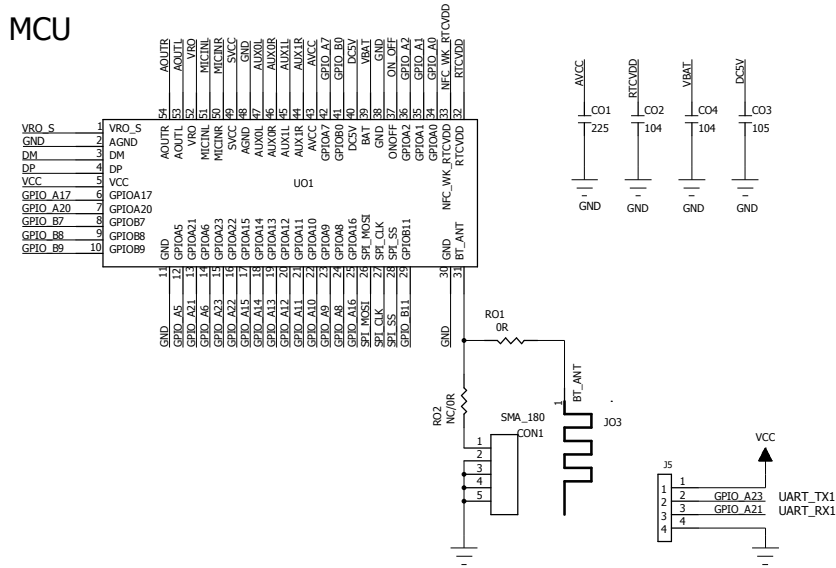


POWER SUPPLY

NOTES:
DC5V INPUT:4.75V-5.25V.
The Maximum Limit Voltage of VBAT is 5.0V.




ON/OFF KEY


The RK3,RK4 must Welding.

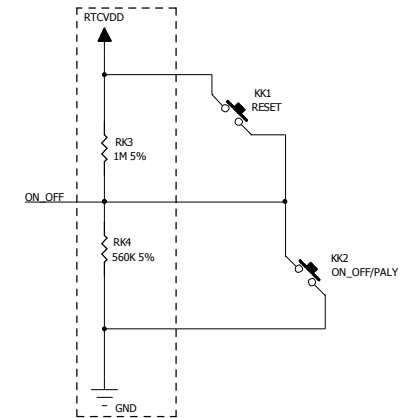



NOR FLASH

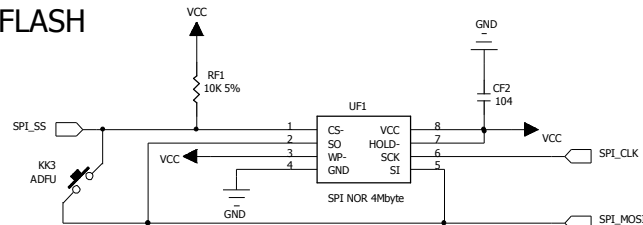

TF CARD

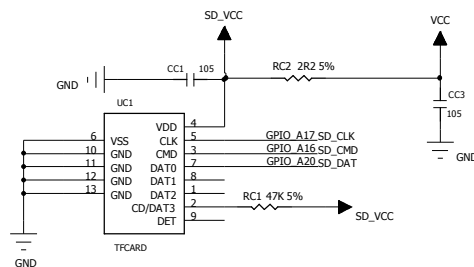


POWER VOLTAGE TEST

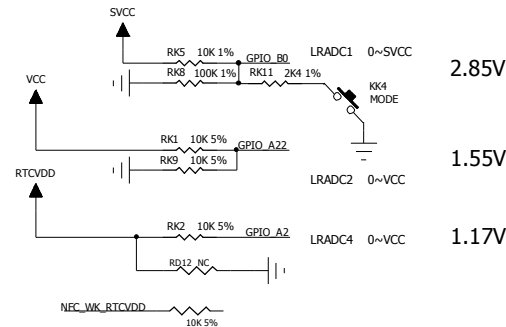


ATS2825_MODULE_TEST

File name:	ATS2825_MODULE_TEST
Sheet name:	MODULE/FLASH/POWER
Drawing No:	Version: V1.1
Drawn By:	Date: 2016-07-04
Checked By:	Date:
Approved By:	Date:
Size:	A3
Sheet:	2 of 3


USB

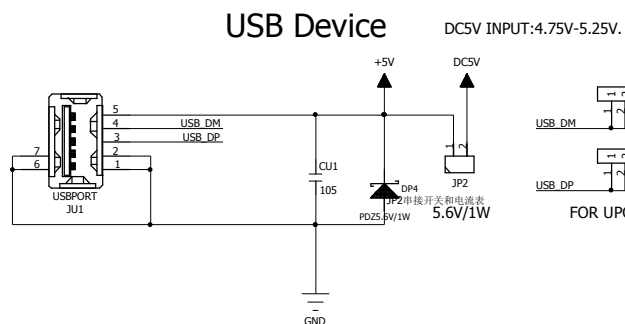


USB HOST

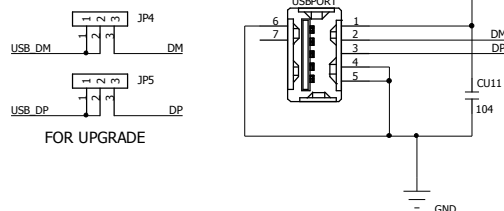

LED

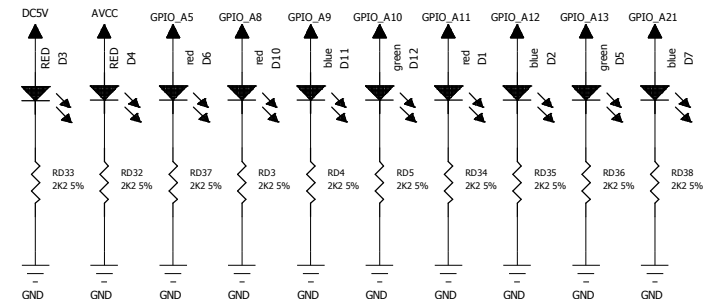


PA

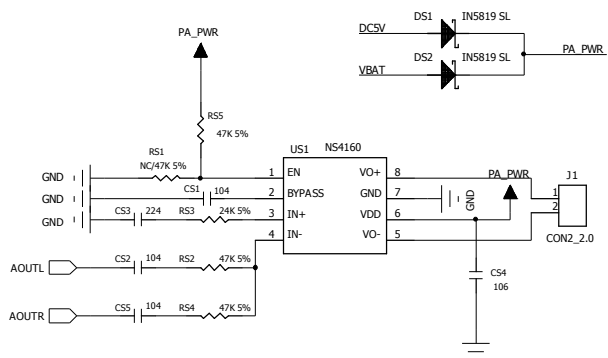


接4R喇叭

GPIO TEST

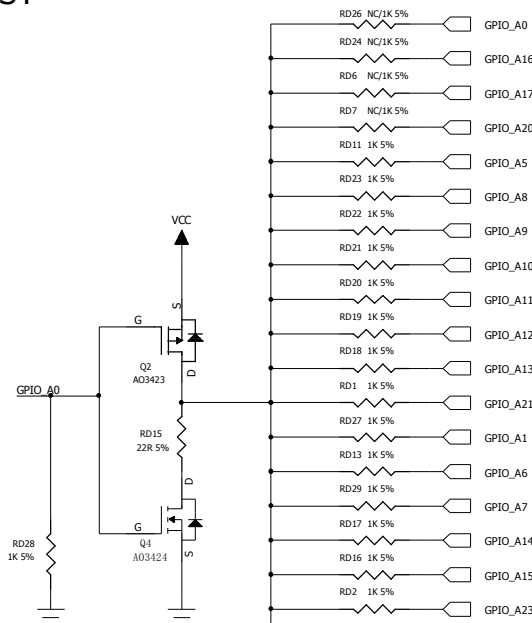

GPIO测试上下拉切换
A0输出高则GPIO接下拉
A0输出低则GPIO接上拉

CHANNEL TEST

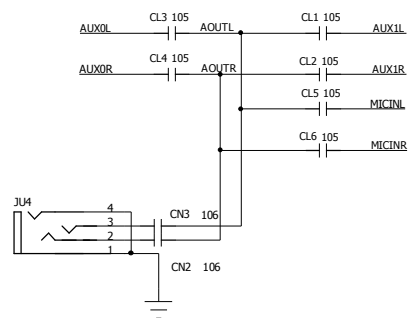

ATS2825_MODULE_TEST	
File name:	ATS2825_MODULE_TEST
Sheet name:	USB/PA(LED)/GPIO
Drawing No:	Version: V1.1
Drawn By:	Date: 2016-07-04
Checked By:	Date:
Approved By:	Date:
Size: A3	Sheet: 3 of 3