MTP F26 · TEAM C · RADIO TEAM

Radio brief: band, module and link budget

Team Santiago, Andrian, Marcos **Version** 0.7.1 · Fri 16 Oct 2026 **Next session** Fri 23 Oct (week 5)

New in v0.7 (16 Oct): 20 dBm e.i.r.p. is the baseline for SRI and MRM. A professor said yes to 20 dBm. For our narrowband radio that is allowed only as a **frequency-hopping radio with listen-before-talk** (CNAF UN-85 a), EN 300 328 adaptive FHSS), so SRI and MRM now hop with the same SP4 and omni: **+10.5 dB on every link**, MRM 260 m **+13.9 dB**. NM stays at 10 mW on channel 80; Quick Mode uses the 10 mW channel too. Our hops now keep ≥ 6 MHz from the other teams, and our boxes need ≥ 15 m from theirs while they stay at 10 mW. See 20 dBm with frequency hopping.

New in v0.5 (decided 13 Oct, Santiago with Marcos): one omni antenna per box on the Ebyte E01-ML01SP4. Antennas cannot change between the competition modes, and the patches' risks in NM (aiming, the rim corner, tuning) outweighed their +1 dB on MRM. The SP4 has the antenna socket on the module, so the flex omni plugs straight in. Shopping list updated below.

New in v0.4: all four teams agreed to run **every mode at 2.4 GHz**, so 868 MHz is dropped. The radio is now the **Ebyte E01-ML01DP5** (Nordic nRF24L01+ with PA and LNA) at 250 kbps, with **two patch antennas** per box and our own channel in MRM. **Do not order the Adafruit RFM69 or the Molex antennas**; the new shopping list is below. **Order by Fri 16 Oct.**

Every figure carries a tag: `RULE` from the competition rules PDF, `VERIFIED` against a primary source, `ASSUMPTION` to be replaced by a measurement, and `ESTIMATE`.

Bottom line

1. **2.4 GHz is the right band for this competition.** In MRM all teams transmit at once `RULE`. At 868 MHz four teams would share one 250 kHz channel (about a quarter of 67 kbps each). At 2.4 GHz each team gets its own channel, there is no duty-cycle limit, and NM has one common radio for everybody.
2. **Margin, now with 20 dBm.** SRI and MRM hop at up to 20 dBm e.i.r.p. (CNAF UN-85 a), approved by a professor). With the SP4 and one omni at 0.75 m: **SRI 70 m +36.5 dB,**

MRM 260 m +13.9 dB (+8.4 dB at today's RF_PWR −12 until T0 measures the module). NM stays at 10 mW on one channel (UN-85 b): **+9.9 dB**.

3. **MRM is no longer the thin link.** +13.9 dB at 0.75 m, +6.9 dB even at 0.5 m. The new constraint is courtesy: at 20 dBm our box would drown a 10 mW neighbour, so keep **≥ 15 m** between our boxes and the other teams' at each end (10 m is enough if they go to 20 dBm too).
4. **Speed is no longer a problem.** 250 kbps gives ~159 kbps of goodput. The simulator delivers the whole file in 28 s at 5 % loss, and all 10,000 lines even without compression (73 s).
5. **One omni, decided.** Plugged straight into the SP4 (no adapter) and with the SP4's −96 dBm sensitivity, it is only 1 dB behind the two-patch build on MRM, with none of the patches' NM risks. Remaining risk: if T0 measures only ~+2 dBm out of the module, every link loses ~5 dB.
6. **MRM channel plan:** the other three teams keep RF_CH 24 / 49 / 82; we leave 74 and hop over 27 channels at least 6 MHz from theirs. A neighbouring box 2 m away can arrive 55 dB above our 260 m signal, so the fixed channels sit 25 MHz apart where possible.

Working baseline decided

The **E01-ML01SP4** is a genuine Nordic nRF24L01+ with a PA and an LNA, as a 14.85 × 18 mm SMD module with an **IPEX (U.FL) antenna socket**. Datasheet: +20 dBm max, **−96 dBm at 250 kbps**, 120 mA TX, 26 mA RX, 2.0–3.6 V `VERIFIED`. Its lowest power setting gives about **+2 to +7 dBm**, depending on the PA gain; test T0 measures it before any field test `ASSUMPTION`. With the 3 dBi peak of the omni that is at most 9.5 dBm e.i.r.p. That is the 10 mW setting for NM, Quick Mode and the fallback. The hopping profile for SRI and MRM may go up to 20 dBm e.i.r.p. (below); the driver refuses anything higher on every other profile.

Four radio profiles are generated by `radio/phy_config.py`. Each is checked against the band edges (Carson bandwidth plus ±60 ppm crystal drift per box) and the 10 dBm e.i.r.p. limit for its antenna path.

PROFILE	USE	CHANNEL	RATE	AT SMA	ANTENNA PATH
TEAM_250K	Quick Mode,	74 · 2474 MHz	250 kbps	≤ +7 dBm	omni 3 dBi peak, −0.5 dB

PROFILE	USE	CHANNEL	RATE	AT SMA	ANTENNA PATH
	bench, fallback (10 mW)				
TEAM_1M	Fallback option at 1 Mbps	74 · 2474 MHz	1 Mbps	≤ +7 dBm	omni 3 dBi peak, −0.5 dB
NM_COMMON	Shared with all teams (below)	80 · 2480 MHz	250 kbps	≤ +7 dBm	omni 3 dBi peak, −0.5 dB
TEAM_FHSS	**SRI and MRM baseline:** hopping with listen-before-talk (D-R6)	27 hops · 2402–2476	250 kbps	≤ +13 dBm (−12)	omni 3 dBi peak, −0.5 dB

No duty-cycle limit

Neither UN-85 b) nor adaptive hopping under UN-85 a) has a duty-cycle condition, so the 3-rounds-per-hour limit of 868 MHz is gone. Test as often as we like. The firmware's duty-cycle guard was removed.

The power limit is the only rule to watch. On the 10 mW profiles the driver **refuses any setting above RF_PWR −18 dBm**; only the hopping profile goes higher, and only after a clear-channel check on each hop.

Firmware ready before the hardware

A portable C driver for the nRF24L01+ passes 194 host checks against a simulated radio, including two radios talking over a simulated channel, the power limit, and the listen-before-talk rules of the hopping profile. It needs five board functions (SPI select and transfer, CE pin, microsecond delay and clock).

Frames use dynamic length and the radio's CRC, and go out without the chip's own ACKs, so our ARQ stays in charge. The protocol simulator runs on it: 13 of 13 scenarios pass, two of them hopping.

Antenna

One Molex 146153-0100 flex dipole per box (34.9 × 9 mm, 2.4–3.0 dBi peak, > 66 % efficiency), plugged into the SP4's socket, stuck **vertically** as high as possible on a side wall. The same antenna serves SRI, MRM and NM, and Quick Mode too.

The model uses 2 dBi in the box `ASSUMPTION`; test T5 measures it.

What to buy (order by Fri 16 Oct)

ITEM	QTY	PRICE	WHY
Ebyte E01-ML01SP4 (nRF24L01P + PA/LNA, SMD, IPEX)	6	verify	2 boxes, 2 for the bench, 2 spares. Modules shown at Quick Mode are final, so buy them all from one batch, and check the EU seller and lead time first.
Molex 146153-0100 flex omni, 100 mm cable, U.FL	4	≈ €2–4	The antenna. Check the part is the MHF (U.FL) version, not MHF4.
U.FL-to-SMA-female pigtail	2	€2–3	To measure the module on the spectrum analyser (T0, T13).

Do not buy Ebyte E01C-* parts or no-name "nRF24L01+PA+LNA" boards: Ebyte's own manual says the E01C uses the Si24R1 clone chip. The SP4 is SMD, so it needs a small breakout (or the carrier PCB) from the first bench test. Not needed any more: the DP5, SMA pads and whips.

Antenna: one omni decided 13 Oct

The antennas cannot change between SRI, MRM and NM, so one build has to serve all three. The comparison we decided on, model at 0.75 m (the first row is the decision; the others are the 9 Oct options):

BUILD	E.I.R.P.	SRI 70 M	MRM 260 M	MRM AT 1.0 M	NM 100 M, −10 DB
SP4 + one omni, plugged straight in (decided), 10	8.5 dBm	+26.0	+3.4	+8.3	+9.9

BUILD	E.I.R.P.	SRI 70 M	MRM 260 M	MRM AT 1.0 M	NM 100 M, −10 DB
mW one channel (NM; SRI/MRM fallback)					
DP5 + two patches, 4.5 dBi (not chosen)	10.0 dBm	+27.0	+4.4	+9.3	+10.9
DP5 + one omni 2 dBi, via adapter	8.0 dBm	+23.0	+0.4	+5.3	+6.9
One omni straight on the SMA	8.7 dBm	+24.4	+1.8	+6.7	+8.3
One omni, 0 dBi inside the box	6.0 dBm	+19.0	−3.6	+1.3	+2.9
SP4 + one omni + 20 dBm hopping: SRI/MRM baseline	19.0 dBm	+36.5	+13.9	+18.8	+9.9 NM stays at 10 mW

Why one omni

- Covers every direction in NM, including the box at the corner of the two rims, with no aiming
- One radio per box, no patch boards, no VNA tuning, off-the-shelf antenna
- Only ~1 dB behind the patches on MRM once it plugs straight into the SP4

What we give up

- At 10 mW the MRM margin was thin (+3.4 dB at 0.75 m); hopping at 20 dBm lifts it to +13.9 dB. Mounting the antenna high still adds +5 dB per 25 cm
- No sideways rejection of other teams' boxes: the ≥ 10 m spacing of the channel plan still holds, with no extra isolation

Why not the E01-2G4M27D

Its −99 dBm receiver is tempting, but its lowest output is about +9 dBm. Behind a ~3 dBi antenna that is ~12 dBm e.i.r.p., over the 10 mW limit. It would be legal in the 20 dBm hopping mode, but it could not run NM, Quick Mode or the fallback at 10 mW, so it stays out.

20 dBm with frequency hopping baseline · 16 Oct

CNAF UN-85 has two regimes in 2400–2483.5 MHz `VERIFIED`. **b)** generic low-power devices: under 10 mW e.i.r.p.: NM, Quick Mode and the fallback. **a)** wideband data systems under EN 300 328: **100 mW e.i.r.p.**, but the density is capped at **100 mW per 100 kHz for frequency hopping** and **10 mW per MHz for anything else**. Our signal is under 1 MHz wide, so without hopping a) still means ~10 dBm. The 20 dBm needs a hopping radio that follows the EN 300 328 sharing rules.

EN 300 328 V2.2.2 has two kinds of hopping. **Non-adaptive** hopping caps power × duty: at 20 dBm the radio may transmit only 10 % of the time (~16 kbps), too slow for a 2-minute file. **Adaptive hopping with listen-before-talk** has no duty limit, so that is what SRI and MRM use (D-R6). A professor approved 20 dBm e.i.r.p. on 16 Oct.

EN 300 328 RULE (ADAPTIVE FHSS, LBT)	REQUIREMENT	OUR DESIGN (PHY_CONFIG.PY, ALL CHECKS OK)
RF output power (4.3.1.2)	≤ 20 dBm e.i.r.p.	RF_PWR −12 today: ≤ 15.5 dBm at the worst-case PA gain. If T0 measures the gain at ≤ 23.5 dB, −6 is legal: 16.5–20 dBm.
Hop channels (4.3.1.4)	≥ 15 at all times, over ≥ 70 % of the band	**27 channels**, RF_CH 2–76 (even), 74.6 MHz = 89 % of the band; none within 5 MHz of the other teams' MRM channels 24 / 49 / 82 (selectivity −50 dB)
Time per channel (4.3.1.4)	≤ 400 ms in any 400 ms × N window	25 ms per hop, each channel once per 0.675 s cycle: ≤ 222 ms
Hop separation (4.3.1.5)	≥ 100 kHz	2 MHz between neighbours; consecutive hops ≥ 14 MHz apart
Clear channel check (4.3.1.7.2)	Energy detect ≥ 18 µs before each hop's first frame; ≤ −70 dBm/MHz at 20 dBm (relaxed at lower power)	The nRF24's RPD bit after 170 µs in RX: ~−76 dBm at the SP4 port `ESTIMATE`, needed ≤ −64 dBm at −12 and ≤ −68.5 dBm at 20 dBm. **T17 measures it.**

EN 300 328 RULE (ADAPTIVE FHSS, LBT)	REQUIREMENT	OUR DESIGN (PHY_CONFIG.PY, ALL CHECKS OK)
Channel occupancy (4.3.1.7.2)	< 60 ms per check, then idle ≥ 5 %	50 ms, then 2.5 ms idle; busy hops are skipped

What changes

- **Nothing in the hardware.** The SP4 is a +20 dBm module that we hold at its lowest step; hopping only raises the step. TX bursts move toward the datasheet's 120 mA, which the radio LDO already covers.
- **Driver:** only the hopping profile may go above −18 dBm. It refuses channels outside the hop set and any frame without a clear check on the current hop, ends each occupancy at 50 ms and waits the idle gap. 194 host checks pass.
- **Protocol:** unchanged; the radio layer hops every 25 ms (one 16-frame burst). Simulator: all 10,000 lines in 36 s with 10 % of hops busy, 54 s with 25 % busy plus a receiver reboot. Still to build on the Pico: the slot clock and finding the sender's hop timing.
- **NM stays on channel 80 at 10 mW.** Hopping in sync across four teams' boxes for a 0.5 kB file is not worth it, and NM has +9.9 dB.

Why it is allowed, and what to keep

- **Regulation:** the design meets the EN 300 328 adaptive-FHSS rules in the table, at ≤ 20 dBm e.i.r.p. measured with our antenna.
- **Course:** a professor approved 20 dBm e.i.r.p. on 16 Oct. The rules say oral comments do not override the written rules, so Marcos asks on **Atenea (Q3)** for the same yes in writing, copying Prof. Anna Umbert (spectrum regulation).
- **Evidence:** T13 (e.i.r.p.), T17 (where the clear-channel check trips) and T18 (hop pattern, dwell, skipping a busy channel on the analyser), plotted for the ANNEX.
- **Other teams:** we leave our MRM channel (74) and stay ≥ 6 MHz from theirs. At 20 dBm we are 10 dB louder than a 10 mW neighbour: keep **≥ 15 m between boxes** at each MRM end (see the MRM section). The 20 dBm route is open to them too.


MODEL AT 0.75 M (WORKBOOK S24–S26)	E.I.R.P.	SRI 70 M	MRM 260 M	MRM AT 0.5 M	MRM AT 1
10 mW, one channel (fallback)	8.5 dBm	+26.0	+3.4	−3.6	+
Hopping at 20 dBm, RF_PWR −6 (baseline once T0 allows)	19.0 dBm	+36.5	+13.9	+6.9	+1
Hopping at RF_PWR −12 (today, until T0)	13.5 dBm	+31.0	+8.4	+1.4	+1

Rules that constrain the radio

- Unlicensed spectrum only, compliant with **CNAF 2017 UN notes**, IEEE C95.1 (RF exposure) and ESD safety. RULE
- **No chip implementing a standard wireless access protocol** (WiFi, Bluetooth, 2G–5G, ZigBee; the Session 1 slide adds NB-IoT and **LoRa**). The nRF24L01+ has none of them. RULE
- **Nothing may stick out of the 15 × 15 × 7 cm IKEA 365+ box** except buttons, switches and connectors, so the antennas go inside. The box sits on a support of **about 70 cm**. RULE
- **Modules shown at Quick Mode are final.** Antennas, batteries and mechanics may still change. RULE
- Distances: SRI **70 m**, teams one after another, 2 minutes; MRM **~260 m**, **all teams at the same time**, 2 minutes; NM relays along the South and East rims with no line of sight end to end, **5 minutes**. RULE
- Scoring counts only the **first unbroken run of byte-identical lines** (~10,000 lines of ~100 B), so reliability beats raw bit rate. RULE

Spectrum: 2400–2483.5 MHz and our channels

nRF24 channel N sits at 2400 + N MHz, so only **RF_CH 0–83** are legal in Spain; the driver refuses anything higher. Campus WiFi (eduroam) normally uses channels 1, 6 and 11, which leave three gaps. The fixed MRM channels sit in those gaps, 25 MHz apart, plus one at the band edge. Since 16 Oct we leave our channel (74) and hop over 27 channels 2402–2476 MHz, ≥ 6 MHz from the other three. Test T14 (campus survey) confirms it before we propose it.

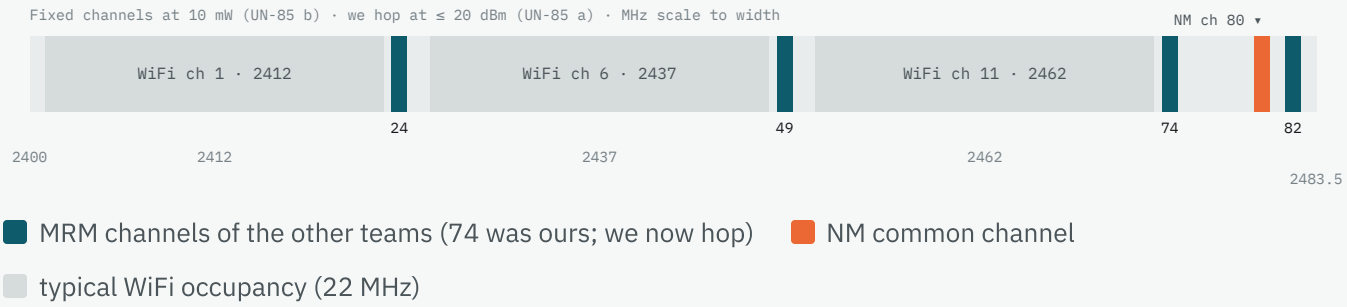

BAND	NOTE	MAX POWER	ACCESS CONDITION	STATUS FOR US	COMME
2400–2483.5 MHz	UN-85 b)	10 mW e.i.r.p.	none (EN 300 440)	NM · Quick Mode · fallback	No dut cycle. I team g own ch

BAND	NOTE	MAX POWER	ACCESS CONDITION	STATUS FOR US	COMME
					in MRM Sharec campu and Blueto
2400–2483.5 MHz	UN-85 a)	100 mW e.i.r.p.; 100 mW/100 kHz hopping, 10 mW/MHz other	sharing rules required (EN 300 328)	SRI · MRM baseline	A non-hoppin narrow radio g nothin mW/M Our SRI/MI hoppin mode listen-before uses it 16 Oct profes approv dBm): dB. NM under
869.40–869.65 MHz	UN-39	500 mW e.r.p.	≤10 % DC	dropped 9 Oct	Better but on kHz ch for fou simult teams MRM a rounds hour.
433 / 5725 MHz	UN-30 / UN-130	10 / 25 mW	≤10 % DC / none	not used	433 MI antenn long fo box; fe cheap

BAND	NOTE	MAX POWER	ACCESS CONDITION	STATUS FOR US	COMME
					WiFi pa 5.8 GH

Sources: CNAF 2017, BOE-A-2017-12318 · CNAF 2021, BOE-A-2021-21346.

MRM: we hop, the others keep their channels

Our ARQ makes both ends transmit (data one way, ACKs back), and the four teams' boxes stand close together at each end. Another team's box a few metres away is far louder than our partner 260 m away. Whether we still hear our partner depends on how far apart the channels are. The nRF24's selectivity at 250 kbps is **−50 dB beyond 6 MHz** and **−60 dB beyond 25 MHz** (datasheet, table 8) VERIFIED.

OTHER TEAM'S BOX FROM OUR RECEIVER	2 M	5 M	10 M	20 M
Interferer above our 260 m signal, omni antennas (our build)	55 dB	47 dB	41 dB	35 dB
Same with patches side by side (~10 dB rejection each; not our build)	35 dB	27 dB	21 dB	15 dB

CHANNEL PAIR	SPACING	SELECTIVITY	WHAT IT NEEDS
24 / 49 · 2424 / 2449 MHz	25 MHz	−60 dB	safe even at 2 m
49 / 74 · 2449 / 2474 MHz	25 MHz	−60 dB	safe even at 2 m
74 / 82 · 2474 / 2482 MHz	8 MHz	−50 dB	no longer used: we left 74 on 16 Oct

SINCE 16 OCT: OUR 20 DBM HOPPING BOX R M FROM ANOTHER TEAM'S 10 MW BOX	5 M	10 M
We land above their 260 m partner (our nearest hop is 6 MHz away: −50 dB selectivity)	57.9 dB	51.9 dB
They land above our 260 m partner	36.9 dB	30.9 dB


The 74 / 82 pair no longer matters: we left 74. Ask the organisers for **≥ 15 m between our boxes and the other teams'** at each end while they stay at 10 mW (10 m is enough at RF_PWR −12, or if they also go to 20 dBm). Test T15 checks it with three of our own boxes.

Link budget

This uses the course method: Maxim AN5142 with the course correction (no ½ factor in the flat-earth formula) and the course spreadsheet's worst-case ground bounce (a = 1, |cos|). Inputs:

- antennas at 0.75 m (70 cm support plus position in the box) ASSUMPTION
- −1 dB container loss and 0 dB multipath on open campus paths ASSUMPTION
- flex omni 2 dBi in the box, cable −0.5 dB, in both directions; +7 dBm out of the module at 10 mW, up to +17.5 dBm while hopping ASSUMPTION
- receiver sensitivity from the E01-ML01SP4 datasheet (−96 dBm at 250 kbps) VERIFIED

FLAT-EARTH LINK MARGIN VS DISTANCE · DB ABOVE RECEIVER SENSITIVITY

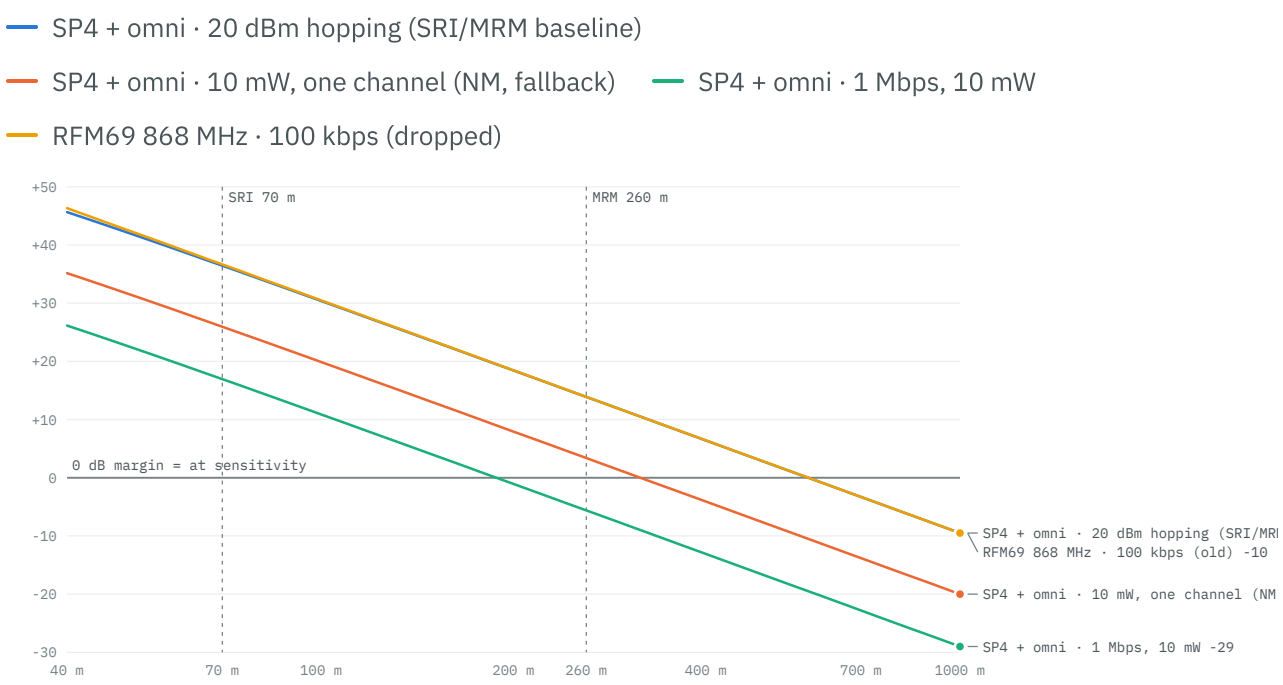

Show as table

SCENARIO	EIRP DBM	RX DBM	SENS. DBM	MARGIN DB	WITH −20 DB MULTIPATH
SRI 70 m · hopping at 20 dBm (baseline)	19.0	-59.5	-96.0	+36.5	+16.4
MRM 260 m · hopping at 20 dBm (baseline)	19.0	-82.1	-96.0	+13.9	-6.1
MRM 260 m · hopping at RF_PWR −12 (today, until T0)	13.5	-87.6	-96.0	+8.4	-11.6

SCENARIO	EIRP DBM	RX DBM	SENS. DBM	MARGIN DB	WITH −20 DB MULTIPATH
NM 100 m hop, −10 dB obstruction · 10 mW, one channel (baseline)	8.5	-86.1	-96.0	+9.9	-10.1
SRI 70 m · 10 mW, one channel (Quick Mode, fallback)	8.5	-70.0	-96.0	+25.9	+6.0
MRM 260 m · 10 mW, one channel (fallback)	8.5	-92.6	-96.0	+3.4	-16.6

Full AN5142 rows are in `radio/MTP-F26_TeamC_Radio_LinkBudget.xlsx` (S24–S26 are the SRI/MRM baseline at 20 dBm hopping, S23 is NM at 10 mW, S21–S22 the 10 mW fallback; S16–S20 the patch option); every cell is a live formula and inputs are in blue. AN5142's default −20 dB multipath is for cluttered paths. Tests T4 and T5 on campus will tell us which number to use.

Antenna height is the biggest lever

At 0.75 m the ground reflection takes over beyond ~18 m at 2.4 GHz. Past that point loss grows 40 dB per decade and hardly depends on frequency: $P_R \approx \mathrm{EIRP}\cdot G_R\cdot(h_1h_2)^2/d^4$.

Raising both antennas from 0.75 to 1.0 m adds **+5 dB** on MRM. Mount the omni as high on the wall as the box allows. Whether "about 70 cm" allows a taller support is Atenea Q4.

The nRF24 has no RSSI

It only has one bit (RPD) that says "above −64 dBm at the chip", about −74 dBm at the SP4's antenna socket. Range tests therefore measure packet loss, and levels come from the spectrum analyser or the model. RPD still works as listen-before-talk and for the campus channel survey.

Datasheet limits that matter

- **32 B maximum payload:** our frames shrank from 64 B to 32 B (28 B of data). VERIFIED
- **Variable-length frames need the chip's auto-ACK feature on,** so the driver sends every frame as "no ACK": no chip ACKs or retries on air.
- **PA always in line:** no bypass, so the lowest output is +2 to +7 dBm; the driver

caps the setting there.

Throughput: does the file fit in 2 minutes?

About 1 MB in 120 s needs **66.7 kbps** of useful throughput. The model assumes selective-repeat ARQ with one ACK per 16 frames and 85 % efficiency for the micro and USB `ASSUMPTION`. The simulator runs the real protocol code over a modelled channel with 5 % random loss, deflate compression, and the nRF24 airtime from the driver.

CONFIGURATION	AIR RATE	GOODPUT (MODEL)	WHOLE FILE (SIM, 5 % LOSS)	LINES, NO COMPRESSI
SP4 hopping, 32 B frames, 10 % of hops busy (SRI/MRM baseline)	250 kbps	141.1 kbps	36 s	10,0
SP4, 32 B frames, one fixed channel	250 kbps	158.7 kbps	28 s	10,000 (73
SP4, 32 B frames, one fixed channel	1 Mbps	594.1 kbps	13 s	10,0
RFM69 868 MHz, 64 B frames (dropped)	100 kbps	67.3 kbps	38 s	9,6
RFM69 868 MHz shared by 4 teams in MRM (dropped)	~25 kbps	~17 kbps	–	~2,5

> At 2.4 GHz each team keeps its full rate in MRM, because it has its own channel. That, not range, is why the band switch pays off.

Module shortlist

Read from the primary datasheets on 9 Oct 2026. Prices and EU lead times are still **TO VERIFY**.

MODULE	CHIP	OUT AT THE CONNECTOR	SENSITIVITY	CONNECTOR	PRO
Ebyte E01-ML01SP4 decided	nRF24L01P + PA/LNA	~+2 to +20 dBm	−96 @250k (datasheet)	IPEX on the module	low
Ebyte E01-ML01DP5 not chosen	nRF24L01P + PA/LNA	~+2 to +20 dBm	~−96 @250k	SMA	low
Ebyte E01-2G4M27D	nRF24L01P + 27 dBm PA	≥ +9 dBm	−99 @250k	SMA	low
Bare nRF24L01+	nRF24L01+	−18 to 0 dBm	−94 @250k	PCB / none	low
TI CC2500 modules	CC2500	+1 dBm	−87 @250k	PCB	low

MODULE	CHIP	OUT AT THE CONNECTOR	SENSITIVITY	CONNECTOR	PRO
E01C-*, no-name PA+LNA boards	Si24R1 clone	unknown		SMA	excl
SX1280 / SX1281	LoRa 2.4 GHz	—			excl
Radio SoCs (nRF52, ESP32, CC2652…)	—	—			excl

Decisions and who they touch

DECISION	OWNER	DEPENDS ON	AFFECTS	STATUS
D-R1b Band: 2.4 GHz for every mode, 250 kbps	All teams + Radio	—	Everything radio	**agreed by the teams, 9 Oct**
D-R2c Radio module (frozen at Quick Mode)	Radio → handed to electronics	T0 output power, T2 sensitivity	PCB, BoM, power supply	**decided 13 Oct: E01-ML01SP4** order by Fri 16 Oct
D-R3 NM radio shared by all teams	Radio + protocols	Other teams' modules	NM bonus (+2 to +2.5)	**draft v0.2 ready** send to teams; freeze by week 6
D-R4 MRM channel per team	Radio + other teams	Campus survey T14	MRM (+1)	**draft: 24 / 49 / 82 fixed; we hop**
D-R6 SRI/MRM as adaptive hopping + listen-before-	Radio + protocols	A professor's yes (written on Atenea Q3), T0	MRM (+10.5 dB), firmware, other teams	**baseline 16 Oct** built and simulated; bench tests next

DECISION	OWNER	DEPENDS ON	AFFECTS	STATUS
talk at ≤ 20 dBm e.i.r.p.		(all steps), T17, T18		
D-R5c Antenna: one flex omni (Molex 146153-0100)	Radio	Box inside height, T5	Mechanics, carrier PCB	decided 13 Oct T5 measures the in-box gain

> **Revisit D-R2c if** T0 measures more than ~+7.5 dBm at the lowest setting (the e.i.r.p. limit with a 3 dBi antenna), or T2 shows a clone or a weak receiver. If T0 measures only ~+2 dBm, the module is legal but every margin drops ~5 dB: then raise the antenna and run the hopping profile at the highest legal step (D-R6).

Handoff to electronics

One **E01-ML01SP4** per box. SMD, 10 pads at 1.27 mm: 1 VCC, 2 CE, 3 CSN, 4 SCK, 5 MOSI, 6 MISO, 7 IRQ, 8–10 GND (Ebyte manual §3). No traces under the module on the top layer.

PIN	AT THE MICRO	WHAT MATTERS
`VCC`, `GND`	supply	**2.0–3.6 V only**, never the battery rail (a Li-ion cell reaches 4.2 V). Use a dedicated 3.3 V LDO for the radio (≥ 300 mA, dropout ≤ 0.1 V at 150 mA) straight from the cell: it regulates down to ~3.4 V and then passes the cell through (≥ 2.95 V at cutoff, fine for the SP4). Battery sense on ADC3 with an ideal diode into VSYS; firmware warns below 3.5 V, and 100 µF + 10 µF + 100 nF at the module. 120 mA in TX, 26 mA in RX.
`SCK` `MOSI` `MISO`	SPI master	Mode 0, MSB first, ≤ 10 MHz.
`CSN`	GPIO out	Chip select, active low.
`CE`	GPIO out	High = receive; a ≥ 10 µs pulse sends one frame.
`IRQ`	GPIO in, optional	Active low: frame sent / frame received. The driver polls today.

PIN	AT THE MICRO	WHAT MATTERS
IPEX	—	The flex omni plugs in here. Keep the module near the antenna wall and away from the battery, USB and the 5 V boost.

Proposed Pico 2 pins: SPI0 GP16/18/19, CSN GP17, CE GP20, IRQ GP21. The SP4 needs a small breakout (or the carrier PCB) from the first bench test, because the Quick Mode module is final. Needed back from electronics: OK on the module and the radio LDO, who makes the breakout, the pin map, a power check, and the box's inside height.

Shared NM radio settings: draft for all teams

Plain nRF24L01+ register settings, so any team's nRF24 board can join with a few register writes and no shared code.

SETTING	VALUE	WHY
Channel	`RF_CH 80 · 2480 MHz`	Clear of WiFi 1/6/11 and of the four MRM channels
Rate	`250 kbps`	Best sensitivity and selectivity; NM moves only ~0.5 kB
Address	`5 B · C2 5A 9D 3E 71`	Different from every team's own address
Frames	dynamic length 1–32 B, hardware CRC-16	Same on every nRF24L01+
ACKs	none on air: send with "no ACK", retries 0	Chip ACKs from several receivers would collide
Power · polarisation	≤ 10 dBm e.i.r.p. · vertical	Legal limit; mismatched polarisation costs 10–20 dB
Channel access	listen before talk with RPD, random back-off	The nRF24 has no carrier sense in hardware

Interop test before week 6: every pair of boxes exchanges 1 000 frames at 10 m on RF_CH 80; pass is ≥ 99 % with a valid end-to-end CRC. Full proposal: `radio/NM_PHY_PROPOSAL.md`.

Test plan

No duty-cycle limit, so tests can be repeated freely. Stay at RF_PWR −18 dBm until T0; the hopping profile goes outdoors once T17 and T18 pass in the lab. For each run, record place, profile, channel, distance, heights, antenna, box open or closed, pad, and frames sent and received.

TEST	WHAT	PASS	WHEN
T0	Bring-up, then **conducted output power at all four settings** on the spectrum analyser (U.FL-to-SMA pigtail, ≥ 30 dB attenuator)	Driver starts; output ≤ +7.5 dBm at −18, so e.i.r.p. ≤ 10 dBm with the 3 dBi antenna. The other steps pick the hopping mode's power. **Gate for any field test.**	modules arrive
T2	Sensitivity at 250 kbps and 1 Mbps through a lab step attenuator	1 % packet loss at ≤ **−92 dBm** (250 kbps). **Gate for the module.**	before Quick Mode
T14	Campus 2.4 GHz survey with the RPD bit, channels 0–83, at each site	Our MRM channels and the NM channel busy < 5 %	before the inter-team meeting
T4	Range, open box, 10 / 70 / 150 / 260 m; then one 2-min transfer at 70 m	≤ 1 % loss to 150 m; all 10,000 lines	after T2
T13	Spectrum analyser: carrier offset, occupied bandwidth on channel 82, e.i.r.p.	Below 2483.5 MHz; ≤ 10 dBm (≤ 20 dBm hopping). Plot in the ANNEX.	book the lab
T17	D-R6: input level where the clear-channel check (RPD) trips, from a signal generator	≤ the threshold for our power (−64 dBm at −12, −68.5 dBm at 20 dBm)	with T13
T18	D-R6: hop pattern, dwell and occupancy on the analyser; skips a channel with a CW interferer on it	27 channels, ≤ 25 ms dwell, ≤ 50 ms per check, busy channel skipped	with T13
T5	Closed box; antenna high vs middle of the wall; box rotated 0 / 90 / 180°	≤ 1 % loss at 260 m	after T4
T15	MRM near-far with a third box on channel 82 and 49 at 2 m and 10 m	≤ 1 % loss on the 260 m link	after T5

EXPECTED (MODEL)	10 M	70 M	150 M	260 M
SP4 + omni · level	−56 dBm	−70 dBm	−83 dBm	−93 dBm
SP4 + omni · margin	+40 dB	+26 dB	+13 dB	+3 dB

Next: to Fri 23 Oct

ITEM	DATE ASG.	ASSIGNED TO	DESCRIPTION	STATUS	DUE DATE	END DATE	RESULT
R7	09/10/26	RT + PM	Band, module and antenna decisions	Done	16/10/26	13/10/26	2.4 GHz (09/10); SP4 + one omni (13/10)
R12	13/10/26	RT → ET	Order 6 × E01-ML01SP4, 4 × Molex 146153-0100, 2 × U.FL-to-SMA pigtails	Open	16/10/26		
R13	09/10/26	Andrian	Campus 2.4 GHz survey (T14) at the SRI, MRM and NM sites	Open	16/10/26		
R14	09/10/26	RT	MRM channel plan + NM radio settings v0.2 to the other teams' leaders	Open	16/10/26		

ITEM	DATE ASG.	ASSIGNED TO	DESCRIPTION	STATUS	DUE DATE	END DATE	RESULT
R9	13/10/26	RT → ET	Electronics handoff v0.3 reviewed; pin map, radio LDO, SP4 breakout and box height back	Open	16/10/26		
R15	16/10/26	Marcos	Post Atenea Q3: written confirmation of the 20 dBm the professor approved; copy Prof. Anna Umbert	Open	23/10/26		
R16	16/10/26	RT → teams	Tell the other teams we hop in SRI/MRM (we leave 74, stay ≥ 6 MHz from 24 / 49 / 82); agree ≥ 15 m between boxes	Open	23/10/26		
R11	04/10/26	RT	Tests T0 and T2 done; D-R2b confirmed or reversed	Open	before QM		

Questions to ask

Atenea forum (posted by the project leader)

- **Allowed chips.** Is the nRF24L01+ on the Ebyte E01-ML01SP4 allowed? Its packet

Consultants

- **Anna Umbert** (spectrum regulation): please review the D-R6 hopping design for UN-85 a) at 20 dBm. Which plots

format is Nordic-proprietary and it has no Bluetooth.

- **20 dBm with hopping (Q3, updated 16 Oct).** A professor approved 20 dBm e.i.r.p.; please confirm in writing for our SRI/MRM mode (27-channel adaptive hopping with listen-before-talk per EN 300 328, ≤ 20 dBm e.i.r.p. measured; NM at 10 mW). What evidence do you want? Worth +10.5 dB on MRM.
- **Support height and box.** Is the support fixed at 70 cm? May the box stand on its 15 × 7 cm edge?
- **Cooperation.** May teams agree a common NM radio and an MRM channel split, sharing settings but not code?

(power, hop pattern, clear-channel threshold) should go in the ANNEX?

- **Concepción Santos / Carles Puente** (antennas): placing a flex omni inside a plastic box on a 70 cm support; measuring its in-box gain at the lab; effect of the battery, the foil and hands.
- **Paradells / Perelló** (protocols, with the protocols team): one channel per team in MRM and listen-before-talk in NM.

Files: `radio/MTP-F26_TeamC_Radio_LinkBudget.xlsx` (hand-in link budget, live formulas) · `radio/linkbudget.py` (same model, plus the MRM near-far printout) · `radio/phy_config.py` (radio profiles and checks) · `radio/fw/` (nRF24 driver and tests) · `radio/DECISIONS.md`, `HANDOFF_ET.md`, `NM_PHY_PROPOSAL.md`, `TEST_PLAN.md`, `ATENEA_QUESTIONS.md`. Repo: github.com/SantiBarrios2002/mtp-f26-teamc.

Primary sources: competition rules PDF (MTP F26, Network Upgrade III + Sustainability); Session #1 slides; AN5142 with the course annotations; CNAF 2017/2021 (BOE); nRF24L01+ Product Specification v1.0; Ebyte E01-ML01SP4, E01-2G4M27D and E01C manuals; Molex 146153 and Taoglas FXP73 antenna listings.