

Quasi-Zenith Satellite System  
Interface Specification  
DCX Service  
  
(IS-QZSS-DCX-003)

March, 2025

Cabinet Office

**Disclaimer of Liability**

The Cabinet Office, Government of Japan (“CAO”) and Quasi-Zenith Satellite System Services Inc. and other service providers of Quasi-Zenith Satellite System make the User Interface Specification (IS-QZSS) (“Document”) available to the public to promote the services using Quasi-Zenith Satellite System (“QZSS”) by development of receivers, applications and so on, and also are aiming for high accuracy and convenience with respect to satellite positioning services and message services of QZSS (collectively “Services”). The Services are freely available to any user. However, the receivers and/or applications developed based on this Document may not receive signals or may receive incorrect signals due to no warranty of the Services. You are therefore highly recommended to ensure appropriate measures to avoid accidents such as redundancy, backup and fail-safe, if you develop receivers and/or applications using the Services for the purpose that will possibly give an impact to human life, body and properties. The Services may be suspended or changed without prior notice in accordance with the decision by Government of Japan. This Document and the Services are available subject to the following terms and conditions. You may use this Document only if you agree to such terms and conditions. You shall be deemed to agree such terms and conditions by using this Document.

(1) With respect to this Document and the information included in this Document, the Cabinet Office, Government of Japan (“CAO”) and Quasi-Zenith Satellite System Services Inc. (“QSS”) disclaim all warranties of any kind, express or implied, including but not limited to, the followings:

- i) warranty of accuracy, completeness, usefulness, and fitness for a particular request or purpose;
- ii) warranty that this Document and the information included in this Document will not be changed in to the future; and
- iii) warranty that this Document and the information included in this Document do not infringe any third party’s intellectual property rights.

(2) With respect to satellite positioning services and message services (collectively “Services”), CAO and QSS disclaim all warranties of any kind, express or implied, from any cause whether it is related to Quasi-Zenith Satellite System, other outside systems or not, including but not limited to, the followings:

- i) warranty as to service area, accuracy, availability, continuity, and integrity described in this Document;
- ii) warranty of usefulness, and fitness for a particular request or purpose; and
- iii) warranty that the use of Services does not infringe any third party’s intellectual property rights.

(3) To the extent permitted by applicable laws, CAO and QSS shall not be responsible and liable for any damages and losses, including but not limited to, direct, indirect, incidental, special or consequential damages, whether under contractual liability, product liability, strict liability, tort liability or otherwise (including intent or negligence), caused by the use of this Document, the information included in this Document and the Services, the inability to use the Services, or the change of this Document and the information included in this Document.

*Document subject to the disclaimer of liability*

## Revision History

| Rev. No. | Date           | Page                                                            | Revision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------|----------------|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 001      | March 29,2024  | —                                                               | —                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 002      | October 3,2025 | 11, 12, 26, 28, 29, 34, 52, 56, 58, 75                          | Correction of errors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|          |                | 7, 8, 49<br>21, 22, 23, 24, 25<br><br>59<br>69<br>69<br>70      | Refinement of descriptions<br><ul style="list-style-type: none"> <li>Sections 4.2.1. and 5.2.<br/>-Refined description about Service Area.</li> <li>Section 4.2.3.11. (1)<br/>-Refined description on A11-Guidance to react library field.<br/>-Moved Table 5.10-1 in section 5.10. to Table 4.2-15 in section 4.2.3.11.</li> <li>Section 5.4.2.<br/>-Refined description regarding J-Alert cancellation.</li> <li>Section 5.8.<br/>-Added description of how to specify the target area.</li> <li>Section 5.8.1.<br/>-Changed the section title.</li> <li>Section 5.8.2.<br/>-Changed the section title.</li> </ul> |
|          |                | 37, 38, 39, 40<br><br>74                                        | Allowed combined use of A11 and the Extended Message (EX2-EX7).<br><ul style="list-style-type: none"> <li>Sections 4.2.4.1.2. – 4.2.4.1.7.</li> </ul> -Removed unnecessary description.<br><ul style="list-style-type: none"> <li>Section 5.10.<br/>-Revised the description of how to use the evacuation action instructions indicated in A11 and Extended</li> </ul> -Removed Figure 5.2-1.                                                                                                                                                                                                                        |
|          |                | 22                                                              | Adding new Evacuation Action Instruction List.<br><ul style="list-style-type: none"> <li>Section 4.2.3.11.</li> </ul> -Added new Evacuation Action Instruction List of "This is a test message for DCX." in Table 4.2-15, which is intended to be used during the test.                                                                                                                                                                                                                                                                                                                                              |
|          |                | 7,8,13,14,15,19, 20,21,22,35,36, 37,38,39,40,50, 52,54,57,68,74 | Delete the [tentative name] notation from “municipality transmitted information” and named “information from local government”.<br><ul style="list-style-type: none"> <li>Section 4.2.1.</li> <li>Sections 4.2.3.1.-4.2.3.3.</li> <li>Sections 4.2.3.9.-4.2.3.11.</li> <li>Table 4.2-15</li> <li>Section 4.2.3.17.</li> <li>Section 4.2.4.1.</li> <li>Sections 4.2.4.1.2.-4.2.4.1.3.</li> <li>Sections 4.2.4.1.4.-4.2.4.1.8.</li> <li>Section 5.2.</li> <li>Section 5.3.1.</li> <li>Section 5.4.</li> <li>Section 5.4.1.</li> <li>Section 5.7.</li> <li>Section 5.10.</li> </ul>                                     |
| 003      | March 28,2025  | 15, 54, 68                                                      | Change “Municipality” to “Local Government” of Provider Identifier definition for Japan<br><ul style="list-style-type: none"> <li>Sections 4.3.3.3.</li> <li>Table 4.2-6</li> <li>Sections 5.3.1</li> <li>Sections 5.7.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                   |

| Rev. No. | Date | Page                  | Revision                                                                                                                                                                                                                                                                                       |
|----------|------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |      | 37,41,42,45,69,<br>70 | Change “Municipality” to “city(s), town(s) and village(s)”. <ul style="list-style-type: none"><li>• Section 4.2.4.1.1.</li><li>• Table 4.2-21</li><li>• Section 4.2.4.2.1</li><li>• Table 4.2 24</li><li>• Section 4.2.4.2.2</li><li>• Figure 4.2-8</li><li>• Sections 5.8.1.-5.8.2.</li></ul> |

## Table of Contents

|                                                                                       |    |
|---------------------------------------------------------------------------------------|----|
| 1. Scope .....                                                                        | 1  |
| 2. Relevant Documents and Definition of Terms .....                                   | 2  |
| 2.1. Applicable Documents.....                                                        | 2  |
| 2.2. Reference Documents .....                                                        | 3  |
| 2.3. Abbreviations.....                                                               | 4  |
| 3. Signal Specifications .....                                                        | 5  |
| 4. Message Specifications.....                                                        | 6  |
| 4.1. Message Configuration .....                                                      | 6  |
| 4.1.1. Overview.....                                                                  | 6  |
| 4.1.2. Timing .....                                                                   | 6  |
| 4.1.3. Cyclic Redundancy Check (CRC) .....                                            | 6  |
| 4.1.4. Transmission Order of DCX Messages .....                                       | 6  |
| 4.2. Message Contents .....                                                           | 7  |
| 4.2.1. Overview.....                                                                  | 7  |
| 4.2.2. Satellite Designation (SD) .....                                               | 9  |
| 4.2.3. Common Alert Message Format (CAMF) .....                                       | 11 |
| 4.2.3.1. A1-Message Type .....                                                        | 13 |
| 4.2.3.2. A2-Country/Region Name .....                                                 | 14 |
| 4.2.3.3. A3-Provider Identifier .....                                                 | 15 |
| 4.2.3.4. A4-Hazard Category and Type.....                                             | 17 |
| 4.2.3.5. A5-Severity.....                                                             | 17 |
| 4.2.3.6. A6-Hazard Onset: Week Number .....                                           | 18 |
| 4.2.3.7. A7-Hazard Onset: Time of the Week .....                                      | 18 |
| 4.2.3.8. A8-Hazard Duration .....                                                     | 19 |
| 4.2.3.9. A9-Selection of Library .....                                                | 19 |
| 4.2.3.10. A10-Version of Library .....                                                | 20 |
| 4.2.3.11. A11-Guidance to react library.....                                          | 21 |
| 4.2.3.12. A12-Ellipse Centre Latitude .....                                           | 28 |
| 4.2.3.13. A13-Ellipse Centre Longitude.....                                           | 29 |
| 4.2.3.14. A14-Ellipse Semi-Major Axis .....                                           | 30 |
| 4.2.3.15. A15-Ellipse Semi-Minor Axis .....                                           | 32 |
| 4.2.3.16. A16-Ellipse Azimuth.....                                                    | 34 |
| 4.2.3.17. A17-Main Subject for Specific Settings .....                                | 35 |
| 4.2.3.18. A18-Specific Settings.....                                                  | 35 |
| 4.2.4. Extended Message .....                                                         | 36 |
| 4.2.4.1. DCX message (L-Alert), DCX message (information from local government) ..... | 36 |
| 4.2.4.1.1. EX1-Target Area Code .....                                                 | 37 |

|                                                                                                                                             |    |
|---------------------------------------------------------------------------------------------------------------------------------------------|----|
| 4.2.4.1.2. EX2-Evacuate Direction Type .....                                                                                                | 37 |
| 4.2.4.1.3. EX3-Additional Ellipse Centre Latitude .....                                                                                     | 38 |
| 4.2.4.1.4. EX4-Additional Ellipse Centre Longitude.....                                                                                     | 39 |
| 4.2.4.1.5. EX5-Additional Ellipse Semi-Major Axis .....                                                                                     | 39 |
| 4.2.4.1.6. EX6-Additional Ellipse Semi-Minor Axis .....                                                                                     | 39 |
| 4.2.4.1.7. EX7-Additional Ellipse Azimuth.....                                                                                              | 39 |
| 4.2.4.1.8. Vn-Version Number .....                                                                                                          | 40 |
| 4.2.4.2. DCX message (J-Alert).....                                                                                                         | 41 |
| 4.2.4.2.1. EX8-Target Area Code List Type .....                                                                                             | 41 |
| 4.2.4.2.2. EX9-Target Area Code List.....                                                                                                   | 42 |
| 4.2.4.2.3. Vn-Version Number .....                                                                                                          | 45 |
| 4.2.4.3. DCX message (information from organizations outside Japan).....                                                                    | 46 |
| 4.2.4.3.1. EX11-Organization Outside Japan-Specific Area .....                                                                              | 46 |
| 4.2.4.3.2. Vn-Version Number .....                                                                                                          | 46 |
| 4.3. MT44 NULL Message .....                                                                                                                | 47 |
| 4.4. DCX Message Output from the Receiver .....                                                                                             | 48 |
| 4.4.1. Sentence Format.....                                                                                                                 | 48 |
| 5. User Algorithm .....                                                                                                                     | 49 |
| 5.1. Relationship between Receiver Output and Display .....                                                                                 | 49 |
| 5.2. Service Area .....                                                                                                                     | 49 |
| 5.3. Examples of the Transmitted DCX message .....                                                                                          | 52 |
| 5.3.1. DCX message (L-Alert)/ DCX message (information from local government) ....                                                          | 52 |
| 5.3.2. DCX message (J-Alert) .....                                                                                                          | 56 |
| 5.4. Transmission Overview .....                                                                                                            | 57 |
| 5.4.1. DCX message (L-Alert)/ DCX message (information from local government) ....                                                          | 57 |
| 5.4.2. DCX message (J-Alert) .....                                                                                                          | 59 |
| 5.5. Message Duplication Checking Method .....                                                                                              | 61 |
| 5.6. SD - Satellite Designation Field Usage Method.....                                                                                     | 62 |
| 5.6.1. Overview.....                                                                                                                        | 62 |
| 5.6.2. Example of the Transmission Sequence .....                                                                                           | 64 |
| 5.6.3. Example of the User Algorithm .....                                                                                                  | 66 |
| 5.7. Method for Determining Types of Information Transmitted as MT44.....                                                                   | 68 |
| 5.8. Target Area Determination Method .....                                                                                                 | 69 |
| 5.8.1. Determining the target area of a DCX message (L-Alert) .....                                                                         | 69 |
| 5.8.2. Determining the target area of a DCX message (J-Alert) .....                                                                         | 70 |
| 5.9. Ellipse Inside/Outside Determination.....                                                                                              | 71 |
| 5.10. Referencing the Evacuation Action (DCX message (L-Alert), DCX message (J-Alert), DCX message (information from local government)..... | 74 |
| 5.11. Using the A8-Hazard Duration .....                                                                                                    | 75 |

## 1. Scope

This document describes the interface specifications of the satellite report for disaster and crisis management (Extended Information) (DCX) between the space segment of QZSS and the user segment. The interface specifications described herein include message specifications.

## 2. Relevant Documents and Definition of Terms

### 2.1. Applicable Documents

The following documents constitute part of this document within the scope defined in this document.

- (1) Quasi-Zenith Satellite System Interface Specification Sub-meter Level Augmentation Service (IS-QZSS-L1S)
- (2) Emergency Warning Satellite Service COMMON ALERT MESSAGE FORMAT SPECIFICATION
- (3) Identification code for cities, towns and villages ( JIS X 0402)

## 2.2. Reference Documents

There are no reference documents.

## 2.3. Abbreviations

|     |      |                                                                            |
|-----|------|----------------------------------------------------------------------------|
| -A- |      |                                                                            |
| -B- |      |                                                                            |
| -C- |      |                                                                            |
|     | CRC  | Cyclic Redundancy Check                                                    |
| -D- |      |                                                                            |
|     | DCX  | Satellite Report for Disaster and Crisis Management (Extended Information) |
| -F- |      |                                                                            |
| -G- |      |                                                                            |
| -H- |      |                                                                            |
| -I- |      |                                                                            |
| -J- |      |                                                                            |
| -K- |      |                                                                            |
| -L- |      |                                                                            |
| -M- |      |                                                                            |
|     | MT   | Message Type                                                               |
| -N- |      |                                                                            |
| -O- |      |                                                                            |
| -P- |      |                                                                            |
|     | PAB  | Preamble                                                                   |
| -Q- |      |                                                                            |
|     | QZSS | Quasi-Zenith Satellite System                                              |
| -R- |      |                                                                            |
| -S- |      |                                                                            |
|     | SLAS | Sub-meter Level Augmentation Service                                       |
| -T- |      |                                                                            |
| -U- |      |                                                                            |
|     | UTC  | Coordinated Universal Time                                                 |
| -V- |      |                                                                            |
| -W- |      |                                                                            |
| -X- |      |                                                                            |
| -Y- |      |                                                                            |
| -Z- |      |                                                                            |

### 3. Signal Specifications

DCX messages are transmitted by L1S signals as part of sub-meter level augmentation service (SLAS).

See Chapter 3 of the applicable document (1) for information about the signal specifications of L1S signals.



Messages with higher priority may interrupt this sequence and be transmitted first.

Due to such interruptions, the same message may not always be transmitted consecutively.

(2) Message transmission for use outside Japan

The transmission order of DCX messages is determined by the order in which they are received from outside Japan, with each message being transmitted as many times as received.

## 4.2. Message Contents

### 4.2.1. Overview

Message type 44 (MT44) is used to transmit DCX message (L-Alert), DCX message (J-Alert), DCX message (information from local government), and DCX message (information from organizations outside Japan).

DCX message (L-Alert) is created based on the evacuation information transmitted by the Foundation for MultiMedia Communications.

DCX message (J-Alert) is created based on the national protection information transmitted by the Fire and Disaster Management Agency and other national protection information.

DCX message (information from local government) is created based on the evacuation information transmitted by the local government.

DCX message (information from organizations outside Japan) is created based on the disaster organization control information received from organizations outside Japan.

Table 4.2-1 shows the information transmitted as MT44.

DCX message (L-Alert), DCX message (J-Alert) and DCX message (information from local government) are transmitted for users in Japan.

DCX message (Information from organizations outside Japan) is transmitted for users outside Japan.

See 5.2. for service areas of each service type.

Table 4.2-1 Information Transmitted as MT44

| Service type          | Transmitted Information                                    | Information Source Controlled by                                                     | Contents Transmitted                                                                                                                                                          |
|-----------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For Japan             | DCX message (L-Alert)                                      | Foundation for MultiMedia Communications                                             | Information created based on L-Alert (disaster information) received from the Foundation for MultiMedia Communications                                                        |
|                       | DCX message (J-Alert)                                      | Fire and Disaster Management Agency, Ministry of Internal Affairs and Communications | Information created based on J-Alert (national protection information) received from the Fire and Disaster Management Agency, Ministry of Internal Affairs and Communications |
|                       | DCX message (information from local government)            | Local Government                                                                     | Information created based on evacuation information received from the local government                                                                                        |
| For use outside Japan | DCX message (Information from organizations outside Japan) | Disaster prevention organization outside Japan                                       | Information created based on disaster information received from organizations outside Japan                                                                                   |

In the format of MT44, the 10-bit Satellite Designation (SD), 122-bit Common Alert Message Format (CAMF), and 74-bit Extended Message fields follow the MT field.

Figure 4.2-1 shows the format of MT44. See the applicable document (2) for details on CAMF.

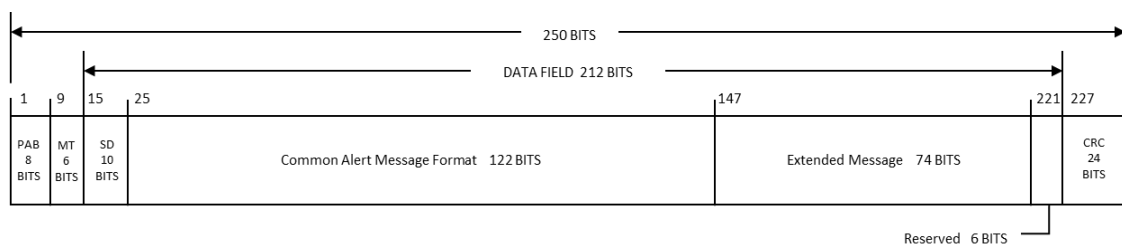


Figure 4.2-1 MT44 Format

#### 4.2.2. Satellite Designation (SD)

This field consists of the service type indicating which QZSS satellite transmits MT44 for Japan and which QZSS satellite transmits MT44 for use outside Japan and the information notifying the receiver about which QZSS satellite is transmitting MT44. Table 4.2-2 shows the field format. See 5.6 for details.

Table 4.2-2 Satellite Designation (SD) Field Format

| Parameter        | Name                            | Number of Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------|---------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SDMT             | Satellite Designation Mask Type | 1              | Satellite designation information mask type<br>Indicates the type of SDM (satellite designation information mask), which is one of the following.<br>"0": Service type. SDM indicates the service type indicating whether MT44 is for Japan or for use outside Japan.<br>"1": MT44 transmission status. SDM indicates the MT44 transmission status.<br>* The "MT44 transmission status" is transmitted infrequently, such as once a minute. |
| SDM              | Satellite Designation Mask      | 9              | Satellite designation information mask<br>Each bit indicates the satellite designation information of one of the 9 satellites.<br>When SDMT is "0", the bit indicates the service type of the corresponding satellite.<br>"0": For Japan<br>"1": For use outside Japan<br>When SDMT is "1", the bit indicates the MT44 transmission status of the corresponding satellite.<br>"0": Transmission stopped<br>"1": Transmission in progress    |
| Bit <sub>1</sub> | Satellite (1)                   | 1              | Satellite designation information of Satellite (1)                                                                                                                                                                                                                                                                                                                                                                                          |
| Bit <sub>2</sub> | Satellite (2)                   | 1              | Satellite designation information of Satellite (2)                                                                                                                                                                                                                                                                                                                                                                                          |
| Bit <sub>3</sub> | Satellite (3)                   | 1              | Satellite designation information of Satellite (3)                                                                                                                                                                                                                                                                                                                                                                                          |
| Bit <sub>4</sub> | Satellite (4)                   | 1              | Satellite designation information of Satellite (4)                                                                                                                                                                                                                                                                                                                                                                                          |
| Bit <sub>5</sub> | Satellite (5)                   | 1              | Satellite designation information of Satellite (5)                                                                                                                                                                                                                                                                                                                                                                                          |
| Bit <sub>6</sub> | Satellite (6)                   | 1              | Satellite designation information of Satellite (6)                                                                                                                                                                                                                                                                                                                                                                                          |

| Parameter |                  | Name          | Number of Bits | Description                                        |
|-----------|------------------|---------------|----------------|----------------------------------------------------|
|           | Bit <sub>7</sub> | Satellite (7) | 1              | Satellite designation information of Satellite (7) |
|           | Bit <sub>8</sub> | Satellite (8) | 1              | Satellite designation information of Satellite (8) |
|           | Bit <sub>9</sub> | Satellite (9) | 1              | Satellite designation information of Satellite (9) |

#### 4.2.3. Common Alert Message Format (CAMF)

Figure 4.2-2 shows the message format of the Common Alert Message Format. Table 4.2-3 shows the parameter definition. Details for each field are presented starting from section 4.2.3.1. The tables within each section outline the contents of these fields and are designed to aid user understanding. It should be noted that some tables only illustrate a part of the contents as examples. See the applicable document (2) for details on CAMF.

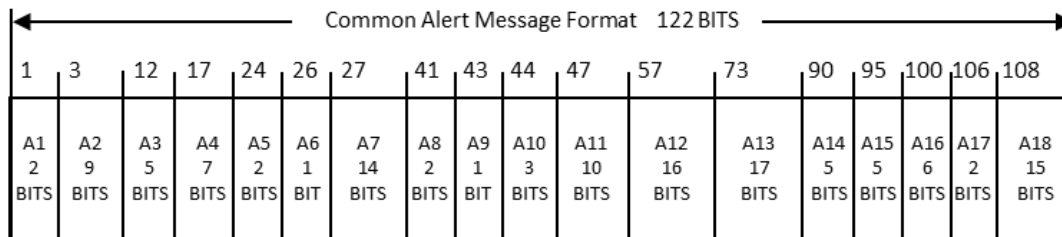


Figure 4.2-2 Common Alert Message Format (CAMF) Message Format

Table 4.2-3 Common Alert Message Format (CAMF) Parameter Definition

| Parameter | Description                                     | Number of Bits |
|-----------|-------------------------------------------------|----------------|
| A1        | Message Type<br>→ See 4.2.3.1                   | 2              |
| A2        | Country/Region Name<br>→ See 4.2.3.2            | 9              |
| A3        | Provider Identifier<br>→ See 4.2.3.3            | 5              |
| A4        | Hazard Category and Type<br>→ See 4.2.3.4       | 7              |
| A5        | Severity<br>→ See 4.2.3.5                       | 2              |
| A6        | Hazard Onset: Week Number<br>→ See 4.2.3.6      | 1              |
| A7        | Hazard Onset: Time of the Week<br>→ See 4.2.3.7 | 14             |
| A8        | Hazard Duration<br>→ See 4.2.3.8                | 2              |
| A9        | Selection of Library<br>→ See 4.2.3.9           | 1              |
| A10       | Version of Library<br>→ See 4.2.3.10            | 3              |
| A11       | Guidance to react library<br>→ See 4.2.3.11     | 10             |
| A12       | Ellipse Centre Latitude<br>→ See 4.2.3.12       | 16             |
| A13       | Ellipse Centre Longitude<br>→ See 4.2.3.13      | 17             |
| A14       | Ellipse Semi-Major Axis<br>→ See 4.2.3.14       | 5              |

| Parameter | Description                                          | Number of Bits |
|-----------|------------------------------------------------------|----------------|
| A15       | Ellipse Semi-Minor Axis<br>→ See 4.2.3.15            | 5              |
| A16       | Ellipse Azimuth<br>→ See 4.2.3.16                    | 6              |
| A17       | Main Subject for Specific Settings<br>→ See 4.2.3.17 | 2              |
| A18       | Specific Settings<br>→ See 4.2.3.18                  | 15             |

#### 4.2.3.1. A1-Message Type

This field is a 2-bit code indicating the message type.

The message types are Test, Alert, Update, and All Clear.

Table 4.2-4 shows the message types.

Table 4.2-4 Message Type

| Code [2bits] | Message Type |
|--------------|--------------|
| 00           | Test         |
| 01           | Alert        |
| 10           | Update       |
| 11           | All Clear    |

“00” (Test) indicates test transmission. It is used for training and system testing on the user receiver side.

“01” (Alert) indicates the occurrence of an alert.

“10” (Update) indicates that a field other than A2-Country/Region Name, A3-Provider Identifier, and A4-Hazard Category and Type has been updated. For DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government), an alert is identified according to the following conditions.

- DCX message (L-Alert), DCX message (information from local government)

The values of the A2, A3, A4, and EX1 fields match.

- DCX message (J-Alert)

The values of the A2, A3, and A4 fields match.

“11” (All Clear) indicates the end of an alert. For DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government), an alert is identified in the same way as “10” (Update).

## 4.2.3.2. A2-Country/Region Name

This field is a 9-bit code that indicates the country or region issuing the alert.

Table 4.2-5 shows the contents of Country/Region Name.

In the case of DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government), the code is fixed to "001101111" indicating Japan.

Table 4.2-5 Country/Region Name

| Code [9 bits] | Country Name |
|---------------|--------------|
| 000000000     | Afghanistan  |
| 000000001     | Albania      |
| 000000010     | Antarctica   |
| . . .         | . . .        |
| 001101111     | Japan        |
| . . .         | . . .        |
| 011111000     | Zambia       |
| 011111001     | Reserved     |
| . . .         | . . .        |
| 111111111     | Reserved     |

#### 4.2.3.3. A3-Provider Identifier

This field is a 5-bit code that indicates the organization issuing the alert message.

Table 4.2-6 shows the contents of Provider Identifier.

In the case of DCX message (L-Alert), the code is fixed to "00001" (FMMC).

In the case of DCX message (J-Alert), "00010" (FDMA) or "00011" (Related Ministries) is specified.

In the case of DCX message (information from local government), the code is fixed to "00100" (Local Government).

Table 4.2-6 Provider Identifier

| Code<br>[5 bits] | Provider<br>ID | Provider Name<br>(Japan)                                 | Provider Name<br>(Australia)                                                        | Provider Name<br>(Fiji)                                | Provider Name<br>(Thailand)                                         |
|------------------|----------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------------------------|
| 00000            | 0              | not used                                                 | not used                                                                            | not used                                               | not used                                                            |
| 00001            | 1              | Foundation for<br>MultiMedia<br>Communications<br>(FMMC) | National<br>Emergency<br>Management<br>Agency (NEMA)                                | National<br>Disaster<br>Management<br>Office (NDMO)    | Department of<br>Disaster<br>Prevention and<br>Mitigation<br>(DDPM) |
| 00010            | 2              | Fire and Disaster<br>Management<br>Agency (FDMA)         | Bureau of<br>Meteorology<br>(BOM)                                                   | Fiji<br>Meteorological<br>Service (FMS)                | Thai<br>Meteorological<br>Department<br>(TMD)                       |
| 00011            | 3              | Related Ministries                                       | Australian<br>Climate Service<br>(ACS)                                              | Hydrology<br>Section, Fiji<br>Water Authority<br>(FWA) | National Disaster<br>Warning Center<br>(NDWC)                       |
| 00100            | 4              | Local<br>Government                                      | Geoscience<br>Australia (GA)                                                        | Mineral<br>Resources<br>Department<br>(MRD)            | Department of<br>Mineral<br>Resources (DMR)                         |
| 00101            | 5              | Reserved                                                 | Commonwealth<br>Scientific and<br>Industrial<br>Research<br>Organisation<br>(CSIRO) | Fiji<br>Broadcasting<br>Corporation<br>(FBC)           | Navy<br>Hydrographic<br>Department,<br>Royal Thai Navy<br>(RTN)     |
| 00110            | 6              | Reserved                                                 | Australian Bureau<br>of Statistics<br>(ABS)                                         | Reserved                                               | Department of<br>Water Resources<br>(DWR)                           |
| 00111            | 7              | Reserved                                                 | Resilience New<br>South Wales<br>(Resilience NSW)                                   | Reserved                                               | Royal Irrigation<br>Department (RID)                                |
| 01000            | 8              | Reserved                                                 | State Emergency<br>Service New<br>South Wales<br>(SES)                              | Reserved                                               | Department of<br>Pollution Control<br>(DPC)                         |

| Code<br>[5 bits] | Provider<br>ID | Provider Name<br>(Japan) | Provider Name<br>(Australia)                          | Provider Name<br>(Fiji) | Provider Name<br>(Thailand)                                                     |
|------------------|----------------|--------------------------|-------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------|
| 01001            | 9              | Reserved                 | New South Wales<br>Rural Fire Service<br>(NSW RFS)    | Reserved                | Geo-Informatics<br>and Space<br>Technology<br>Development<br>Agency<br>(GISTDA) |
| 01010            | 10             | Reserved                 | Joint Australian<br>Tsunami Warning<br>Centre (JATWC) | Reserved                | Electricity<br>Generating<br>Authority of<br>Thailand (EGAT)                    |
| 01011            | 11             | Reserved                 | Flood Knowledge<br>Centre (FKC)                       | Reserved                | Royal Forest<br>Department<br>(RFD)                                             |
| 01100            | 12             | Reserved                 | Australian<br>Broadcasting<br>Corporation<br>(ABC)    | Reserved                | Department of<br>Parks, Wildlife<br>and Plant<br>Conservation<br>(DPWPC)        |
| 01101            | 13             | Reserved                 | Reserved                                              | Reserved                | Water Crisis<br>Prevention Center<br>(WCPC)                                     |
| 01110            | 14             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 01111            | 15             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10000            | 16             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10001            | 17             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10010            | 18             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10011            | 19             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10100            | 20             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10101            | 21             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10110            | 22             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 10111            | 23             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11000            | 24             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11001            | 25             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11010            | 26             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11011            | 27             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11100            | 28             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11101            | 29             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11110            | 30             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |
| 11111            | 31             | Reserved                 | Reserved                                              | Reserved                | Reserved                                                                        |

#### 4.2.3.4. A4-Hazard Category and Type

This field is a 7-bit code indicating the hazard type of the issued alert.

Table 4.2-7 shows the contents of Hazard Category and Type.

See the applicable document (2) for information about the details of the code.

Table 4.2-7 Hazard Category and Type

| Code [7 bits] | Hazard Category and Type       |
|---------------|--------------------------------|
| 0000000       | not used                       |
| 0000001       | CBRNE - Air Strike             |
| 0000010       | CBRNE - Attack on IT Systems   |
| . . .         | . . .                          |
| 0010010       | ENVIRONMENT - Marine Pollution |
| . . .         | . . .                          |
| 0011011       | FIRE - Forest Fire             |
| . . .         | . . .                          |
| 0101100       | GEO - Tsunami                  |
| . . .         | . . .                          |
| 0110011       | HEALTH - Pandemic              |
| . . .         | . . .                          |
| 1001101       | MET - Storm or Thunderstorm    |
| . . .         | . . .                          |
| 1110000       | TRANSPORT - Tunnel accident    |
| 1110001       | OTHER - Test Alert             |
| 1110010       | reserved                       |
| . . .         | . . .                          |
| 1111111       | reserved                       |

#### 4.2.3.5. A5-Severity

This field is a 2-bit code indicating the severity of the alert.

Table 4.2-8 shows the contents of Severity.

Table 4.2-8 Severity

| Code [2bits] | Severity                                           |
|--------------|----------------------------------------------------|
| 00           | Unknown                                            |
| 01           | Moderate-Possible threat to life or property       |
| 10           | Severe - Significant threat to life or property    |
| 11           | Extreme - Extraordinary threat to life or property |

#### 4.2.3.6. A6-Hazard Onset: Week Number

This field is a 1-bit code indicating the week a hazard is expected to occur (either the current week or the following week).

Table 4.2-9 shows the contents of Hazard Onset: Week Number.

Table 4.2-9 Hazard Onset: Week Number

| Code [1bit] | Week    |
|-------------|---------|
| 0           | Current |
| 1           | Next    |

#### 4.2.3.7. A7-Hazard Onset: Time of the Week

This field is a 14-bit code indicating the exact time a hazard is expected to occur within the week specified in the A6-Hazard Onset: Week Number, with a resolution of 1 minute. The time is represented in UTC.

Table 4.2-10 shows the contents of Hazard Onset: Time of the Week.

Table 4.2-10 Hazard Onset: Time of the Week

| Code [14 bits] | Day/Hour/Min (UTC) |
|----------------|--------------------|
| 00000000000000 | not used           |
| 00000000000001 | MONDAY - 00:00 AM  |
| 00000000000010 | MONDAY - 00:01 AM  |
| 00000000000011 | MONDAY - 00:02 AM  |
| . . .          | . . .              |
| 10011101011110 | SUNDAY - 11:57 PM  |
| 10011101011111 | SUNDAY - 11:58 PM  |
| 10011101100000 | SUNDAY - 11:59 PM  |
| 10011101100001 | not used           |
| . . .          | . . .              |
| 11111111111111 | not used           |

#### 4.2.3.8. A8-Hazard Duration

This field is a 2-bit code indicating the valid duration in which an alert is expected (the unit is the hour (H)).

Table 4.2-11 shows the contents of Hazard Duration.

This field can be used for the recipient to clear expired alerts. Even if the "All Clear" message is not transmitted, the receiving side can judge whether an alert is active or not, by referencing this field and comparing its value with the current time.

Table 4.2-11 Hazard Duration

| Code [2bits] | Duration             |
|--------------|----------------------|
| 00           | Unknown              |
| 01           | Duration < 6H        |
| 10           | 6H ≤ Duration < 12H  |
| 11           | 12H ≤ Duration < 24H |

#### 4.2.3.9. A9-Selection of Library

This field uses a 1-bit code to distinguish between the International library and the Country/region guidance library for identifying which guidance library to utilize.

Table 4.2-12 shows the contents of Selection of Library.

The International library was created by the European Commission based on the inputs from EU member nations.

The Country/region guidance library is one created by each individual country or region. In the case of DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government), the code is fixed to "1" (Country/region guidance library).

Table 4.2-12 Selection of Library

| Code [1 bit] | Library                         |
|--------------|---------------------------------|
| 0            | International library           |
| 1            | Country/region guidance library |

#### 4.2.3.10. A10-Version of Library

This field is a 3-bit code indicating the version of the guidance library to be used.

Table 4.2-13 shows the contents of Version of Library.

In the case of DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government), the code is fixed to “000” (Library version = #1).

Table 4.2-13 Version of Library

| Code [3 bits] | Library version |
|---------------|-----------------|
| 000           | #1              |
| 001           | #2              |
| 010           | #3              |
| 011           | #4              |
| 100           | #5              |
| 101           | #6              |
| 110           | #7              |
| 111           | #8              |

#### 4.2.3.11. A11-Guidance to react library

This field is a 10-bit code indicating evacuation action instructions.

The field consists of two different lists. An instruction is selected from each list, and the selected instructions are combined and used.

The contents of the lists are described below.

- (1) DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government)

Note: Because the field format and content differ from CAME, refer to this section instead of applicable document (2).

The field consists of the following two lists.

- Basic instruction
- Basic instruction information

Figure 4.2-3 shows the format of the Guidance to react library field. Table 4.2-14 shows the contents of the field. The first two bits of the 10-bit field represent the “Basic Instruction,” while the remaining eight bits represent the “Basic Instruction Information.” When the first two bits are not 00, the evacuation action instructions are expressed by combining the two lists. When the first two bits are 00, the evacuation action instructions are expressed using the entire 10-bit value, rather than by combining the two lists. All patterns of evacuation action instructions are shown in Table 4.2-15.

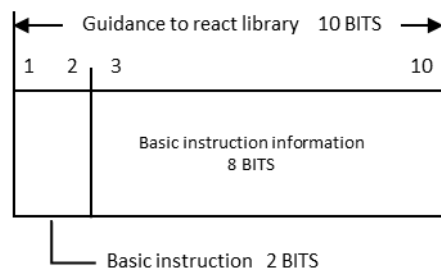


Figure 4.2-3 Format of the Guidance to react library Field (DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government))

Table 4.2-14 Guidance to react library (1/2) Bits 1-2 (Basic instruction)

| Code [bits 1-2] | Basic instruction  |
|-----------------|--------------------|
| 00              | “” (Not specified) |
| 01              | “Stay”             |
| 10              | “Move to/toward”   |
| 11              | “Keep away from”   |

Table 4.2-14 Guidance to react library (2/2) Bits 3-10 (Basic instruction information)

Document subject to the disclaimer of liability

| Code [bits 3-10]           | Basic instruction information                                   |
|----------------------------|-----------------------------------------------------------------|
| 00000000                   | "" (Not specified)                                              |
| 00000001                   | "Under/inside a solid structure"                                |
| 00000010                   | "3rd floor or higher"                                           |
| 00000011                   | "Underground"                                                   |
| 00000100                   | "Mountain"                                                      |
| 00000101                   | "Water area"                                                    |
| 00000110                   | "Building where chemicals are handled, such as a factory"       |
| 00000111                   | "Cliffs and areas at risk of collapse"                          |
| 00001000<br>to<br>01111110 | Reserved                                                        |
| 01111111                   | "Take the best immediate action to save your life."             |
| 10000000<br>to<br>11111110 | Reserved for the evacuation action instruction text for J-Alert |
| 11111111                   | "Take the best immediate action to save your life."             |

Table 4.2-15 Evacuation Action Instruction List

| A11 - Guidance Instruction Library[10 bits] |                          | Evacuation Action Instruction Text                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit1-2                                      | bit3-10                  |                                                                                                                                                                                                                                                                                                                                                              |
| "00"                                        | "00000000"               | "" (Not specified)<br>In the case of DCX message (information from local government), reference EX2 to EX7.                                                                                                                                                                                                                                                  |
| "00"                                        | "00000001"               | "Take the best immediate action to save your life."<br>"直ちに命を守るための最善の行動を。"                                                                                                                                                                                                                                                                                   |
| "00"                                        | "00000010" to "01111101" | Reserved                                                                                                                                                                                                                                                                                                                                                     |
| "00"                                        | "01111110"               | "This is a test message for DCX."<br>"これは、DCX のテストです。"                                                                                                                                                                                                                                                                                                       |
| "00"                                        | "01111111"               | "Take the best immediate action to save your life."<br>"直ちに命を守るための最善の行動を。"                                                                                                                                                                                                                                                                                   |
| "00"                                        | "10000000"               | "Missile launched, missile launched. It is believed that a missile was launched. Please take shelter inside buildings or underground."<br>"ミサイル発射。ミサイル発射。ミサイルが発射されたものとみられます。建物の中、又は地下に避難して下さい。"                                                                                                                                                              |
| "00"                                        | "10000001"               | "Missile passed, missile passed. It is believed that the previous missile has passed over the area. The call for evacuation will be canceled. If you find any suspicious object, please stay away from it and inform the police or the fire department immediately."<br>"ミサイル通過。ミサイル通過。先程のミサイルは通過したものとみられます。避難の呼びかけを解除します。不審なものには決して近寄らず直ちに警察や消防などに連絡して下さい。" |

Document subject to the disclaimer of liability

| A11 - Guidance Instruction Library[10 bits] |                          | Evacuation Action Instruction Text                                                                                                                                                                                                 |
|---------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit1-2                                      | bit3-10                  |                                                                                                                                                                                                                                    |
| "00"                                        | "10000010"               | "It is believed that the previous missile has dropped in the sea. The call for evacuation will be canceled. If you find any suspicious object, please stay away from it and inform the police or the fire department immediately." |
|                                             |                          | "先程のミサイルは、海に落下したものとみられます。避難の呼びかけを解除します。不審なものには決して近寄らず直ちに警察や消防などに連絡して下さい。"                                                                                                                                                          |
| "00"                                        | "10000011"               | "It is believed that the previous missile will not come to Japan. The call for evacuation will be canceled."                                                                                                                       |
|                                             |                          | "先程のミサイルは、我が国には飛来しないものとみられます。避難の呼びかけを解除します。"                                                                                                                                                                                       |
| "00"                                        | "10000100"               | "Take shelter immediately, take shelter immediately. Please take shelter inside buildings or underground. It is believed that a missile will drop around this area. Please take shelter immediately."                              |
|                                             |                          | "直ちに避難。直ちに避難。直ちに建物の中、又は地下に避難して下さい。ミサイルが、周辺に落下するものとみられます。直ちに避難して下さい。"                                                                                                                                                               |
| "00"                                        | "10000101"               | "The previous missile has been intercepted and destroyed. There is a possibility of pieces of the destroyed missile dropping. We will keep you informed. Please stay indoors for shelter."                                         |
|                                             |                          | "先程のミサイルは、迎撃により破壊されました。ミサイルの破片の落下の可能性があります。続報を伝達しますので、引き続き屋内に避難して下さい。"                                                                                                                                                             |
| "00"                                        | "10000110"               | "Missile dropped, missile dropped. It is believed that a missile has dropped around this area. We will keep you informed. Please stay indoors for shelter."                                                                        |
|                                             |                          | "ミサイル落下。ミサイル落下。ミサイルが、周辺に落下したものとみられます。続報を伝達しますので、引き続き屋内に避難して下さい。"                                                                                                                                                                   |
| "00"                                        | "10000111"               | "It is believed that the previous missile will not drop in Japan. The call for evacuation will be canceled."                                                                                                                       |
|                                             |                          | "先程のミサイルは、我が国には落下しないものとみられます。避難の呼びかけを解除します。"                                                                                                                                                                                       |
| "00"                                        | "10001000"               | "This is a test message for J-Alert."                                                                                                                                                                                              |
|                                             |                          | "これは、J アラートのテストです。"                                                                                                                                                                                                                |
| "00"                                        | "10001001" to "11111110" | To be used in the evacuation action instruction text for J-Alert (reserved).                                                                                                                                                       |

| A11 - Guidance Instruction Library[10 bits] |                          | Evacuation Action Instruction Text                                                                |
|---------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------|
| bit1-2                                      | bit3-10                  |                                                                                                   |
| "00"                                        | "11111111"               | "Take immediate action to save your life."<br>"直ちに命を守るための最善の行動を。"                                 |
| "01"                                        | "00000000"               | "Stay."<br>"留まれ。"                                                                                 |
|                                             |                          | "Stay. Under/inside a solid structure."<br>"留まれ。頑丈なものの下/中。"                                       |
| "01"                                        | "00000001"               | "Stay. 3rd floor or higher."<br>"留まれ。3 階以上。"                                                      |
|                                             |                          | "Stay. Underground."<br>"留まれ。地下。"                                                                 |
| "01"                                        | "00000010"               | "Stay. Mountain."<br>"留まれ。山。"                                                                     |
|                                             |                          | "Stay. Water area."<br>"留まれ。水場。"                                                                  |
| "01"                                        | "00000011"               | "Stay. Building where chemicals are handled, such as a factory."<br>"留まれ。工場等化学系を取扱う建物。"           |
|                                             |                          | "Stay. Cliffs and areas at risk of collapse."<br>"留まれ。崖等崩れやすい場所。"                                 |
| "01"                                        | "00001000" to "01111111" | Reserved                                                                                          |
| "01"                                        | "10000000" to "11111111" | To be used in the evacuation action instruction text for J-Alert (reserved).                      |
| "10"                                        | "00000000"               | " Move to/toward"<br>"向かえ。"                                                                       |
|                                             |                          | " Move to/toward Under/inside a solid structure."<br>"向かえ。頑丈なものの下/中。"                             |
| "10"                                        | "00000001"               | " Move to/toward 3rd floor or higher."<br>"向かえ。3 階以上。"                                            |
|                                             |                          | " Move to/toward Underground."<br>"向かえ。地下。"                                                       |
| "10"                                        | "00000010"               | " Move to/toward Mountain."<br>"向かえ。山。"                                                           |
|                                             |                          | " Move to/toward Water area."<br>"向かえ。水場。"                                                        |
| "10"                                        | "00000011"               | " Move to/toward Building where chemicals are handled, such as a factory."<br>"向かえ。工場等化学系を取扱う建物。" |
|                                             |                          | " Move to/toward Cliffs and areas at risk of collapse."<br>"向かえ。崖等崩れやすい場所。"                       |
| "10"                                        | "00001000" to "01111111" | Reserved                                                                                          |
| "10"                                        | "10000000" to "11111111" | Reserved for the evacuation action instruction text for J-Alert.                                  |
| "11"                                        | "00000000"               | "Keep away from"<br>"離れろ。"                                                                        |
|                                             |                          | "Keep away from Under/inside a solid structure."<br>"離れろ。頑丈なものの下/中。"                              |

| A11 - Guidance Instruction Library[10 bits] |                          | Evacuation Action Instruction Text                                                               |
|---------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------|
| bit1-2                                      | bit3-10                  |                                                                                                  |
| "11"                                        | "00000010"               | "Keep away from 3rd floor or higher."<br>"離れろ。3 階以上。"                                            |
| "11"                                        | "00000011"               | "Keep away from Underground."<br>"離れろ。地下。"                                                       |
| "11"                                        | "00000100"               | "Keep away from Mountain."<br>"離れろ。山。"                                                           |
| "11"                                        | "00000101"               | "Keep away from Water area."<br>"離れろ。水場。"                                                        |
| "11"                                        | "00000110"               | "Keep away from Building where chemicals are handled, such as a factory."<br>"離れろ。工場等化学系を取扱う建物。" |
| "11"                                        | "00000111"               | "Keep away from Cliffs and areas at risk of collapse."<br>"離れろ。崖等崩れやすい場所。"                       |
| "11"                                        | "00001000" to "01111111" | Reserved                                                                                         |
| "11"                                        | "10000000" to "11111111" | Reserved for the evacuation action instruction text for J-Alert.                                 |

(2) DCX message (information from organizations outside Japan)

When bit 1 of the A9 field is “0” (International library), the field consists of the two lists mentioned below.

- List A: General required action
- List B: Monitoring + Required action

Figure 4.2-4 shows the format of the field. Table 4.2-16 shows the contents of the field.

When bit 1 of the A9 field is “1” (Country/region guidance library), the library created by the country or region indicated in the A2 field is used. Details are undecided.

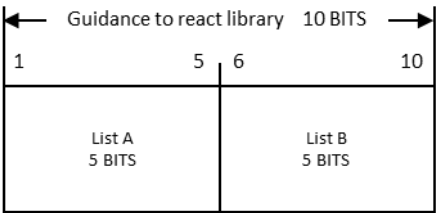


Figure 4.2-4 Format of the Guidance to react library Field (DCX message (information from organizations outside Japan))

Table 4.2-16 Guidance to react library (1/2) Bits 1-5 (List A: General required action)

| Code<br>[bits 1-5] | Instruction<br>Code | Instruction list – EN                                                                                                                                                                   |
|--------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00000              | IC-A-01             | [empty]                                                                                                                                                                                 |
| 00001              | IC-A-02             | You are in the danger zone, leave the area immediately. Listen to radio or media for directions and information.                                                                        |
| 00010              | IC-A-03             | You are in the danger zone, leave the area immediately and reach the evacuation point indicated by the area plotted in yellow. Listen to radio or media for directions and information. |
| 00011              | IC-A-04             | Seek shelter in a building immediately. Stay under cover and stay informed.                                                                                                             |
| . . .              | . . .               | . . .                                                                                                                                                                                   |
| 11111              | IC-A-32             | Conditions have improved and are no longer expected to meet alert criteria.                                                                                                             |

Table 4.2-16 Guidance to react library (2/2) Bits 6-10 (List B: Monitoring + Required action)

| Code<br>[bits 6-10] | Instruction<br>Code | Instruction list – EN                                                                                                                    |
|---------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 00000               | IC-B-01             | [empty]                                                                                                                                  |
| 00001               | IC-B-02             | Check with the weather services and local authorities for additional information                                                         |
| 00010               | IC-B-03             | Find out the location of the information points set up by the authorities on official channels (radio, internet, TV, social networks...) |
| 00011               | IC-B-04             | Sensitive or vulnerable people should not go out unless they must.                                                                       |
| . . .               | . . .               | . . .                                                                                                                                    |
| 11111               | IC-B-32             | This replaces the warning previously in effect for this area.                                                                            |

## 4.2.3.12. A12-Ellipse Centre Latitude

This field is a 16-bit code indicating the ellipse centre latitude.

Latitude in the range of  $-90^{\circ}$  to  $90^{\circ}$  is expressed while equally divided by the assigned 16 bits.

The relational expression of the code value and latitude is shown below. (A12 is converted to a decimal number when assigned.)

$$\text{Latitude [deg]} = -90 + \frac{180}{2^{16} - 1} A12$$

(Calculation example) When A12 = “1011001011000001”

When “1011001011000001” is converted to a decimal number, the result is “45761”.

This is assigned to the above expression. The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place). Therefore, the calculation is as follows.

$$\text{Latitude [deg]} = -90 + (180 \div ((2^{16}) - 1)) \times 45761 \doteq 35.688$$

For DCX message (J-Alert), this field is not used (fixed to “0000000000000000”).

#### 4.2.3.13. A13-Ellipse Centre Longitude

This field is a 17-bit code indicating the ellipse centre longitude.

Longitude in the range of  $-180^{\circ}$  to  $180^{\circ}$  is expressed while equally divided by the assigned 17 bits.

The relational expression of the code value and longitude is shown below. (A13 is converted to a decimal number when assigned.)

$$\text{Longitude [deg]} = -180 + \frac{360}{2^{17} - 1} A13$$

(Calculation example) When A13 = “11100011010101011”

When “11100011010101011” is converted to a decimal number, the result is “116395”.

This is assigned to the above expression. The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place). Therefore, the calculation is as follows.

$$\text{Longitude [deg]} = -180 + (360 \div ((2^{17}) - 1)) \times 116395 \doteq 139.691$$

For DCX message (J-Alert), this field is not used (fixed to “0000000000000000”).

## 4.2.3.14. A14-Ellipse Semi-Major Axis

This field is a 5-bit code indicating the ellipse semi-major axis length.

The relational expression of the code value and ellipse semi-major axis length is shown below.

(a is an integer between 0 and 31.)

$$Radius[m] = 10^{Log10(Min Radius) + \frac{a (Log10(Max Radius) - Log10(Min Radius))}{Max a}}$$

Max Radius[m] = 2500000

Min Radius[m] = 216.20

Max a = 31

The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place).

Table 4.2-17 shows the contents of Ellipse Semi-Major Axis.

Table 4.2-17 Ellipse Semi-Major Axis

| Code [5 bits] | a  | Radius [km] |
|---------------|----|-------------|
| 00000         | 0  | 0.216       |
| 00001         | 1  | 0.292       |
| 00010         | 2  | 0.395       |
| 00011         | 3  | 0.535       |
| 00100         | 4  | 0.723       |
| 00101         | 5  | 0.978       |
| 00110         | 6  | 1.322       |
| 00111         | 7  | 1.788       |
| 01000         | 8  | 2.418       |
| 01001         | 9  | 3.269       |
| 01010         | 10 | 4.421       |
| 01011         | 11 | 5.979       |
| 01100         | 12 | 8.085       |
| 01101         | 13 | 10.933      |
| 01110         | 14 | 14.784      |
| 01111         | 15 | 19.992      |
| 10000         | 16 | 27.035      |
| 10001         | 17 | 36.559      |
| 10010         | 18 | 49.439      |
| 10011         | 19 | 66.855      |
| 10100         | 20 | 90.407      |
| 10101         | 21 | 122.255     |
| 10110         | 22 | 165.324     |
| 10111         | 23 | 223.564     |
| 11000         | 24 | 302.322     |
| 11001         | 25 | 408.824     |
| 11010         | 26 | 552.846     |
| 11011         | 27 | 747.603     |
| 11100         | 28 | 1010.970    |
| 11101         | 29 | 1367.116    |

| Code [5 bits] | a  | Radius [km] |
|---------------|----|-------------|
| 11110         | 30 | 1848.727    |
| 11111         | 31 | 2500.000    |

For DCX message (J-Alert), this field is not used (fixed to “00000”).

## 4.2.3.15. A15-Ellipse Semi-Minor Axis

This field is a 5-bit code indicating the ellipse semi-minor axis length.

The relational expression of the code value and ellipse semi-minor axis length is shown below.

(a is an integer between 0 and 31.)

$$Radius[m] = 10^{Log10(Min Radius) + \frac{a (Log10(Max Radius) - Log10(Min Radius))}{Max a}}$$

Max Radius[m] = 2500000

Min Radius[m] = 216.20

Max a = 31

The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place).

Table 4.2-18 shows the contents of Ellipse Semi-Minor Axis.

Table 4.2-18 Ellipse Semi-Minor Axis

| Code [5 bits] | a  | Radius [km] |
|---------------|----|-------------|
| 00000         | 0  | 0.216       |
| 00001         | 1  | 0.292       |
| 00010         | 2  | 0.395       |
| 00011         | 3  | 0.535       |
| 00100         | 4  | 0.723       |
| 00101         | 5  | 0.978       |
| 00110         | 6  | 1.322       |
| 00111         | 7  | 1.788       |
| 01000         | 8  | 2.418       |
| 01001         | 9  | 3.269       |
| 01010         | 10 | 4.421       |
| 01011         | 11 | 5.979       |
| 01100         | 12 | 8.085       |
| 01101         | 13 | 10.933      |
| 01110         | 14 | 14.784      |
| 01111         | 15 | 19.992      |
| 10000         | 16 | 27.035      |
| 10001         | 17 | 36.559      |
| 10010         | 18 | 49.439      |
| 10011         | 19 | 66.855      |
| 10100         | 20 | 90.407      |
| 10101         | 21 | 122.255     |
| 10110         | 22 | 165.324     |
| 10111         | 23 | 223.564     |
| 11000         | 24 | 302.322     |
| 11001         | 25 | 408.824     |
| 11010         | 26 | 552.846     |
| 11011         | 27 | 747.603     |
| 11100         | 28 | 1010.970    |

| Code [5 bits] | a  | Radius [km] |
|---------------|----|-------------|
| 11101         | 29 | 1367.116    |
| 11110         | 30 | 1848.727    |
| 11111         | 31 | 2500.000    |

For DCX message (J-Alert), this field is not used (fixed to “00000”).

#### 4.2.3.16. A16-Ellipse Azimuth

This field is a 6-bit code indicating the ellipse azimuth angle.

The azimuth angle in the range of  $-90^\circ$  to  $90^\circ$  is expressed while equally divided by the assigned 6 bits.

The relational expression of the code value and azimuth angle is shown below. (A16 is converted to a decimal number when assigned.)

$$\text{Azimuth angle}[deg] = -90 + \frac{180}{2^6} A16$$

(Calculation example) When A16 = “110000”

When “110000” is converted to a decimal number, the result is “48”.

This is assigned to the above expression. The number of decimal places shown for the calculation result is 2 (rounded off at the third decimal place). Therefore, the calculation is as follows.

$$\text{Azimuth angle [deg]} = -90 + (180 \div 2^6) \times 48 = 45.00$$

For DCX message (J-Alert), this field is not used (fixed to “000000”).

#### 4.2.3.17. A17-Main Subject for Specific Settings

This field is a 2-bit code indicating the category of the additional information regarding the hazard.

Table 4.2-19 shows the contents of Main Subject for Specific Settings.

For DCX message (L-Alert) and DCX message (information from local government), the category is fixed to “00” (B1 - Improved Resolution of Main Ellipse).

For DCX message (J-Alert), this field is not used. (Fixed to “00”)

Table 4.2-19 Main Subject for Specific Settings

| Code<br>[bits 1-2] | Main Subjects                                               | Comments                                                                                                                                                                                             |
|--------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00                 | B1 - Improved Resolution of Main Ellipse                    | The parameters improve the resolution of the center of the ellipse and of its axes.                                                                                                                  |
| 01                 | B2 - Position of the Centre of the Hazard                   | When centre of hazard is different from the centre of the ellipse. It is expressed in degrees of latitude and longitude in offset of the center of the ellipse, with a limitation of +/- 10 degrees. |
| 10                 | B3 - Secondary Ellipse Definition                           | Geometry of this second ellipse is computed from the original ellipse (shift, size and rotation).                                                                                                    |
| 11                 | B4 - Quantitative and detailed information about the Hazard | Option to provide quantitative or more detailed information related to the hazard category and type.                                                                                                 |

#### 4.2.3.18. A18-Specific Settings

This field is a 15-bit code indicating the additional information regarding the hazard.

See the applicable document (2) for details.

For DCX message (J-Alert), this field is not used (fixed to “000000000000000”)

#### 4.2.4. Extended Message

This message is a 74-bit extended area containing DCX message-specific information.

The contents of each DCX message are described below.

##### 4.2.4.1. DCX message (L-Alert), DCX message (information from local government)

Figure 4.2-5 shows the message format. Table 4.2-20 shows the parameter definition.

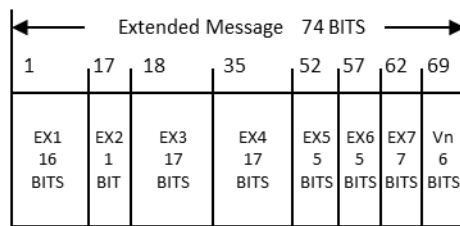


Figure 4.2-5 Extended Message Format (DCX message (L-Alert) and DCX message (information from local government))

Table 4.2-20 Parameter Definition (DCX message (L-Alert) and DCX message (information from local government))

| Parameter | Description                                            | Number of Bits |
|-----------|--------------------------------------------------------|----------------|
| EX1       | Target Area Code<br>→ See 4.2.4.1.1                    | 16             |
| EX2       | Evacuate Direction Type<br>→ See 4.2.4.1.2             | 1              |
| EX3       | Additional Ellipse Centre Latitude<br>→ See 4.2.4.1.3  | 17             |
| EX4       | Additional Ellipse Centre Longitude<br>→ See 4.2.4.1.4 | 17             |
| EX5       | Additional Ellipse Semi-Major Axis<br>→ See 4.2.4.1.5  | 5              |
| EX6       | Additional Ellipse Semi-Minor Axis<br>→ See 4.2.4.1.6  | 5              |
| EX7       | Additional Ellipse Azimuth<br>→ See 4.2.4.1.7          | 7              |
| Vn        | Version number<br>→ See 4.2.4.1.8                      | 6              |

#### 4.2.4.1.1. EX1-Target Area Code

This field is a 16-bit code indicating the alert target city, town and village.

A value coded based on the applicable document (3) is set.

Table 4.2-21 shows the contents of Target Area Code .

Coding is performed by removing the least significant digit (check digit) from the 6-digit code of applicable document (3).

(Coding example)

The code of Sapporo City of Hokkaido is "011002" (in decimal notation).

The least significant digit is removed, and the value converted to a 16-bit binary number is set in EX1.

"1100" (decimal notation) → "0000010001001100" (binary notation)

If the target area is not specified, ALL0 is set.

This field is used when the ellipse-based target area judgment is not made (A12 to A16 fields are all set to "0").

Table 4.2-21 Target Area Codes

| Code [16 bits]   | Prefecture Name | City, Town and Village Name |
|------------------|-----------------|-----------------------------|
| 0000010001001100 | Hokkaido        | Sapporo                     |
| 0000010010110010 | Hokkaido        | Hakodate                    |
| 0000010010110011 | Hokkaido        | Otaru                       |
| . . .            | . . .           | . . .                       |
| 1011100100010101 | Okinawa         | Taketomi                    |
| 1011100100010110 | Okinawa         | Yonaguni                    |

#### 4.2.4.1.2. EX2-Evacuate Direction Type

This field is a 1-bit code indicating the action instruction for the additional target area.

Table 4.2-22 shows the contents of Evacuate Direction Type.

The additional target area is that enclosed in the ellipse indicated by the EX3 to EX7 fields.

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

Table 4.2-22 EX2-Evacuate Direction Type

| Code [bit 1] | Instruction                                 |
|--------------|---------------------------------------------|
| 0            | "Leave the additional target area range."   |
| 1            | "Head to the additional target area range." |

#### 4.2.4.1.3. EX3-Additional Ellipse Centre Latitude

This field is a 17-bit code indicating the ellipse centre latitude of the additional target area.

Latitude in the range of  $-90^{\circ}$  to  $90^{\circ}$  is expressed while equally divided by the assigned 17 bits.

The relational expression of the code value and latitude is shown below. (EX3 is converted to a decimal number when assigned.)

$$\text{Latitude [deg]} = -90 + \frac{180}{2^{17} - 1} EX3$$

(Calculation example) When EX3 = "10110010110000010"

When "10110010110000010" is converted to a decimal number, the result is "91522".

This is assigned to the above expression. The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place). Therefore, the calculation is as follows.

$$\text{Latitude [deg]} = -90 + (180 \div ((2^{17}) - 1)) \times 91522 \doteq 35.687$$

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

#### 4.2.4.1.4. EX4-Additional Ellipse Centre Longitude

This field is a 17-bit code indicating the ellipse centre longitude of the additional target area.

Longitude in the range of 45° to 225° is expressed while equally divided by the assigned 17 bits.

The relational expression of the code value and longitude is shown below. (EX4 is converted to a decimal number when assigned.)

$$\text{Longitude [deg]} = 45 + \frac{180}{2^{17} - 1} EX4$$

\* It is sufficient that a range of 180° can be expressed with the center being the orbiting range of the QZSS. Therefore, the range is 45° to 225° with the center being 135°.

(Calculation example) When EX4 = "10000110101010110"

When "10000110101010110" is converted to a decimal number, the result is "68950".

This is assigned to the above expression. The number of decimal places shown for the calculation result is 3 (rounded off at the fourth decimal place). Therefore, the calculation is as follows.

$$\text{Longitude [deg]} = 45 + (180 \div ((2^{17}) - 1)) \times 68950 \div 139.689$$

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

#### 4.2.4.1.5. EX5-Additional Ellipse Semi-Major Axis

This field is a 5-bit code indicating the ellipse semi-major axis length of the additional target area.

See Table 4.2-17.

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

#### 4.2.4.1.6. EX6-Additional Ellipse Semi-Minor Axis

This field is a 5-bit code indicating the ellipse semi-minor axis length of the additional target area.

See Table 4.2-18.

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

#### 4.2.4.1.7. EX7-Additional Ellipse Azimuth

This field is a 7-bit code indicating the ellipse azimuth angle of the additional target area.

The azimuth angle in the range of -90° to 90° is expressed while equally divided by the assigned 7 bits.

The relational expression of the code value and azimuth angle is shown below. (EX7 is

Document subject to the disclaimer of liability

converted to a decimal number when assigned.)

$$\text{Azimuth angle}[deg] = -90 + \frac{180}{2^7} EX7$$

(Calculation example) When EX7 = "1100000"

When "1100000" is converted to a decimal number, the result is "96".

This is assigned to the above expression. The number of decimal places shown for the calculation result is 2 (rounded off at the third decimal place). Therefore, the calculation is as follows.

$$\text{Azimuth angle [deg]} = -90 + (180 \div 2^7) \times 96 = 45.00$$

This field is used for DCX message (information from local government).

This field is not used for DCX message (L-Alert).

#### 4.2.4.1.8. Vn-Version Number

This field is a 6-bit code indicating the version number of DCX message (L-Alert) or DCX message (information from local government). The value is fixed to "000001".

#### 4.2.4.2. DCX message (J-Alert)

Figure 4.2-6 shows the message format. Table 4.2-23 shows the parameter definition.

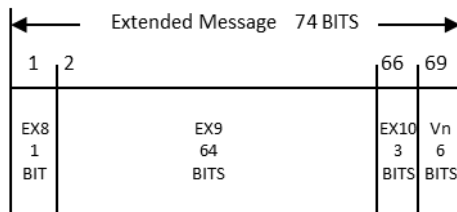


Figure 4.2-6 Extended Message Format (DCX message (J-Alert))

Table 4.2-23 Parameter Definition (DCX Message (J-Alert))

| Parameter | Description                                   | Number of Bits |
|-----------|-----------------------------------------------|----------------|
| EX8       | Target Area Code List Type<br>→ See 4.2.4.2.1 | 1              |
| EX9       | Target Area Code List<br>→ See 4.2.4.2.2      | 64             |
| EX10      | Reserved                                      | 3              |
| Vn        | Version number<br>→ See 4.2.4.2.3             | 6              |

##### 4.2.4.2.1. EX8-Target Area Code List Type

This field is a 1-bit code indicating whether the contents of the EX9-Target Area Code List are prefecture codes or cities, towns and villages codes.

Table 4.2-24 shows the contents of the Target Area Code List Type.

Table 4.2-24 EX8-Target Area Code List Type

| Code [bit 1] | Target Area Code List Type      |
|--------------|---------------------------------|
| 0            | Prefecture code                 |
| 1            | Cities, towns and villages code |



[illegible]



- (2) In the case of a cities, towns and villages
- The field consists of four 16-bit cities, towns and villages codes. (Up to 4 codes are set.)
- Figure 4.2-8 shows the field format.

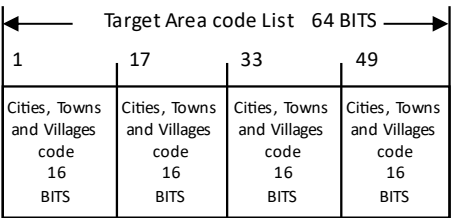


Figure 4.2-8 Format of the Target Area Code List Field (Cities, Towns and Villages)

See 4.2.4.1.1 for information about the cities, towns and villages codes.

When no cities, towns and villages are specified, ALL0 is set.

4.2.4.2.3. Vn-Version Number

This field is a 6-bit code indicating the version number of DCX message (J-Alert). The value is fixed to "000001".

#### 4.2.4.3. DCX message (information from organizations outside Japan)

Figure 4.2-9 shows the message format. Table 4.2-26 shows the parameter definition.

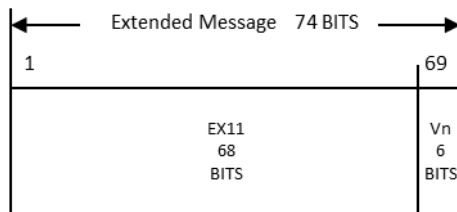


Figure 4.2-9 Extended Message Format (DCX message (information from organizations outside Japan))

Table 4.2-26 Parameter Definition (DCX message (information from organizations outside Japan))

| Parameter | Description                                                 | Number of Bits |
|-----------|-------------------------------------------------------------|----------------|
| EX11      | Organization outside Japan-Specific Area<br>→ See 4.2.4.3.1 | 68             |
| Vn        | Version Number<br>→ See 4.2.4.3.2                           | 6              |

##### 4.2.4.3.1. EX11-Organization Outside Japan-Specific Area

This field is a 68-bit code indicating organization outside Japan-specific information. Details are undefined.

##### 4.2.4.3.2. Vn-Version Number

This field is defined under the unique version management system of an organization outside Japan.

#### 4.3. MT44 NULL Message

This message is to transmit the Satellite Designation (SD field) to the receiver even when there is no information to transmit a DCX message. Since the message is dedicated to the transmission of the satellite designation information, it is not processed as a DCX message.

For the values to be set in each field of the message, see Table 4.3-1.

Table 4.3-1 MT44 NULL Message

| Message Field                          | Number of Bits | Setting Value          |
|----------------------------------------|----------------|------------------------|
| PAB                                    | 8              | —                      |
| MT                                     | 6              | "101100" (MT44)        |
| SD                                     | 10             | See 4.2.2              |
| Common Alert Message Format            | —              | —                      |
| A1-Message Type                        | 2              | All bits set to "0"    |
| A2-Country/Region Name                 | 9              | "001101111" (Japan) *1 |
| A3-Provider Identifier                 | 5              | All bits set to "0"    |
| A4-Hazard Category and Type            | 7              | All bits set to "0"    |
| A5-Severity                            | 2              | All bits set to "0"    |
| A6-Hazard Onset : Week Number          | 1              | "0"                    |
| A7-Hazard Onset : Time of Week         | 14             | All bits set to "0"    |
| A8-Hazard Duration                     | 2              | All bits set to "0"    |
| A9-Selection of Library                | 1              | "0"                    |
| A10-Version of Library                 | 3              | All bits set to "0"    |
| A11-Guidance to react library          | 10             | All bits set to "0"    |
| A12-Ellipse Centre Latitude            | 16             | All bits set to "0"    |
| A13-Ellipse Centre Longitude           | 17             | All bits set to "0"    |
| A14-Ellipse Semi-Major Axis            | 5              | All bits set to "0"    |
| A15-Ellipse Semi-Minor Axis            | 5              | All bits set to "0"    |
| A16-Ellipse azimuth                    | 6              | All bits set to "0"    |
| A17-Main Subject for Specific Settings | 2              | All bits set to "0"    |
| A18- Specific Settings                 | 15             | All bits set to "0"    |
| Extended Message                       | 74             | All bits set to "0"    |
| Reserved                               | 6              | —                      |
| CRC                                    | 24             | —                      |

\*1 "001101111" (Japan) is also transmitted from the satellites allocated to organizations outside Japan.

#### 4.4. DCX Message Output from the Receiver

This section describes how to output a DCX message from the receiver. The sentence format shown below is recommended for DCX message output from the receiver.

##### 4.4.1. Sentence Format

- Output all characters in ASCII code.
- Start every sentence with the message header "\$QZQSM".
- Of the 8 bits representing the PRN number of L1S in binary notation, use the low-order 6 bits written in decimal notation to express the satellite number.
- The total length is 252 bits because 2 bits of "00" are added after the 250 bits of the DCX message.
- At the end of the sentence, add the carriage return <CR> or linefeed <LF> code.

Table 4.4-1 shows the sentence format.

Table 4.4-1 Sentence Format

| Field            | Value                           | Number of Characters |
|------------------|---------------------------------|----------------------|
| Message header   | \$QZQSM                         | 6                    |
| Field delimiter  | ,                               | 1                    |
| Satellite number | 56,57,58,61(PRN184,185,186,189) | 2                    |
| Field delimiter  | ,                               | 1                    |
| DCX message      |                                 | 63                   |
| Field delimiter  | *                               | 1                    |
| Checksum         |                                 | 2                    |

Example: \$QZQSM, 56, 53B0604DE . . . . . 9ABCDEFC\*1F

## 5. User Algorithm

### 5.1. Relationship between Receiver Output and Display

Figure 5.1-1 shows an image (example) of the relationship between receiver output and display.

After receiving the L1S signal, the receiver outputs a message in the sentence format described in 4.4.1

Based on the receiver output, the CPU app references the DCX message and outputs it to the screen or other destination.

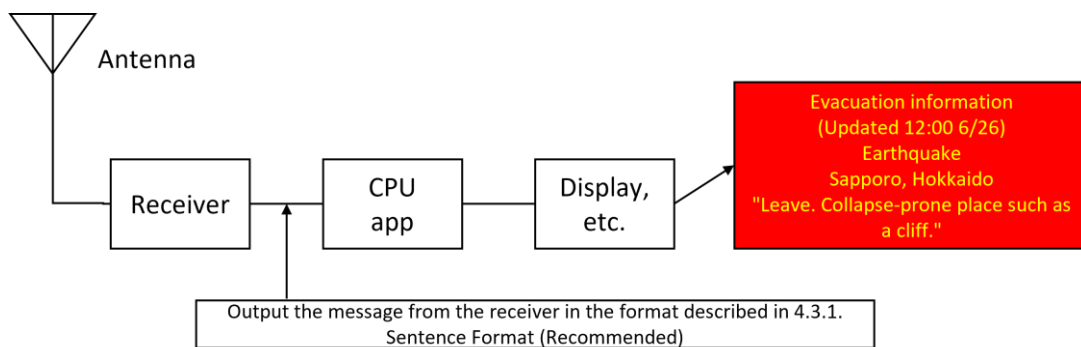


Figure 5.1-1 Image (Example) of the Relationship between Receiver Output and Display

### 5.2. Service Area

DCX messages for Japan are available within the area shown in Figure 5.2-1, and DCX messages for use outside Japan are available within the area shown in Figure 5.2-2. The area in Figure 5.2-2 is where at least one QZS transmitting DCX messages for use outside Japan is visible with an elevation angle of 10 degrees or more. The actual area where a transmitted message is valid depends on the content of the message. See 4.2 for details.

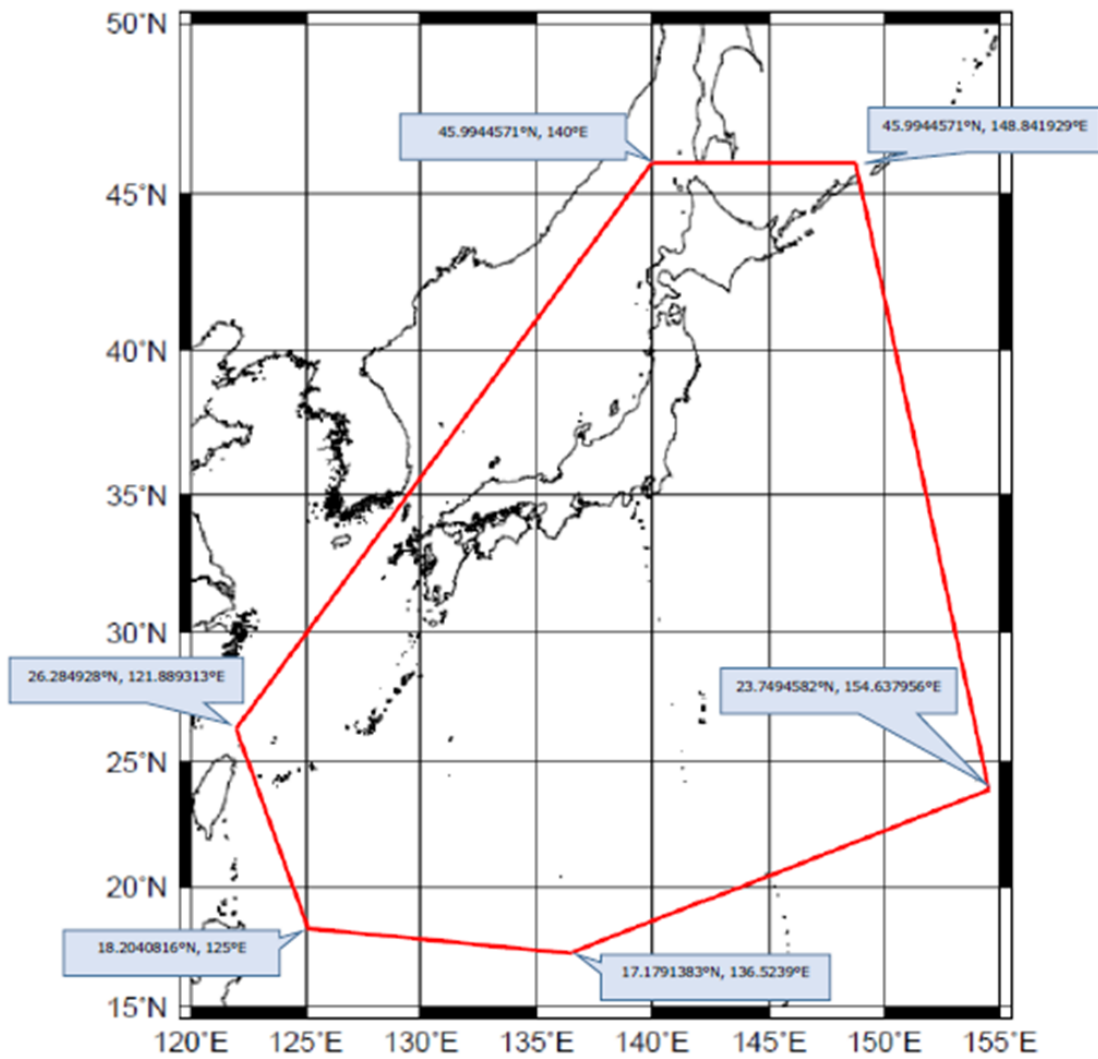


Figure 5.2-1 Service Area (DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government))

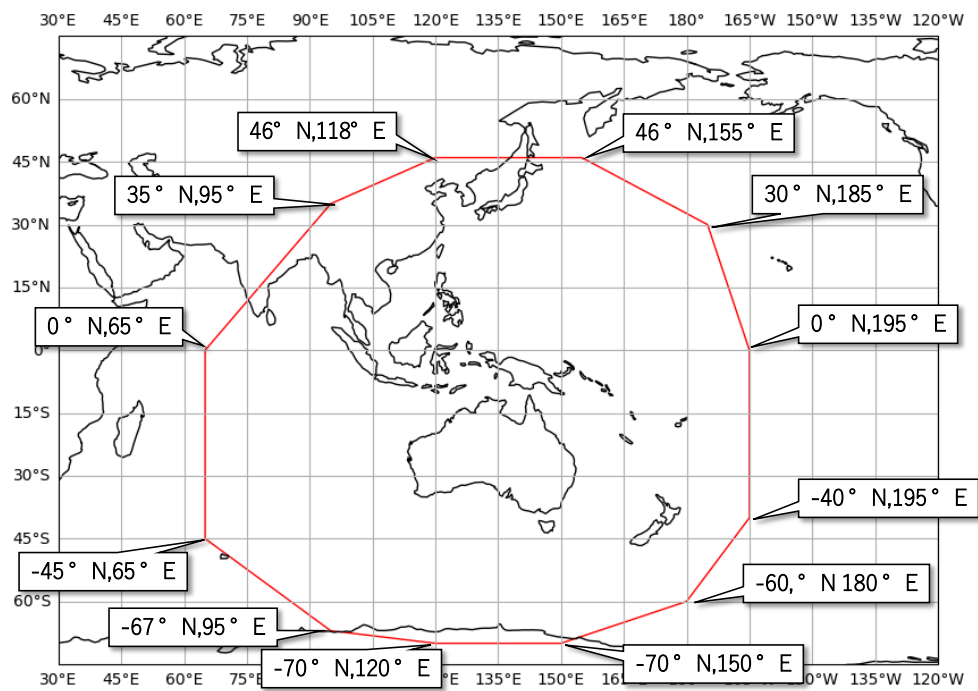


Figure 5.2-2 Service Area (DCX message (information from organizations outside Japan))

### 5.3. Examples of the Transmitted DCX message

### 5.3.1. DCX message (L-Alert)/ DCX message (information from local government)

(1) DCX message (L-Alert)

| Format | PAB  |      | MT   | SD   |      | A1   | A2 |      | A3   | A4   | A5   | A6   | A7 |   | A8   | A9   | A10  | A11  |      |
|--------|------|------|------|------|------|------|----|------|------|------|------|------|----|---|------|------|------|------|------|
| BIN    | 0101 | 0011 | 1101 | 1000 | 0011 | 0000 | 01 | 0011 | 0111 | 0000 | 1001 | 0101 | 10 | 0 | 1001 | 0011 | 0001 | 1100 | 0010 |
| HEX    | 5    | 3    | B    | 0    | 6    | 0    | 4  | D    | E    | 1    | 9    | 5    | 2  |   | 4    | C    | D    | A    | 305  |

| A12  |      |      |      | A13  |      |      |      | A14   | A15   | A16    | A17 | A18    |      |      |      |
|------|------|------|------|------|------|------|------|-------|-------|--------|-----|--------|------|------|------|
| 1011 | 0010 | 1100 | 0001 | 1110 | 0011 | 0101 | 0101 | 01101 | 01011 | 110000 | 00  | 000000 | 0000 | 0000 | 0000 |
| B    | 2    | C    | 1    | E    | 3    | 5    | 5    | B     | 5     | 7      | 8   | 0      | 0    | 0    | 0    |

| EX1              |   |   | EX2 | EX3              |   |   |   | EX4              |   |   |   | EX5   | EX6   | EX7      | Vn      | Rsv     | CRC              |          |   |   |   |   |   |   |
|------------------|---|---|-----|------------------|---|---|---|------------------|---|---|---|-------|-------|----------|---------|---------|------------------|----------|---|---|---|---|---|---|
| 0011001100110000 |   |   | 0   | 0000000000000000 |   |   |   | 0000000000000000 |   |   |   | 00000 | 00000 | 00000000 | 0000001 | 0000000 | 1000101010100000 | 11000110 |   |   |   |   |   |   |
| C                | C | C | 0   | 0                | 0 | 0 | 0 | 0                | 0 | 0 | 0 | 0     | 0     | 0        | 0       | 1       | 0                | 2        | 2 | A | 8 | 1 | 8 | 8 |

### A1-Message Type : Alert

A2-Country/Region Name : Japan

A3-Provider Identifier : FMMC

A4-Hazard Category and Type : Rainfall

A5-Severity : Severe

A6-Hazard Onset : Week Number : Current week

A7-Hazard Onset : Time of the Week : SUNDAY - 01:00 PM

A8-Hazard Duration : 6H <= Duration < 12H

A9-Selection of Library : Country/region guidance library

A10-Version of Library : Library version#1

A11-Guidance to react library : "Keep away from Water area."

Target area : Area enclosed in the ellipse indicated by the following parameters

A12-Ellipse Centre Latitude : 35.688

A13-Ellipse Centre Longitude : 139.691

A14-Ellipse Semi-Major Axis : 10.933(km)

A15-Ellipse Semi-Minor Axis : 5.979(km)

A16-Ellipse Azimuth : 45.00 (degrees)

A17-Main Subject for Specific Settings : B1-Improved Resolution of Main Ellipse

## A18- Specific Settings

Refined Latitude of Centre of Main Ellipse : 0.000000

Refined Longitude of Centre of Main Ellipse : 0.000000000

Refined Length of Semi-Major Axis : 1.000

*Document subject to the disclaimer of liability*

Refined Length of Semi-Minor Axis : 1.000  
EX1-Target Area Code : Shinjuku, Tokyo  
EX2 to EX7 : Not used

## (2) DCX message (information from local government)

| Format | PAB      |        | MT     |      | SD |          | A1 | A2    |         | A3 | A4 |          | A5     | A6 | A7 |     | A8       | A9 | A10 | A11 |   |
|--------|----------|--------|--------|------|----|----------|----|-------|---------|----|----|----------|--------|----|----|-----|----------|----|-----|-----|---|
| BIN    | 01010011 | 101100 | 000110 | 0000 | 01 | 00110111 | 11 | 00100 | 1010010 | 10 | 0  | 10010011 | 001101 | 10 | 1  | 000 | 00000000 |    |     |     |   |
| HEX    | 5        | 3      | B      | 0    | 6  | 0        | 4  | D     | E       | 4  | A  | 5        | 2      | 4  | C  | D   | A        | 0  | 0   | 0   | 0 |

| A12              |   |   |   | A13              |   |   |   | A14   | A15   | A16    | A17 | A18            |   |   |   |   |
|------------------|---|---|---|------------------|---|---|---|-------|-------|--------|-----|----------------|---|---|---|---|
| 1011001011000001 |   |   |   | 1110001101010101 |   |   |   | 01101 | 01011 | 110000 | 00  | 00000000000000 |   |   |   |   |
| B                | 2 | C | 1 | E                | 3 | 5 | 5 | B     | 5     | 7      | 8   | 0              | 0 | 0 | 0 | 0 |

| EX1              |   |   |   | EX2 | EX3               |   |   |   | EX4              |   |   |   | EX5   | EX6   | EX7     | Vn     | Rsv    | CRC                     |   |   |   |   |   |   |   |   |
|------------------|---|---|---|-----|-------------------|---|---|---|------------------|---|---|---|-------|-------|---------|--------|--------|-------------------------|---|---|---|---|---|---|---|---|
| 0011001100110000 |   |   |   | 0   | 10110010110000010 |   |   |   | 0000000000000000 |   |   |   | 01101 | 01011 | 1100000 | 000001 | 000000 | 11101011001110101001001 |   |   |   |   |   |   |   |   |
| C                | C | C | C | 1   | 6                 | 5 | 8 | 2 | 0                | 0 | 0 | 0 | 3     | 5     | 7       | 8      | 0      | 1                       | 0 | 3 | A | C | E | A | 4 | 4 |

A1-Message Type : Alert

A2-Country/Region Name : Japan

A3-Provider Identifier : Local Government

A4-Hazard Category and Type : Tropical Cyclone (Typhoon)

A5-Severity : Severe

A6-Hazard Onset : Week Number : Current week

A7-Hazard Onset : Time of the Week : SUNDAY - 01:00 PM

A8-Hazard Duration : 6H <= Duration < 12H

A9-Selection of Library : Country/region guidance library

A10-Version of Library : Library version#1

A11-Guidance to react library : Not specified (Reference EX2 to EX7.)

Target area : Area enclosed in the ellipse indicated by the following parameters

A12-Ellipse Centre Latitude : 35.688

A13-Ellipse Centre Longitude : 139.691

A14-Ellipse Semi-Major Axis : 10.933(km)

A15-Ellipse Semi-Minor Axis : 5.979(km)

A16-Ellipse Azimuth : 45.00 (degrees)

A17-Main Subject for Specific Settings : B1-Improved Resolution of Main Ellipse

A18- Specific Settings

Refined Latitude of Centre of Main Ellipse : 0.000000

Refined Longitude of Centre of Main Ellipse : 0.000000000

Refined Length of Semi-Major Axis : 1.000

Refined Length of Semi-Minor Axis : 1.000

EX1-Target Area Code : Shinjuku, Tokyo

EX2-Evacuate Direction Type : "Leave the additional target area range."

Additional target area : Area enclosed in the ellipse indicated by the following parameters

Document subject to the disclaimer of liability

EX3-Additional Ellipse Centre Latitude : 35.687

EX4-Additional Ellipse Centre Longitude : 139.689

EX5-Additional Ellipse Semi-Major Axis : 10.933(km)

EX6-Additional Ellipse Semi-Minor Axis : 5.979(km)

EX7-Additional Ellipse Azimuth : 45.00 (degrees)

### 5.3.2. DCX message (J-Alert)

| Format | PAB                          |            | MT    |           | SD        |           | A1        | A2        |           | A3        | A4        | A5        | A6        | A7        |           | A8        | A9        | A10       | A11       |           |
|--------|------------------------------|------------|-------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| BIN    | 1001101010110000011100000001 | 0011011111 | 00010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 | 000100010 |
| HEX    | 9                            | A          | B     | 0         | 6         | 0         | 4         | D         | E         | 2         | 1         | 1         | 0         | 2         | D         | 1         | 4         | 2         | 0         | 3         |

| A12              | A13              | A14   | A15   | A16    | A17 | A18              |
|------------------|------------------|-------|-------|--------|-----|------------------|
| 0000000000000000 | 0000000000000000 | 00000 | 00000 | 000000 | 00  | 0000000000000000 |
| 0 0 0 0 0        | 0 0 0 0 0        | 0     | 0 0 0 | 0 0 0  | 0   | 0 0 0 0 0        |

| EX8 | EX9 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | EX10 | Vn | Rsv | CRC |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|------|----|-----|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0    | 0  | 0   | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

A1-Message Type : Alert

A2-Country/Region Name : Japan

A3-Provider Identifier : FDMA

A4-Hazard Category and Type : Missile Attack

A5-Severity : Severe

A6-Hazard Onset : Week Number : Current week

A7-Hazard Onset : Time of the Week : MONDAY - 00:00 PM

A8-Hazard Duration : Duration=00

A9-Selection of Library : Country/region guidance library

A10-Version of Library : Library version#1

All-Guidance to react library : "Move to. Underground."

A12 to A18 : Not used

EX8-Target Area Code List Type : Prefecture code

EX9-Target Area Code List : Hokkaido, Aomori, Akita

## 5.4. Transmission Overview

This section shows examples of message transmission for DCX message (L-Alert), DCX message (J-Alert), and DCX message (information from local government). Message transmission for DCX message (information from organizations outside Japan) is undecided.

Basically, a received message may be handled according to the receiver's unique criteria.

### 5.4.1. DCX message (L-Alert)/ DCX message (information from local government)

Examples of MT44 message transmission for L-Alert and information from local government are shown below.

#### (1) Clearing alerts using a DCX message (A1-Message Type="All Clear")

Alerts are cleared when a DCX message in which A1-Message Type is set to "All Clear" is received.

Figure 5.4-1 shows an example of clearing alerts using All Clear.

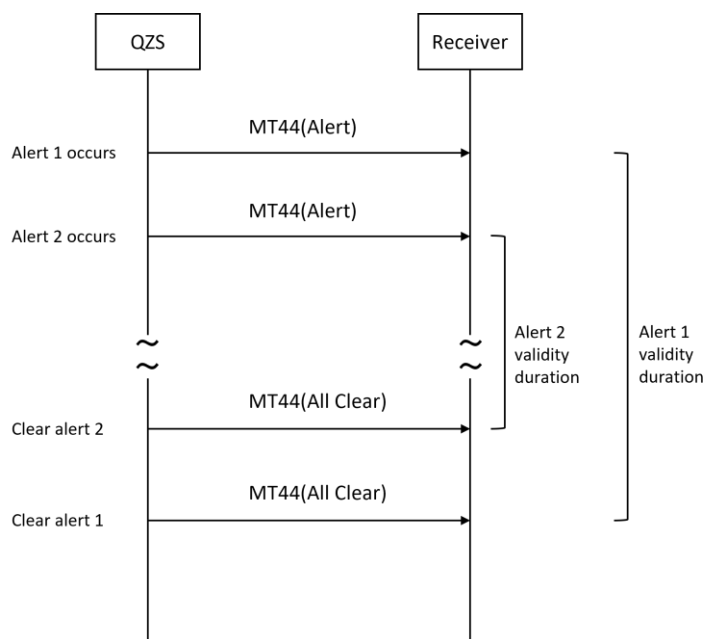


Figure 5.4-1 Clearing Alerts Using All Clear

## (2) Clearing alerts using the A8-Hazard Duration

When a DCX message in which A1-Message Type is set to "All Clear" has yet to be received, alerts are cleared according to the validity duration indicated by the A8-Hazard Duration. See 5.11 for details.

Figure 5.4-2 shows an example of clearing alerts according to the Hazard Duration.

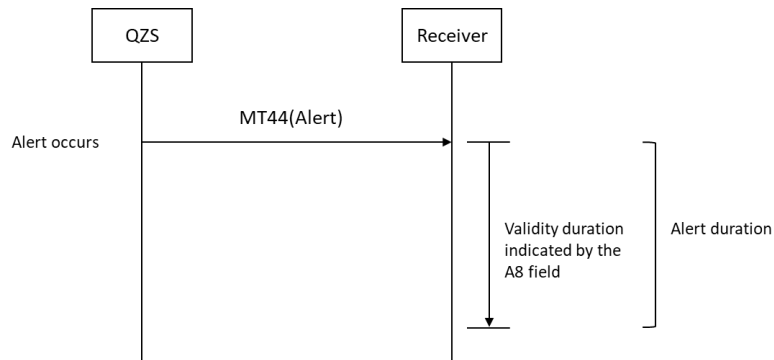


Figure 5.4-2 Clearing Alerts According to the Hazard Duration

When a DCX message in which A1-Message Type is set to "All Clear" has yet to be received and when the A8 field is set to "00" (Unknown), alerts received a week ago or earlier are cleared.

#### 5.4.2. DCX message (J-Alert)

DCX message (J-Alert) generally supports only the transmission of DCX messages (A1-Message Type="Alert"). It does not support clearing alerts using DCX messages (A1-Message Type="All Clear").

An example of message transmission is shown below.

(Example) Example of message transmission in case of ballistic missile launch

Figure 5.4-3 shows an example of message transmission.

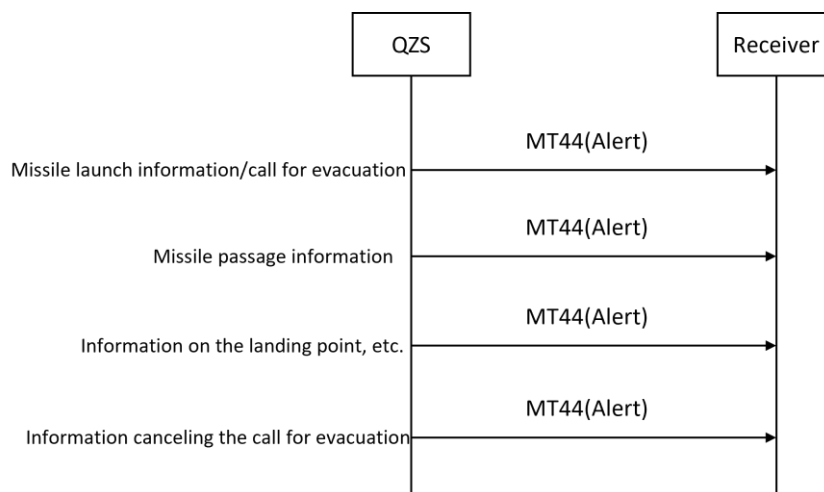


Figure 5.4-3 Example of Message Transmission for DCX message (J-Alert)

As shown in the example above, messages to cancel a call for evacuation are also transmitted as a message in which the A1-Message Type is set to "Alert."

It is therefore not possible to determine whether the message is a call for evacuation or a cancellation of the call from the A1-Message Type. To identify whether the message is a call to evacuate or a cancellation of the evacuation call, refer to the contents provided in the A1-Guidance to react library.

If a DCX message (A1-Message Type="Alert") is a false alert, a DCX message (A1-Message Type="All Clear") is transmitted.

Figure 5.4-4 shows an example of message transmission in case of a false alert.

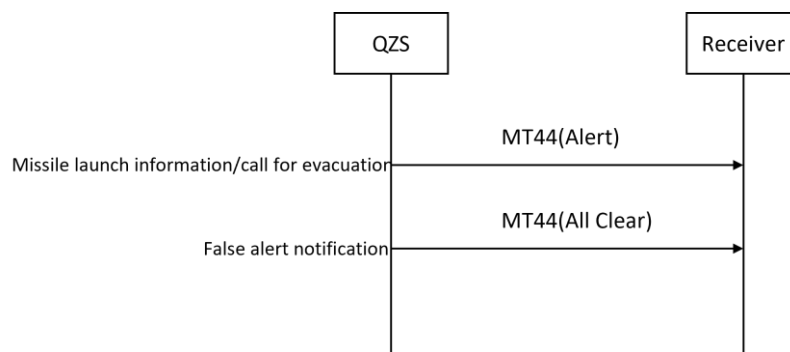


Figure 5.4-4 Example of Message Transmission for DCX message (J-Alert)  
(False Alert)


### 5.5. Message Duplication Checking Method

Since a message is transmitted repeatedly (typically twice; this can be changed by setting the QZSS parameter), a duplication check is necessary.


When performing duplication check, it is necessary to note that the same message may not be received consecutively. As described in the transmission order outlined in section 4.1.4, higher priority messages may interrupt lower priority messages. Therefore, the same message may not always be received twice in a row.

An example of checking method is described below.


Step (1) Save the first received message as history.

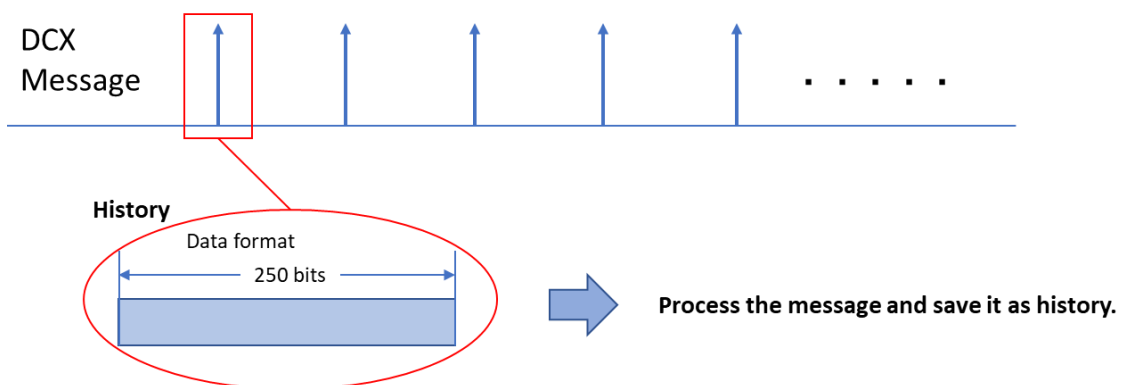


Step (2) Compare the saved history and the next message to check whether MT (Message Type ID) and CAMF to EM (Extended Message) match.

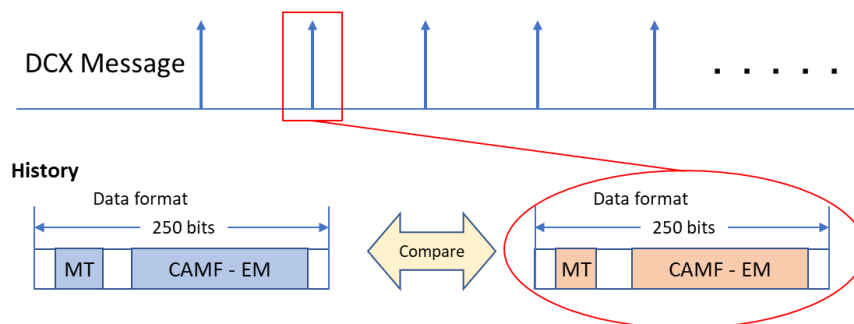

[When the data matches]

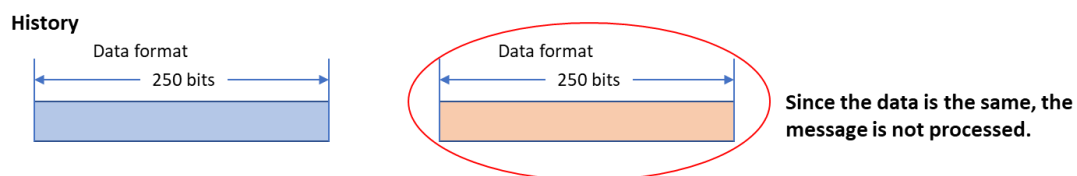

[When the data does not match]

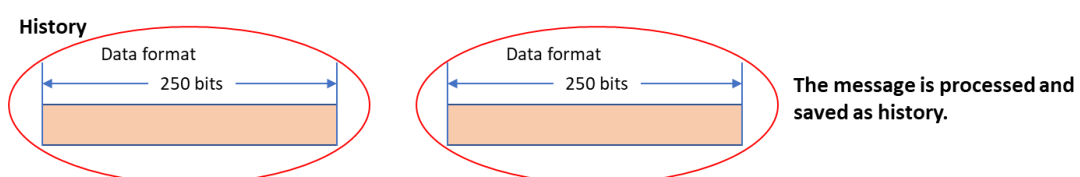

## 5.6. SD - Satellite Designation Field Usage Method

### 5.6.1. Overview

The SD field notifies the receiver about the service type indicating which QZSS satellite transmits MT44 for Japan and which QZSS satellite transmits MT44 for use outside Japan, as well as about the MT44 transmission status indicating which QZSS satellite is transmitting MT44. The receiver selects the QZSS satellite to capture, based on the service type and MT44 transmission status.

- Service type (SDMT="0")

When the SDMT field is set to "0", the SDM field shows the service type. This is a bit flag indicating the service type of each QZSS satellite.

For example, when the nine bits of the SDM field are "010000100", only the two satellites corresponding to Bit<sub>2</sub> and Bit<sub>7</sub> are of the service type for use outside Japan. For the seven satellites corresponding to the remaining bits, Bit<sub>1</sub>, Bit<sub>3</sub> to Bit<sub>6</sub>, Bit<sub>8</sub>, and Bit<sub>9</sub>, the service type for Japan is specified.

- MT44 transmission status (SDMT="1")

When the SDMT field is set to "1", the SDM field shows the MT44 transmission status. This is a bit flag indicating the MT44 transmission status of each QZSS satellite.

For example, when the nine bits of the SDM field are "011100100", it indicates that only the four satellites corresponding to Bit<sub>2</sub> to Bit<sub>4</sub>, and Bit<sub>7</sub> are transmitting the MT44 message. Note that the MT44 transmission status does not change unless a fault occurs or the configuration of QZSS satellites transmitting MT44 is changed. Therefore, it is transmitted less frequently than the service type (once a minute or so).

A capture target satellite list is created by combining the data obtained from the service type and MT44 transmission status. This list shows the candidate satellites to be captured by the receiver. The same MT44 is transmitted from satellites with the same service type. Therefore, even if the capture target satellite list has multiple satellites but not all the satellites can be captured for reasons such as the limit to the number of receive channels, the receiver may select the satellite to capture using its unique metrics.

In the case of the receiver for Japan, the capture target satellite list includes the satellites for which the service type is set to 0 and the MT44 transmission status is set to 1 (Table 5.6-1).

Table 5.6-1 Example of a Capture Target Satellite List Created for Japan

| SDM Field                     | Bit <sub>1</sub> | Bit <sub>2</sub> | Bit <sub>3</sub> | Bit <sub>4</sub> | Bit <sub>5</sub> | Bit <sub>6</sub> | Bit <sub>7</sub> | Bit <sub>8</sub> | Bit <sub>9</sub> |
|-------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Service Type                  | 0                | 1                | 0                | 0                | 0                | 0                | 1                | 0                | 0                |
| MT44 Transmission Status      | 0                | 1                | 1                | 1                | 0                | 0                | 1                | 0                | 0                |
| Capture Target Satellite List |                  |                  | ●                | ●                |                  |                  |                  |                  |                  |

In the case of the receiver for use outside Japan, the capture target satellite list includes the satellites for which the service type is set to 1 and the MT44 transmission status is set to 1 (Table 5.6-2).

Table 5.6-2 Example of a Capture Target Satellite List Created for Use Outside Japan

| SDM Field                     | Bit <sub>1</sub> | Bit <sub>2</sub> | Bit <sub>3</sub> | Bit <sub>4</sub> | Bit <sub>5</sub> | Bit <sub>6</sub> | Bit <sub>7</sub> | Bit <sub>8</sub> | Bit <sub>9</sub> |
|-------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Service Type                  | 0                | 1                | 0                | 0                | 0                | 0                | 1                | 0                | 0                |
| MT44 Transmission Status      | 0                | 1                | 1                | 1                | 0                | 0                | 1                | 0                | 0                |
| Capture Target Satellite List |                  | ●                |                  |                  |                  |                  | ●                |                  |                  |

Table 5.6-3 shows the PRNs and QZSS satellites to assign to the SDM field.

Table 5.6-3 PRNs and QZSS Satellites to Assign to the SDM Field

| SDM Field        | PRN | QZSS Satellites | Remark       |
|------------------|-----|-----------------|--------------|
| Bit <sub>1</sub> | 183 | QZS1            |              |
| Bit <sub>2</sub> | 184 | QZS2            |              |
| Bit <sub>3</sub> | 185 | QZS4            |              |
| Bit <sub>4</sub> | 186 | QZS1R           |              |
| Bit <sub>5</sub> | -   | -               | Not assigned |
| Bit <sub>6</sub> | -   | -               | Not assigned |
| Bit <sub>7</sub> | 189 | QZS3            |              |
| Bit <sub>8</sub> | -   | -               | Not assigned |
| Bit <sub>9</sub> | -   | -               | Not assigned |

### 5.6.2. Example of the Transmission Sequence

Figure 5.6-1 shows an example of the transmission sequence for creating the capture target satellite list.

This example assumes that there are two receivers, one for Japan and one for use outside Japan, along with only one L1S receive channel. Four satellites, QZS1R, QZS2, QZS3, and QZS4, are transmitting MT44. By default, the service type for Japan is specified for QZS2 and QZS3 and the service type for use outside Japan is specified for QZS1R and QZS4. It is assumed that, after the initial start, the receiver has captured QZS1R as a tentative capture target. (The receiver may capture another QZSS satellite according to its unique criteria.)

The capture target satellite is determined when the two values of the service type and MT44 transmission status are received. Since the receiver (for Japan) includes two satellites, QZS2 and QZS3, in the capture target satellite list, it changes the capture target from QZS1R to QZS2. (The receiver may change to QZS3 according to its unique criteria.) While the receiver (for use outside Japan) includes two satellites, QZS1R and QZS4, in the capture target satellite list, there is no need to change the capture target because it has already captured QZS1R. (The receiver may change to QZS4 according to its unique criteria.)

If a change is made to the service type, the QZSS satellites transmit the message with the value of the service type changed. Since the receiver (for Japan) includes two satellites, QZS1R and QZS3, in the capture target satellite list, it changes the capture target from QZS2 to QZS1R. (The receiver may change to QZS3 according to its unique criteria.) Since the receiver (for use outside Japan) includes two satellites, QZS2 and QZS4, in the capture target satellite list, it changes the capture target from QZS1R to QZS2.

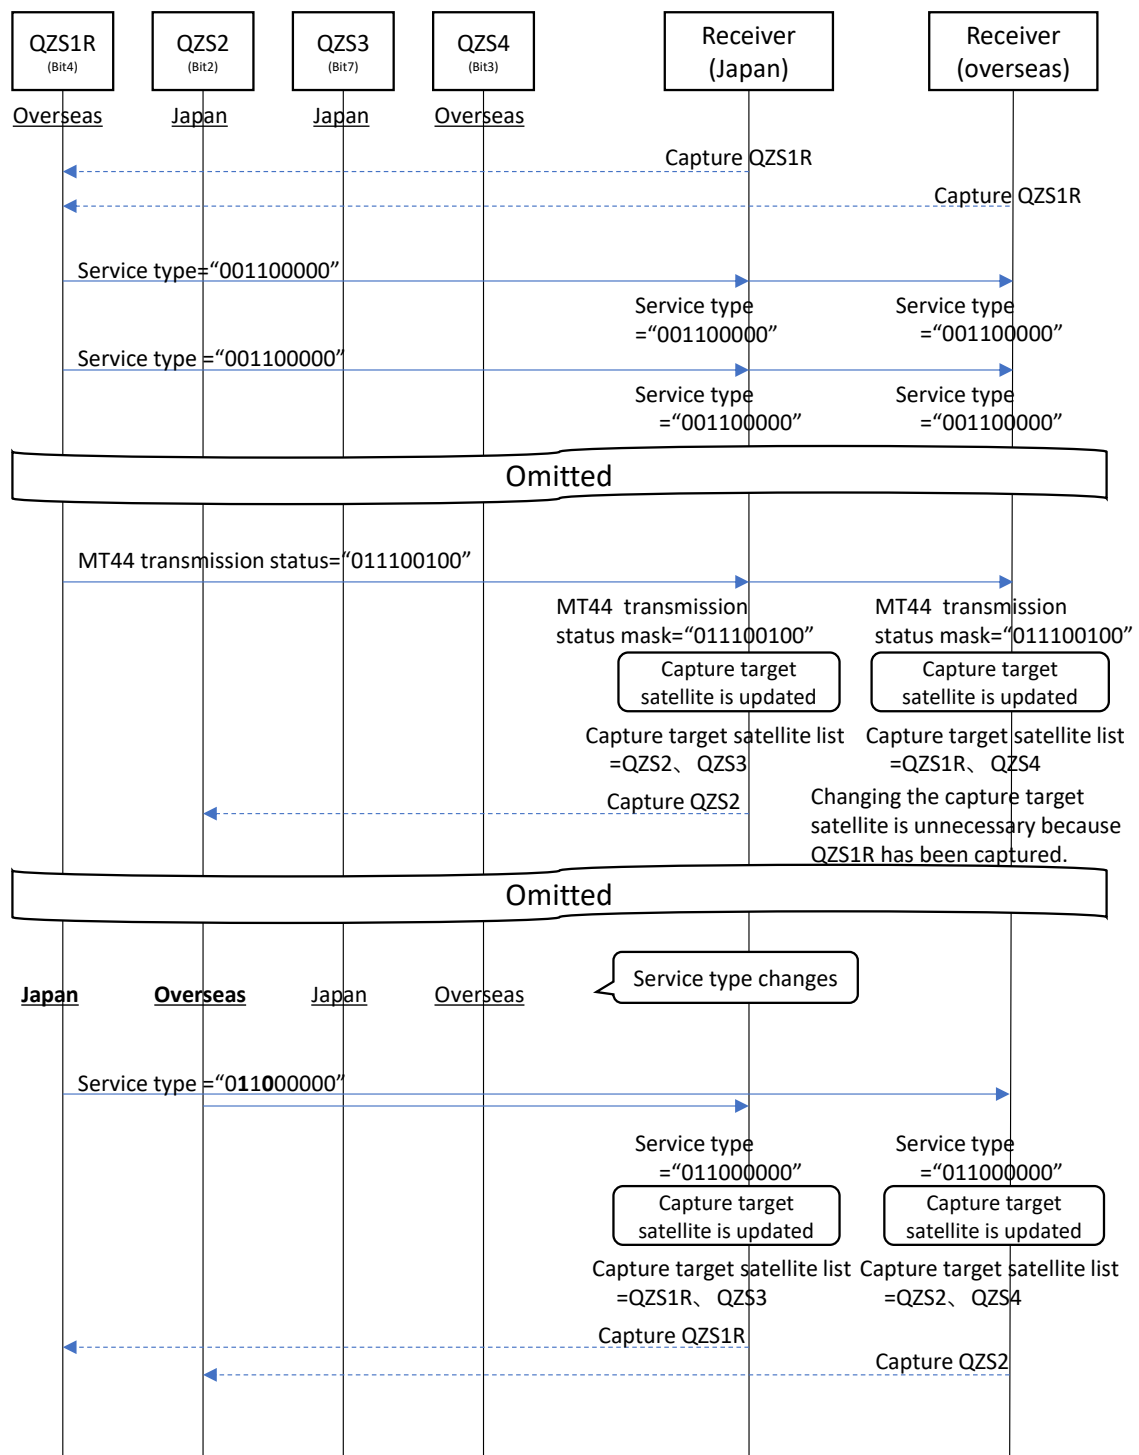


Figure 5.6-1 Example of the SD Field Transmission Sequence

### 5.6.3. Example of the User Algorithm

Figure 5.6-2 shows an example of the user algorithm used for the receiver to process the SD field. This is a mere example, and the receiver may process the field using its unique flowchart.

Immediately after the start, the receiver captures a QZSS satellite to receive MT44. While this example assumes that the receiver captures QZS1R, the receiver may capture any other QZSS satellite according to its unique criteria. After that, it receives MT44 at regular intervals.

Upon receiving MT44, the receiver performs the specified application processing, processes the SD field data, and creates a capture target satellite list.

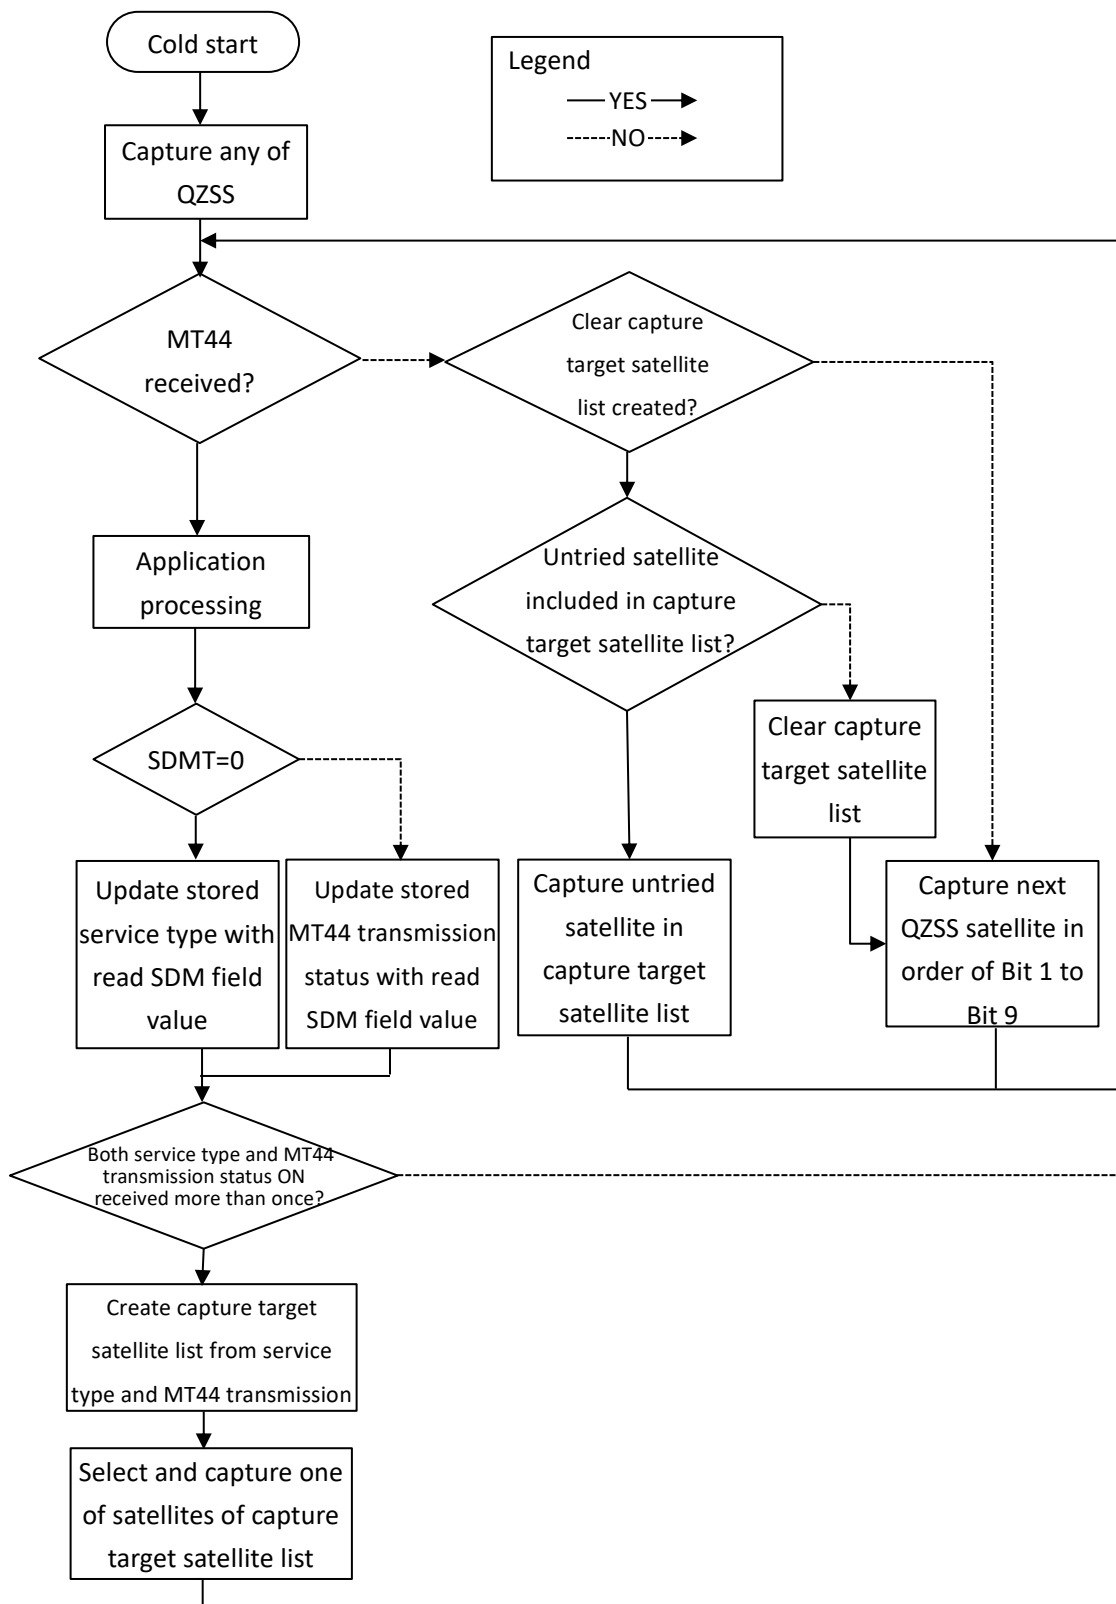


Figure 5.6-2 Example of the Algorithm for Reading the SD Field (Flowchart)

### 5.7. Method for Determining Types of Information Transmitted as MT44

DCX message type is determined by referencing the A2-Country/Region Name and A3-Provider Identifier.

- DCX message (information from organizations outside Japan)  
A2 = Other than "001101111" (Japan)
- DCX message (L-Alert)  
A2 = "001101111" (Japan) and A3 = "00001" (FMMC)
- DCX message (J-Alert)  
A2 = "001101111" (Japan) and A3 = "00010" (FDMA) or "00011" (Related Ministries)
- DCX message (information from local government)  
A2 = "001101111" (Japan) and A3 = "00100" (Local Government)
- Other than the above  
When A2 is "001101111" (Japan) but A3 is other than "00001", "00010", "00011", or "00100",  
the message is not the intended information and is therefore discarded.

Figure 5.7-1 shows DCX message type determination flowchart.

The SD field needs to be processed regardless of whether the message is processed or discarded in the application processing. See 5.6.3

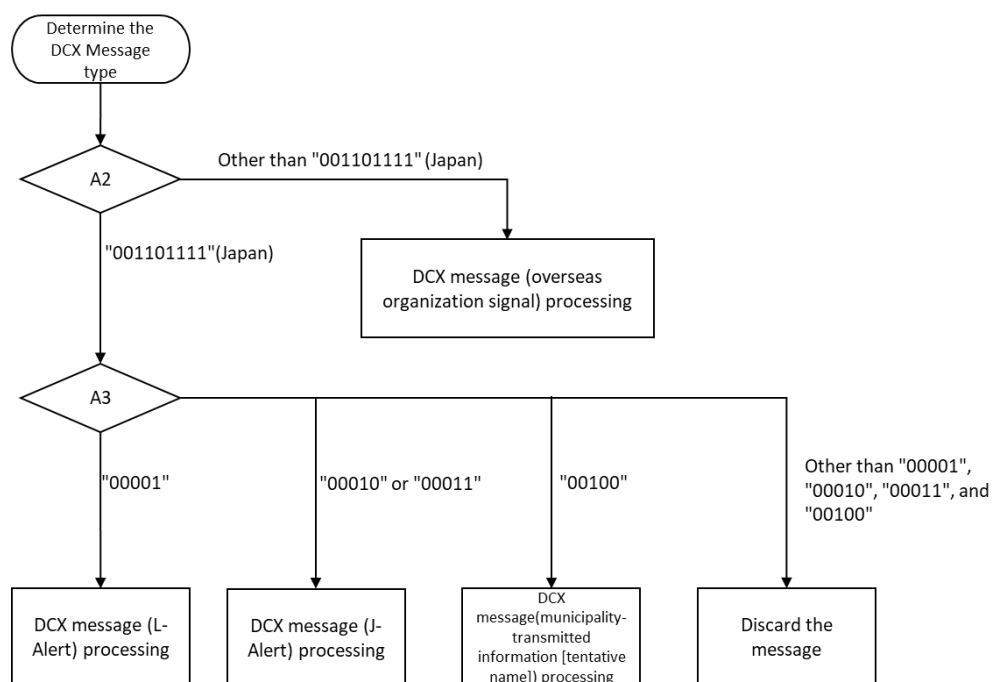


Figure 5.7-1 DCX Message Type Determination Flowchart

## 5.8. Target Area Determination Method

The target area is represented either by the area enclosed in the ellipse indicated by the A12 to A16 fields or by the Target Area Code in an Extended Message.

### 5.8.1. Determining the target area of a DCX message (L-Alert)

The target area is represented in the following two fields.

- Area enclosed in the ellipse indicated by the A12 to A16 fields
- Citie, town and village indicated by the EX1 field

When the A12 to A16 fields are all "0", the EX1 field is referenced.

Figure 5.8-1 shows the target area determination flowchart.

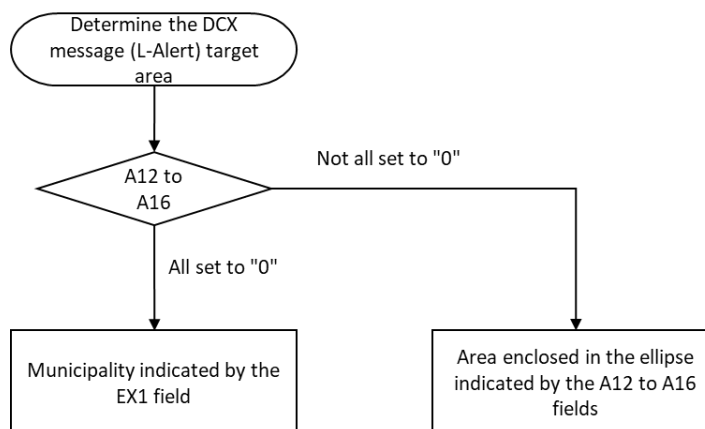


Figure 5.8-1 Target Area Determination Flowchart for DCX message (L-Alert)

### 5.8.2. Determining the target area of a DCX message (J-Alert)

The target area is represented in the Extended Message fields: EX8 (Target Area Code List Type) and EX9 (Target Area Code List) . The A12 to A16 fields are not used (A12 to A16 fields are all "0").

Depending on the value of EX8, the contents of EX9 differ.

- When EX8 = "0" (prefecture)

EX9 is a prefecture code shown in Table 4.2-25, and the target area is the prefecture indicated by the prefecture code.

- When EX8 = "1" (cities, towns and villages)

EX9 is a cities, towns and villages code shown in Table 4.2-21, and the target area is the cities, towns and villages indicated by the cities, towns, and villages code.

Figure 5.8-2 shows the target area determination flowchart.

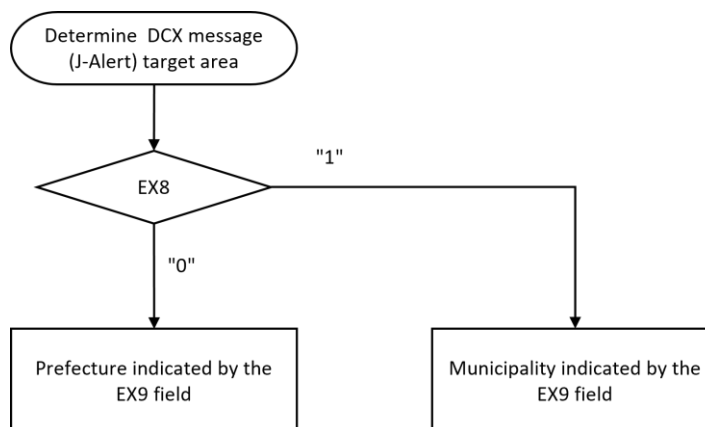


Figure 5.8-2 Target Area Determination Flowchart for DCX message (J-Alert)

### 5.9. Ellipse Inside/Outside Determination

The ellipse inside/outside determination method is described below that is used to determine whether or not given coordinates are within the range with respect to the target area indicated by the ellipse parameters of A12 to A16 (Target area - Ellipse) shown in Table 4.2-3 or EX3 to EX7 (Additional Ellipse) shown in Table 4.2-20.

Since the above-mentioned two types of ellipse parameters differ only in the value range and accuracy, the inside/outside determination can be made using the same method. This section describes the procedure using only A12 to A16 (Target area - Ellipse).

#### ■ Premise

The parameters are as follows. See Figure 5.9-1.

|                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>■ Ellipse</b> <ul style="list-style-type: none"> <li>Centre latitude (A12): <math>lat_0</math> (unit: degrees)</li> <li>Centre longitude (A13): <math>lon_0</math> (unit: degrees)</li> <li>Semi-Major Axis (A14): <math>a</math> (unit: km)</li> <li>Semi-Minor Axis (A15): <math>b</math> (unit: km)</li> <li>Azimuth (A16): <math>\theta</math> (unit: degrees)</li> <li>Center coordinates: <math>E_0(lat_0, lon_0)</math></li> </ul> | <b>■ Target points for inside/outside determination</b> <ul style="list-style-type: none"> <li>Latitude: <math>lat_{p0}</math> (unit: degrees)</li> <li>Longitude: <math>lon_{p0}</math> (unit: degrees)</li> <li>Coordinates: <math>P_0(lat_{p0}, lon_{p0})</math></li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

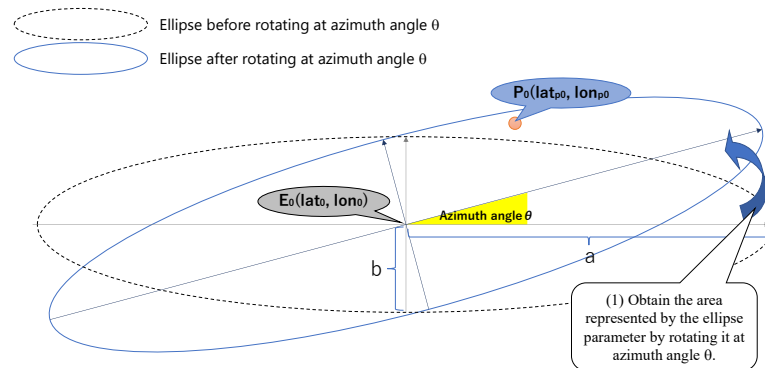


Figure 5.9-1 Ellipse Inside/Outside Determination – Premise

#### (1) Convert the ellipsoidal coordinate system to a local Cartesian coordinate system.

Convert the target point coordinates  $P_0(lat_{p0}, lon_{p0})$  in the ellipsoidal coordinate system and the ellipsoidal center coordinates  $E_0(lat_0, lon_0)$  to the ENU (East-North-Up) local Cartesian coordinate system, using  $E_0$  as the origin. This results in  $P_1(x_{p1}, y_{p1})$ ,  $E_1(x_1, y_1) = (0, 0)$ , respectively. The WGS84 geodetic system is employed.

An example of the calculation procedure is shown below. It should be noted that the calculations are based on an ellipsoidal height of 0.

Document subject to the disclaimer of liability

1. Convert ellipsoidal coordinates  $P_0$  and  $E_0$  to the ECEF coordinate system using Equation 5.9.1. Ellipsoidal coordinates  $Q$  ( $\text{lat}_Q$ ,  $\text{lon}_Q$ ) are converted to the ECEF coordinate system. ' $a_e$ ' represents the semi-major axis of the Earth's ellipsoid (WGS84), ' $f$ ' denotes the flattening of the Earth's ellipsoid, and ' $e$ ' stands for the eccentricity.

Equation 5.9.1 Converting Geographic Coordinates to ECEF Coordinates

$$ECEF(Q) = \begin{bmatrix} Q_x \\ Q_y \\ Q_z \end{bmatrix} = \begin{bmatrix} N \cos \varphi_Q \cos \lambda_Q \\ N \cos \varphi_Q \sin \lambda_Q \\ N(1 - e^2) \sin \varphi_Q \end{bmatrix}$$

$$\varphi_Q = \frac{\text{lat}_Q \cdot \pi}{180}$$

$$\lambda_Q = \frac{\text{lon}_Q \cdot \pi}{180}$$

$$N = \frac{a_e}{\sqrt{1 - e^2 (\sin \varphi_Q)^2}}$$

$$e^2 = 2f - f^2$$

$$a_e = 6378137$$

$$f = \frac{1}{298.257223563}$$

2. Using Equation 5.9.2, compute the position vector  $\overrightarrow{E_0 P_0}$ , representing the relative position from  $E_0$  to  $P_0$ .

Equation 5.9.2 Computation of the Position Vector

$$\overrightarrow{E_0 P_0} = \begin{bmatrix} x \\ y \\ z \end{bmatrix} = \begin{bmatrix} P_{0x} - E_{0x} \\ P_{0y} - E_{0y} \\ P_{0z} - E_{0z} \end{bmatrix}$$

3. Taking  $E_0$  as the origin, convert the vector  $\overrightarrow{E_0 P_0}$  to the ENU local coordinate system using Equation 5.9.3

Equation 5.9.3 Conversion from Position Vector to ENU Local Coordinate System

$$ENU(P_0) = \begin{bmatrix} P_{0e} \\ P_{0n} \\ P_{0u} \end{bmatrix} = \begin{bmatrix} -x \sin \lambda_{E_0} + y \cos \lambda_{E_0} \\ -x \sin \varphi_{E_0} \cos \lambda_{E_0} - y \sin \varphi_{E_0} \sin \lambda_{E_0} + z \cos \varphi_{E_0} \\ x \cos \varphi_{E_0} \cos \lambda_{E_0} - y \cos \varphi_{E_0} \sin \lambda_{E_0} + z \sin \varphi_{E_0} \end{bmatrix}$$

4. Interpret and handle the ENU coordinates ( $e$ ,  $n$ ) as plane coordinates ( $x$ ,  $y$ ) according to Equation 5.9.4.

Equation 5.9.4 Interpreting ENU Local Coordinates as Plane Coordinates

$$x_{p1} = P_{0e}$$

$$y_{p1} = P_{0n}$$

- (2) Rotate  $P_1$  backward at azimuth angle  $\theta$  so that it is parallel to the ellipse before rotating at azimuth angle  $\theta$ .

Rotate coordinates  $P_1$  backward at azimuth angle  $\theta$ , with the center being coordinates  $E_1$ , which are the center point of the ellipse, in order to obtain coordinates  $P_2(x_2, y_2)$ . See Equation 5.9.5 and Figure 5.9-2.

Equation 5.9.5 Rotating  $P_1$  Backward by  $\theta$  with  $E_1$  Being the Center

$$x_{p2} = (x_{p1} - x_1) \times \cos(-\theta) - (y_{p1} - y_1) \times \sin(-\theta) + x_1$$

$$y_{p2} = (x_{p1} - x_1) \times \sin(-\theta) + (y_{p1} - y_1) \times \cos(-\theta) + y_1$$

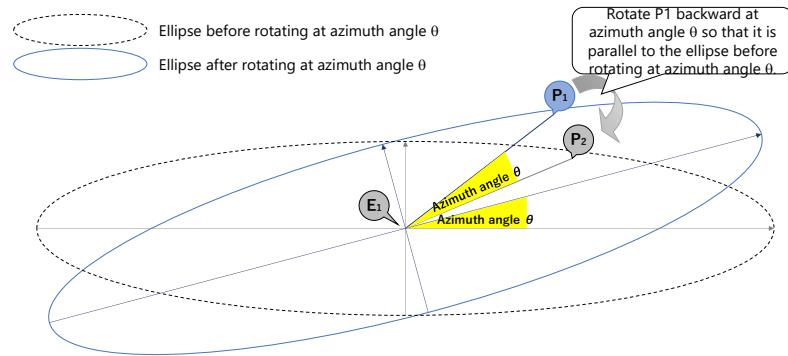


Figure 5.9-2 Ellipse Inside/Outside Determination - Rotating  $P_1$  Backward by  $\theta$  with  $E_1$  Being the Center

- (3) Calculate the ellipse equation (standard) for inside/outside determination.

Apply major axis radius  $a$ , minor axis radius  $b$ , and coordinates  $P_2(x_{p2}, y_{p2})$  to the ellipse equation (standard). The coordinates are determined to be inside the ellipse when right side value is less than 1, or outside the ellipse when this value is more than 1. See Equation 5.9.6 and Figure 5.9-3.

Equation 5.9.6 Application to the Ellipse Equation (Standard)

$$\text{Ellipse equation (standard)} = \frac{x_{p2}^2}{a^2} + \frac{y_{p2}^2}{b^2}$$

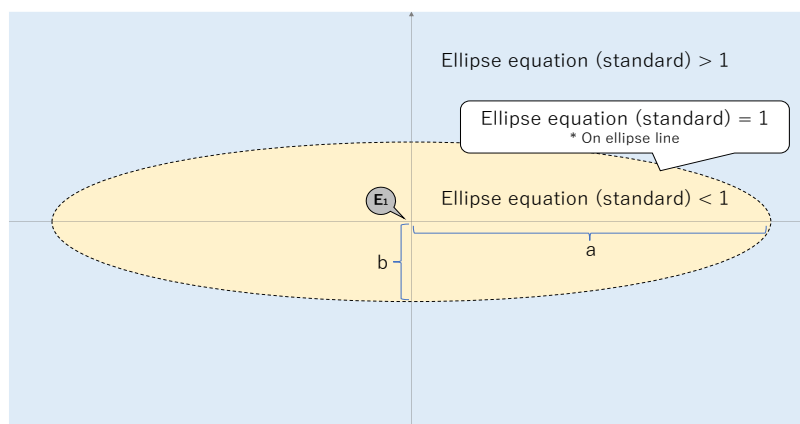


Figure 5.9-3 Ellipse Inside/Outside Determination - Range Indicated by the Ellipse Equation Result

#### 5.10. Referencing the Evacuation Action (DCX message (L-Alert), DCX message (J-Alert), DCX message (information from local government))

DCX message has two types of evacuation action instruction as shown below:

1 : A11-Guidance to react library

This field indicates the evacuation actions listed in Table 4.2-15. This instruction is available when the message is DCX message (L-Alert) , DCX message (J-Alert), and DCX message (information from local government). When all the bits of A11 are set to "0", this field indicates no instruction.

2 : EX2-Evacuate Direction Type, and EX3 to EX7 Additional Ellipse

These fields specify in more detail the area from which people are instructed to "Leave" or to which they are instructed to "Head" using the additional ellipse. This instruction is available when the message is DCX message (information from local government). When all the bits of EX2 and EX3 to EX7 are set to "0", EX2 and EX3 to EX7 indicate no instruction.

Both types of instruction can indicate the area to evacuate from or head to, but the EX2 and EX3 to EX7 fields specify this area more precisely than the A11 field. "Instructions by the EX2 and EX3 to EX7 fields are available only when the message is a DCX message (information from local government). In such cases, there are instances where both types are broadcast, and instances where only one type is broadcast." When both types are broadcast, it is recommended to follow the combined instructions. When the message is a DCX message (L-Alert) or a DCX message (J-Alert), only instruction by the A11 field is available.

### 5.11. Using the A8-Hazard Duration

The A8-Hazard Duration indicates the expected validity duration of a DCX message (in hours (H)).

This field consists of two bits to indicate the following four patterns.

00: Duration Unknown

01: Duration < 6H


10:  $6H \leq \text{Duration} < 12H$

11:  $12H \leq \text{Duration} < 24H$

The time the duration starts is specified by the A7-Hazard Onset : Time of the Week. (A7 specifies UTC time.)


An example of using the A8 field is shown below.

(Example) When A7 = "00000000011111" (MONDAY - 00:30 AM) and A8 = "10"

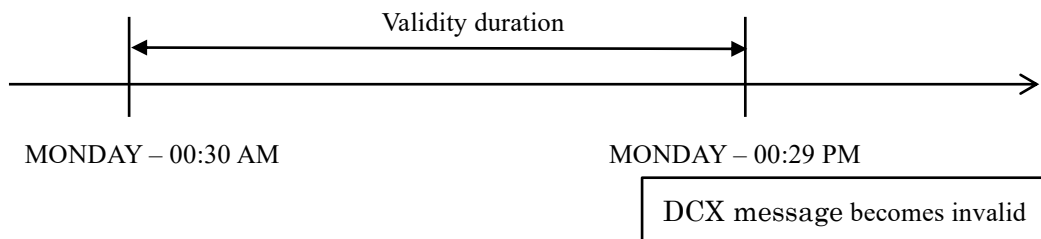

In some cases, the "Update" message (A1-Message Type = "10") may update the validity duration.

(Example) When the "Update" message in which A8 is set to "10" is received after reception of the "Alert" message in which A7 is set to "00000000011111" (MONDAY - 00:30 AM) and A8 is set to "01"

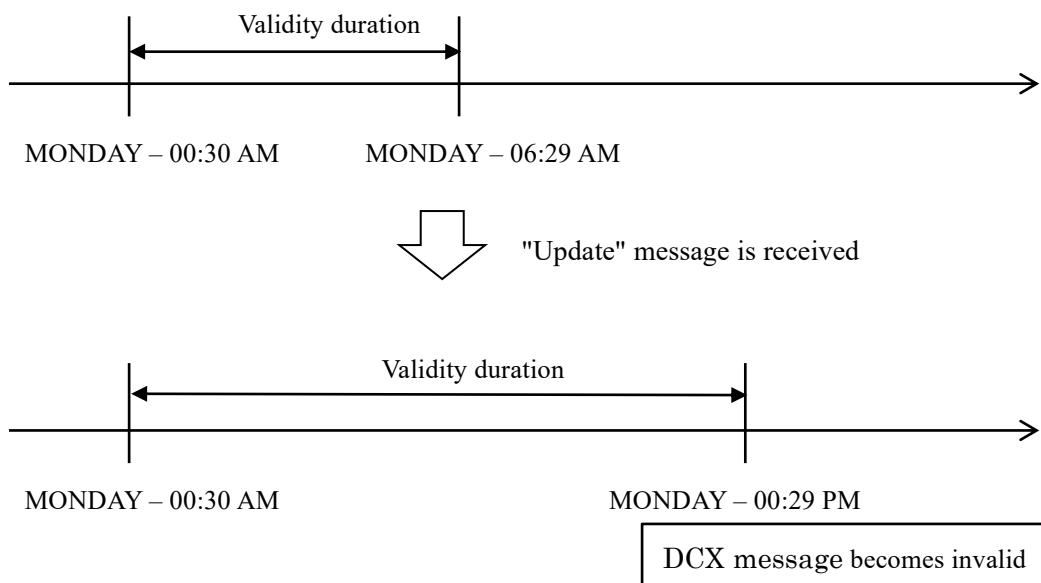

If the "All Clear" message (A1-Message Type = "11") is received during the validity duration, the corresponding DCX message is cleared.

(Example) When the "All Clear" message is received during the validity duration after reception of the "Alert" message in which A7 is set to "00000000011111" (MONDAY - 00:30 AM) and A8 is set to "10"

